

# **NETWORKING & SYSTEM ADMINISTRATION LAB**

**(20MCA136)**

## **LAB RECORD**

Submitted in partial fulfilment of the requirements for the award of the degree of Master of Computer Applications of A P J Abdul Kalam Technological University, Kerala.

**Submitted by:**

**JERIL JOY (SJC23MCA-2034)**



**MASTER OF COMPUTER APPLICATIONS**  
**ST. JOSEPH'S COLLEGE OF ENGINEERING AND**  
**TECHNOLOGY, PALAI**  
**CHOONDACHERRY P.O, KOTTAYAM**  
**KERALA**

**May 2024**

# **ST. JOSEPH' S COLLEGE OF ENGINEERING AND TECHNOLOGY, PALAI**

**(An ISO 9001: 2015 Certified College)**

**CHOONDACHERRY P.O, KOTTAYAM, KERALA**



## **CERTIFICATE**

This is to certify that the Networking & System Administration Lab Record (20MCA136) submitted by **Jeril Joy**, student of **Second** semester **MCA** at **ST. JOSEPH'S COLLEGE OF ENGINEERING AND TECHNOLOGY, PALAI** in partial fulfilment for the award of Master of Computer Applications is a bonafide record of the lab work carried out by him under our guidance and supervision. This record in any form has not been submitted to any other University or Institute for any purpose.

**Mr. Anish Augustine K**  
**Assistant Professor ,**  
**Dept. of Computer Application**  
**(Faculty In- Charge)**

**Dr. Rahul Shajan**  
**Associate Professor**  
**(Head, Department of**  
**Computer Application)**

Submitted for the End Semester Examination held on \_\_\_\_\_

**Examiner 1**

**Examiner 2**

## **DECLARATION**

I Jeril Joy, do hereby declare that the Networking & System Administration Lab Record (20MCA136) is a record of work carried out under the guidance of Mr. Anish Augustine K, Asst. Professor, Department of Computer Applications, SJCET, Palai as per the requirement of the curriculum of Master of Computer Applications Programme of A P J Abdul Kalam Technology University, Thiruvananthapuram. Further, I also declare that this record has not been submitted, full or part thereof, in any University / Institution for the award of any Degree / Diploma.

Place: Choondacherry

JERIL JOY

Date :

(SJC23MCA-2034)

## **DEPARTMENT OF COMPUTER APPLICATIONS**

### **VISION**

To emerge as a center of excellence in the field of computer education with distinct identity and quality in all areas of its activities and develop a new generation of computer professionals with proper leadership, commitment and moral values.

### **MISSION**

- Provide quality education in Computer Applications and bridge the gap between the academia and industry.
- Promoting innovation research and leadership in areas relevant to the socio economic progress of the country.
- Develop intellectual curiosity and a commitment to lifelong learning in students, with societal and environmental concerns.

### **COURSE OUTCOMES**

After the completion of the course 20MCA136 Networking & System Administration Lab the student will be able to :

<b>CO 1</b>	Install and configure common operating systems.	K3 (Apply)
<b>CO 2</b>	Perform system administration tasks.	K3 (Apply)
<b>CO 3</b>	Install and manage servers for web applications.	K2 (Understand)
<b>CO 4</b>	Write shell scripts required for system administration.	K3 (Apply)
<b>CO 5</b>	Acquire skill sets required for a DevOps.	K3 (Apply)

## CONTENT

Sl. No.	Program List	Page No.
1	Introduction to Computer hardware	1
2	Install latest version of Ubuntu on a virtual box	6
3	Study of a terminal based text editor such as Vim or Gedit, Basic Linux commands: - familiarity with following commands/operations expected	21
4	Shell scripting	31
4.1	Shell program to check the given number and its reverse are same.	32
4.2	Shell program to find the sum of odd and even numbers from a set of numbers	34
4.3	Shell program to find the roots of a quadratic equation	35
4.4	Shell program to generate prime numbers between 1 and 50	37
4.5	Shell program to find the sum of digits of a number using function	43
4.6	Shell program to print the reverse of a number using function	44
4.7	Shell script, which receives two filenames as arguments. It checks whether the two files contents are same or not. If they are same then second file is deleted.	47
4.8	Shell script to check executable rights for all files in the current directory, if a file does not have the execute permission then make it executable	50
4.9	Shell program to create Pascal's triangle	53
4.10	Shell script to find out the unique words in a file and also count the occurrence of each of these words	55
5	File system hierarchy in a common Linux distribution	60

<b>6</b>	Installation and configuration of LAMP stack. Deploy in an open source application such as phpmyadmin and WordPress.	65
<b>7</b>	Build and install software from source code, familiarity with make and cmake utilities expected	73
<b>8</b>	Introduction to command line tools for networking IPv4 networking, network commands	75
<b>9</b>	Analyzing network packet stream using tcpdump and Wireshark	78
<b>10</b>	Introduction to Hypervisors and VMs, Xen or KVM Introduction to Containers: Docker, installation and deployment	81
<b>11</b>	Installing and configuring modern frameworks like Laravel	85

**1. Introduction to Computer hardware: Physical identification of major components of a computer system such as mother board, RAM modules, daughter cards, bus slots, SMPS, internal storage devices, interfacing ports.**

**Procedure:**

**What is Computer Hardware?**

Computer hardware is a hardware part of a computer system. In simple words, only those parts of the computer system which we can see or touch are called computer hardware.

Hardware is an important part of our computer system without which the computer is incomplete. You cannot use a computer without hardware and without hardware, there cannot be a computer system or construction.

**1. Mouse**



A mouse is a hardware input device that is used to move the cursor or pointer on computer screens. It can also be used to run computer programs, select items in a graphical user interface, and manipulate objects in the computer world. Some common examples of how it can be used are clicking on buttons, scrolling up and down the screen, selecting files, opening folders, and so on.

**2. Keyboard**



A keyboard is an input device that you use to enter data into a computer. It's also called the input device for your computer. Keyboards are used with PCs, laptops, tablets, and other devices. There are many different types of keyboards, but the most common one is the QWERTY keyboard. A QWERTY keyboard has all the letters in alphabetical order on it. This is different from some other types of keyboards, like Dvorak or Colemak keyboards. For example, these keyboards have keys arranged differently than what you're used to seeing on a QWERTY keyboard. And that means that typing on these keyboards will feel like typing in another language at first! But don't worry - once you get accustomed to it, it feels natural!

### 3. Monitor



Personal computers use a monitor to display data, run the software, and interact with the user. A monitor is an electronic visual display that connects to your computer or laptop. It is used for displaying images, text, videos, games, web pages, and more. Monitors are available in different sizes depending on the needs of the person using them. The most common types of monitors are CRT (cathode ray tube), LCD (liquid crystal display), and LED (light-emitting diode).

### 4. Motherboard





The motherboard is the backbone of our computer system. It's the central processing unit or CPU. It connects all the other components, like memory and graphics card, to the power supply. The motherboard is where all the wires are plugged in and it's also where you place your RAM, which is your computer's working memory. The motherboard is what makes one machine different from another.

Motherboards are made up of tiny transistors that control the flow of electricity through copper tracks on their surface. These transistors are called Integrated Circuits or ICs for short.

## 5. CPU ( Central Processing Unit )



A CPU, or central processing unit, is the brain of a computer. The CPU processes information and runs programs. It functions as a control unit that executes programs according to instructions in its program memory. The CPU contains elements such as registers, an arithmetic logic unit (ALU), and control logic for sequencing instructions.

## 6. RAM Memory



A computer's RAM is a type of computer memory that stores information so the CPU can access it directly. Computer systems use main memory to store both data and programs. The more RAM you have, the more data your system can process at one time. This will lead to more efficient operations on your computer, which translates into better performance for the user.

## 7. ROM Memory



ROM stands for a type of memory chip that can be read from but not written to. In other words, it's a form of data storage that can't be changed after being programmed. It's sometimes called "non-volatile" memory because the stored information will remain even when not powered up or in use. ROM is often used to store a computer's basic start-up instructions and certain types of data, such as your car's on-board computer system and a calculator's data tables.

## 8. Hard Disk Drive



A hard disk drive is a piece of hardware inside a computer that stores information. It's used to store software and data in a safe place, which can be accessed when needed. With magnetic storage, there are no moving parts - unlike a CD or DVD player in which you need to move a disk in order

to access data. You can think of it as "a closet" where all your stuff is stored safely. As long as you have power, you can get to your things when you need them.

## 9. Optical Drive



shutterstock.com • 117172483

Optical Drives are used in PCs to read and write CDs and DVDs. The optical drive reads the data from the disc, which can then be transformed into a digital file that is readable by the computer. This makes it easy to backup files, play music or movies, or copy data from one disc to another. The term "CD" refers to Compact Discs, which are the most common type of optical drive on modern computers. They are often used for installing software on your computer, moving data between computers, or writing new programs.

## 10. Power Supply



A power supply is an electrical appliance that provides the necessary power to operate a computer. Computers are powered by electricity, and the power supply converts the alternating current (AC) from the electric outlet into direct current (DC). The power supply in a computer can be an internal or external component.

## **2. Install latest version of Ubuntu on a virtualbox**

### **Procedure:**

1. Download and Virtualbox Windows 10 Installation
2. Ubuntu ISO download
3. Install Virtualbox
4. Create an Ubuntu VM
5. Install Ubuntu on Virtualbox Windows 10 6. Install Virtualbox Guest Additions

### **Download and Virtualbox Windows 10 Installation**

1. Install Ubuntu on VirtualBox
2. HowTo Install Ubuntu On VirtualBox?
  - 2.1. Open VirtualBox
  - 2.2. Click on “New” to create a virtual machine
  - 2.3. Enter Name for your Virtual Machine
  - 2.4. Select “Linux” Operating System from “Type”
  - 2.5. Click “Next”
  - 2.6. Enter amount of memory (RAM) = 1024 MB and click “Next”
  - 2.7. Click “Create” to create hard drive
  - 2.8. Click “Next”
  - 2.9. Click “Next”
  - 2.10. Enter Size of Virtual Hard Drive = 20 GB and Click “Create”
  - 2.11. Select Virtual Machine
  - 2.12. Click on “Start” to start the virtual machine
  - 2.13. Select disk file source
  - 2.14. After selecting the OS file to be installed click “Open”
  - 2.15. Click “Start”
  - 2.16. Click “Ok”
  - 2.17. Click “Install Ubuntu”

- 2.18. Click “Continue”
- 2.19. Click “Install Now”
- 2.20. Click “Continue”
- 2.21. Select location and click “Continue”
- 2.22. Select keyboard layout & click “Continue”
- 2.23. Fill all the details and Click “Continue”
- 2.24. Now the installation process will start and installation window will appear
- 2.25. Click “Restart Now”
- 2.26. When the system will get restarted the following message will appear. Press “Enter”
- 2.27. Close the pop-up messages by clicking on the Close (×) button

### 3. Steps To Maximize The Size Of Ubuntu Desktop

- 3.1. Go to “Devices”
- 3.2. Click “Insert Guest Additions CD Image...”
- 3.3. Click “Run”
- 3.4. Click “Authenticate”
- 3.5. Press “Enter”
- 3.6. Now “Restart” your system for the changes to be applied.
- 3.7. After the system gets restarted. Go to “View”
- 3.8. Click “Switch to Full screen”
- 3.9. Click “Switch”


## Output Screenshot

**STEP 1:** Installing Virtual Box.


a. Starting pop-up window for the installation.



b. Custom setup window to select the features you want and select installation location

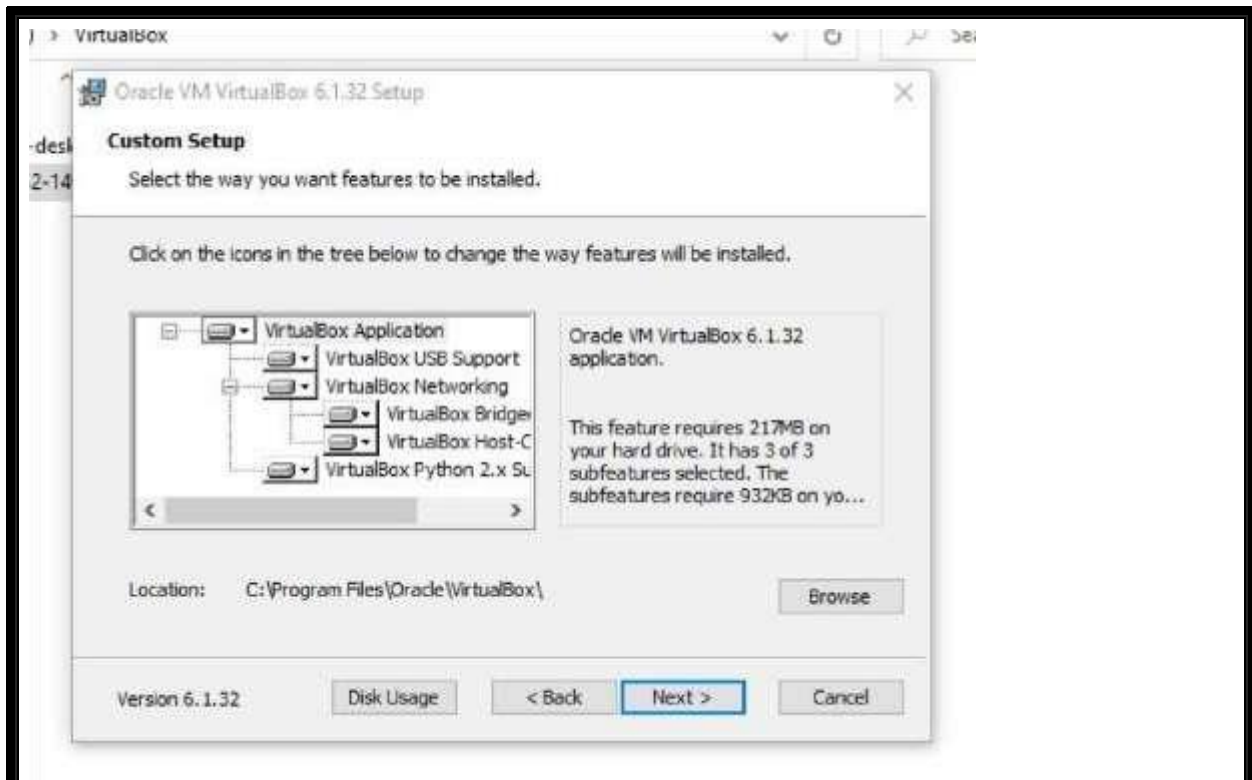

c. Custom setup window to choose from the option below.

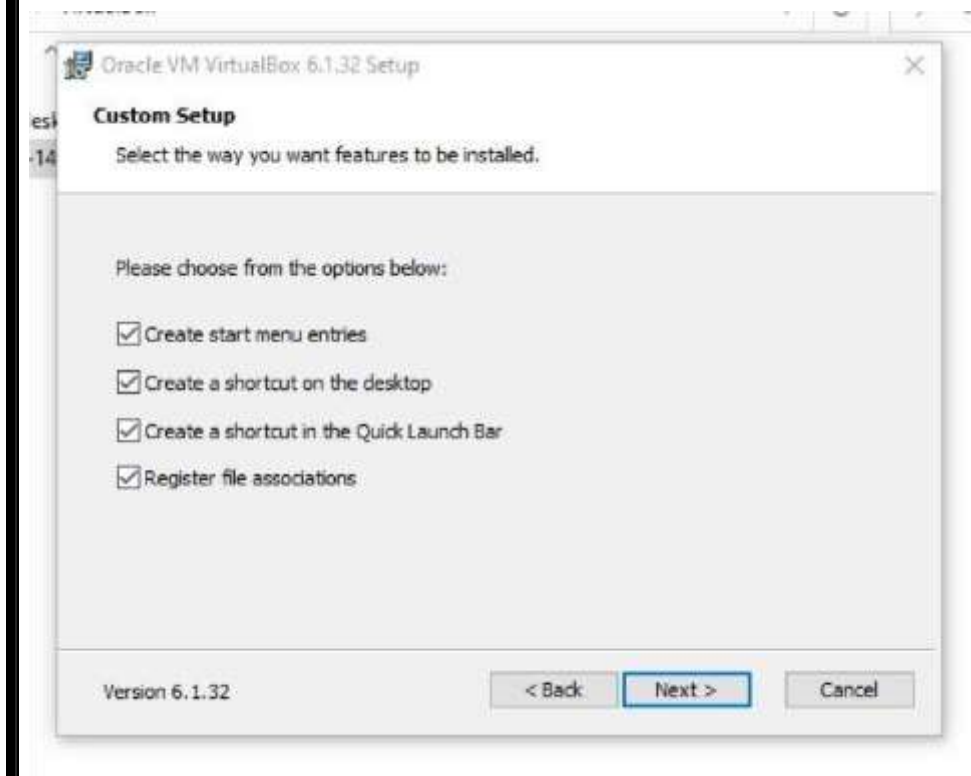

d. Custom setup window to confirm the installation.




e. Custom setup window to install the virtual box with the install button.



f. Installation box showing the installation status.



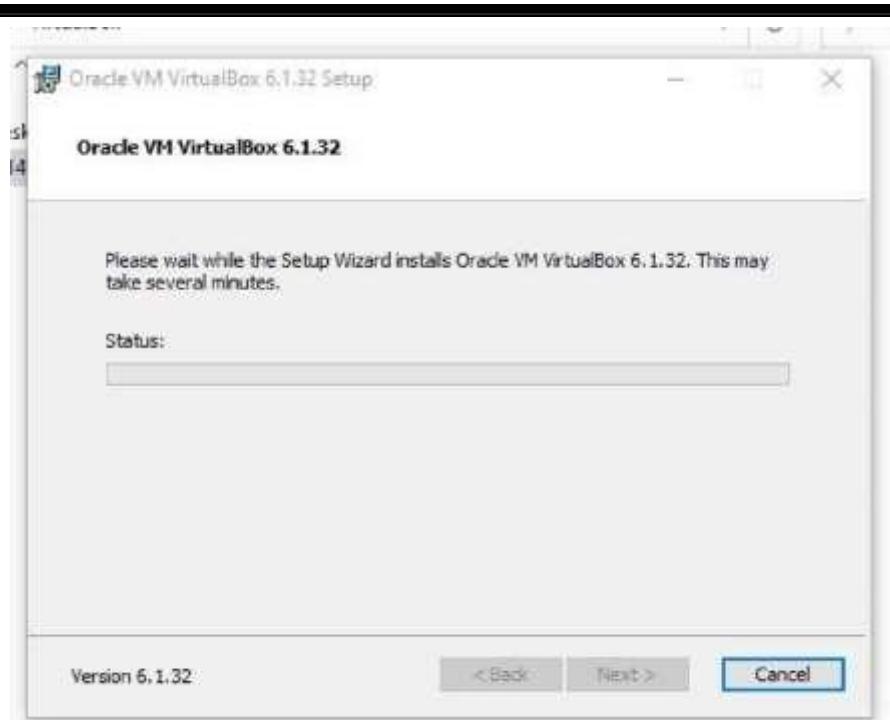


g. Installation complete pop-up windows with the finish button.




**STEP 2:** Setup the Ubuntu Instance in the VM Virtual Box.




- a. After selecting the NEW button to create the Ubuntu instance, the pop-up window to enter & select the name, type and version of the OS.

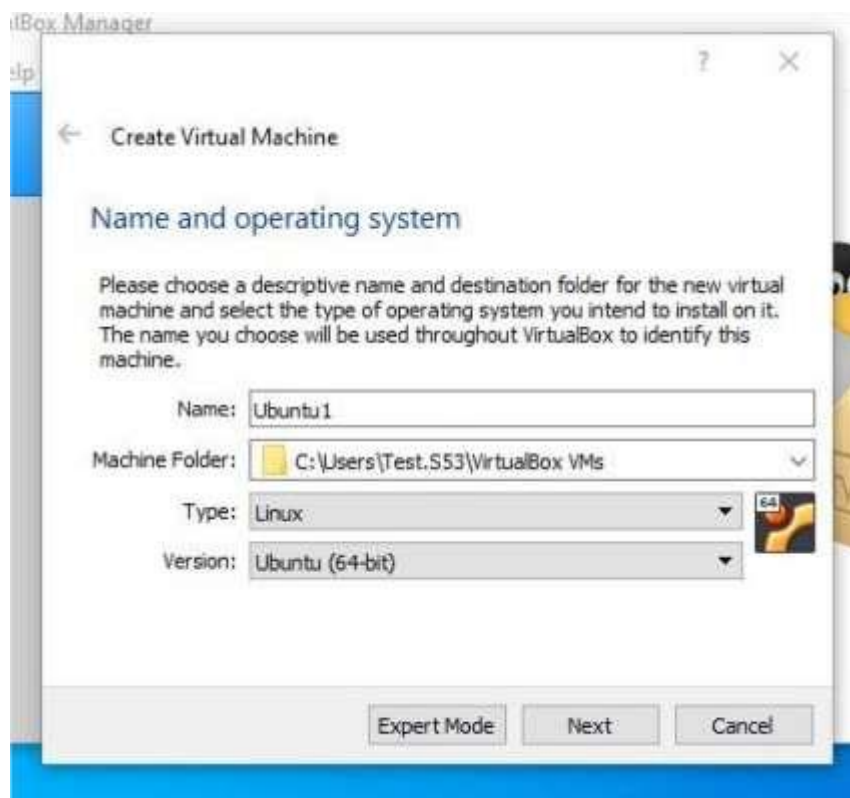


- b. Choose the main memory size for the OS.

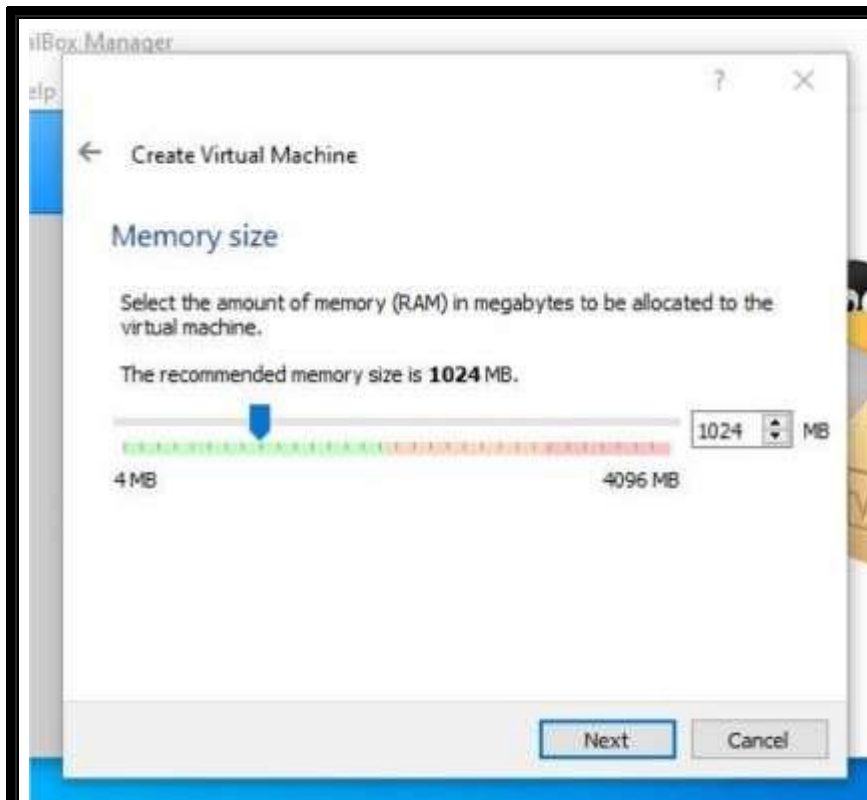


c. Option to add a virtual hard disk to the new machine instance.

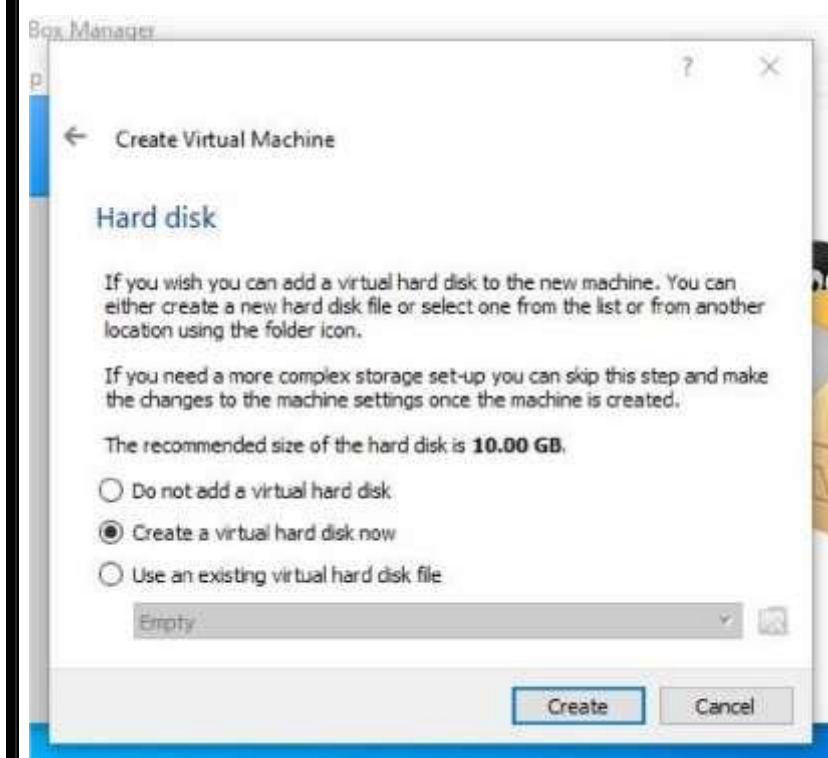


d. Option to choose the type of new virtual hard disk for new instance of OS.

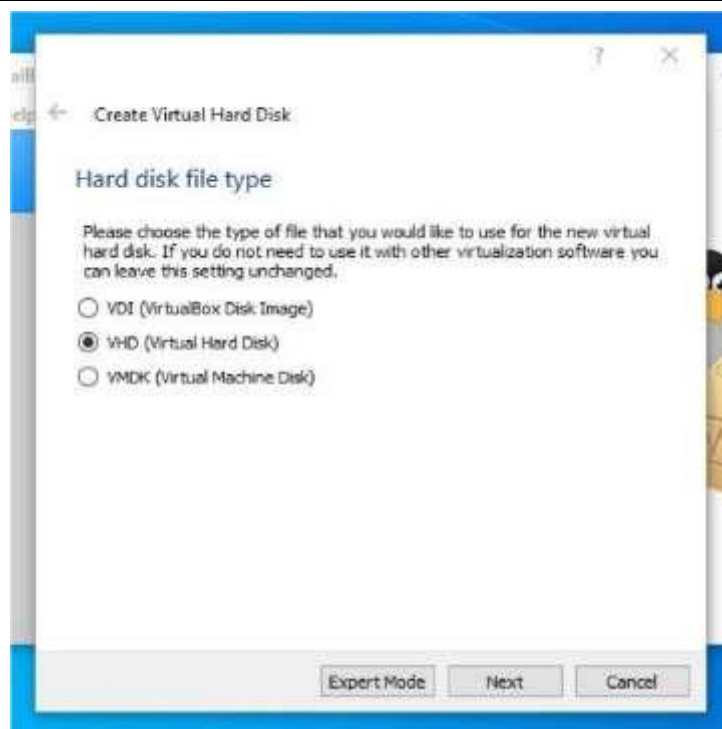

- e. Options to choose the methods of accessing the physical hard disk space for the new instance from the existing hard disk

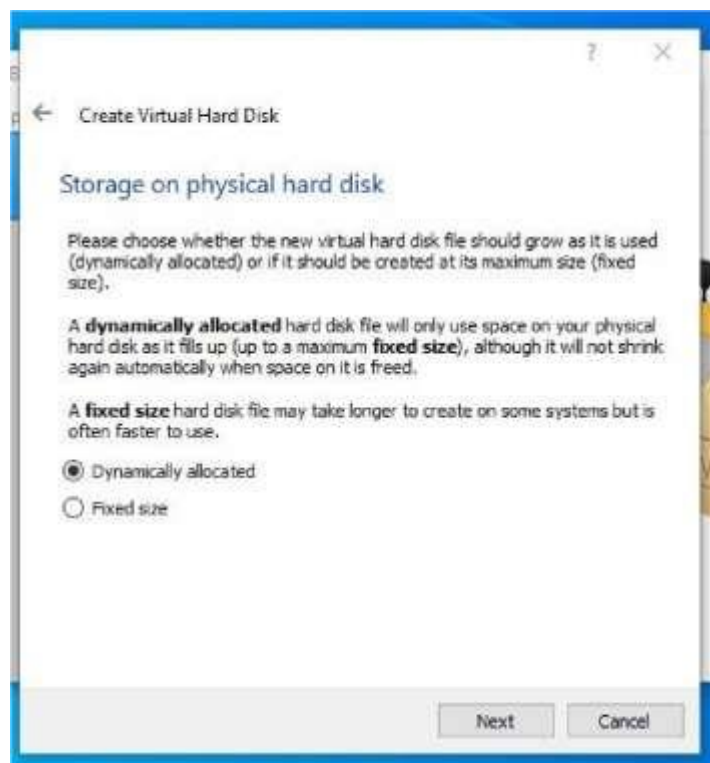


- f. Panel to select the size of the virtual disk in megabytes and location and name of the instance and final submit to create the instance of OS.

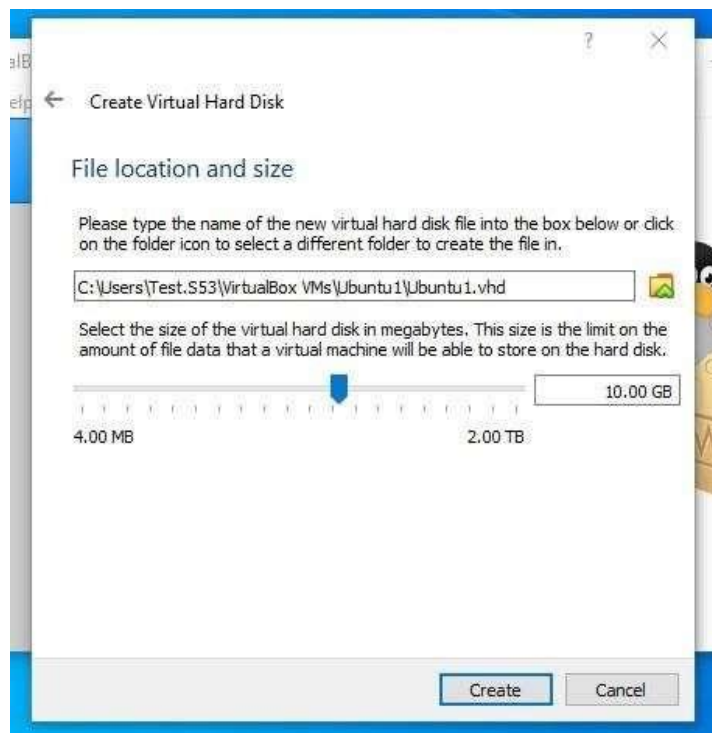

g. The newly created OS instance and at the left side of the application.




h. Settings the configurations of the instance created and adding the ISO image file of the OS correspondingly and Selecting the ISO image file from the local device.

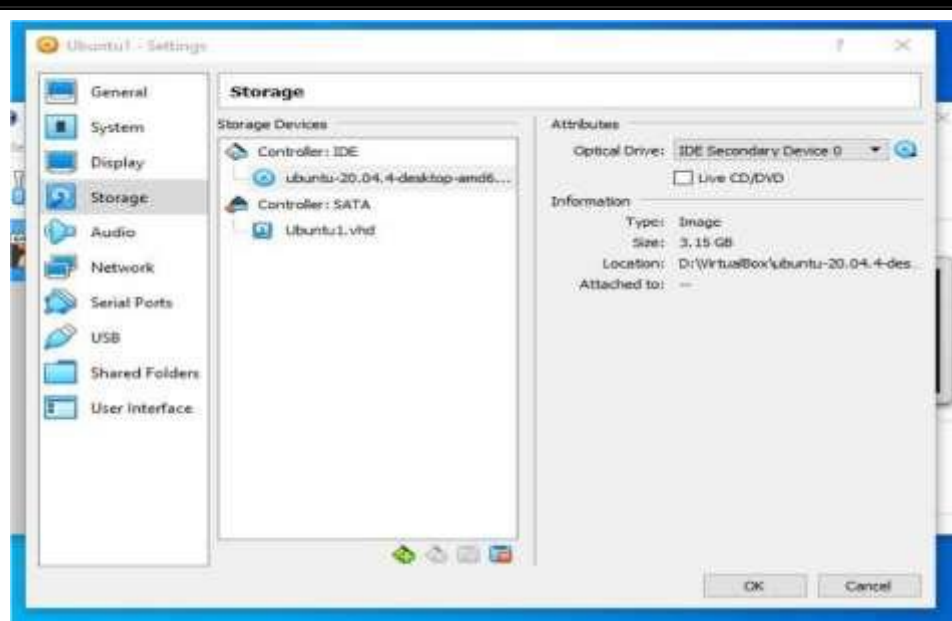


**STEP 3:** Installation of the Ubuntu OS within the newly created instance.

a. Running the new OS instance and selecting the “Install Ubuntu” to install the loaded ISO file.

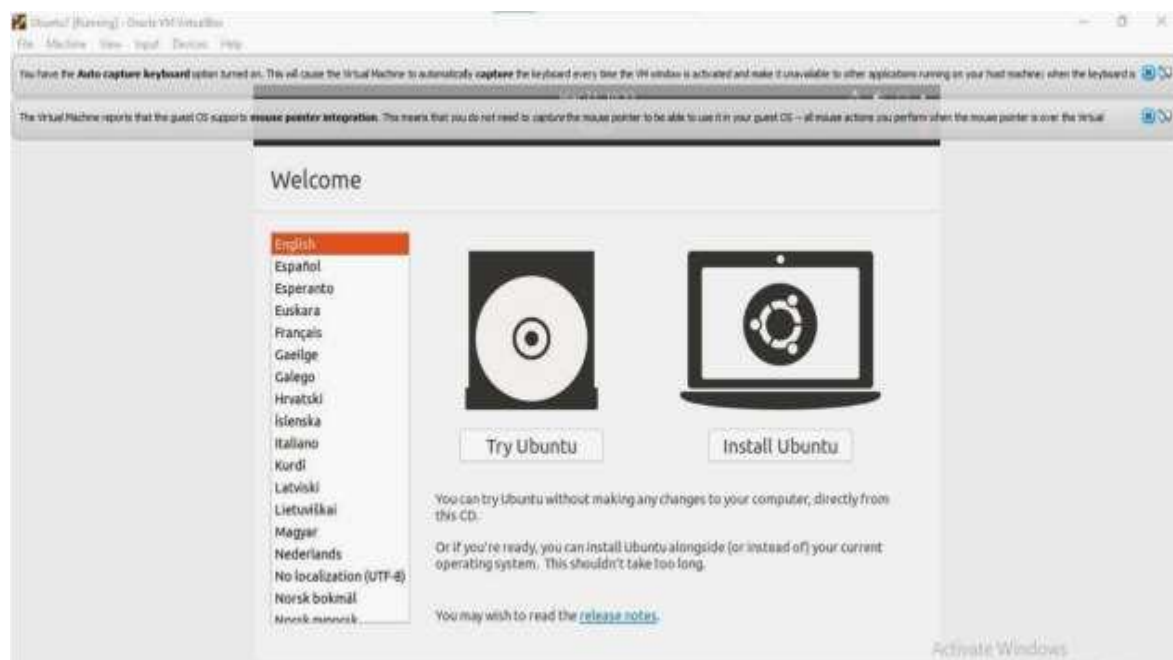

b. Selecting the language for install the ubuntu OS.

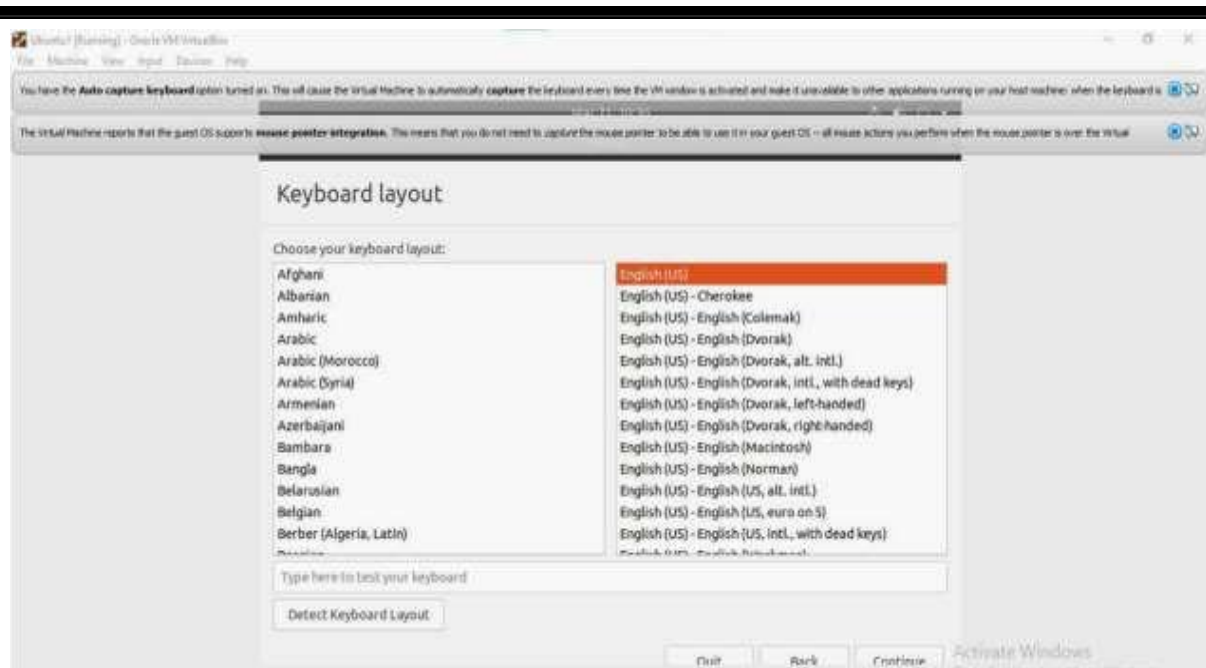


c. Selection of other installation along & within with the installation of ubuntu.



d. Selecting the disk partitioning allocation options from the given below.



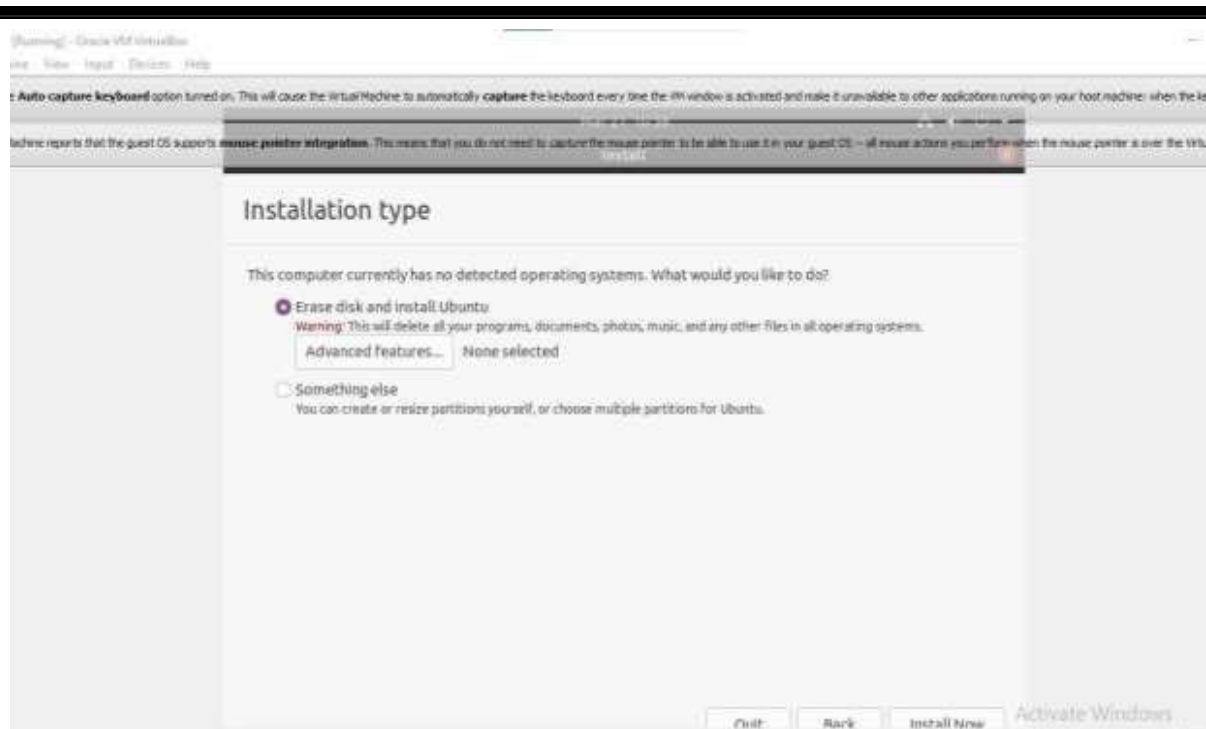

e. Selecting the geographical location for the time/location.




f. Entering the name, username & password for the account to sign in to the ubuntu OS after installation.







- g. Installing the ubuntu OS in the instance, extracting the ubuntu ISO file, setting configurations, setting the various software within, etc.

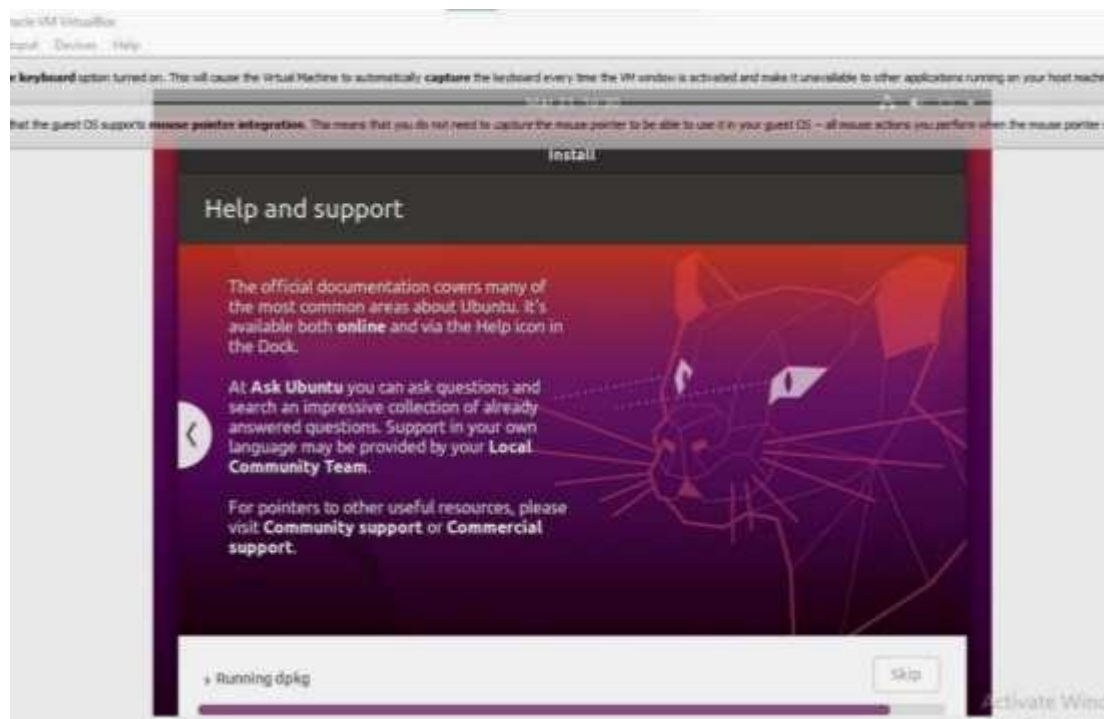


- h. Restarting the OS instance to finalize the installation.

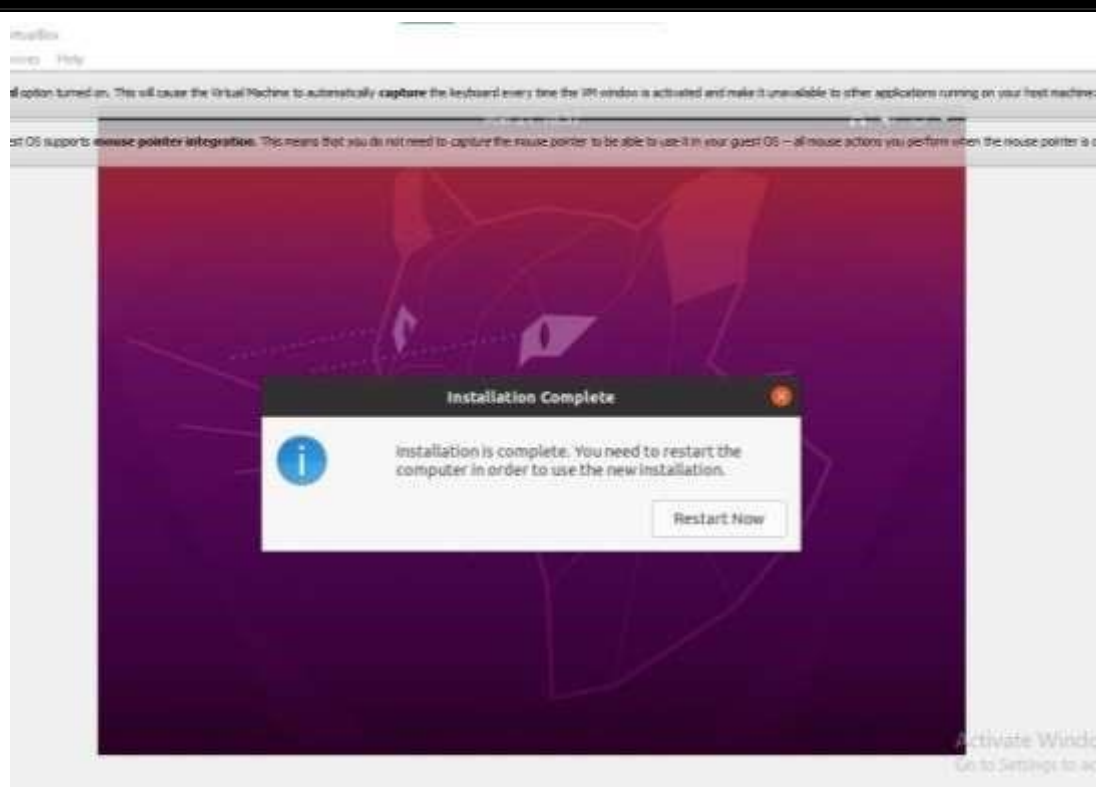

- i. Signing in and visiting the home screen of the ubuntu OS using the previously registered username & password.

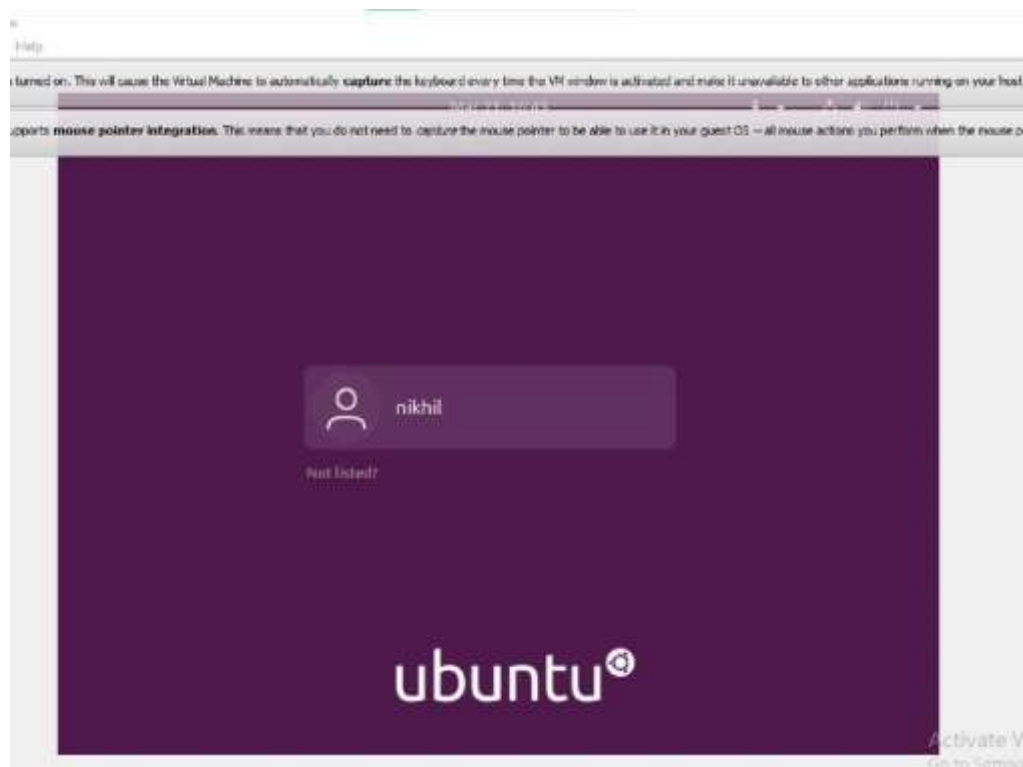

## Output

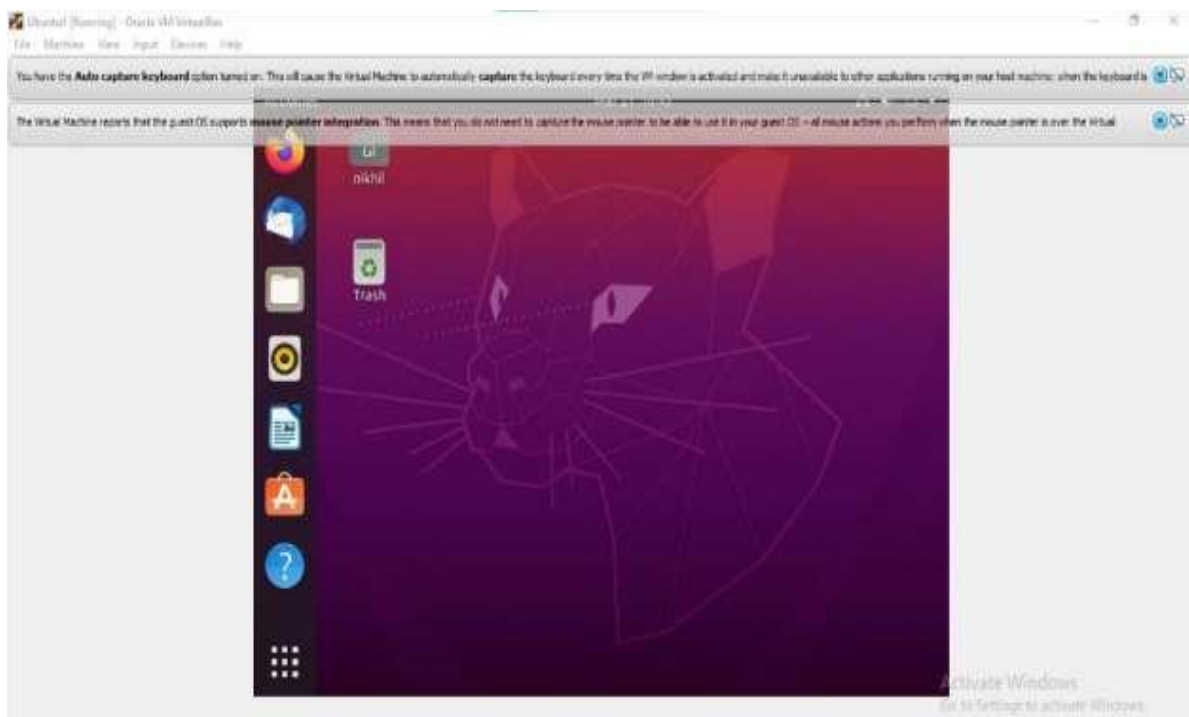

**3. Study of a terminal based text editor such as Vim or Gedit, Basic Linux commands: - familiarity with following commands/operations expected**

### Procedure

**Pwd:** This command is used to display the location of the current working directory.

Syntax :-\$ pwd

Output

```
student@S25:~$ pwd
/home/student
```

**Mkdir:** This command is used to create a new directory under any directory.

Syntax :-\$ mkdir<directory name>

Output

```
student@S25:~$ mkdir stud1
student@S25:~$ pwd
/home/student
```

**ls:** This command is used to display a list of content of directory.

Syntax :-\$ ls

Output

```
student@S25:~$ ls
Desktop  Downloads  Music      Public      snap  Templates
Documents examples.desktop Pictures  PycharmProjects stud1  Videos
```

**Man:** This command is used to display the user manual of any command that we can run on the terminal.

Syntax :-\$ man <command name>

```
student@S47:~$ man pwd
```

**Cd:** This command is used to change the current directory.

Syntax :-\$ cd <directory name>

Output

```
student@S46:~$ cd stardust
student@S46:~/stardust$ cd ..
```

- **cd.. :** This command is used to move to the parent directory of current directory, or the directory one level up from the current directory.
- **cd -:** This command is used to switch back to previous directory we were working earlier.

**cat > filename:** This command is used to create a file and add contents to that file.

Syntax :-\$ cat > filename.txt **cat filename:** This command is used to

view the contents in the file.

Syntax :-\$ cat filename.txt

Output

```
student@S46:~/stardust$ cat >a.txt  
Nertwork is good
```

```
^Z  
[1]+  Stopped                  cat > a.txt
```

**cat>>filename:**This command is used to add contents to an existing file. Syntax :-\$

cat >> filename.txt

Output

```
student@S46:~/stardust$ cat>>a.txt  
r1mca136  
^Z  
[2]+  Stopped                  cat >> a.txt
```

**cat filename1 > filename2:**This command is used to copy the content from one file to another file.

Syntax :-\$ cat filename1 > filename2

Output

```
student@S46:~/stardust$ cat a.txt > b.txt  
student@S46:~/stardust$ cat b.txt  
Nertwork is good  
^Z  
r1mca136
```

**read :**This command is used to read the content of a line to a variable.

Syntax :-\$ read variablename

**Find:**This command is used to display contents of particular directory.

Syntax :-\$ find filename.txt **grep** :This command will let you search through all the text in a given file.

Syntax :-\$ grep word filename.txt

Output:-

➤ **grep -i** :command used for a case insensitive search

Syntax: \$ grep -i filename.txt

➤ **grep -v** :command used for inverted search.

Syntax: `$ grep -v filename.txt`

- **grep -A1**:command used to display line after the result.

Syntax: `$ grep -A1 filename.txt`

- **grep -B1**:command used to display line before the result.

Syntax: `$ grep -B1 filename.txt`

- **grep -C1**:command used to display line before and after the result.

Syntax: `$ grep -C1 filename.txt` **wc -word count**:This command is used for counting purpose which is used to find the number of lines,the number of words,the number of characters and the number of bytes.

- **wc -l** (count number of lines)
- **wc -w** (count number of words)
- **wc -c** (count number of characters)
- **wc -m** (count number of bytes) Syntax :- `$ wc -l filename.txt`

`$ wc -w filename.txt`

`$ wc -c filename.txt`

`$ wc -m filename.txt`

Output

```
student@S3:~$ cat marvel1
captian america
  ironman
spiderman
hulk
xmen
strange
student@S3:~$ wc marvel1
 6  7 53 marvel1
```

```
student@S3:~$ wc -c marvel1
53 marvel1
```

```
student@S3:~$ wc -w marvel1
7 marvel1
```

```
student@S3:~$ wc -l marvel1
6 marvel1
```

```
student@S3:~$ wc -m marvel1
53 marvel1
```

**df** :This command is used to get a report on system disc space usage.

Syntax :-\$ df filename.txt

Output

```
student@S3:~$ df
Filesystem      1K-blocks    Used Available Use% Mounted on
udev            3989460         0   3989460  0% /dev
tmpfs           803792      1824    801968  1% /run
/dev/sda6      114460828 33493392  75110056 31% /
tmpfs          4018948    26024   3992924  1% /dev/shm
tmpfs           5120         4        5116  1% /run/lock
tmpfs          4018948         0   4018948  0% /sys/fs/cgroup
/dev/loop11     164096    164096         0 100% /snap/gnome-3-28-1804/116
/dev/loop17     144128    144128         0 100% /snap/gnome-3-26-1604/98
/dev/loop21     207872    207872         0 100% /snap/vlc/1397
/dev/loop15        640        640         0 100% /snap/gnome-logs/106
/dev/loop3       2688      2688         0 100% /snap/gnome-system-monitor/174
/dev/loop7       2560      2560         0 100% /snap/gnome-calculator/884
/dev/loop27      1024      1024         0 100% /snap/gnome-logs/81
/dev/loop2      144128    144128         0 100% /snap/gnome-3-26-1604/104
```

➤ **df -m** :This command is used to see the report in mega bytes.

Syntax :\$ df -m filename.txt

**cut -d**:This command is used to cut and display the content based on the delimiter given.

Syntax :-\$ cut -d delimiter -f fieldnumber filename

```
student@S3:~$ cut -d- -f2 b3.txt
33
56
77
student@S3:~$ cut -d- -f1 b3.txt
english
hindi
maths
```

**cut -b**:This command is used to cut and display the content based on the specified byte number.



Syntax :-\$ cut -b bytenumber filename

Output

```
student@S3:~$ cut -b 2 mark1
n
a
c
```

**cut --complement -c:** This command is used to erase the specified character and display the remaining content of the file.

Syntax :-\$ cut --complement -c characternumber filename.txt Output

```
student@S3:~$ cut --complement -c 1 mark1
nglish 67
aths 78
cience 90
```

**Paste:** This command is used to paste the contents from the specified file. Syntax :-\$ paste filename

```
student@S3:~$ paste marvel1 marvel2
captian america black pink
ironman          bts
spiderman        batman
hulk             cartoon
xmen             ton
strange jerry
```

**More:** This command is used to view the text files in the command prompt, displaying one screen at a time in case the file is large.

Syntax :-\$ more filename

**Cp:** This command is used to copy the contents from an existing file to a new file.

Syntax :-\$ cpexisting\_filenamenew\_filename

Output



```

student@S33:~$ ls
b3.txt  doc      Downloads  file1  flower  ls      Pictures  Public  sample  sandra  Templates
Desktop Documents examples.desktop  files  fruits  Music  plants  PycharmProjects  samples  snap    Videos
student@S33:~$ cat world
cat: world: No such file or directory
student@S33:~$ cat flower
lotus
jasmine
rose
marrigold
student@S33:~$ cp flower flowerlist
student@S33:~$ cat flowerlist
lotus
jasmine
rose
marrigold

```

**Mv:** This command is used to move an existing file or directory from one location to another.

Syntax :- \$ mv filename directory\_name

Output

```

student@S3:~$ mv dq.txt akhila
student@S3:~$ cd akhila
student@S3:~/akhila$ ls
a.txt  b.txt  dq.txt

```

**Head:** This command is used to display the first 10 lines of the file by default. Syntax :-  
\$ head filename

Output

```

student@S3:~$ head b1.txt
Familiarisation of cat command
Cat having different option
new file

adding content
appending
updating
qweerrttf
adfgtttg
weryhbvf
student@S3:~$ head -4 b1.txt
Familiarisation of cat command
Cat having different option
new file

```

- **head -number:** This command is used to display the lines of the file to the specified number from head.

**Tail:** This command is used to display the last 10 lines of the file by default.

Syntax :- \$ tail filename

Output

```
student@S3:~$ tail b1.txt
new file

adding content
appending
updating
qweerfttf
adfgtttg
weryhbvf
zfsfg
ojkhh
student@S3:~$ tail -3 b1.txt
weryhbvf
zfsfg
ojkhh
```

- **tail -number**: This command is used to display the lines of the file to the specified number from tail.

**sudo useradd** : This command is used to add new user.

Syntax :-\$ sudo useradd username

Output

```
mca@S3:~$ sudo useradd Akhila
[sudo] password for mca:
Sorry, try again.
[sudo] password for mca:
```

- **sudo passwd** : This command is used to add password to the user.

Syntax :-\$ sudo passwd username

- **sudo usermod** : This command is used to add members.

Syntax :-\$ sudo usermod -G groupname username **delete**

- **sudo userdel username** - used to delete user.

- **sudo groupdel groupname** - used to delete group name.

Syntax :-\$ **sudo userdel username**

- **sudo groupdel groupname chmod** : This command is used change directory permission of files.

➤ **chmod +rwx**

➤ **chmod -wx**

□ **chmod -rwx**

Syntax :- \$ chmod +wx filename

\$ chmod -wx filename

\$ chmod -rwx filename

Output

```
mca@S3:~$ ls
a1.txt Desktop Documents Downloads examples.desktop mozilla.pdf Music Pictures Public PycharmProjects
mca@S3:~$ chmod +rwx a1.txt
mca@S3:~$ chmod -wx a1.txt
mca@S3:~$ cat >>a1.txt
bash: a1.txt: Permission denied
mca@S3:~$ chmod -rwx a1.txt
mca@S3:~$ cat a1.txt
cat: a1.txt: Permission denied
```

**chown:** This command is used to give ownership to user .

Syntax :- \$ sudo chown username filename

Output

```
mca@S3:~$ sudo useradd Anjali
mca@S3:~$ sudo chown Anjali a1.txt
```

**Ssh:** This command is used to provide a secure encrypted connection between two hosts over an insecure network.

Syntax :- \$ ssh mca@ipaddress

```
mca@S40:~$ sudo ssh mca@192.168.6.46
The authenticity of host '192.168.6.46 (192.168.6.46)' can't be established.
ECDSA key fingerprint is SHA256:hQC0bgw7WBI7zuABHq2AKWIpGnXDeBBGWGvJqDHDPNY.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added '192.168.6.46' (ECDSA) to the list of known hosts.
mca@192.168.6.46's password:
Welcome to Ubuntu 18.04 LTS (GNU/Linux 4.15.0-23-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage

 * Canonical Livepatch is available for installation.
   - Reduce system reboots and improve kernel security. Activate at:
     https://ubuntu.com/livepatch

8 packages can be updated.
0 updates are security updates.


Last login: Mon Apr 25 15:48:44 2022 from 192.168.6.63
mca@S46:~$
```

## PROGRAM 1

**AIM: Shell program to check the given number is even or odd.**

```
#Author: Jeril Joy
echo "Enter a number:"
read n
r=`expr $n % 2`
if [ $r -eq 0 ]
then
echo "$n is Even number!"
else
echo "$n is Odd number!"
fi
```

## OUTPUT

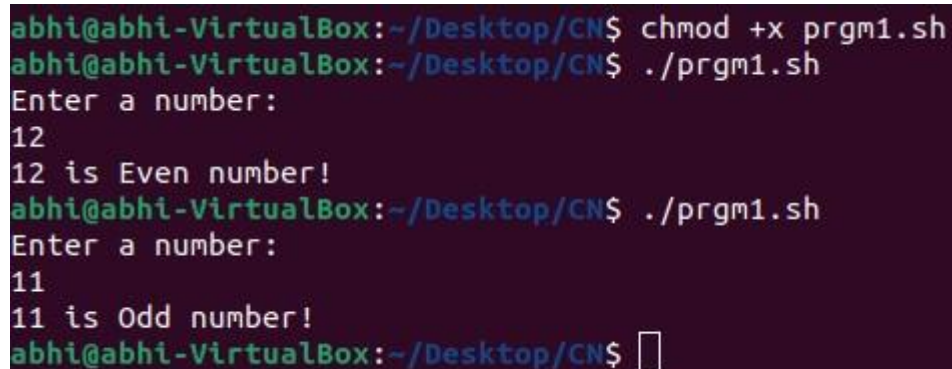

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm1.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm1.sh
Enter a number:
12
12 is Even number!
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm1.sh
Enter a number:
11
11 is Odd number!
abhi@abhi-VirtualBox:~/Desktop/CN$
```


## PROGRAM 2

**AIM: Shell program to check a leap year.**

```
#Author: Jeril Joy
echo "Enter a year:"
read y
a=`expr $y % 4`
b=`expr $y % 100`
c=`expr $y % 400`
if [ $a -eq 0 -a $b -ne 0 -o $c -eq 0 ]
then
```

```
echo "$y is leap year!"
else
echo "$y is not a leap year!"
fi
```

## OUTPUT

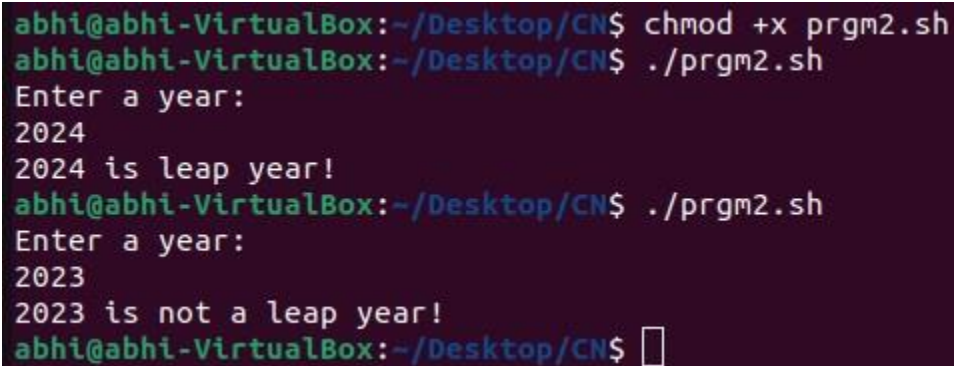

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm2.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm2.sh
Enter a year:
2024
2024 is leap year!
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm2.sh
Enter a year:
2023
2023 is not a leap year!
abhi@abhi-VirtualBox:~/Desktop/CN$
```


## PROGRAM 3

**AIM: Shell program to find the area and circumference of a circle.**

#Author: Jeril Joy

```
echo "Enter the radius of the circle:"
read r
area=`expr 3.14*$r*$r|bc`
echo "Area=$area"
circum=`expr 2*3.14*$r|bc`
echo "Circumference=$circum"
```

## OUTPUT

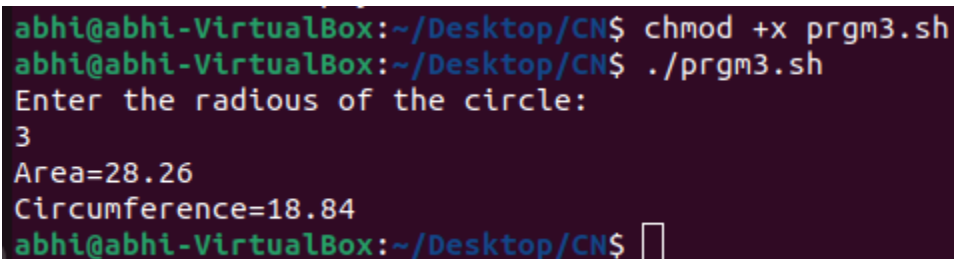

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm3.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm3.sh
Enter the radius of the circle:
3
Area=28.26
Circumference=18.84
abhi@abhi-VirtualBox:~/Desktop/CN$
```


## PROGRAM 4

**AIM: Shell program to check the given number and its reverse are same.**

#Author: Jeril Joy

```
echo "Enter a number:"
read num
r=`expr "$num" |rev `
if [ $r -eq $num ]
then
echo "$num is same to reverse $r !"
else
echo "$num is not same to reverse $r !"
fi
```

## OUTPUT

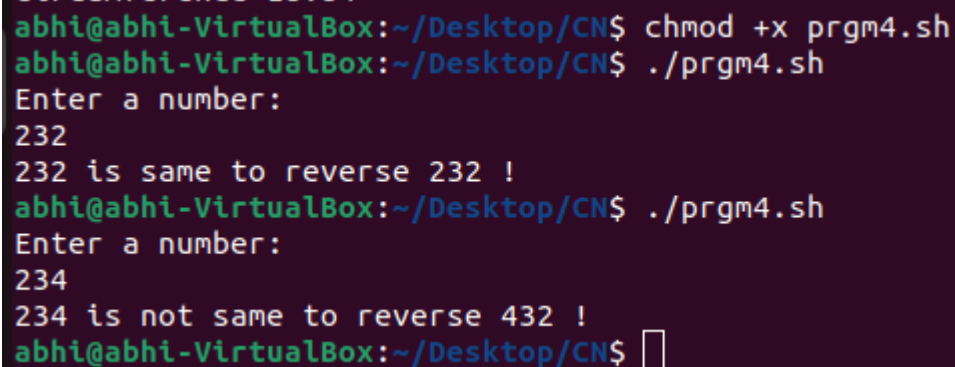

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm4.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm4.sh
Enter a number:
232
232 is same to reverse 232 !
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm4.sh
Enter a number:
234
234 is not same to reverse 432 !
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 5

**AIM:** Shell program to check the given string is palindrome or not.

#Author: Jeril Joy

```
echo "Enter a string:"
read s
echo $s>temp
rev="$(rev temp)"
if [ $s = $rev ]
then
echo "The string is palindrom !"
else
echo "The string is not palindrom !"
fi
```

## OUTPUT

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm5.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm5.sh
Enter a string:
malayalam
The string is palindrom !
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm5.sh
Enter a string:
english
The string is not palindrom !
abhi@abhi-VirtualBox:~/Desktop/CN$ █
```

## PROGRAM 6

**AIM:** Shell program to find the sum of odd and even numbers from a set of numbers.

#Author: Jeril Joy

```
echo "Enter number separated by spaces"
```

```
read number
```

```
for num in $number;
```

```
do
```

```
if ((num % 2 == 0))
```

```
then
```

```
((sum_even+=num))
```

```
else
```

```
((sum_odd+=num))
```

```
fi
```

```
done
```

```
echo "sum of even numbers:$sum_even"
```

```
echo "sum of odd numbers:$sum_odd"
```

## OUTPUT

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm6.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm6.sh
Enter number separated by spaces
1 2 3 4
sum of even numbers:6
sum of odd numbers:4
abhi@abhi-VirtualBox:~/Desktop/CN$ █
```




## PROGRAM 7

**AIM: Shell program to find the roots of a quadratic equation.**

#Author: Jeril Joy

```
echo "Enter the coefficients of the quadratic equation (a, b, c): "  
read a b c  
discriminant=$((b*b - 4*a*c))  
if [ $discriminant -lt 0 ]  
then  
echo "The quadratic equation has no real roots."  
else  
root1=$(echo "scale=2; (-$b + sqrt($discriminant)) / (2*$a)" | bc)  
root2=$(echo "scale=2; (-$b - sqrt($discriminant)) / (2*$a)" | bc)  
echo "The roots of the quadratic equation are: $root1 and $root2"  
fi
```

## OUTPUT

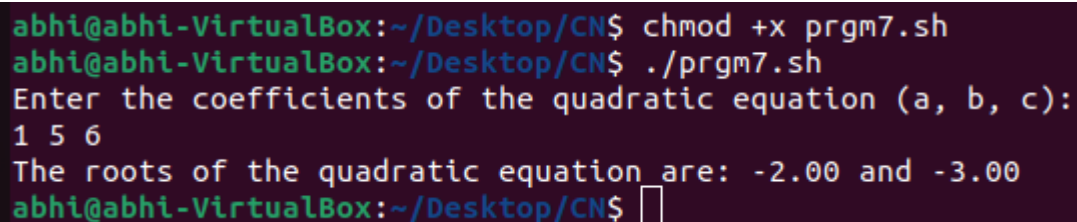

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm7.sh  
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm7.sh  
Enter the coefficients of the quadratic equation (a, b, c):  
1 5 6  
The roots of the quadratic equation are: -2.00 and -3.00  
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 8


**AIM: Shell program to check the given integer is Armstrong number or not.**

#Author: Jeril Joy

```
echo "Enter an integer: "  
read number  
count=${#number}  
sum=0  
for (( i=0; i<count; i++ ))  
do  
digit=${number:i:1}  
sum=$((sum + digit**count))  
done
```

```
done
if [ "$sum" -eq "$number" ]
then
echo "The number $number is an Armstrong number."
else
echo "The number $number is not an Armstrong number."
fi
```

## OUTPUT

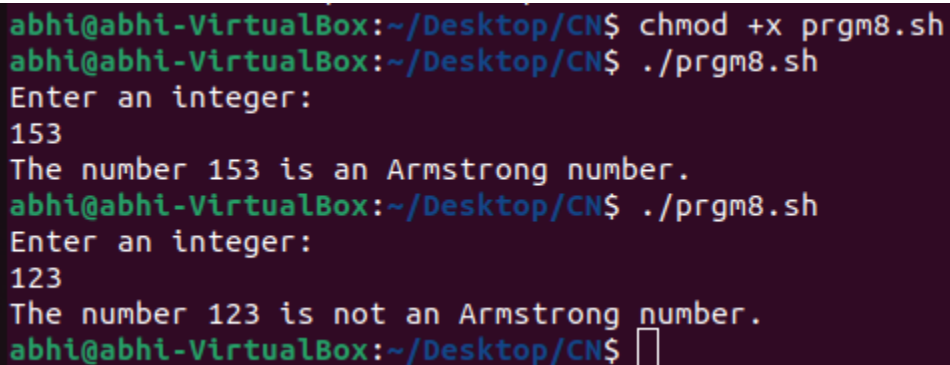

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm8.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm8.sh
Enter an integer:
153
The number 153 is an Armstrong number.
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm8.sh
Enter an integer:
123
The number 123 is not an Armstrong number.
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 9


**AIM:** Shell program to check the given integer is prime or not.

#Author: Jeril Joy

```
echo "Enter an integer: "
read number
flag=1
for (( i=2; i<=number/2; i++ ))
do
if [ $((number%i)) -eq 0 ]
then
flag=0
break
fi
done
if [ $number -eq 1 ]
then
```

```
echo "1 is neither prime nor composite."
elif [ $flag -eq 1 ]
then
echo "$number is a prime number."
else
echo "$number is not a prime number."
fi
```

## OUTPUT

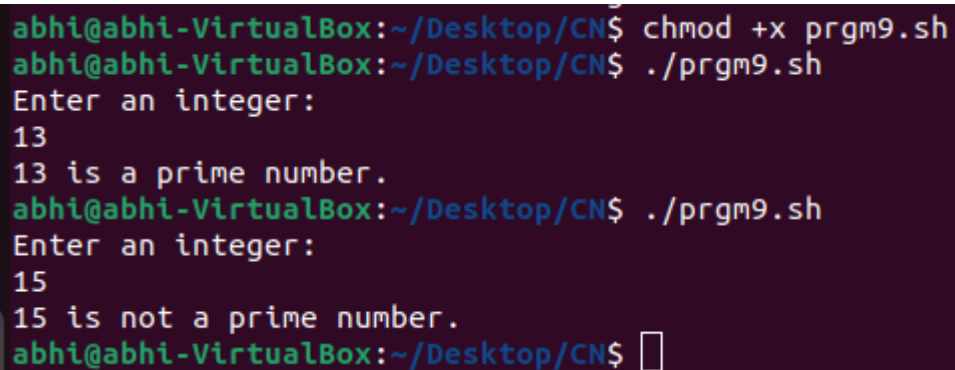

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm9.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm9.sh
Enter an integer:
13
13 is a prime number.
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm9.sh
Enter an integer:
15
15 is not a prime number.
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 10


**AIM:** Shell program to generate prime numbers between 1 and 50.

#Author: Jeril Joy

```
echo "Enter the starting number"
read st
echo "Enter the ending number"
read end
echo "prime numbers between $st and $end are:"
for((num=st;num<=end;num++))
do
flag=0
for((i=2;i<=num/2;i++))
do
if [ $((num%i)) -eq 0 ]
then
flag=1
```

```
break
fi
done
if [ $flag -eq 0 ]
then
echo $num
fi
done
```

## OUTPUT

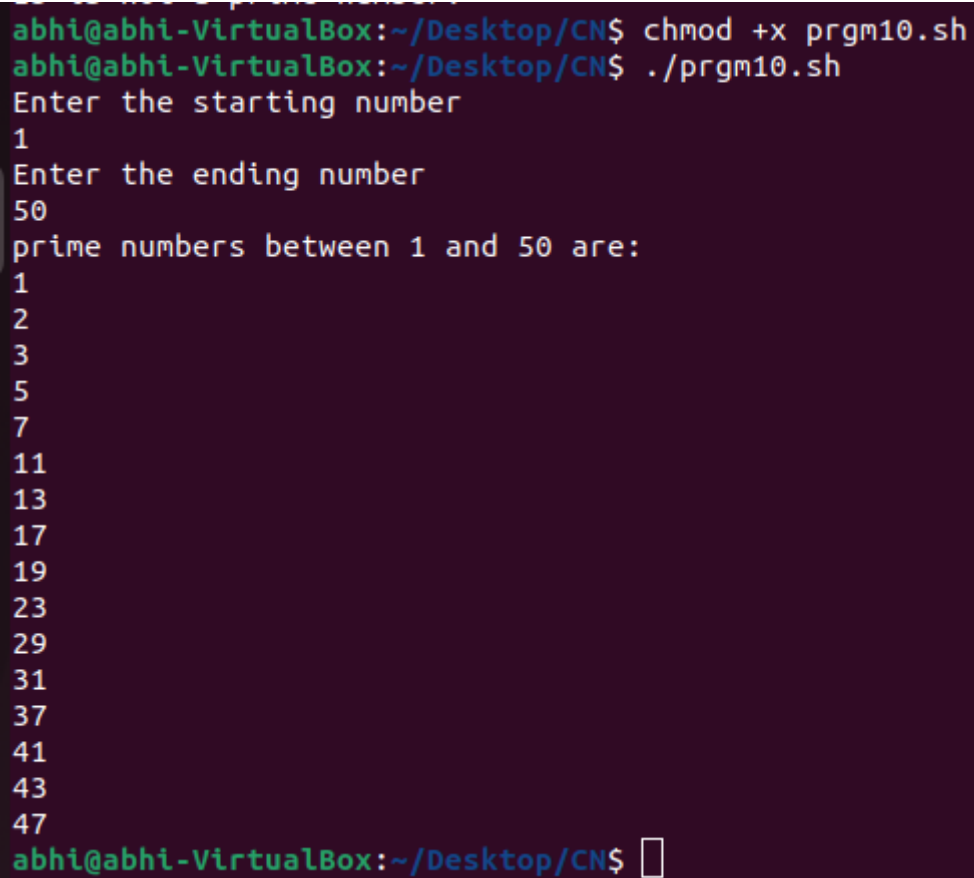

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm10.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm10.sh
Enter the starting number
1
Enter the ending number
50
prime numbers between 1 and 50 are:
1
2
3
5
7
11
13
17
19
23
29
31
37
41
43
47
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 11

**AIM:** Shell program to find the sum of square of individual digits of a number.


#Author: Jeril Joy

```
echo "Enter a number: "
```

```
read number
```

```
sum=0
while [ $number -ne 0 ]
do
digit=$((number % 10))
sum=$((sum + digit * digit))
number=$((number / 10))
done
echo "The sum of the squares of the digits is $sum."
```

## OUTPUT

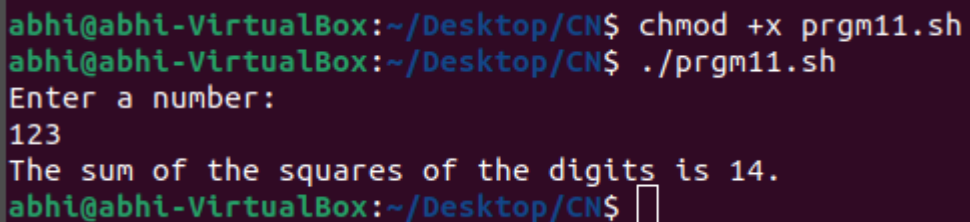

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm11.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm11.sh
Enter a number:
123
The sum of the squares of the digits is 14.
abhi@abhi-VirtualBox:~/Desktop/CN$
```


## PROGRAM 12

**AIM: Shell program to count the number of vowels in a line of text.**

#Author: Jeril Joy

```
echo "Enter a line of text: "
read text
text_lower=$(echo "$text" | tr '[:upper:]' '[:lower:]')
count=$(echo "$text_lower" | tr -cd 'aeiou' | wc -c)
echo "Number of vowels in the text: $count"
```

## OUTPUT

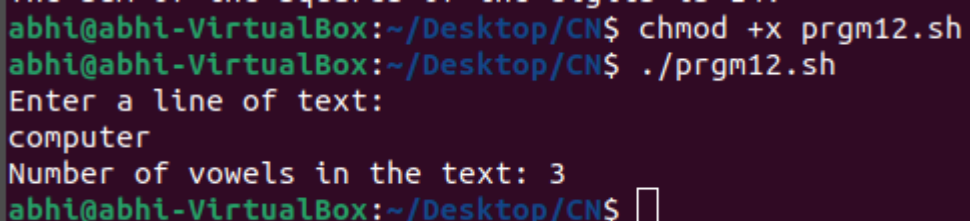

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm12.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm12.sh
Enter a line of text:
computer
Number of vowels in the text: 3
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 13

**AIM: Shell program to display student grades.**

#Author: Jeril Joy

```
echo "Enter mark of the student:"
```

```
read mark
```

```
get_grade() {
```

```
    if [ $1 -ge 90 ];
```

```
    then
```

```
        echo "A"
```

```
    elif [ $1 -ge 80 ];
```

```
    then
```

```
        echo "B"
```

```
    elif [ $1 -ge 70 ];
```

```
    then
```

```
        echo "C"
```

```
    elif [ $1 -ge 60 ];
```

```
    then
```

```
        echo "D"
```

```
    else
```


```
        echo "F"
```

```
    fi
```

```
}
```

```
grade=$(get_grade $mark)
```

```
echo "Student grade: $grade"
```

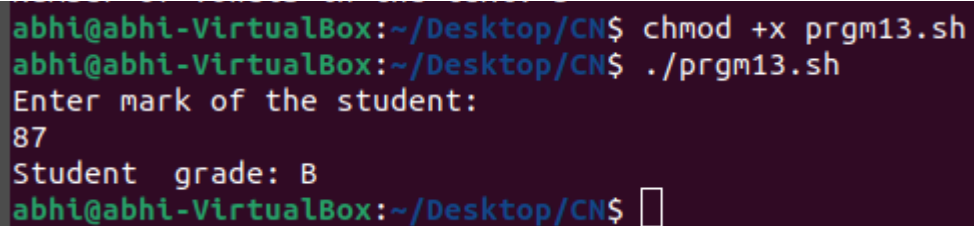
**OUTPUT**

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm13.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm13.sh
Enter mark of the student:
87
Student grade: B
abhi@abhi-VirtualBox:~/Desktop/CN$
```

**PROGRAM 14**

**AIM: Shell program to find the smallest and largest numbers from a set of numbers.**

```
#Author: Jeril Joy
echo "Enter number separated by space:"
read -a number
smallest=${number[0]}
largest=${number[0]}
for num in "${number[@]}";
do
if (( num < smallest ));
then
smallest=$num
fi
if (( num > largest ));
then
largest=$num
fi
done
echo "Smallest number: $smallest"
echo "Largest number: $largest"
```

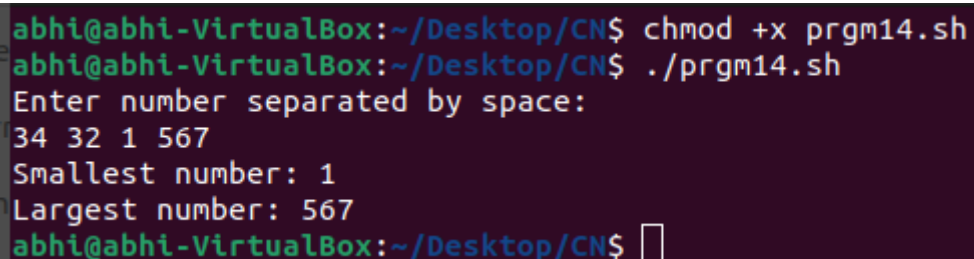**OUTPUT**


```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm14.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm14.sh
Enter number separated by space:
34 32 1 567
Smallest number: 1
Largest number: 567
abhi@abhi-VirtualBox:~/Desktop/CN$
```

**PROGRAM 15****AIM: Shell program to find the smallest digit from a number.**

```
#Author: Jeril Joy
echo "Enter a number: "
```

```
read num
smallest=9
while [ $num -gt 0 ]; do
digit=$((num % 10))
if [ $digit -lt $smallest ]; then
smallest=$digit
fi
num=$((num / 10))
done
echo "The smallest digit is: $smallest"
```

## OUTPUT

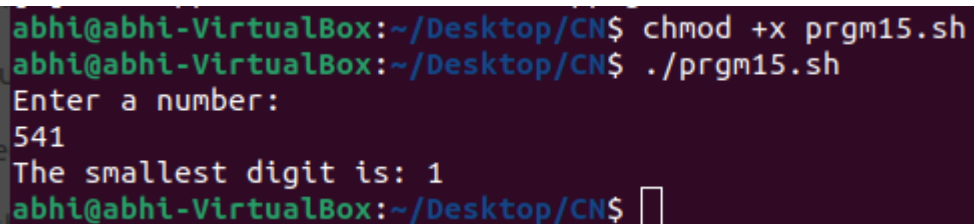

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm15.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm15.sh
Enter a number:
541
The smallest digit is: 1
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 16

**AIM:** Shell program to find the sum of all numbers between 50 and 100, which are divisible by 3 and not divisible by 5.

#Author: Jeril Joy

```
sum=0
for (( i=50; i<=100; i++ )); do
if [ $((i % 3)) -eq 0 ] && [ $((i % 5)) -ne 0 ];
then
sum=$((sum + i))
fi
done
echo "The sum of numbers between 50 and 100 divisible by 3 and not divisible by 5 is: $sum"
```

## OUTPUT



```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm16.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm16.sh
The sum of numbers between 50 and 100 divisible by 3 and not divisible by 5 is: 1050
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 17

**AIM: Shell program to find the second highest number from a set of numbers.**

#Author: Jeril Joy

```
num=(5 3 8 1 9 4 7 2)
```

```
highest=${num[0]}
```

```
second_highest=${num[0]}
```

```
for number in "${num[@]}";
```

```
do
```

```
if (( number > highest ));
```

```
then
```

```
second_highest=$highest
```

```
highest=$number
```

```
elif (( number != highest )) && (( number > second_highest ));
```

```
then
```

```
second_highest=$number
```

```
fi
```

```
done
```

```
echo "Second highest number: $second_highest"
```

## OUTPUT

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm17.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm17.sh
Second highest number: 8
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 18

**AIM: Shell program to find the sum of digits of a number using function.**


#Author: Jeril Joy

```
sum_of_digits()
```

```
{
```

```
num=$1
sum=0
while [ $num -gt 0 ];
do
sum=$((sum + num % 10))
num=$((num / 10))
done
echo $sum
}
echo "Enter a number:"
read number
result=$(sum_of_digits $number)
echo "Sum of digits of $number is $result"
```

## OUTPUT

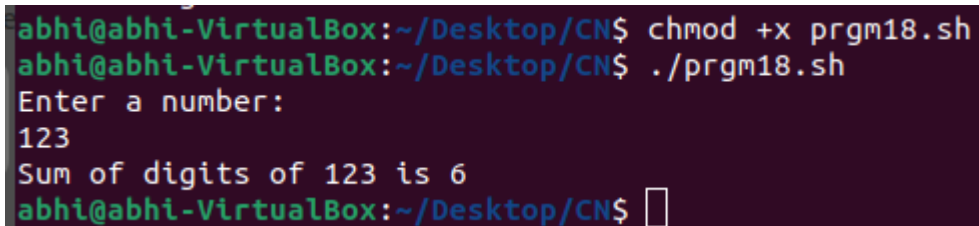

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm18.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm18.sh
Enter a number:
123
Sum of digits of 123 is 6
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 19


**AIM: Shell program to print the reverse of a number using function.**

#Author: Jeril Joy

```
reverse_number()
{
num=$1
reversed=0
while [ $num -gt 0 ];
do
digit=$((num % 10))
reversed=$((reversed * 10 + digit))
num=$((num / 10))
```

```
done
echo $reversed
}
echo "Enter a number:"
read number
result=$(reverse_number $number)
echo "Reverse of $number is $result"
```

## OUTPUT

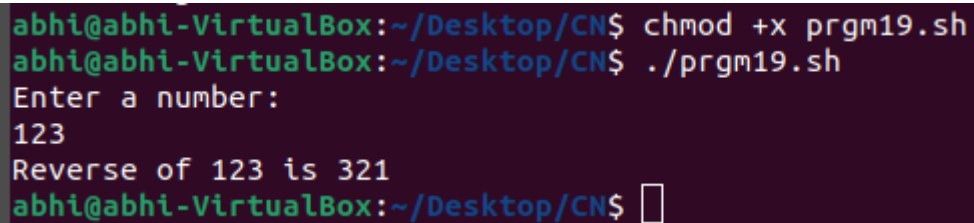

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm19.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm19.sh
Enter a number:
123
Reverse of 123 is 321
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 20

**AIM: Shell program to find the factorial of a number using for loop.**

#Author: Jeril Joy

```
echo "Enter a number:"
read number
if [ $number -lt 0 ];
then
echo "Factorial is not defined for negative numbers."
exit 1
fi
factorial=1
for ((i=1; i<=number; i++));
do
factorial=$((factorial * i))
done
echo "Factorial of $number is $factorial"
```

## OUTPUT

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm20.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm20.sh
Enter a number:
3
Factorial of 3 is 6
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 21

**AIM: Shell program to generate Fibonacci series.**

#Author: Jeril Joy

```
fibonacci()
{
if [ $1 -le 0 ];
then
echo "Invalid input. Please enter a positive integer."
return
fi
a=0
b=1
echo -n "$a, $b"
for (( i=2; i<=$1; i++ )); do
c=$((a + b))
echo -n ", $c"
a=$b
b=$c
done
echo ""
echo "Enter the number of terms in the Fibonacci series:"
read n
fibonacci $n
```

## OUTPUT

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm21.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm21.sh
Enter the number of terms in the Fibonacci series:
4
0, 1, 1, 2
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 22


**AIM:** shell script, which receives two filenames as arguments. It checks whether the two files contents are same or not. If they are same then second file is deleted.

#Author: Jeril Joy

```
if [ $# -ne 2 ];
then
echo "Usage: $0 file1 file2"
exit 1
fi
file1=$1
file2=$2
if [ ! -f "$file1" ];
then
echo "File $file1 does not exist."
exit 2
fi
if [ ! -f "$file2" ];
then
echo "File $file2 does not exist."
exit 3
fi
if cmp -s "$file1" "$file2";
then
echo "Files $file1 and $file2 are the same. Deleting $file2..."
rm "$file2"
```

```
else
echo "Files $file1 and $file2 are different."
fi
```

## OUTPUT

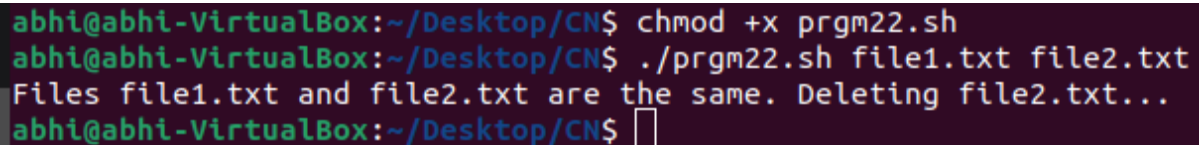

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm22.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm22.sh file1.txt file2.txt
Files file1.txt and file2.txt are the same. Deleting file2.txt...
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 23

**AIM: Menu driven Shell script that Lists current directory, Prints Working Directory, displays Date and displays Users logged in.**

#Author: Jeril Joy

```
while true; do
echo "Select an option:"
echo "1) List current directory contents"
echo "2) Print working directory"
echo "3) Display date and time"
echo "4) Display users logged in"
echo "5) Exit"
read -p "Enter your choice [1-5]: " choice
case $choice in
    1)
        echo "Listing current directory contents..."
        ls -la
        ;;
    2)
        echo "Current working directory:"
        pwd
        ;;
    3)
        echo "Current date and time:"
        date
```

```
;;  
4)  
    echo "Users currently logged in:"  
    who  
    ;;  
5)  
    echo "Exiting."  
    break  
    ;;  
*)  
    echo "Invalid option, please choose a number between 1 and 5."  
    ;;  
esac  
echo  
done
```

**OUTPUT**

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm23.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm23.sh
Select an option:
1) List current directory contents
2) Print working directory
3) Display date and time
4) Display users logged in
5) Exit
Enter your choice [1-5]: 2
Current working directory:
/home/abhi/Desktop/CN

Select an option:
1) List current directory contents
2) Print working directory
3) Display date and time
4) Display users logged in
5) Exit
Enter your choice [1-5]: 4
Users currently logged in:
abhi      tty2      2024-04-13 08:59 (tty2)

Select an option:
1) List current directory contents
2) Print working directory
3) Display date and time
4) Display users logged in
5) Exit
Enter your choice [1-5]: 5
Exiting.
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 24

**AIM:** Shell script to check executable rights for all files in the current directory, if a file does not have the execute permission then make it executable.


#Author: Jeril Joy

```
for file in *;
do
if [ -f "$file" ];
then
if [ ! -x "$file" ];
then
echo "Adding execute permission to $file"
```



```
chmod +x "$file"
else
echo "$file already has execute permissions."
fi
fi
done
```

## OUTPUT

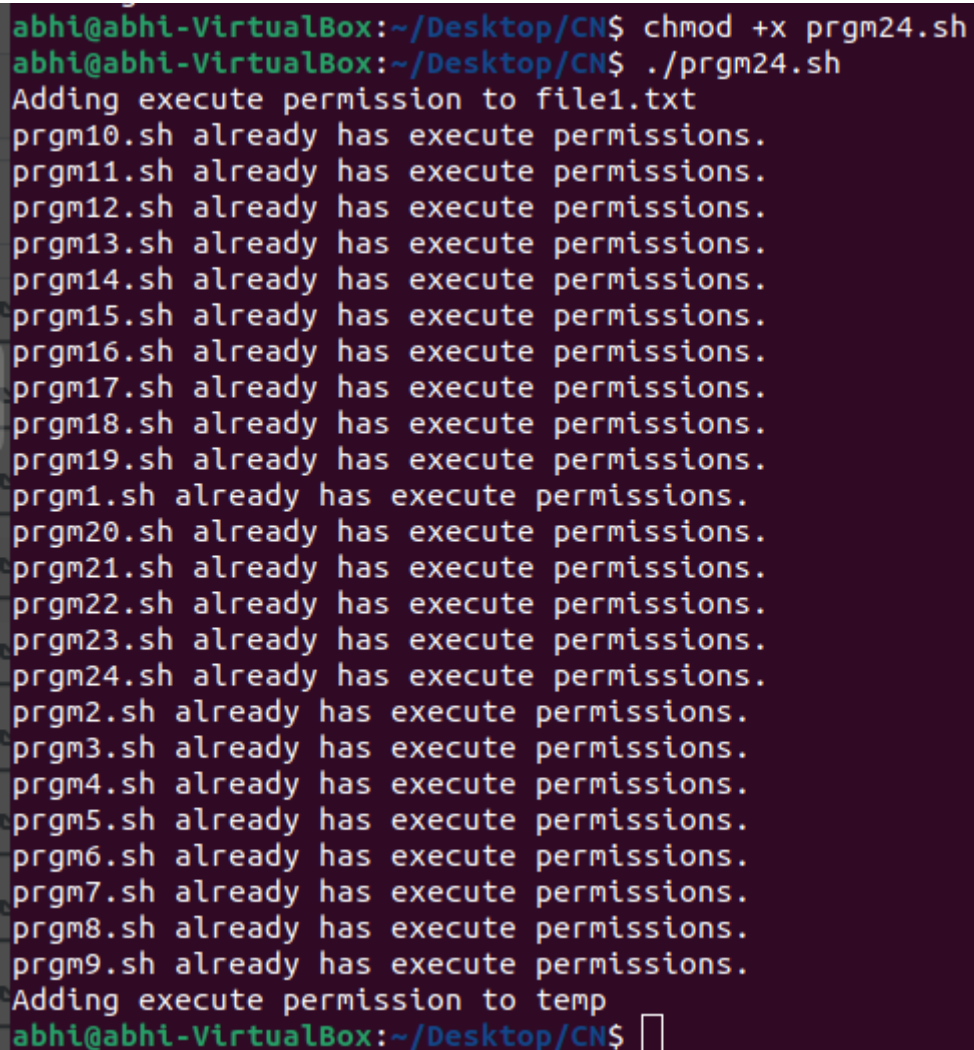

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm24.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm24.sh
Adding execute permission to file1.txt
prgm10.sh already has execute permissions.
prgm11.sh already has execute permissions.
prgm12.sh already has execute permissions.
prgm13.sh already has execute permissions.
prgm14.sh already has execute permissions.
prgm15.sh already has execute permissions.
prgm16.sh already has execute permissions.
prgm17.sh already has execute permissions.
prgm18.sh already has execute permissions.
prgm19.sh already has execute permissions.
prgm1.sh already has execute permissions.
prgm20.sh already has execute permissions.
prgm21.sh already has execute permissions.
prgm22.sh already has execute permissions.
prgm23.sh already has execute permissions.
prgm24.sh already has execute permissions.
prgm2.sh already has execute permissions.
prgm3.sh already has execute permissions.
prgm4.sh already has execute permissions.
prgm5.sh already has execute permissions.
prgm6.sh already has execute permissions.
prgm7.sh already has execute permissions.
prgm8.sh already has execute permissions.
prgm9.sh already has execute permissions.
Adding execute permission to temp
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 25


**AIM:** Shell program to generate all combinations of 1, 2, and 3 using loop.

#Author: Jeril Joy

```
for i in 1 2 3; do
    for j in 1 2 3; do
```

```
    for k in 1 2 3; do
        echo "$i$j$k"
    done
done
done
```

## OUTPUT

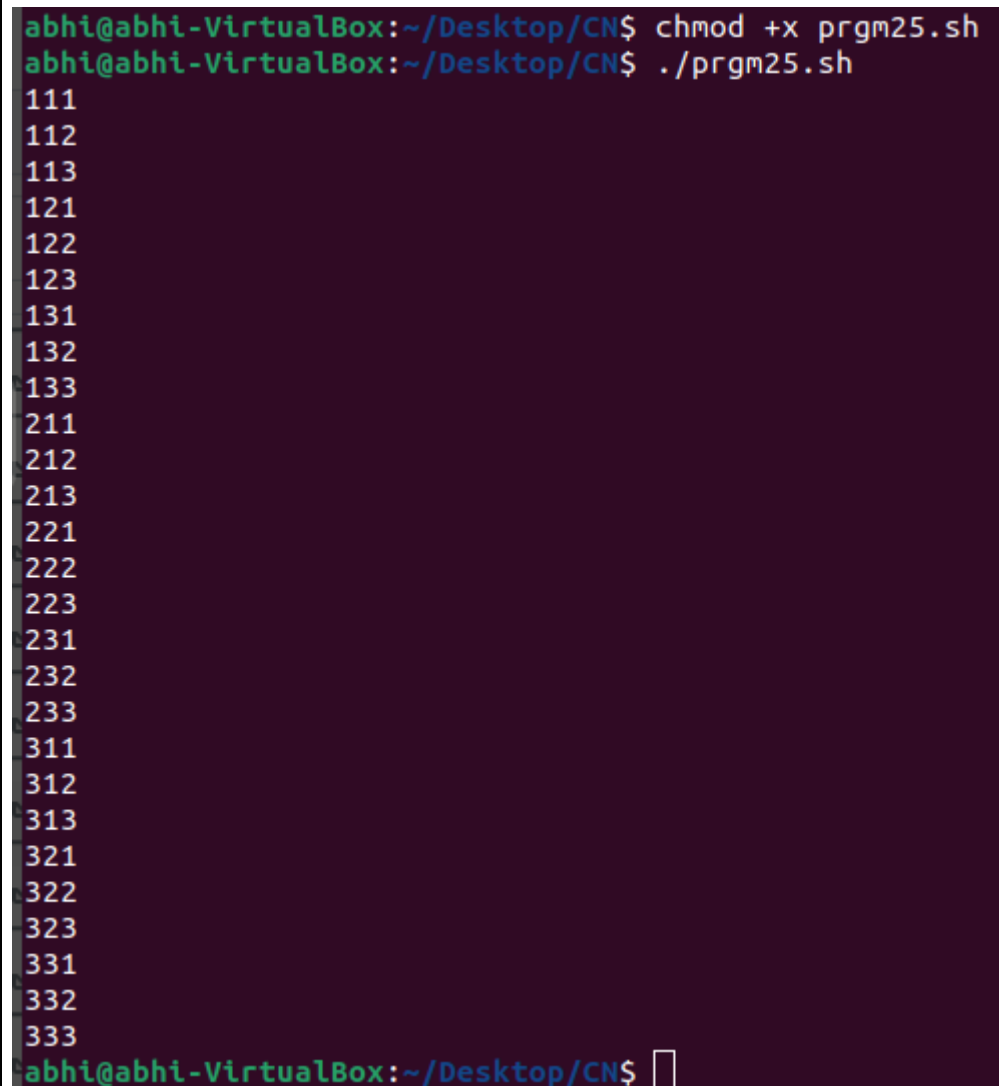

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm25.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm25.sh
111
112
113
121
122
123
131
132
133
211
212
213
221
222
223
231
232
233
311
312
313
321
322
323
331
332
333
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 26

**AIM: Shell program to create the number series.**

#Author: Jeril Joy

```
num=1
```

```
row=1
```


```
while [ $row -le 4 ]; do
```

```

for (( i=1; i<=$row; i++ )); do
echo -n "$num "
num=$((num+1))
done
echo ""
row=$((row+1))
done

```

## OUTPUT

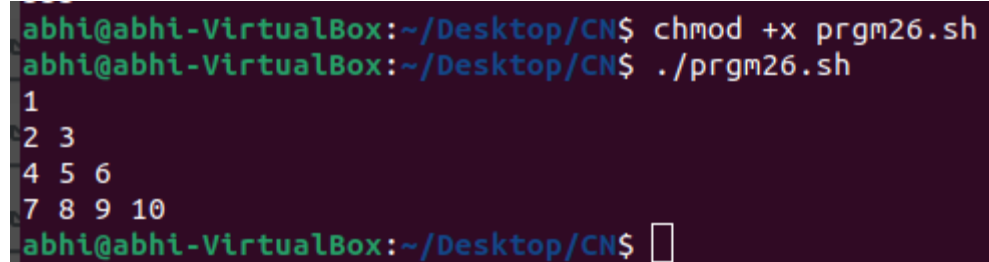

```

abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm26.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm26.sh
1
2 3
4 5 6
7 8 9 10
abhi@abhi-VirtualBox:~/Desktop/CN$ 

```

## PROGRAM 27

**AIM: Shell program to create Pascal's triangle.**

#Author: Jeril Joy

```


factorial() {
num=$1
fact=1
while [ $num -gt 1 ]; do
fact=$((fact * num))
num=$((num - 1))
done
echo $fact
}

binomial_coefficient() {
n=$1
k=$2
numerator=$(factorial $n)
denominator=$(( $(factorial $k) * $(factorial $((n - k))) ))

```

```
echo $((numerator / denominator))
}
echo -n "Enter the number of rows for Pascal's Triangle: "
read rows
for (( n=0; n<rows; n++ ))
do
for (( space=rows; space>n; space-- ))
do
echo -n " "
done
for (( k=0; k<=n; k++ ))
do
echo -n "$(binomial_coefficient $n $k) "
done
echo ""
done
```

## OUTPUT

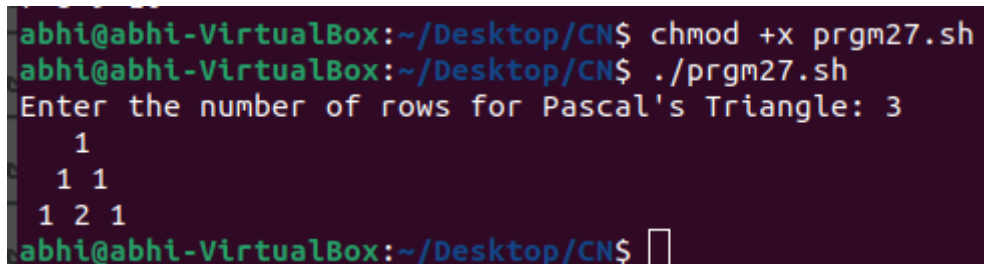

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm27.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm27.sh
Enter the number of rows for Pascal's Triangle: 3
  1
 1 1
1 2 1
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 28


### AIM: Decimal to Binary Conversion Shell Script.

#Author: Jeril Joy

```
echo "Enter a decimal number: "
read decimal
binary=""
while [ $decimal -gt 0 ]; do
remainder=$((decimal % 2))
```

```
binary="$remainder$binary"
decimal=$((decimal / 2))
done
echo "The binary equivalent is: $binary"
```

## OUTPUT

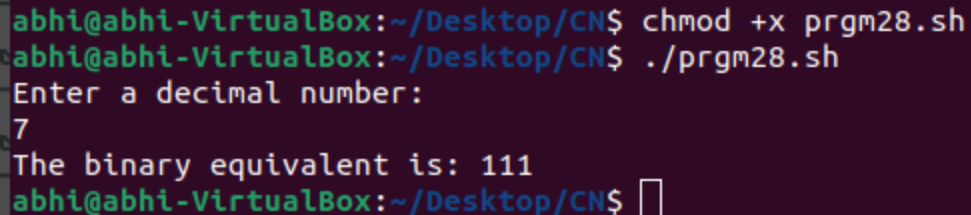


```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm28.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm28.sh
Enter a decimal number:
7
The binary equivalent is: 111
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 29

**AIM: Shell Script to Check Whether a String is Palindrome or not.**

```
#Author: Jeril Joy
echo "Enter a string: "
read string
reverse=$(echo $string | rev)
if [ "$string" == "$reverse" ]; then
echo "$string is a palindrome."
else
echo "$string is not a palindrome."
fi
```

## OUTPUT

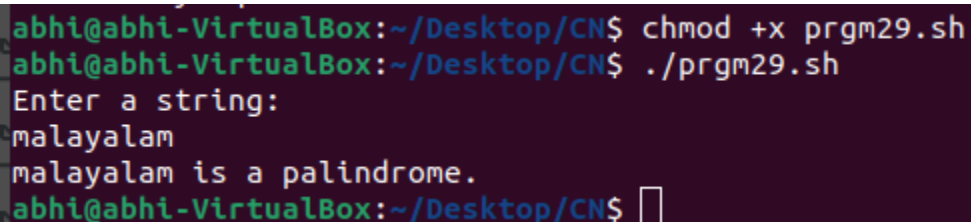

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm29.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm29.sh
Enter a string:
malayalam
malayalam is a palindrome.
abhi@abhi-VirtualBox:~/Desktop/CN$
```


## PROGRAM 30

**AIM: Shell script to find out the unique words in a file and also count the occurrence of each of these words.**

```
#Author: Jeril Joy
if [ $# -ne 1 ];
```

```
then
echo "Usage: $0 <filename>"
exit 1
fi
if [ ! -f "$1" ];
then
echo "File not found: $1"
exit 1
fi
filename="$1"
declare -A word_count
while IFS= read -r word;
do
word=$(echo "$word" | tr -d '[:punct:]')
word=$(echo "$word" | tr '[:upper:]' '[:lower:]')
((word_count[$word]++))
done < "$filename"
echo "Unique words and their counts:"
for word in "${!word_count[@]}";
do
echo "$word: ${word_count[$word]}"
done
```

## OUTPUT

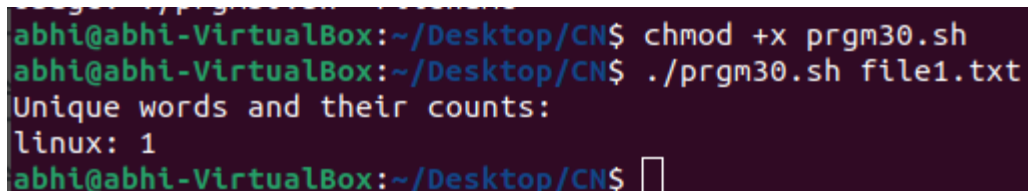

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm30.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm30.sh file1.txt
Unique words and their counts:
linux: 1
abhi@abhi-VirtualBox:~/Desktop/CN$
```


## PROGRAM 31

**AIM:** shell script to get the total count of the word “Linux” in all the “.txt” files and also across files present in subdirectories.

#Author: Jeril Joy

```
search_dir="."
files=$(find "$search_dir" -type f -name "*.txt")
count=0
for file in $files; do
occurrences=$(grep -o "Linux" "$file" | wc -l)
count=$((count + occurrences))
done
echo "Total count of 'Linux' in all .txt files: $count"
```

## OUTPUT

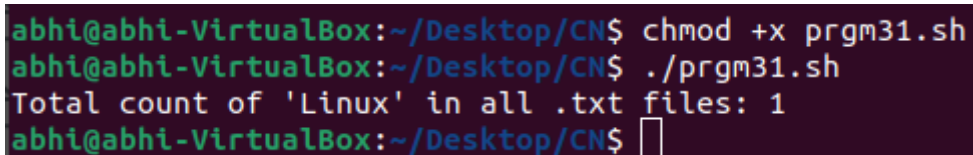

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm31.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm31.sh
Total count of 'Linux' in all .txt files: 1
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 32

**AIM:** shell script to validate password strength. Here are a few assumptions for the password string. ( Length – minimum of 8 characters. Contain both alphabet and number.Include both the small and capital case letters.)

#Author: Jeril Joy

```
read -p "Enter your password: " password
if [[ ${#password} -lt 8 ]]; then
echo "Password length must be at least 8 characters."
exit 1
fi
if ! [[ "$password" =~ [A-Za-z]+[0-9]+ ]]; then
echo "Password must contain both alphabet and number."
exit 1
fi
if ! [[ "$password" =~ [a-z]+ ]] || ! [[ "$password" =~ [A-Z]+ ]]; then
echo "Password must include both small and capital case letters."
exit 1
fi
echo "Password is valid."
```

## OUTPUT

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm32.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm32.sh
Enter your password: Abc1@123
Password is valid.
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 33

**AIM: Shell script to print the count of files and subdirectories in the specified directory.**

#Author: Jeril Joy

echo "Enter directory path: "

read directory

num\_files=\$(find \$directory -type f | wc -l)

num\_directories=\$(find \$directory -type d | wc -l)

echo "Number of files: \$num\_files"

echo "Number of directories: \$num\_directories"

## OUTPUT

```
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm33.sh
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm33.sh
Enter directory path:
/home/abhi/Desktop/CN
Number of files: 35
Number of directories: 1
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## PROGRAM 34

**AIM: Shell script to reverse the list of strings and reverse each string further in the list.**

#Author: Jeril Joy

my\_list=("string1" "string2" "string3" "string4")

my\_list=\$(echo "\${my\_list[@]}" | tr ' ' '\n' | tac | tr '\n' ' ')

for i in "\${!my\_list[@]}"

do

my\_list[\$i]=`echo \${my\_list[\$i]} | rev`

done



```
echo "${my_list[@]}"
```


## OUTPUT

```
Number of directories: 1  
abhi@abhi-VirtualBox:~/Desktop/CN$ chmod +x prgm34.sh  
abhi@abhi-VirtualBox:~/Desktop/CN$ ./prgm34.sh  
4gnirts 3gnirts 2gnirts 1gnirts  
abhi@abhi-VirtualBox:~/Desktop/CN$
```

## 5. File system hierarchy in a common Linux distribution, file and device permissions, study of system configuration files in /etc, familiarizing log files for system events, user activity, network events.

The Linux File Hierarchy Structure or the Filesystem Hierarchy Standard (FHS) defines the directory structure and directory contents in Unix-like operating systems. It is maintained by the Linux Foundation.

- ☐ In the FHS, all files and directories appear under the root directory /, even if they are stored on different physical or virtual devices.
- ☐ Some of these directories only exist on a particular system if certain subsystems, such as the X Window System, are installed.
- ☐ Most of these directories exist in all UNIX operating systems and are generally used in much the same way; however, the descriptions here are those used specifically for the FHS, and are not considered authoritative for platforms other than Linux.

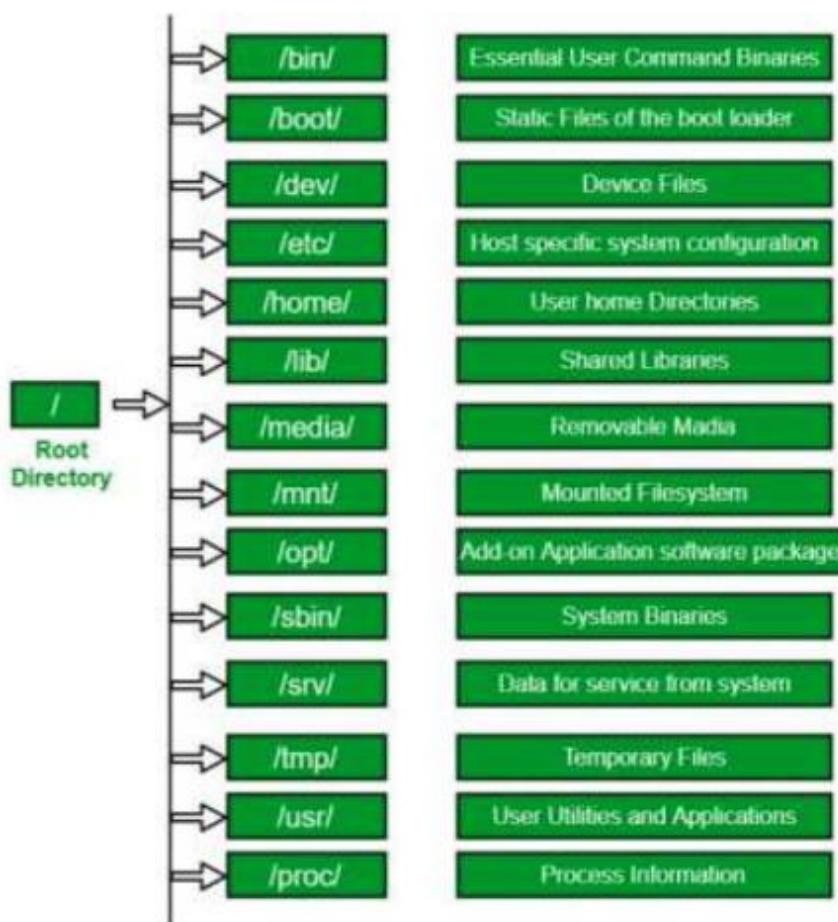

## – The Root Directory

Everything on your Linux system is located under the / directory, known as the root directory. You can think of the / directory as being similar to the C:\ directory on Windows – but this isn't strictly true, as Linux doesn't have drive letters. While another partition would be located at D:\ on Windows, this other partition would appear in another folder under / on Linux.

**/bin** : Essential command binaries that need to be available in single user mode; for all users, e.g., cat, ls, cp.

- ☐ Contains binary executables
- ☐ Common linux commands you need to use in single-user modes are located under this directory.
- ☐ Commands used by all the users of the system are located here e.g. ps, ls, ping, grep, cp

The /bin directory contains the essential user binaries (programs) that must be present when the system is mounted in single-user mode. Applications such as Firefox are stored in /usr/bin, while important system programs and utilities such as the bash shell are located in /bin. The /usr directory may be stored on another partition – placing these files in the /bin directory ensures the system will have these important utilities even if no other file systems are mounted. The /sbin directory is similar – it contains essential system administration binaries.

**/boot – Static Boot File:** The /boot directory contains the files needed to boot the system – for example, the GRUB boot loader's files and your Linux kernels are stored here. The boot loader's configuration files aren't located here, though – they're in /etc with the other configuration files.

**/cdrom** – Historical Mount Point for CD-ROMs

The /cdrom directory isn't part of the FHS standard, but you'll still find it on Ubuntu and other operating systems. It's a temporary location for CD-ROMs inserted in the system. However, the standard location for temporary media is inside the /media directory.

## **/dev – Device Files**

Linux exposes devices as files, and the /dev directory contains a number of special files that represent devices. These are not actual files as we know them, but they appear as files – for example, /dev/sda represents the first SATA drive in the system. If you wanted to partition it, you could start a partition editor and tell it to edit /dev/sda.

This directory also contains pseudo-devices, which are virtual devices that don't actually

correspond to hardware. For example, /dev/random produces random numbers. /dev/null is a special device that produces no output and automatically discards all input – when you pipe the output of a command to /dev/null, you discard it.

### **/etc – Configuration Files**

The /etc directory contains configuration files, which can generally be edited by hand in a text editor. Note that the /etc/ directory contains system-wide configuration files – user-specific configuration files are located in each user's home directory.

### **/home – Home Folders**

The /home directory contains a home folder for each user. For example, if your user name is bob, you have a home folder located at /home/bob. This home folder contains the user's data files and user-specific configuration files. Each user only has write access to their own home folder and must obtain elevated permissions (become the root user) to modify other files on the system.

### **/lib – Essential Shared Libraries**

The /lib directory contains libraries needed by the essential binaries in the /bin and /sbin folder. Libraries needed by the binaries in the /usr/bin folder are located in /usr/lib.

### **/lost+found – Recovered Files**

Each Linux file system has a lost+found directory. If the file system crashes, a file system check will be performed at next boot. Any corrupted files found will be placed in the lost+found directory, so you can attempt to recover as much data as possible.

### **/media – Removable Media**

The /media directory contains subdirectories where removable media devices inserted into the computer are mounted. For example, when you insert a CD into your Linux system, a directory will automatically be created inside the /media directory. You can access the contents of the CD inside this directory.

### **/mnt – Temporary Mount Points**

Historically speaking, the /mnt directory is where system administrators mounted temporary file systems while using them. For example, if you're mounting a Windows partition to perform some file recovery operations, you might mount it at /mnt/windows. However, you can mount other file systems anywhere on the system.

### **/opt – Optional Packages**

The /opt directory contains subdirectories for optional software packages. It's commonly used by proprietary software that doesn't obey the standard file system hierarchy – for example, a proprietary program might dump its files in /opt/application when you install it.

### **/proc – Kernel & Process Files**

The /proc directory is similar to the /dev directory because it doesn't contain standard files. It contains special files that represent system and process information.

### **/root – Root Home Directory**

The /root directory is the home directory of the root user. Instead of being located at /home/root, it's located at /root. This is distinct from /, which is the system root directory.

### **/run – Application State Files**

The /run directory is fairly new, and gives applications a standard place to store transient files they require like sockets and process IDs. These files can't be stored in /tmp because files in /tmp may be deleted.

### **/sbin – System Administration Binaries**

The /sbin directory is similar to the /bin directory. It contains essential binaries that are generally intended to be run by the root user for system administration.

### **/selinux – SELinux Virtual File System**

If your Linux distribution uses SELinux for security (Fedora and Red Hat, for example), the /selinux directory contains special files used by SELinux. It's similar to /proc. Ubuntu doesn't use SELinux, so the presence of this folder on Ubuntu appears to be a bug.

### **/srv – Service Data**

The /srv directory contains “data for services provided by the system.” If you were using the Apache HTTP server to serve a website, you’d likely store your website’s files in a directory inside the /srv directory.

### **/tmp – Temporary Files**

Applications store temporary files in the /tmp directory. These files are generally deleted whenever your system is restarted and may be deleted at any time by utilities such as tmpwatch.

### **/usr – User Binaries & Read-Only Data**

The /usr directory contains applications and files used by users, as opposed to applications and files used by the system. For example, non-essential applications are located inside the /usr/bin directory instead of the /bin directory and non-essential system administration binaries are located in the /usr/sbin directory instead of the /sbin directory. Libraries for each are located inside the /usr/lib directory. The /usr directory also contains other directories – for example, architecture-independent files like graphics are located in /usr/share. The /usr/local directory is where locally compiled applications install to by default – this prevents them from mucking up the rest of the system.

### **/var – Variable Data Files**

The /var directory is the writable counterpart to the /usr directory, which must be read-only in normal operation. Log files and everything else that would normally be written to /usr during normal operation are written to the /var directory. For example, you’ll find log files in /var/log.

## 6. Installation and configuration of LAMP stack. Deploy an open source application such as phpmyadmin and Wordpress.

### Procedure

#### Install Apache2

##### ☐ Update your system:

sudo apt update

```
mca@53:~$ sudo apt update
Hit:1 http://packages.microsoft.com/repos/vscode stable InRelease
Hit:2 http://in.archive.ubuntu.com/ubuntu bionic InRelease
Err:3 http://ppa.launchpad.net/jonathonf/python-3.6/ubuntu bionic InRelease
403 Forbidden [IP: 185.125.190.52 80]
Ign:4 https://repo.mongodb.org/apt/ubuntu trusty/mongodb-org/3.6 InRelease
Hit:5 http://ppa.launchpad.net/webupd8team/java/ubuntu bionic InRelease
Get:6 https://repo.mongodb.org/apt/ubuntu trusty/mongodb-org/3.6 Release [2,495 B]
Get:7 https://repo.mongodb.org/apt/ubuntu trusty/mongodb-org/3.6 Release.gpg [801 B]
Err:7 https://repo.mongodb.org/apt/ubuntu trusty/mongodb-org/3.6 Release.gpg
```

##### ☐ Install Apache using apt:

sudo apt install apache2

```
mca@53:~$ sudo apt install apache2
Reading package lists... Done
Building dependency tree
Reading state information... Done
apache2 is already the newest version (2.4.29-1ubuntu4).
The following packages were automatically installed and are no longer required:
  debhelper dh-autoreconf dh-strip-nondeterminism libarchive-cpio-perl libfile-stripnondeterminism-perl libmail-sendmail-perl libpcre16-3
  libpcre3-dev libpcre32-3 libpcrecpp0v5 libssl-dev libssl-doc libsys-hostname-long-perl php-common php-pear php-xsl php7.2-cli
  php7.2-common php7.2-json php7.2-opcache php7.2-readline php7.2-xsl pkg-php-tools po-debconf shtool
Use 'sudo apt autoremove' to remove them.
0 upgraded, 0 newly installed, 0 to remove and 8 not upgraded.
```

##### ☐ Confirm that Apache is now running with the following command:

sudo systemctl status apache2

##### ☐ If it is not working !


sudo systemctl stop apache2 # to stop if running

sudo systemctl start apache2 # to start if not running

##### ☐ Once installed, test by accessing your server's IP in your browser:

<http://127.0.0.1/>

<http://localhost/>

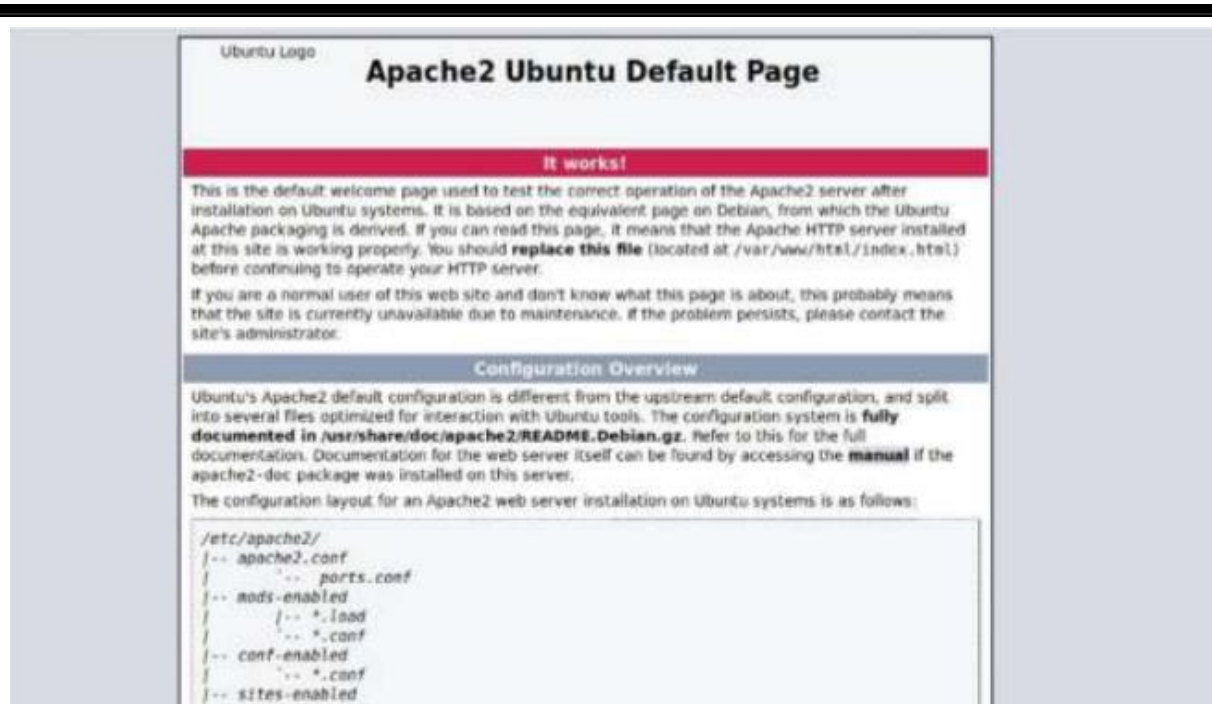

## Install mariadb

`sudo apt install mariadb-server mariadb-client`

`sudo systemctl status mysql # to check status`

`sudo systemctl start mysql # if not running`

`sudo mysql_secure_installation # Secure your newly installed MariaDB`

## Install PHP and commonly used modules

`sudo apt install php libapache2-mod-php php-openssl php-cli php-gd`

`php-curl php-mysql`

`sudo systemctl restart apache2`

### Test PHP Processing on Web Server

`sudo nano /var/www/html/phpinfo.php`

☐ Inside the file, type in the valid PHP code:

```
<?php
```

```
phpinfo ();
```

```
?>
```

☐ Press **CTRL + X** to save and close the file. Press **y** and **ENTER** to confirm Open a browser and type in your IP address/`phpinfo.php`



`http://127.0.0.1/phpinfo.php`

Install phpmyadmin

```
sudo apt install phpmyadmin php-mbstring php-zip php-gd php-json php-curl
```

```
sudo systemctl restart apache2
```

☐ **Open a browser : `http://localhost/phpmyadmin`**

**username:root**

**password : yourpassword** If php my admin page not found :

```
nano /etc/apache2/apache2.conf
```

☐ **Add this line to last of the file.**

**Press CTRL + X to save and close the file. Press y and ENTER to confirm**

```
Include /etc/phpmyadmin/apache.conf
```

☐ **restart apache2 - now try : `http://localhost/phpmyadmin`**

```
sudo systemctl restart apache2
```

☐ **If any problem for login run the following command**

**sudo mysql**

```
ALTER USER root@localhost IDENTIFIED BY "yourpassword";
```

## **Install WordPress with LAMP on Ubuntu 18.04**

### **Step 1 – Download WordPress**

Download the latest version of the WordPress package and extract it by issuing the commands below on the terminal:

☐ `wget -c http://wordpress.org/latest.tar.gz`

```
mca@53:~$ wget -c http://wordpress.org/latest.tar.gz
--2022-06-13 15:24:19-- http://wordpress.org/latest.tar.gz
Resolving wordpress.org (wordpress.org)... 198.143.164.252
Connecting to wordpress.org (wordpress.org)|198.143.164.252|:80... connected.
HTTP request sent, awaiting response... 301 Moved Permanently
Location: https://wordpress.org/latest.tar.gz [following]
--2022-06-13 15:24:20-- https://wordpress.org/latest.tar.gz
Connecting to wordpress.org (wordpress.org)|198.143.164.252|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 21166276 (20M) [application/octet-stream]
Saving to: 'latest.tar.gz'

latest.tar.gz          100%[=====]
2022-06-13 15:24:24 (5.98 MB/s) - 'latest.tar.gz' saved [21166276/21166276]
```

☐ `tar -xzf latest.tar.gz`

```
mca@53:~$ tar -xzf latest.tar.gz
wordpress/
wordpress/xmlrpc.php
wordpress/wp-blog-header.php
wordpress/readme.html
wordpress/wp-signup.php
wordpress/index.php
wordpress/wp-cron.php
wordpress/wp-config-sample.php
wordpress/wp-login.php
wordpress/wp-settings.php
wordpress/license.txt
wordpress/wp-content/
wordpress/wp-content/themes/
wordpress/wp-content/themes/twentytwentyone/
wordpress/wp-content/themes/twentytwentyone/footer.php
wordpress/wp-content/themes/twentytwentyone/template-parts/
```

Then move the WordPress files from the extracted folder to the Apache default root directory, /var/www/html/:

☐ `sudo mv wordpress/* /var/www/html/`

Next, set the correct permissions on the website directory, that is give ownership of the WordPress files to the webserver as follows:

☐ `sudo chown -R www-data:www-data /var/www/html/`

☐ `sudo chmod -R 755 /var/www/html/`

## Step 2 – Creating a MySQL Database and User for WordPress

The first step you'll take is a preparatory one. Even though MySQL is already installed, you still need to create a database to manage and store

the user information for WordPress to use. To get started, log into the MySQL root(administrative) account by issuing the following command:


```
❑ sudo mysql
```

You will be prompted for the password you set for the MySQL root account when you installed the software. However, if you have password authentication enabled for your root user, you can run the following command and enter your password information when prompted:

```
❑ mysql -u root -p
```

From there, you'll create a new database that WordPress will control. You can call this whatever you would like, but we will be using wordpress in this guide as an example. Create the database for WordPress by writing the following:

```
❑ CREATE DATABASE wordpress DEFAULT CHARACTER SET utf8 COLLATE utf8_unicode_ci;
```

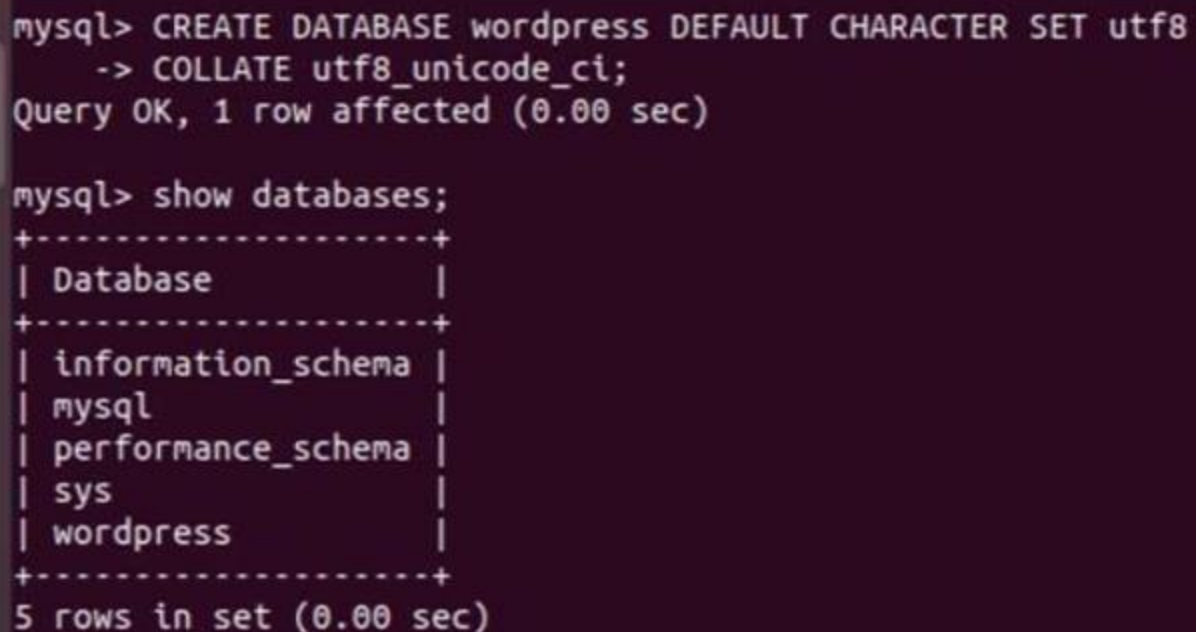

```
mysql> CREATE DATABASE wordpress DEFAULT CHARACTER SET utf8
-> COLLATE utf8_unicode_ci;
Query OK, 1 row affected (0.00 sec)

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
| wordpress |
+-----+
5 rows in set (0.00 sec)
```

Next, you're going to create a separate MySQL user account that you'll use exclusively to operate on the new database. Creating one-function databases and accounts is a good idea from a management and security standpoint. We will use the name wordpressuser as an example in this guide. Feel free to change this if you'd like. You can create this account,

set a password for it, and then grant it access to the database you created all by running the following command. Remember to choose a strong password here for your database user:

```
❑ GRANT ALL ON wordpress.* TO
```

```
'wordpressuser'@'localhost' IDENTIFIED BY 'password';
```

After creating this user, flush the privileges to ensure that the current instance of MySQL knows about the recent changes you've made:

```
❑ FLUSH PRIVILEGES;
```

Exit out of MySQL:

```
❑ EXIT
```

You now have a database and user account in MySQL, each made specifically for WordPress. Go the /var/www/html/ directory and rename existing wp-config-sample.php to wpconfig.php. Also, make sure to remove the default Apache index page.

```
❑ cd /var/www/html/
```

```
❑ sudo mv wp-config-sample.php wp-config.php
```

```
❑ sudo rm -rf index.html
```

```
mca@S3:~$ cd /var/www/html/
```

```
mca@S3:/var/www/html$ sudo mv wp-config-sample.php wp-config.php
```

```
mca@S3:/var/www/html$ sudo rm -rf index.html
```

Then update it with your database information under the MySQL settings section (refer to the highlighted boxes in the image below): This setting can be added after the database connection settings, or anywhere else in the file: Save and close the file when you are finished. Restart the web server and mysql service using the commands below:

```
❑ sudo systemctl restart apache2.service
```

```
❑ sudo systemctl restart mysql.service
```


```
mca@S46:/var/www/html$ sudo systemctl restart apache2.service  
mca@S46:/var/www/html$ sudo systemctl restart mysql.service
```

### Step 3 – Completing the Installation Through the Web Interface


Now that the server configuration is complete, you can complete the installation through the web interface. In your web browser, navigate to your server's domain name or public IP address:

□ [https://server\\_domain\\_or\\_IP](https://server_domain_or_IP)

Select the language you would like to use: Next you will be directed to the main setup page. Select a name for your WordPress site and choose a username (it is recommended not to choose something like “admin” for security purposes). A strong password is generated automatically. Save this password or select an alternative strong password. Enter your email address and select whether you want to discourage search engines from indexing your site: Once you log in, you will be taken to the WordPress administration dashboard: From there, you can begin using and customizing your WordPress site

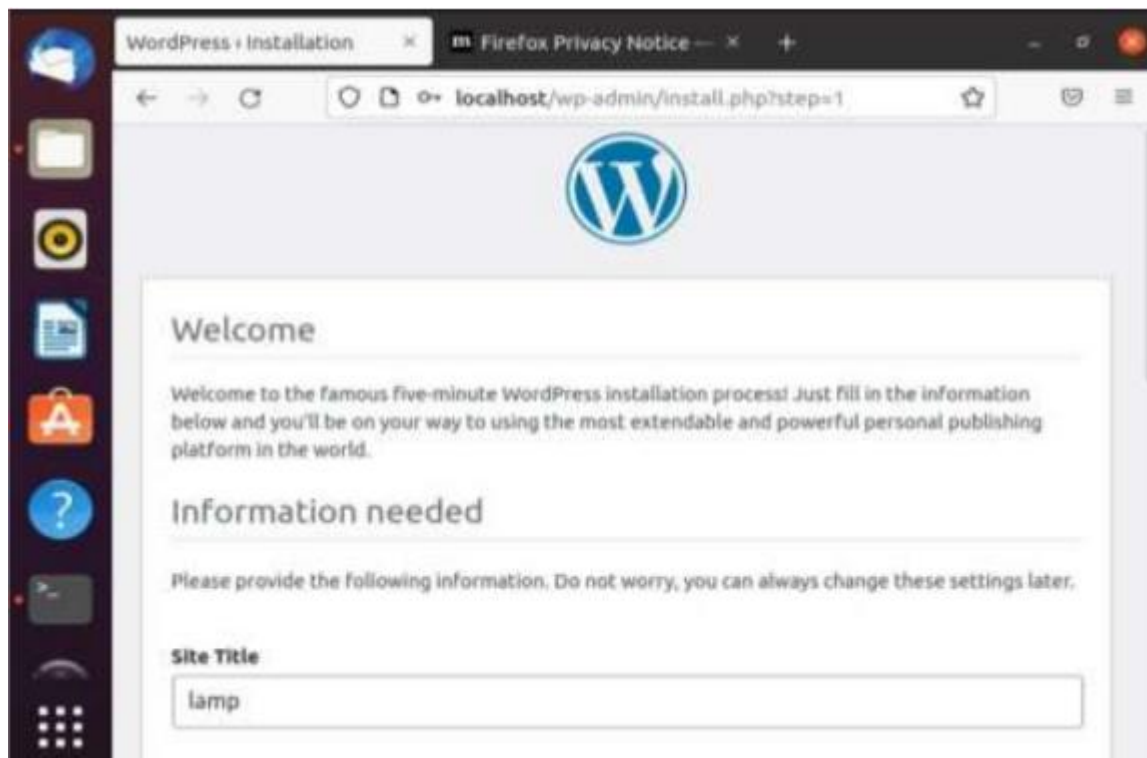

Once you log in, you will be taken to the WordPress administration dashboard: From there, you can begin using and customizing your WordPress site.

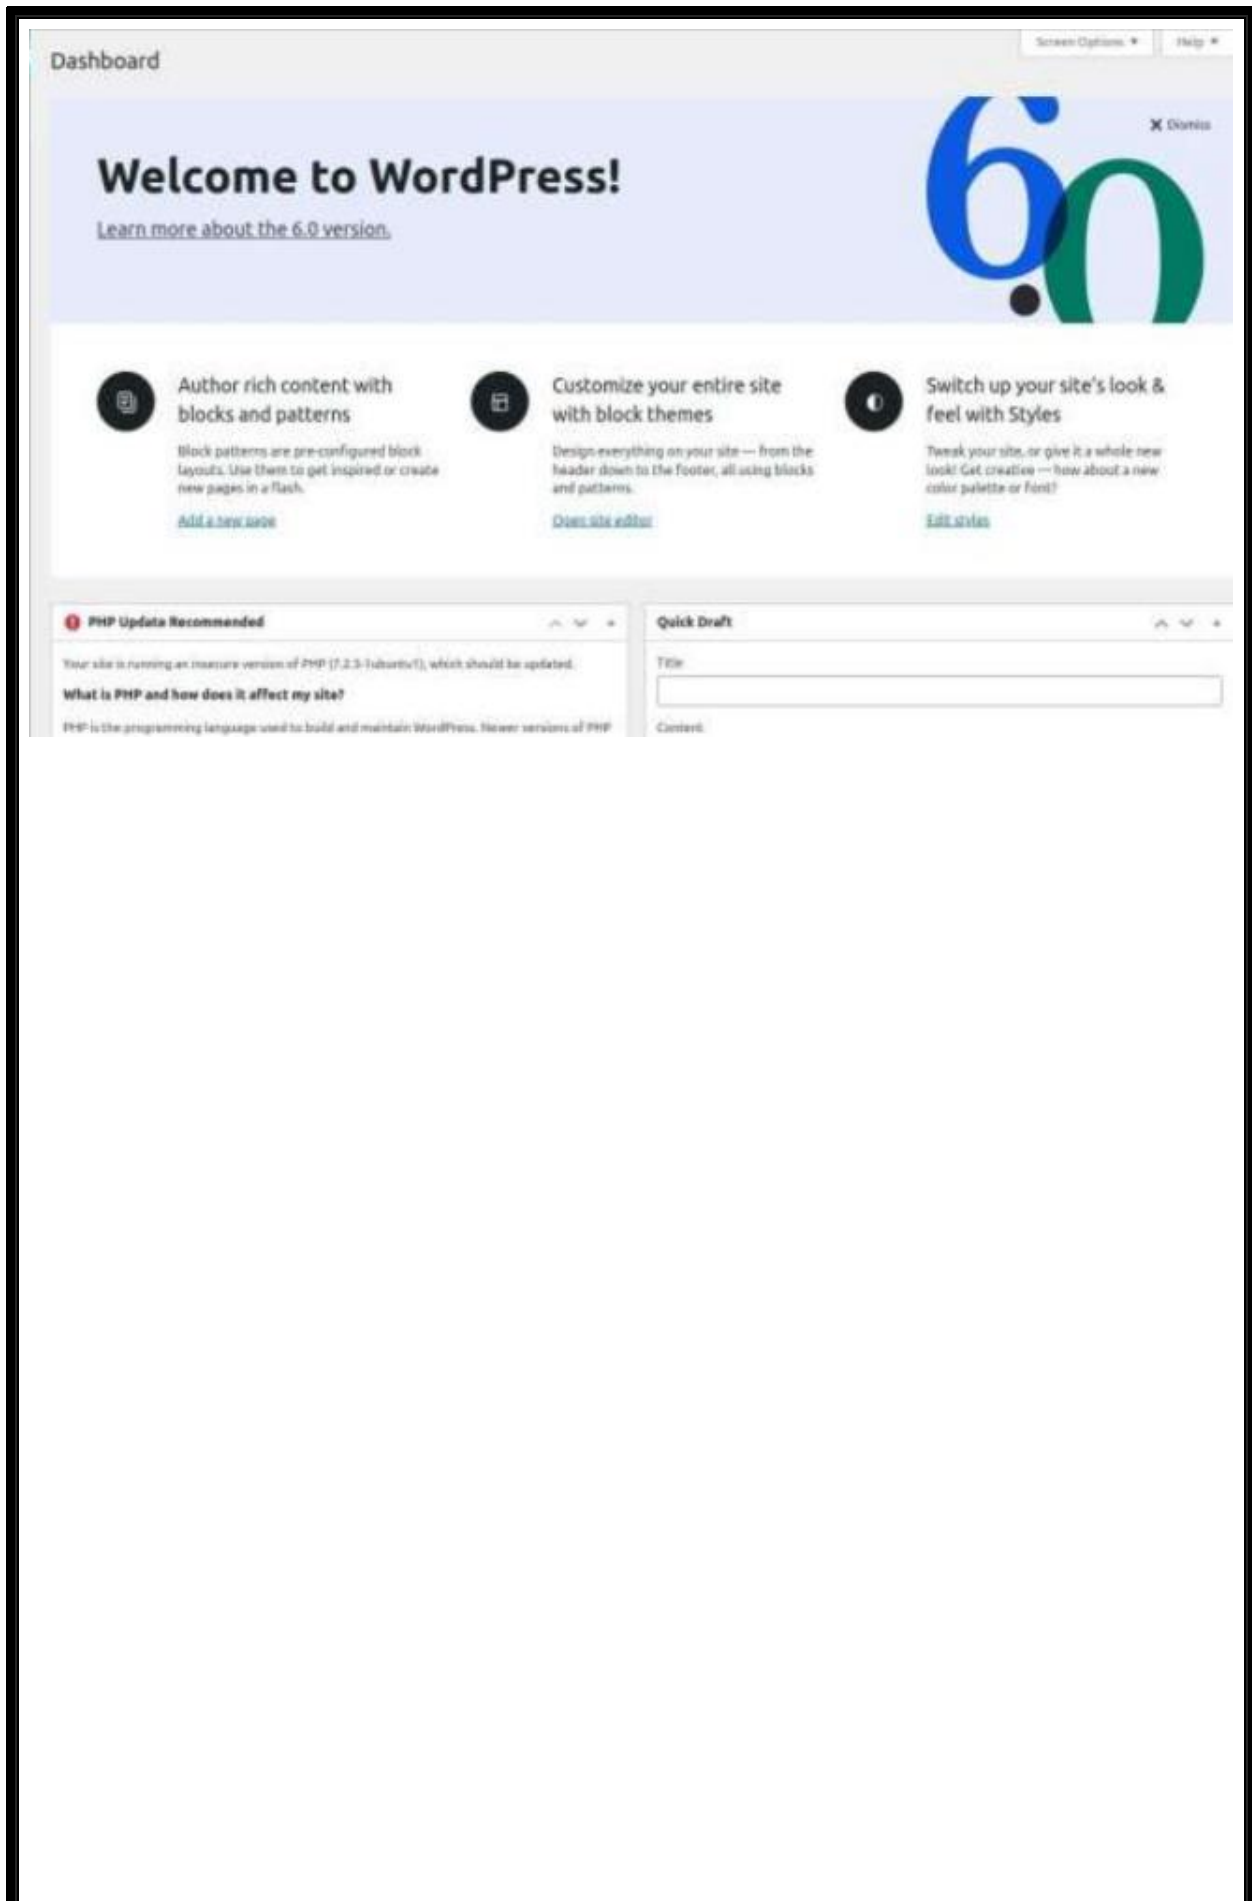



## 7. Build and install software from source code, familiarity with make and cmake utilities expected.

### Procedure& Output Screenshot

Install the cmake

#### Apt show cmake

```
mca@S3:~/Documents/CMake$ apt show cmake
Package: cmake
Version: 3.10.2-1ubuntu2
Priority: optional
Section: devel
Origin: Ubuntu
Maintainer: Ubuntu Developers <ubuntu-devel-discuss@lists.ubuntu.com>
Original-Maintainer: Debian CMake Team <pkg-cmake-team@lists.alioth.debian.org>
Bugs: https://bugs.launchpad.net/ubuntu/+filebug
Installed-Size: 17.3 MB
Depends: cmake-data (= 3.10.2-1ubuntu2), procps, libarchive13 (>= 3.0.4), libc6 (>= 2.15), libcurl4 (>= 7.16.2), libexpat1 (>= 2.0.1), libgcc1 (>= 1:3.0), libjsoncpp1 (>= 1.7.4), libhash0 (>= 1.2.6), libstdc++6 (>= 5.2), libuv1 (>= 1.4.2), zlib1g (>= 1:1.2.3.3)
Recommends: gcc, make
Suggests: cmake-doc, ninja-build
Homepage: https://cmake.org/
Supported: 5y
```

☐ **\$sudo apt install cmake g++ make:** To install cmake , g++ and make using the apt command.

```
mca@S3:~/Documents/CMake$ sudo apt install cmake g++ make
[sudo] password for mca:
Reading package lists... Done
Building dependency tree
Reading state information... Done
g++ is already the newest version (4:7.3.0-3ubuntu2).
make is already the newest version (4.1-9.1ubuntu1).
make set to manually installed.
The following packages were automatically installed and are no longer required:
  debhelper dh-autoreconf dh-strip-nondeterminism libarchive-cpio-perl
  libfile-stripnondeterminism-perl libmail-sendmail-perl libpcre16-3
  libpcre3-dev libpcre32-3 libpcrecpp0v5 libssl-dev libssl-doc
  libsys-hostname-long-perl php-common php-pear php-xml php7.2-cli
  php7.2-common php7.2-json php7.2-opcache php7.2-readline php7.2-xml
  pkg-php-tools po-debconf shtool
Use 'sudo apt autoremove' to remove them.
The following additional packages will be installed:
  cmake-data libcurl4 libjsoncpp1 libhash0 libuv1
Suggested packages:
```

#### Create directory

☐ **Mkdir cmake:** creating a different directory for our project using the mkdir and cd commands.

```
mca@S3:~/Documents/CMake$ mkdir myproject
```

### □ Cd cmake

```
mca@S3:~/Documents/CMake$ cd myproject
```

### □ gedit Helloworld.cpp

Now create a C++ source file named Hello\_world.cpp and add the following : **gedit CmakeLists.txt** Create a CMakeLists.txt file(with this exact capitalization) which is required by CMake:

### Create directory called

#### Mkdir build:

To run cmake we need to change into the build directory:

#### Cmake..

```
mca@S3:~/Documents/CMake/myproject/build$ cmake ..
-- The C compiler identification is GNU 7.3.0
-- The CXX compiler identification is GNU 7.3.0
-- Check for working C compiler: /usr/bin/cc
-- Check for working C compiler: /usr/bin/cc -- works
-- Detecting C compiler ABI info
-- Detecting C compiler ABI info - done
-- Detecting C compile features
-- Detecting C compile features - done
-- Check for working CXX compiler: /usr/bin/c++
-- Check for working CXX compiler: /usr/bin/c++ -- works
-- Detecting CXX compiler ABI info
-- Detecting CXX compiler ABI info - done
-- Detecting CXX compile features
-- Detecting CXX compile features - done
-- Configuring done
-- Generating done
-- Build files have been written to: /home/mca/Documents/CMake/myproject/build
```

### □ Cmake --build : To generate the executable simply by typing:run hello

```
mca@S3:~/Documents/CMake/myproject/build$ cmake --build .
Scanning dependencies of target hello
[ 50%] Building CXX object CMakeFiles/hello.dir/Hello_world.cpp.o
[100%] Linking CXX executable hello
[100%] Built target hello
```

### □ ./hello: Run the executable by typing:

```
mca@S3:~/Documents/CMake/myproject/build$ ./hello
Hello World!
```



**8. Introduction to command line tools for networking IPv4 networking, network commands: ping route traceroute, nslookup, ip. Setting up static and dynamic IP addresses. Concept of Subnets, CIDR address schemes, Subnet masks, iptables, setting up a firewall for LAN, Application layer (L7) proxies.**

### Procedure

1. **ifconfig:** This command in windows allows you to see a summarized information of your network such as ip address, subnet mask , server address etc.

#### Output

```
sjcet@Z238-UL:~/kishor/sem2/CN$ ifconfig
eno1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 172.16.54.197 netmask 255.255.240.0 broadcast 172.16.63.255
    inet6 fe80::a4fb:b17f:9247:b333 prefixlen 64 scopeid 0x20<link>
    ether 3c:52:82:6e:b2:a7 txqueuelen 1000 (Ethernet)
    RX packets 366691 bytes 298946338 (298.9 MB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 188619 bytes 49238714 (49.2 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
    device interrupt 16 memory 0xd1000000-d1020000

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 5842 bytes 546463 (546.4 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 5842 bytes 546463 (546.4 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

2. **nslookup** : To show the server to which the system is connected by default. If we want to find the ip address of a particular domain name, we can also use nslookup

```
sjcet@Z238-UL:~/kishor/sem2/CN$ nslookup google.com
Server:          127.0.0.53
Address:         127.0.0.53#53

Non-authoritative answer:
Name:   google.com
Address: 142.250.193.142
Name:   google.com
Address: 2404:6800:4007:81f::200e
```

3. **ping** : The command used to check the availability of a host. The response shows the URL you are pinging, the ip address associated with the URL and the size of packets being sent on

the first line . The next four lines shows the replies from each individual packets including the time(in milliseconds) for the response and the time to live(TTL) of the packet, that is the amount of time that must pass before the packet discarded.

```

sjcet@Z238-UL:~/kishor/sem2/CN$ ping -c 4 google.com
PING google.com (142.250.196.46) 56(84) bytes of data:
64 bytes from maa03s45-in-f14.1e100.net (142.250.196.46): icmp_seq=1 ttl=59 time
=70.9 ms
64 bytes from maa03s45-in-f14.1e100.net (142.250.196.46): icmp_seq=2 ttl=59 time
=71.8 ms
64 bytes from maa03s45-in-f14.1e100.net (142.250.196.46): icmp_seq=3 ttl=59 time
=73.5 ms
64 bytes from maa03s45-in-f14.1e100.net (142.250.196.46): icmp_seq=4 ttl=59 time
=71.3 ms

--- google.com ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3003ms
rtt min/avg/max/mdev = 70.942/71.885/73.494/0.972 ms
sjcet@Z238-UL:~/kishor/sem2/CN$ █

```

**4. traceroute :** traceroute is a command-line utility in Linux and other Unix-like operating systems that allows you to track the path that packets take from your computer to a destination host on a network. It's used for troubleshooting network connectivity issues and identifying network delays

```

sjcet@Z238-UL:~/kishor/sem2/CN$ traceroute google.com
traceroute to google.com (142.250.195.46), 30 hops max, 60 byte packets
 1  _gateway (172.16.48.2)  0.250 ms  0.197 ms  0.153 ms
 2  172.24.71.66 (172.24.71.66)  1.801 ms  1.868 ms  1.827 ms
 3  * * *
 4  * * *
 5  72.14.218.250 (72.14.218.250)  39.904 ms  40.840 ms *
 6  * * *
 7  142.251.55.74 (142.251.55.74)  40.436 ms * *
 8  142.251.55.67 (142.251.55.67)  33.950 ms 74.125.242.138 (74.125.242.138) 18
.648 ms 74.125.242.147 (74.125.242.147) 32.593 ms
 9  108.170.253.113 (108.170.253.113) 39.160 ms maa03s37-in-f14.1e100.net (142.
250.195.46) 20.368 ms 108.170.253.113 (108.170.253.113) 38.347 ms
sjcet@Z238-UL:~/kishor/sem2/CN$ █

```

**5. netstat :** netstat is a command-line utility in Linux and other Unix-like operating systems that provides information about network connections, routing tables, interface statistics, masquerade connections, and more. It's used for monitoring network-related information and diagnosing network issues.

```

sjcet@Z238-UL:~/kishor/sem2/CN$ netstat -a
Active Internet connections (servers and established)
Proto Recv-Q Send-Q Local Address           Foreign Address         State
tcp        0      0 localhost:domain        0.0.0.0:*               LISTEN
tcp        0      0 localhost:ipp           0.0.0.0:*               LISTEN
tcp        0      0 localhost:33060         0.0.0.0:*               LISTEN
tcp        0      0 localhost:mysql         0.0.0.0:*               LISTEN
tcp        0      0 Z238-UL:50362          sd-ln-f188.1e100.n:5228 ESTABLISHED
tcp        0      0 Z238-UL:41866          maa03s46-ln-f10.1:https ESTABLISHED
tcp        0      0 Z238-UL:56220          maa03s42-ln-f3.1e:https ESTABLISHED
tcp        0      0 Z238-UL:45476          maa05s18-ln-f10.1:https ESTABLISHED
tcp        0      0 Z238-UL:38946          162.247.243.29:https   ESTABLISHED
tcp        0      0 Z238-UL:39036          maa03s34-ln-f10.1:https ESTABLISHED
tcp        0      0 Z238-UL:35500          maa05s09-ln-f3.1e:https ESTABLISHED
tcp        0      0 Z238-UL:52014          104.18.2.161:https    ESTABLISHED
tcp        0      0 Z238-UL:33820          a184-51-195-169.d:https ESTABLISHED
tcp        0 29587 Z238-UL:44876          maa05s17-ln-f14.1:https ESTABLISHED
tcp        0      0 Z238-UL:42126          maa05s28-ln-f14.1:https ESTABLISHED
tcp        0      0 Z238-UL:35788          maa05s09-ln-f14.1:https ESTABLISHED
tcp        0      0 Z238-UL:56332          84.170.224.35.bc.g:http TIME_WAIT
tcp        0      1 Z238-UL:37450          maa05s12-ln-f4.1e:https LAST_ACK
tcp        0      0 Z238-UL:47766          maa03s26-ln-f3.1e:https ESTABLISHED
tcp        0      0 Z238-UL:40350          maa03s46-ln-f14.1:https TIME_WAIT
tcp        0      0 Z238-UL:46120          maa03s42-ln-f3.1e:https ESTABLISHED
tcp        0      0 Z238-UL:45488          maa05s18-ln-f10.1:https ESTABLISHED
tcp        0      0 Z238-UL:58958          li781-4.members.l:https ESTABLISHED
tcp        0      1 Z238-UL:57628          maa05s20-ln-f4.1e:https LAST_ACK
tcp        0      0 Z238-UL:40184          maa05s17-ln-f13.1:https TIME_WAIT
tcp        0      0 Z238-UL:53738          172.16.208.2:8090     ESTABLISHED
tcp        0      0 Z238-UL:52980          li695-222.members:https ESTABLISHED
tcp        0      0 Z238-UL:49846          maa05s25-ln-f3.1e:https ESTABLISHED
tcp        0      0 Z238-UL:60996          ec2-35-174-127-31:https ESTABLISHED
tcp        0      0 Z238-UL:44324          maa05s19-ln-f14.1:https ESTABLISHED
tcp6       0      0 ip6-localhost:ipp      [::]:*                 LISTEN
udp        0      0 224.0.0.251:mdns       0.0.0.0:*               *
udp        0      0 224.0.0.251:mdns       0.0.0.0:*               *
udp        0      0 0.0.0.0:mdns           0.0.0.0:*               *
udp        0      0 0.0.0.0:42940          0.0.0.0:*               *
udp        0      0 localhost:domain       0.0.0.0:*               *
udp        0      0 Z238-UL:bootpc         _gateway:bootps        ESTABLISHED
udp        0      0 0.0.0.0:631            0.0.0.0:*               *
udp        0      0 localhost:domain       0.0.0.0:*               *
udp        0      0 Z238-UL:bootpc         _gateway:bootps        ESTABLISHED
udp        0      0 0.0.0.0:631            0.0.0.0:*               *
udp6       0      0 [::]:mdns              [::]:*

```

**6. hostname :** The hostname command is a command-line utility in Linux and other Unix-like operating systems that allows you to view or set the hostname of the system. The hostname is the unique name assigned to a computer within a network.

```

sjcet@Z238-UL:~/kishor/sem2/CN$ hostname
Z238-UL

```

**7. arp :** The arp command is a command-line utility in Linux and other Unix-like operating systems that allows you to view and manipulate the Address Resolution Protocol (ARP) cache, which is used to map IP addresses to MAC addresses on a local network. ARP is essential for communication between devices within the same subnet.

```

sjcet@Z238-UL:~/kishor/sem2/CN$ arp -a
_gateway (172.16.48.2) at 7c:5a:1c:cf:50:b9 [ether] on eno1

```

**8. uname :** The uname command is a command-line utility in Linux and other Unix-like operating systems that provides information about the system's kernel and operating system. It's used to retrieve information about the system's architecture, release version, and other details.

```
sjcet@Z238-UL:~/kishor/sen2/CN$ uname -a
Linux Z238-UL 5.4.0-147-generic #164-Ubuntu SMP Tue Mar 21 14:23:17 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
```

## **9. Analyzing network packet stream using tcpdump and wireshark. Perform basic network service tests using nc.**

### **Procedure**

#### **1. How to Install tcpdump in Linux**

Many Linux distributions already shipped with the tcpdump tool, if in case you don't have it on a system, you can install it using the command.

❑ \$ sudo apt-get install tcpdump [On Debian, Ubuntu and Mint]

#### **2. Display Available Interfaces**

To list the number of available interfaces on the system, run the following command with -D option.

#### **3. Capture Packets from Specific Interface**

The command screen will scroll up until you interrupt and when we execute the tcpdump command it will captures from all the interfaces, however with -i switch only capture from the desired interface.

#### **4. Capture Only N Number of Packets**

When you run the tcpdump command it will capture all the packets for the specified interface, until you hit the cancel button. But using -c option, you can capture a specified number of packets.

```
# tcpdump -c 5 -i enp3s0
```

#### **5. Display Captured Packets in HEX and ASCII**

The following command with option -XX capture the data of each packet, including its link level header in HEX and ASCII format

#### **6. Capture and Save Packets in a File**



As we said, that tcpdump has a feature to capture and save the file in a .pcap format, to do this just execute the command with -w option.

### **7. Capture Packet from Specific Port**

Let's say you want to capture packets for specific port 80, execute the below command by specifying port number 80

### **8. Read Captured Packets File**

To read and analyze captured packet 0001.pcap file use the command with -r option

wire shark

### **Installing Wireshark on Ubuntu 20.04**

The Wireshark utility is available on all major desktop platforms, i.e., Linux, Microsoft Windows, FreeBSD, MacOS, Solaris, and many more. Follow the steps below to install Wireshark on Ubuntu 20.04.

#### **Step 1 : Update APT**

First, as always, update and upgrade your APT through the following command.

Syntax:

```
$ sudo apt update
```

#### **Step 2: Download and Install Wireshark**

Now that Wireshark's latest version has been added to the APT, you can download and install it with the following command.

syntax

```
$ sudo apt install wireshark
```

#### **Step 3: Enable Root Privileges**

When Wireshark installs on your system, you will be prompted by the following window. As Wireshark requires superuser/root privileges to operate, this option asks to enable or disable permissions for all every user on the system. Press the "Yes" button to allow other users, or press the "No" button to restrict other users

from using Wireshark.

**Step 4:**

You must add a username to the Wireshark group so that this user can use Wireshark. To do this, execute the following command, adding your required username after “wireshark” in the command.

**Syntax:**

```
$ sudo adduser $user wireshark
```

**Step 5:** Launch Wireshark

In the terminal window, type the following command to start the Wireshark application. **Syntax:**

```
$ wireshark
```

You can also open Wireshark through the Graphical User Interface (GUI) by opening the activities on the Ubuntu desktop, and in the search bar, type “Wireshark,” and click on the application result.

**10. Introduction to Hypervisors and VMs, Xen or KVM , Introduction to Containers:****Docker, installation and deployment****Procedure**

For the Ubuntu system, all packages required to run KVM are available on official upstream repositories.

Install them using the commands:

- ☐ sudo apt update
- ☐ apt-get install qemu qemu-kvm libvirt-bin bridge-utils virt-manager virtviewer–  
y

Create Virtual Machine • You can create virtual machine using virt-manager utility. Run the following command to start the virt-manager:

- ☐ sudo virt-manager
- ☐ virsh help
- ☐ virsh help
- ☐ virsh help list
- ☐ Sudo virsh nodeinfo
- ☐ Virsh start
- ☐ vm virsh start
- ☐ virsh start testvm1

**Step 1:** Update the repositories

**Step 2:** Install essential KVM packages

Install virt-manager, a tool for creating and managing VMs

```
mcagU40:~$ sudo apt install qemu-kvm libvirt-daemon-system libvirt-clients bridge-utils virt-manager
Reading package lists... Done
Building dependency tree
Reading state information... Done
qemu-kvm is already the newest version (1:2.11+dfsg-1ubuntu7.4).
The following additional packages will be installed:
  augeas-lenses dmidecode ebttables gir1.2-appindicator3-0.1 gir1.2-gtk-vnc-2.0
  gir1.2-libosinfo-1.0 gir1.2-libvirt-glib-1.0 gir1.2-spiceclient-glib-2.0
  gir1.2-spiceclient-gtk-3.0 libaugeas0 libdevmapper-event1.02.1
  libgovirt-common libgovirt2 libgtk-vnc-2.0-0 libgvnc-1.0-0 liblvm2app2.2
  liblvm2cmd2.02 libnetcf1 libosinfo-1.0-0 libphodav-2.0-0
  libphodav-2.0-common libspice-client-glib-2.0-8 libspice-client-gtk-3.0-5
  libusbredirhost1 libvirt-daemon libvirt-daemon-driver-storage-rbd
  libvirt-glib-1.0-0 libvirt0 libxml2-utils lvm2 osinfo-db python-asn1crypto
  python-certifi python-cffi-backend python-chardet python-cryptography
  python-dbus python-enum34 python-gi python-gi-cairo python-idna
  python-ipaddr python-ipaddress python-libvirt python-libxml2 python-openssl
  python-pkg-resources python-requests python-six python-urllib3
  spice-client-glib-usb-acl-helper virt-viewer virtinst
Suggested packages:
  augeas-doc augeas-tools libosinfo-l10n gstreamer1.0-plugins-bad
  gstreamer1.0-libav libvirt-daemon-driver-storage-gluster
  libvirt-daemon-driver-storage-sheepdog libvirt-daemon-driver-storage-zfs
```

**Step 3:** Start virt-manager with

**Step 4:** In the first window, click the computer icon in the upper-left corner, In the dialogue box that opens, select the option to install the VM using an ISO image. Then click Forward.



**Step 5:** Choose ISO, click Forward


**Step 6:** Enter the amount of RAM and the number of CPUs you wish to allocate to the VM and proceed to the next step.

**Step 7:** Allocate hard disk space to the VM. Click Forward to go to the last step.





**Step 8:** Specify the name for your VM and click Finish to complete the setup.

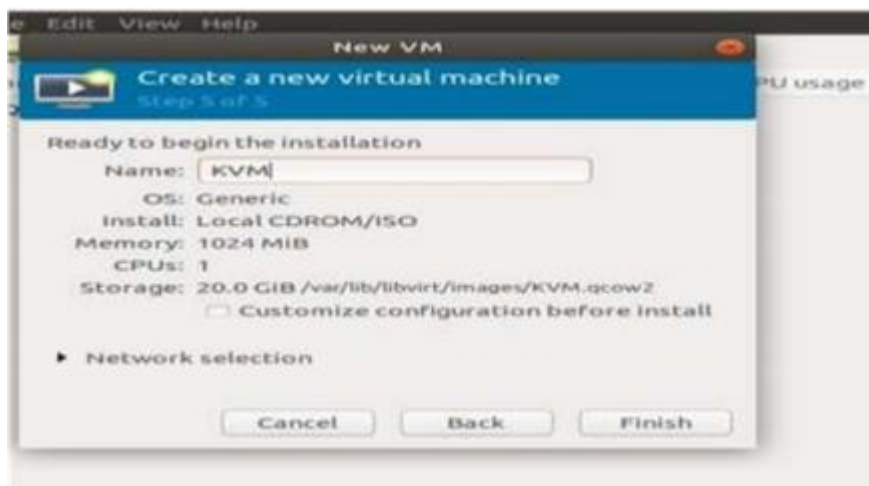

**Step 9:** Select language

**Step 10:** The VM starts automatically, prompting you to start installing the OS that's on the ISO file.

**Step 11:** Check the state of KVM

```
mca@U40:~$ sudo virsh list --all
 Id      Name                           State
-----
 1       KVM                            running
mca@U40:~$
```

Introduction to Containers: Docker installation and deployment

**Procedure****Steps for Installing Docker:**

**Step 1 :** Open the terminal on Ubuntu.

**Step 2 :** Remove any Docker files that are running in the system, using the following command

☐ Command : `$ sudo apt-get remove docker docker-engine docker.io`

After entering the above command, you will need to enter the password of the root and press enter.

**Step 3 :** Check if the system is up-to-date using the following command:

☐ Command : `$ sudo apt-get update`

**Step 4 :** Install Docker using the following command:

☐ Command : `$ sudo apt install docker.io`

You'll then get a prompt asking you to choose between y/n – choose 'y'

**Step 5 :** Install all the dependency packages using the following command:

☐ Command : `$ sudo snap install docker`

**Step 6 :** Before testing Docker, check the version installed using the following command:

☐ Command : `$ docker --version`

**Step 7 :** Pull an image from the Docker hub using the following command:

☐ Command : `$ sudo docker run hello-world`

Here, hello-world is the docker image present on the Docker hub.

**Step 8 :** Check if the docker image has been pulled and is present in your system using the following command:

☐ Command : `$ sudo docker images`

**Step 9 :** To display all the containers pulled, use the following command:

☐ Command : `$ sudo docker ps -a`

**Step 10 :** To check for containers in a running state, use the following command:

☐ Command : `$ sudo docker ps`

**11. Installing and configuring modern frameworks like Laravel typically involves setting up a web server, PHP, a database, and the framework itself. Below is a general guide to**

**installing and configuring Laravel on a Linux system. Please note that specific steps may vary based on your distribution and environment.**

### **Step 1: Prerequisites**

- ☐ **Install Required Software:** Make sure you have a web server (e.g., Apache or Nginx), PHP, Composer (dependency manager), and a database server (e.g., MySQL) installed on your system.
- ☐ **Install Composer:** Download and install Composer by following the instructions on the official Composer website.

### **Step 2: Install Laravel**

**1. Create a New Laravel Project:** Open a terminal and navigate to the directory where you want to create your Laravel project. Run the following command:

- ☐ `composer create-project --prefer-dist laravel/laravel myproject`

This will create a new Laravel project named "myproject."

### **Step 3: Configure the Web Server**

#### **1. Apache:**

- ☐ Create a new virtual host configuration for your Laravel project in your Apache configuration.
- ☐ Set the DocumentRoot to the public directory of your Laravel project.
- ☐ Enable the necessary Apache modules (e.g., rewrite) and restart Apache.

#### **2. Nginx:**

- ☐ Create a new server block configuration for your Laravel project in your Nginx configuration.
- ☐ Set the root directive to the public directory of your Laravel project.
- ☐ Configure the necessary location directives and restart Nginx.

### **Step 4: Configure Laravel**

#### **1. Environment Configuration:**

- ☐ Rename the .env.example file in your Laravel project root to .env.
- ☐ Set database connection details, application key, and other settings in the .env file.

**2. Generate Application Key:** Run the following command in your Laravel project

directory:

☐ php artisan key:generate

**3. Run Migrations:** If your .env file is configured with database details, run migrations to create necessary database tables:

☐ php artisan migrate

### Step 5: Testing the Setup

**1. Access the Application:** Open a web browser and visit the URL you configured for your Laravel project. You should see the Laravel welcome page.

**2. Create Routes and Views:** Begin building your application by defining routes and creating views in the resources/views directory.