



Conexión desde máquinas linux a
través de Gateway


1. CONFIGURACIÓN DEL CLIENTE DE ESCRITORIO REMOTO

Este manual usa el cliente Remmina versión 1.2 desde la cual se puede configurar un Gateway server.

El Gateway de escritorio remoto habilita conectividad a las máquinas dentro de la red de la Universidad.

Para conectarse debe completar el siguiente procedimiento:


1. Inicie el cliente de escritorio remoto remmina.
2. En la pestaña Advanced configurar el **RD Gateway Server** con el nombre del Gateway **rras.virtual.uniandes.edu.co** tal cual como se muestra a continuación.

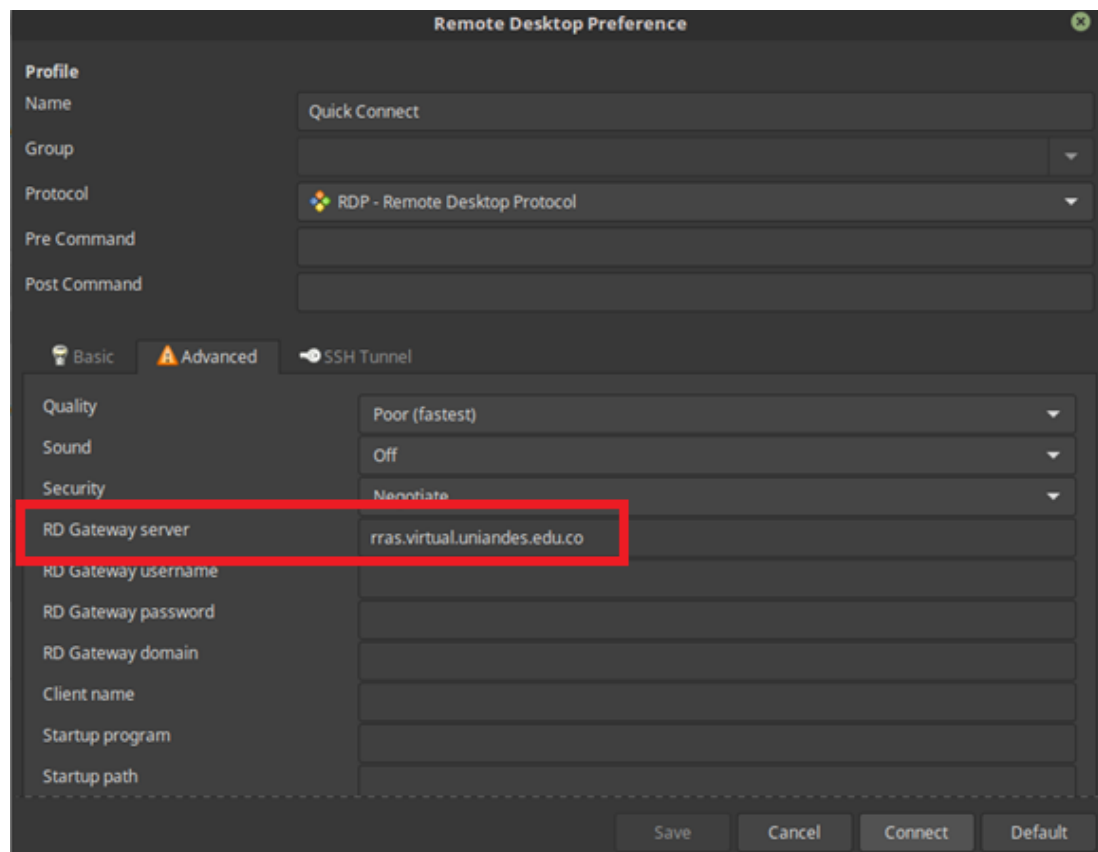

2. CONEXIÓN A LA MÁQUINA

1. En la pestaña Basic de Remmina se deben completar los siguientes campos:

- Server
- User name
- User password
- Domain

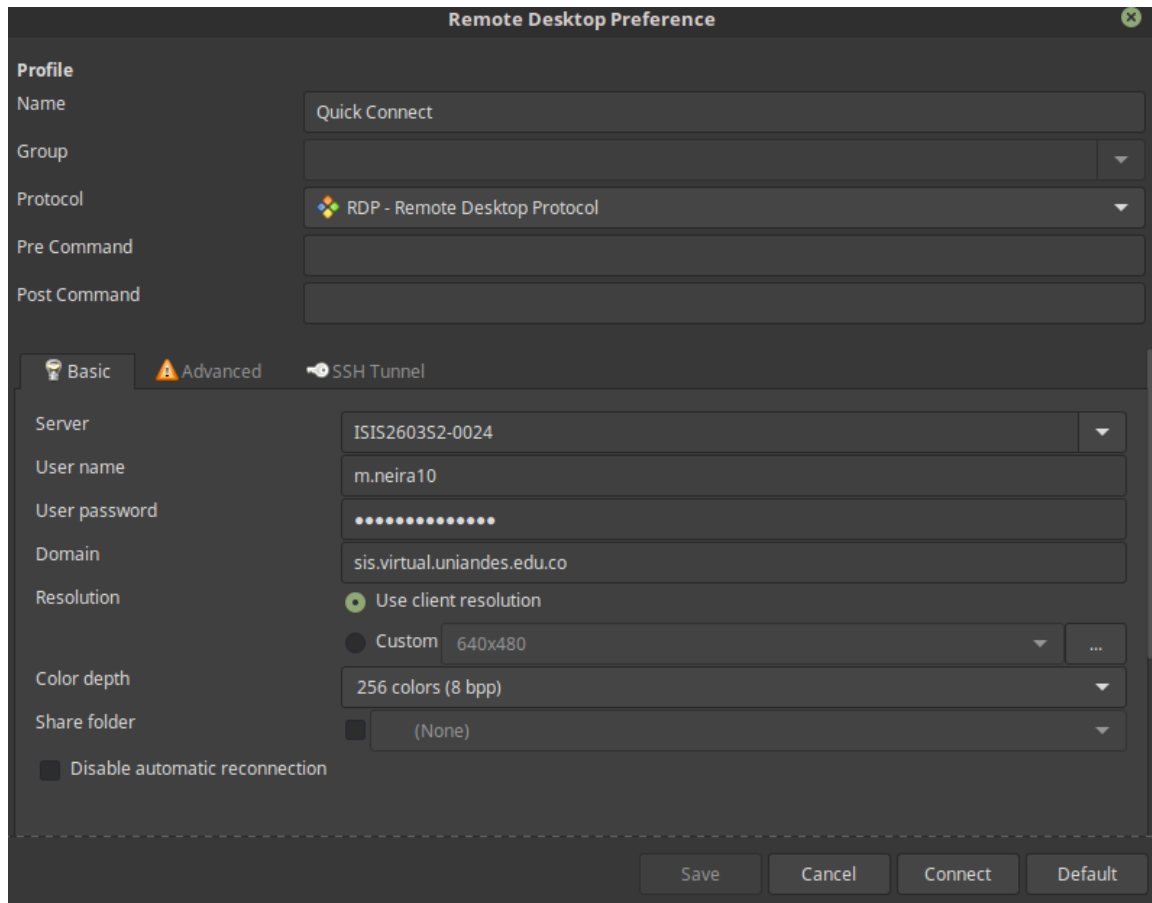

The image shows the 'Remote Desktop Preference' dialog box in Remmina. The 'Basic' tab is selected, showing fields for Name, Group, Protocol, Pre Command, and Post Command. Below these are tabs for 'Basic', 'Advanced', and 'SSH Tunnel'. The 'Basic' tab contains fields for Server, User name, User password, Domain, Resolution, Color depth, Share folder, and a checkbox for 'Disable automatic reconnection'. The 'Advanced' tab is currently active, showing fields for Server, User name, User password, Domain, Resolution, Color depth, Share folder, and a checkbox for 'Disable automatic reconnection'. The 'SSH Tunnel' tab is also visible. At the bottom are buttons for 'Save', 'Cancel', 'Connect', and 'Default'.

Field	Value
Name	Quick Connect
Group	
Protocol	RDP - Remote Desktop Protocol
Pre Command	
Post Command	
Server	ISIS260352-0024
User name	m.neira10
User password
Domain	sis.virtual.uniandes.edu.co
Resolution	Use client resolution
Color depth	256 colors (8 bpp)
Share folder	(None)
Disable automatic reconnection	<input type="checkbox"/>