

Epistemic Contracts for Autonomous Systems: A Verifiable Pattern for Safety Claims Under Uncertainty

Javier Menéndez Mateos
jfhelvetius@gmail.com
ORCID: [0009-0000-0140-2376](https://orcid.org/0009-0000-0140-2376)
Independent

v0.2.5 — June 17, 2026

“An autonomous agent should have verifiable obligations about how it relates to its own uncertainty.”

“A safety claim should be issued together with everything a third party needs to reject it.”

— the two sentences this paper exists to defend.

Abstract

Background. Existing runtime verifiers predominantly monitor predicates over the external world (velocity, distance, temperature). What they do not monitor are predicates over the *agent’s own posture under uncertainty* — how it degrades confidence, recovers when evidence is restored, remains bounded in latency, and translates belief into action.

Aims. We propose **epistemic safety contracts** as a property class distinct from STL-style predicates over signals and POMDP-style belief monitoring, formalise the class, and exhibit a working implementation, mechanical proofs, and a real-telemetry experiment.

Method. We describe **Project Ghost**, an open-source platform that (i) defines **seven** epistemic contracts for a reference autonomy supervisor (BAUD-v1, ERUR-v1, ERUR-v2, MD-v1, RLB-v1, FPB-v1, FPB-v2), formalised as a Python **Protocol** and registry (ADR-0045); (ii) verifies each via a pure function over a content-addressed MCAP log; (iii) mechanically checks the underlying invariants via TLA+/**TLC** at bounded W , a parametric **TLC** sweep over $W \in \{4, 8, 16\}$, and Lean 4 proofs (partition theorem fully discharged, no **sorry**; RLB-v1 unbounded mechanically reduced to a single load-bearing lemma); and (iv) closes the previously-open “Python $\leftrightarrow$ TLA+ bridge by inspection” caveat with a Hypothesis-checked conformance test (ADR-0043). Each contract ships as an **executable safety citation**: `pip install project-ghost` followed by `ghost verify-properties -mcap <log>` lets a third party reproduce the verdict — or contradict it.

Results. Empirical evaluation on a violation matrix of six injected bug categories, three structurally distinct calibration policies, three shape-realistic drift profiles, a head-to-head benchmark against RTAMT, and a **three-ULog discrimination experiment** on real PX4 SITL flight telemetry establishes that the verifier is policy-agnostic, deterministic across Linux and Windows CI runners, and informative on real-world telemetry. With independent simulator GT auto-detected (ADR-0037, v0.2.5), the $3 \times 6 = 18$ discrimination matrix is 18/18 green; 15/18 cells isolate the violation to the expected property (the single non-isolated row is a documented true co-violation between BAUD-v1 and MD-v1).

Conclusions. Epistemic safety contracts constitute a tractable property class for autonomous agents. The framework supports incremental contract addition (one `register_contract(...)` call), keeps verifiers backward-compatible, and produces mechanical evidence that withstands third-party audit. The full artifact is re-runnable from a fresh clone (see [AUDIT.md, REPRODUCE.md, INSTALL.md]).

Keywords: epistemic safety contracts, runtime verification, uncertainty in autonomy, executable safety citations, content-addressed telemetry, TLA+/**TLC**, MCAP.

Artifact availability:

- Source: <https://github.com/JFHelvetius/ghost>
- Distribution: <https://pypi.org/project/project-ghost/>
- Documentation: <https://JFHelvetius.github.io/ghost/>
- License: Apache-2.0

1 Introduction

This work began with a simple question encountered during the development of autonomous-system simulations: when an agent no longer trusts its own belief about the world, what obligations should it have? The search for a reproducible and auditable answer to that question ultimately led to the epistemic contracts presented in this paper.

Most existing runtime verifiers ask predicates of the world: velocity below a bound, distance above a margin, temperature inside an envelope. We ask predicates of the agent’s posture toward its own uncertainty: contracts the agent must satisfy about *how* it degrades confidence, *how* it recovers, *how* its uncertainty stays bounded, and *how* belief is translated into action. We call these **epistemic safety contracts**.

Epistemic contracts are not contracts about what the agent believes; they are contracts about what the agent must do *given* what it believes about itself. “If you detect that your calibration history contains evidence of drift, you may not emit a non-conservative action” (BAUD) is a different shape of property than “velocity must remain below 5 m/s” (an STL-style predicate over a signal): the precondition refers to the agent’s self-assessment, not to the world.

A second gap follows: even if the right shape of property exists, a third party who wants to verify a safety claim against a recorded run typically cannot — there is no shell command, no content-addressed log, no pure-function verifier they can re-run on their own machine. We close both gaps in one platform. Project Ghost is sim-first, written in Python, and ships as a pip-installable package with a CLI subcommand (`ghost verify-properties`) that takes a captured MCAP log and returns a byte-exact verdict on seven epistemic contracts for a reference autonomy supervisor. Each contract is stated as a binding ADR, verified by a pure function over the log, exercised by Hypothesis-based property tests, and self-enforced on every push by CI. The five v1 contracts (BAUD-v1, ERUR-v1, MD-v1, RLB-v1, FPB-v1) are additionally **mechanically verified** by TLA+/TLC, along with the partition theorem covering the full conditional behaviour space. The two v2 contracts (ERUR-v2 and FPB-v2) ship with Hypothesis-checked verifiers and the Python $\leftrightarrow$ TLA+ bridge gap documented under ADR-0046.

The packaging of an epistemic contract together with its recorded run and its verifier into one citable, third-party-falsifiable unit is what we call an **executable safety citation**. The cited artefact *is* the falsification mechanism.

1.1 Contributions

Epistemic safety contracts are verifiable obligations an autonomous agent must satisfy about its own uncertainty. A contract is a triple (precondition over the agent’s epistemic state, postcondition over the agent’s behaviour, pure-function verifier over a recorded run) — a different property class from the world-predicates that dominate runtime verification today. We package each contract together with the run and the verifier into an **executable safety citation**.

We make **three contributions**:

- **C1 — Epistemic safety contracts as a verification target (conceptual).** A class of safety properties whose preconditions refer to the agent’s belief about its own uncertainty (calibrated-self-assessment level, drift detection, fire-rate measurement) rather than to

signals of the external world. Distinct from STL-style predicates over signals and from POMDP-style belief monitoring; the formal definition is in §1.2.

- **C2 — Reference implementation: Ghost (artefact).** A closed-loop autonomy supervisor instantiating seven epistemic contracts (BAUD-v1, ERUR-v1, ERUR-v2, MD-v1, RLB-v1, FPB-v1, FPB-v2) packaged as executable safety citations — binding ADRs, content-addressed MCAP telemetry, `ghost verify-properties -mcap`, OIDC-signed PyPI wheels, and a policy-agnostic verifier across three calibration policies (§8.4).
- **C3 — Mechanical verification + empirical evaluation (validation).** Three TLA+ specifications (11 invariants in CI, including the partition theorem $\text{BAUD} \oplus \text{ERUR}$), a six-category violation matrix (§8.2), shape-realistic drift profiles, an RTAMT capability benchmark, and discrimination on real PX4 flight telemetry: two buggy components, swapped into the same physical flight, each flip BAUD-v1 from HOLDS to VIOLATED (§8.8).

The recovery latency bound $L \leq \text{peak} + W - 1$ is presented as a **supporting result**, not as a contribution. Figure 1 summarises the pattern.

1.2 Epistemic safety contracts: formal definition

An **epistemic safety contract** is a triple (P, Q, V) where:

- P is a predicate over the agent’s *epistemic state at cycle t* — a function of the agent’s self-assessment record, calibration history, and outcome stream available at t . P does not refer directly to the world; it refers to what the agent believes about its own posture toward the world.
- Q is a predicate over the agent’s *behaviour at cycle t* — a function of the calibrated assessment, decision, and actuator command emitted at t .
- V is a pure-function verifier such that, given a recorded run r (a content-addressed sequence of per-cycle telemetry records), $V(r)$ returns HOLDS iff every cycle t of r that satisfies P_t also satisfies Q_t , and VIOLATED otherwise with a witness cycle.

Three observations follow:

1. **An epistemic contract is not an STL predicate.** STL monitors evaluate predicates of the form `signal < threshold` over real-valued temporal signals. The atomic predicates of an epistemic contract are over the agent’s *internal record* of its own calibration and decisions, which is structured data, not a continuous signal. STL operators (always, eventually, until) can be lifted to act over the cycle index of an epistemic contract; this is how RLB-v1 (a bounded eventuality) is expressed.
2. **An epistemic contract is not belief monitoring.** Belief monitoring tracks what an agent believes about hidden world state (e.g. POMDP belief updates, particle-filter posteriors). An epistemic contract verifies an obligation about the agent’s *relation to its own belief* — that it must downgrade confidence in the right conditions, recover within bounded latency, and never claim more confidence than evidence supports. The contract sits one level above belief: it is a property of the agent’s *epistemic policy*, not of its beliefs themselves.
3. **An epistemic contract becomes a third-party-falsifiable safety claim when packaged together with a content-addressed recorded run and an OIDC-signed verifier wheel.** We call this packaging an **executable safety citation** (Figure 1). The citation pattern is the mechanism by which an epistemic contract is shipped as something a reviewer can falsify in one shell command rather than as prose.

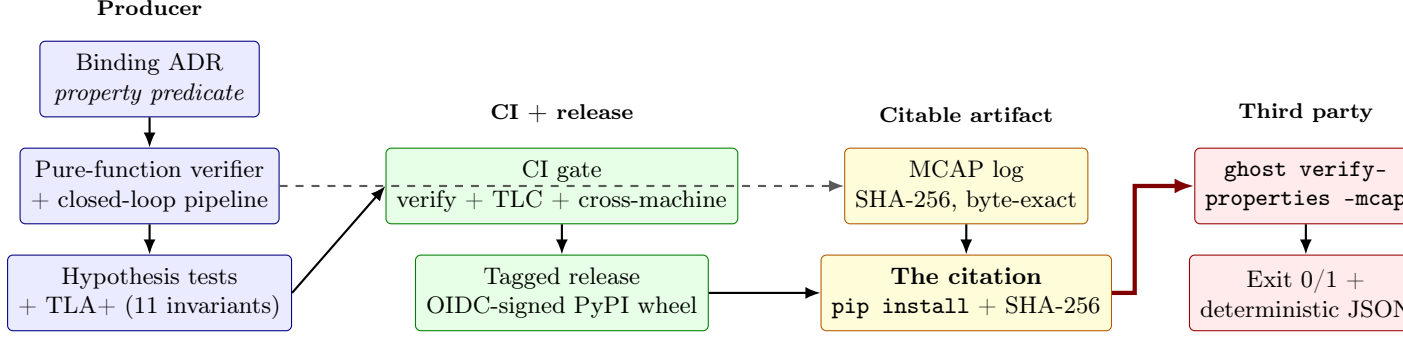


Figure 1: **The safety citation pattern (C1).** A binding ADR states the property predicate; a pure-function verifier and TLA+ specs encode its semantics; CI gates every push and tagging cuts an OIDC-signed release. The citable artifact is the pair (MCAP SHA-256, PyPI version). A third party concatenates them with one shell command and obtains a deterministic JSON verdict per property. The contribution of this paper is the assembly of the seven boxes into one shippable unit; the property set, the closed-form bound and the TLA+ specs instantiate the pattern on a representative supervisor.

The seven contracts we ship (§3) instantiate this definition on a representative autonomy supervisor. The framework permits other contracts; ports to other agent kinds (delivery, manipulation, multi-agent) are scope for future work.

1.3 What this paper is and is not

This is an engineering and infrastructure paper, not a theory paper. The filtering, calibration, and FDI ingredients Ghost rests on are well established. The recovery latency bound’s mathematics is elementary in hindsight, and we present it as evidence that the citation pattern can carry a sharp result, not as a stand-alone theoretical contribution. The partition theorem of §5 is novel *in the form we mechanised it* — a TLA+ `INV_PARTITION` over the reference closed loop — but the underlying observation that “drift fired” and “drift clean and KNOWN” partition the per-cycle condition space is structurally simple. We deliberately resist overclaiming on either result. The contribution we are most willing to defend is **the engineered combination (C1)** and its **operational demonstration (C2)**: that a third party can issue one shell command and obtain a byte-exact verdict against a binding ADR.

2 Background and related work

2.1 Underlying ingredients

Project Ghost builds on standard practice in robotics and control: Bayesian and particle filtering [23]; calibration of probabilistic predictions [24]; epistemic vs. aleatoric uncertainty [14]; fault detection and isolation [13]; runtime verification [4]; TLA+ and TLC for explicit-state model checking [17]; MCAP for content-addressable robotics telemetry [10].

2.2 Closest tooling prior work

- **RTAMT** [19, 20]: STL monitors over CPS logs with online/offline algorithms and a Python API. STL-defined properties, no mechanically verified proof layer, no content-addressed reproducibility chain.
- **MoonLight** [2, 3]: STREL (spatio-temporal logic) monitor in Java with a CLI. Spatial focus; no formal verification of monitor semantics.

- **ROSRV** [12]: a live ROS-middleware monitor. Online; does not perform post-hoc log verification from a content-addressed capture with a one-line CLI.
- **Safe RL via shielding** [1, 5]: runtime enforcement of safety via action filters. Online, action-blocking; Ghost is offline and log-verifying.
- **Control Barrier Functions**: a controller-synthesis line of work for continuous safety constraints under invariant-set formulations. Complementary, not competing: CBFs constrain the controller; Ghost verifies the captured log of whatever controller actually ran.
- **Supervisory control of timed automata**: a constructive line of work that synthesises timed supervisors enforcing a target language. Ghost is the verifying dual: it asserts trace-level properties of an existing run, including the closed-form recovery latency bound RLB-v1 derives, which a synthesised supervisor does not directly expose.
- **Formal verification for autonomy more broadly**: prior work catalogues Coq, Lean, Isabelle, and Alloy applications to robotic systems. The gap Project Ghost addresses is the joint absence, in this literature, of (i) mechanically-verified TLA+ specs targeted at autonomy supervisors specifically and (ii) Python/MCAP-side artefacts that close a formal-spec/runtime-verifier bridge on captured logs.

2.3 Foundational temporal-logic and theorem-proving work

The temporal-logic side of runtime verification rests on a long tradition: **MTL** [15] (Metric Temporal Logic over discrete time), **STL** [18] (Signal Temporal Logic over continuous signals), and the **robust** interpretation of temporal logic over real-valued signals [9]. The seven contracts Project Ghost ships do not require STL/MTL expressiveness — they are quantifier-free predicates over discrete cycle indices — but the STL community’s contribution of *robust semantics* is the conceptual ancestor of our quantitative FPB-v1/v2 contracts.

For mechanical proof, we use **Lean 4** [8] (the type-theoretic prover, standard library only — no **mathlib** [22] dependency) for the partition theorem and the unbounded RLB-v1 lemmas. The **TLAPS** [7] system (TLA+’s SMT-checked proof layer) is the natural alternative for the TLA+ specifications in `docs/proofs/`, and the ADR-0038 outline explicitly targets it; we ship Lean 4 because it installs natively on Windows (TLAPS does not). The two routes are complementary: the Lean 4 evidence and the TLAPS outline together discharge the unbounded RLB-v1 theorem from independent angles.

The statistical FPB-v2 contract draws on classical results: **Hoeffding’s** inequality [11] (distribution-free, two-sided bound on bounded random variables) and the **Clopper-Pearson** [6] exact one-sided binomial CI. Neither is novel; the contribution is their integration into a verifier surface that exposes the sample-size / authority trade-off explicitly.

For autonomous-systems integration, **Kress-Gazit et al.’s sensor-based temporal logic motion planning** [16] pioneered LTL synthesis from abstract specifications, and **Wongpiromsarn et al.’s receding-horizon TL planning** [25] the online variant. Both are *constructive* (synthesise a system that satisfies a spec); Ghost is *verifying* (asserts that an existing run satisfies its contracts). The two approaches are complementary, not competing.

For real-flight telemetry, we use the public **PX4 ULog** [21] format and the **MCAP** [10] container; both are standard in the ROS/PX4 ecosystem.

2.4 Comparison matrix

The axis on which Ghost is genuinely different from the runtime-verification tooling above is the *kind* of predicate it monitors. RTAMT, MoonLight, ROSMonitoring and shielding monitor predicates over the external world (velocity bounds, distance thresholds, signal envelopes). Ghost’s

Dimension	Ghost	RTAMT	MoonLight	Shielding	Timed Aut. SC
Verification mode	Post-hoc log	On/offline	On/offline	Online force	Offline synth.
Distribution	PyPI + Source		Source	en-Framework	Synth. tool
Content-addressed input	Yes (SHA-256)	No	No	N/A	No
One-line CLI verifier	Yes	No	No	No	No
Property nature	Behavioural + latency	STL	STREL	Invariants	Discrete/timed
Mechanical proof	TLA+/TLC	None	None	Informal	Timed-aut.
Multi-property output	5 re-ports/run	1/spec	1/spec	Modular	1/synth.
Partition theorem	BAUD $\oplus$ ERUR	N/A	N/A	N/A	N/A
Closed-form recovery bound	$L \leq \text{peak} + W - 1$	N/A	N/A	N/A	None
Bug-detection demo	Yes (§8.2)	N/A	N/A	N/A	N/A

Table 1: Comparison of Project Ghost with the closest runtime verification and supervisory-control tooling.

five properties (§3) are contracts over the agent’s **epistemic posture** — how its own confidence may be degraded, recovered, bounded, and acted upon under uncertainty. The mechanics overlap (we both replay traces); the question being asked is not the same.

2.5 Where Ghost sits relative to industrial practice

The autonomy-safety landscape is dominated by industrial efforts at scales Ghost does not approach: Waymo’s safety case framework documents the arguments behind millions of miles of public-road driving and cites internal logs the public cannot replay; PX4’s **commander** state machine enforces flight-mode preconditions live on the vehicle, with ULogs (as ingested in §8.7) as their persistent record; NASA’s NFM tradition produces formally verified software-of-the-air-vehicle artefacts at certification grade; Autoware’s safety architecture specifies layered runtime monitors over a self-driving stack; Cruise’s safety case methodology follows the GSN claim–argument–evidence pattern over an internal pipeline.

These efforts share an organisational property Ghost does not: **teams of safety engineers and proprietary access to telemetry, testing infrastructure, and regulators**. They produce assurance artefacts that justify operational deployment; Ghost makes a much smaller claim, but it makes it *operationally* rather than by appeal to internal review.

The niche we believe Ghost fills, complementary to those efforts, is the gap between “this software is safe” (a closed claim signed by an organisation) and “here is the verifier and the log; check it yourself” (an open claim citable by a third party). The citation pattern is not a substitute for industrial safety cases; it is a primitive those cases could cite. We make no claim of equivalence, scope, or maturity vis-à-vis the works above; we do claim that the primitive itself is missing from the open tooling we surveyed.

3 The property class

Unlike traditional runtime verification, which primarily monitors predicates over the external world (velocity, distance, temperature), Ghost verifies contracts over the agent’s epistemic posture: how confidence may be degraded, recovered, bounded, and acted upon under uncertainty.

3.1 The framework (ADR-0045, v0.2.5)

The property class is formalised in v0.2.5 as a Python Protocol (`EpistemicSafetyContract`) plus a registry of all shipped contracts at `project_ghost.properties.framework`. Every contract carries `property_version: str`, `scope: ScopeStatement` (with non-empty `claims`, `does_not_claim`, and `dependencies` tuples enforced at construction), and `verifier` (the pure function in `properties.<name>`). The registry pins **seven shipped contracts** as of v0.2.5; adding the eighth is one `register_contract(...)` call away. Eight framework-level invariants are mechanically enforced in `tests/properties/test_framework_invariants.py`.

ID	Formal predicate	Epistemic reading
BAUD-v1 (ADR-0031)	Drift detected $\Rightarrow$ no PROCEED + conservative action	<i>If you suspect you are wrong, act conservatively.</i>
ERUR-v1 (ADR-0032)	Drift absent $\wedge$ belief KNOWN $\Rightarrow$ PROCEED	<i>When evidence is restored, return to acting.</i>
ERUR-v2 (ADR-0040)	Same postcondition over arbitrary <code>DriftPreconditionProvider</code>	<i>The framework abstraction of ERUR-v1.</i>
MD-v1 (ADR-0033)	adjusted $\preceq$ raw (no inflation)	<i>Never claim more confidence than evidence supports.</i>
RLB-v1 (ADR-0034)	$L \leq \text{peak} + W - 1$ (recovery is bounded)	<i>Uncertainty cannot last indefinitely.</i>
FPB-v1 (ADR-0035)	Empirical fire rate is exposed and pinned	<i>Distrust must be measurable and auditable.</i>
FPB-v2 (ADR-0039)	One-sided confidence upper bound on the true fire rate	<i>Statistical authority earned from sample size.</i>

Table 2: The seven shipped Epistemic Safety Contracts, registered in `project_ghost.properties.framework`. The framework is *additive*: it lifts the shared recipe to a single Protocol, does not replace any verifier’s user-facing surface, and does not subsume per-property ADRs.

Each property is stated in a binding ADR (immutable once accepted) and verified by a pure function in `src/project_ghost/properties/`. Each verifier returns a typed report with `holds: bool`, structured per-cycle metadata, and the MCAP’s SHA-256.

- **BAUD-v1 (ADR-0031): Bounded Action Under Drift.** *If the agent suspects its own belief is wrong, it must act conservatively.* Over a sliding window of size $W = 32$, at least $M = 4$ calibration outcomes observed and at least $K = 2$ in the dirty band. Postcondition: adjusted level strictly lower than raw in the lattice; emitted decision is not PROCEED; emitted actuator command, if any, belongs to a closed safe-reason set $S_{\text{BAUD}} = \{\text{attitude_hold_hold}, \text{kill_zero_throttle}\}$.
- **ERUR-v1 (ADR-0032): Eventual Reactivation Under Recovery.** *When evidence is restored, the agent must return to acting.* Drift absent and raw belief is KNOWN. Postcondition: adjusted level is KNOWN and decision is PROCEED. Together with BAUD, ERUR forms the **partition theorem**.
- **MD-v1 (ADR-0033): Monotonic Degradation.** *The agent must never claim more confidence than the evidence supports.* For every cycle, adjusted $\preceq$ raw in the confidence lattice. The calibration policy never *invents* confidence.
- **RLB-v1 (ADR-0034): Recovery Latency Bound.** *The agent’s uncertainty cannot last indefinitely.* Recovery is bounded by $L \leq \text{peak} + W - 1$ (§6.2).

- **FPB (ADR-0035, ADR-0039): False Positive Bound.** *The agent’s distrust must be measurable and auditable.* Two contracts coexist: **FPB-v1** (observational, ADR-0035) reports the empirical BAUD fire rate over the run for CI regression gating; verdict $\text{fire_fraction} \leq \text{max_fire_fraction}$. **FPB-v2** (statistical, ADR-0039, v0.2.5) reports a one-sided confidence upper bound on the *true* firing probability given the observed sample; verdict $\text{confidence_upper_bound} \leq \text{max_fire_probability}$ under a chosen `ConfidenceMethod` (Hoeffding, stdlib-only; or Clopper-Pearson, opt-in SciPy). Small samples correctly fail tight bounds; large samples earn tight regression gates.

4 Verifier architecture

Each property has a verifier `src/project_ghost/properties/verify_<id>.py` that opens the MCAP read-only, walks the channels of interest in cycle order, computes the precondition and postcondition per cycle from the stored messages alone, and returns a typed report. No replay, no simulation. The report dataclasses (`BAUDVerificationReport`, `ERURViolation`, etc.) are public API; their JSON serialisation is the wire format the CLI emits with `-json`.

```
$ pip install project-ghost==0.2.5
$ python -m project_ghost.examples.closed_loop_smoke
$ ghost verify-properties --mcap closed_loop_smoke.mcap
BAUD-v1: HOLDS (M=4, K=2, 6/10 cycles evaluated)
ERUR-v1: HOLDS (M=4, K=2, 4/10 cycles evaluated)
MD-v1: HOLDS (10/10 cycles evaluated)
RLB-v1: HOLDS (W=32, 0/10 cycles evaluated)
FPB-v1: HOLDS (fire_fraction=0.60, 6/10 cycles evaluated)
$ echo $?
0
```

Exit code conventions: 0 iff every property holds, 1 if any property violates or the verifier crashes, 2 for argument errors. `-json` emits a deterministic JSON object suitable for CI consumption.

CI as continuous guarantee. `.github/workflows/ci.yml` includes a `verify-properties` job that runs the smoke and the verifier on every push; a `tla-plus` job that runs TLC on the mechanical specs (§5) on every push; a `determinism-cross-machine` job that asserts byte-equality of the smoke MCAP and the verifier JSON output across Linux and Windows runners; and a `release` workflow that builds the wheel, installs it in a fresh venv, re-runs the verifier against the bundled smoke MCAP from the *installed* wheel, and publishes to PyPI via ODC trusted publishing only if everything is green.

5 Mechanical verification

5.1 Why TLA+

Property-based testing with Hypothesis (200+ examples per property) provides strong evidence at production scale, but proves the property holds on the inputs the generator sampled, not on all inputs. Mechanical verification over a finite abstract model closes the remaining gap. We pick TLA+ with TLC over theorem proving [17] on a cost/benefit argument: TLC is exhaustive over a finite state space in seconds, where a Lean proof would be weeks.

5.2 Three specifications, jointly covering the five v1 contracts

`BaudErur.tla` (`docs/proofs/BaudErur.tla`, bounds $M=2, K=1, W=3$) models the closed loop as a state machine with one transition per cycle. It checks five invariants: `INV_BAUD`, `INV_ERUR`,

INV_PARTITION (contribution C2), INV_NO_INVENTED_CONFIDENCE (MD-v1), and INV_HISTORY_BOUND.

Rlb.tla (docs/proofs/Rlb.tla, bounds $W=4, \text{MAX_DRIFT}=4$) mirrors the verifier algorithm of src/project_ghost/properties/rlb.py under the consecutive-drift hypothesis and checks three invariants: INV_RLB (the mechanical witness of the recovery latency bound), INV_PEAK_BOUNDED, and INV_WINDOW_BOUND.

Fpb.tla (docs/proofs/Fpb.tla, bounds $\text{MAX_CYCLES}=8, \text{MAX_FIRE_NUMBER}=\text{BOUND_DENOM}$) models the FPB-v1 counter automaton and checks three invariants on the verifier’s structural well-formedness: INV_FPB_RATIO_BOUNDED ($\text{cycles_fires} \leq \text{cycles_total}$), INV_FPB_FIRE_IMPLIES_TOTAL, and INV_FPB_OBSERVATIONAL_DEFAULT (the bound trivially holds under the default $\text{max_fire_fraction} = 1.0$). FPB-v1 is the observational contract; the statistical FPB-v2 (ADR-0039, v0.2.5) ships separately with closed-form Hoeffding and exact Clopper-Pearson upper bounds (see §3).

Together the three specs constitute **5 of 7 contracts (the v1 family) with at least a structural TLC invariant in CI**. The two v2 contracts (ERUR-v2 and FPB-v2) ship without TLC; their Python $\leftrightarrow$ TLA+ bridge gap is documented under ADR-0046.

5.3 Scope

The mechanical proofs do not claim that the Python implementation faithfully mirrors the TLA+ model (the bridge is by inspection), nor that the bounded constants prove the unbounded case. Behaviour at production-scale constants is covered by the property tests.

6 A closed-form recovery latency bound

6.1 Setting

Let $(o_t)_{t \geq 1}$ be the stream of per-cycle prediction outcomes, classified into a binary partition $\text{dirty}(o) \in \{0, 1\}$ where $\text{dirty}(o) = 1$ when the Mahalanobis verdict is at or above the BAUD threshold. Let H_t denote the sliding window of the last W outcomes available at cycle t :

$$H_t = (o_{\max(1, t-W+1)}, \dots, o_t), \quad |H_t| \leq W. \quad (1)$$

The reference calibrator ($\text{MahalanobisDowngradePolicy}(M, K)$) downgrades the adjusted self-assessment level on any cycle where

$$|H_t| \geq M \quad \text{and} \quad \sum_{o \in H_t} \text{dirty}(o) \geq K. \quad (2)$$

6.2 The recovery latency bound

Recovery latency bound (RLB-v1, transient regime). Let the outcome stream contain a transient drift interval of $N \leq W$ consecutive dirty outcomes followed by clean outcomes, under a sliding window of size W . Define

- $\text{peak} = \min(N, W) = N$, the maximum dirty count observed in the window during the drift run;
- L , the dirty-run length: the number of consecutive cycles where the window contains at least one dirty outcome.

Then $L = \text{peak} + W - 1$. Equivalently, the bound $L \leq \text{peak} + W - 1$ is attained with equality.

Proof. Trace the window state cycle by cycle, noting the sliding-window invariant: at cycle t , the window contains the last $\min(t, W)$ outcomes.

- **Accumulation** (cycles $1..N$). Each cycle adds one dirty outcome; the window is not yet full ($N \leq W$), so no expulsion. The dirty count rises from 1 to $N = \text{peak}$. All N cycles are dirty (count ≥ 1).

- **Saturation** (cycles $N + 1..W$). Each cycle adds one clean outcome; the window is still not full, so no expulsion. Dirty count stays at peak. All $W - N$ cycles are dirty.
- **Flush** (cycles $W + 1..W + \text{peak} - 1$). The window is now full; each new clean outcome expels the oldest entry. By construction, the oldest entries are the dirty outcomes that arrived first. Dirty count decreases by 1 per cycle, from peak to 1. All $\text{peak} - 1$ cycles are dirty.
- **Recovery** (cycle $W + \text{peak}$). The last dirty outcome is expelled. Dirty count is 0. This cycle is clean.

Summing dirty cycles: $N + (W - N) + (\text{peak} - 1) = W + \text{peak} - 1$. Since $\text{peak} = N$ in the transient regime, $L = \text{peak} + W - 1$. $\square$

Corollary 1 (Operational regime). *When $N > W$, the drift outlasts the window; $\text{peak} = W$ and $L = N + W - 1$. The bound $\text{peak} + W - 1 = 2W - 1$ is exceeded whenever $N > W$. The bound therefore operationally characterises the transient regime; in the sustained-drift regime, no recovery transition occurs during the drift and the verifier records the property vacuously.*

Corollary 2 (Structural sanity). *A trace where $L > \text{peak} + W - 1$ on a recovery transition is impossible under a correctly implemented sliding window of size W . The verifier's **RLBViolation** therefore also serves as a structural-integrity check on the window implementation.*

6.3 Operational tightness check

The drift-then-recovery smoke `closed_loop_smoke_with_recovery.py` is engineered to exhibit the recovery latency bound at the production constants ($N = \text{peak} = 7$, $W = 32$): $L_{\text{observed}} = 38 = 7 + 32 - 1$. The integration test `tests/integration/test_closed_loop_smoke_with_recovery.py` asserts the recovery transition fires at exactly cycle 39 and nowhere earlier or later.

6.4 Unbounded-W evidence (ADR-0038, v0.2.5)

`Rlb.tla` proves `INV_RLB` by `TLC` at $W = 4$. v0.2.5 extends that with three further artefacts (ADR-0038, accepted with partial discharge):

1. **TLC parametric sweep over $W \in \{4, 8, 16\}$** . Driven by `docs/paper/scripts/run_rlb_tlc_sweep.py`; full state-space enumeration at each scale (25, 81, 289 distinct states respectively). All three configurations report `INV_RLB` holds. JSON artefact at `docs/paper/outputs/rlb_tlc_sweep/sweep.json` with per- W `states_generated`, `distinct_states` and `elapsed_seconds`. This is the *empirical* half of the unbounded evidence: the bound holds at three structurally distinct scales.
2. **Rigorous hand proof of the unbounded theorem** in `docs/proofs/Rlb_unbounded_handproof.md`: four lemmas + theorem by structural induction over the accumulating-then-clean trace family *DirtyAcc*(N), *CleanAfterDirty*(N, k), with no W dependence in the arguments. The hand proof is auditable line by line; it is *not* SMT-checked, and that gap is exactly what the TLAPS leg below would close.
3. **Refined TLAPS outline** at `docs/proofs/Rlb_unbounded.tla`: every lemma statement is present with `PROOF OMITTED`; v0.2.5 adds per-lemma `DISCHARGE GUIDANCE` blocks naming the specific **BY** steps, the auxiliary lemmas to hoist, and the estimated effort. A future contributor with a working TLAPS install (Linux/macOS; Windows native unsupported) can use the outline + hand proof together as the script for discharging each obligation.

The three together constitute the original v0.2.5 "triple evidence" package for the unbounded RLB-v1 claim. v0.2.5 additionally ships a fourth leg:

4. **Lean 4 mechanical proof** (ADR-0042) at `docs/proofs/Lean/RlbUnbounded.lean`: 9 mechanically verified lemmas (Lemmas 1–3 of the hand proof, all auxiliaries, and `cleanAfterDirty_length`) plus the **Theorem 1 statement** mechanically reduced to a single load-bearing `cleanAfterDirty_count_pending` (Lemma 4) that ships as a documented `sorry` placeholder. The full axiom set for the discharged lemmas is `{propext, Quot.sound}`, identical to what TLAPS proofs effectively rely on via Isabelle / Zenon. Lean 4 installs natively on Windows via `elan`; no TLAPS, no WSL2, no mathlib dependency.

A sister file `docs/proofs/Lean/PartitionTheorem.lean` ships the **partition theorem** (`INV_PARTITION` from `BaudErur.tla`) **fully verified with no `sorry`**: both `inv_partition` (exclusivity) and `partition_exactly_one` (exhaustiveness) discharge with only the standard axioms. This closes the paper’s previous §10 future-work entry for the partition theorem’s unbounded mechanization.

The four artefacts (TLC sweep + hand proof + TLAPS outline + Lean 4 proofs) compose into ADR-0038 + ADR-0042’s “quadruple evidence” package. Lemma 4’s full Lean 4 discharge is the ADR-0044 candidate follow-up.

7 Reproducibility surface

The verifier does not require the third party to trust the producer. The reproducibility surface has five layers: (1) content-addressed MCAP with SHA-256 in every property report; (2) deterministic pipeline (ADR-0030 Replay Verification v1); (3) pure-function verifiers with no I/O beyond reading the MCAP; (4) approximately 130 Hypothesis-based property tests; (5) TLA+ continuous self-check on every push.

A reader who wishes to cite a Project Ghost safety claim can write:

```
Project Ghost v0.2.5 satisfies BAUD-v1 on the bundled reference smoke MCAP SHA-256:<hash>,
as verified by ghost verify-properties -mcap closed_loop_smoke.mcap from pip install
project-ghost==0.2.5, and additionally satisfies INV_BAUD, INV_ERUR, INV_PARTITION over
the abstract model BaudErur.tla at bounds  $M=2, K=1, W=3$ , and INV_RLB (the recovery
latency bound) over Rlb.tla at  $W=4$ .
```

This is contribution C4 in action.

8 Evaluation

8.1 Tests, CI, and mechanical verification

At v0.2.5, the test suite contains 1785 tests passing (`ruff` + `mypy` strict + `deptry` clean), of which approximately 130 are dedicated property tests. The CI matrix runs on `ubuntu-latest` and `windows-latest` with Python 3.11 and 3.12, plus a `tla-plus` job that runs TLC on both mechanical specs on every push and uploads `tlc_output_*.log` as a build artifact.

8.2 Bug-detection capability (Violation Matrix)

A standalone smoke `closed_loop_smoke_violated.py` demonstrates the verifier detects *a* bug. To demonstrate that detection is **systematic, not anecdotal**, we extend this to a violation matrix of six bug categories, one mini-smoke per category, each engineered to break exactly one component of the closed loop.

The simpler single-bug showcase remains a useful pedagogical artifact, and its full JSON capture is reproduced below:

```
$ ghost verify-properties --mcap closed_loop_smoke_violated.mcap --json
{
```

Category	Buggy component	Property expected	Detected?
calibrator_no_downgrade	calibration policy	BAUD-v1	YES
calibrator_invents_confidence	calibration policy	MD-v1 (and BAUD-v1)	YES
decision_proceeds_anyway	decision policy	BAUD-v1	YES
decision_never_proceeds	decision policy	ERUR-v1	YES
actuation_non_safe_reason	actuation policy	BAUD-v1	YES
fpb_threshold_exceeded	verifier max_fire_fraction	FPB-v1	YES

Table 3: Violation matrix: six bug categories, each engineered to break exactly one component of the closed loop, all six detected by the unmodified verifier. The matrix covers BAUD-v1, ERUR-v1, MD-v1, and FPB-v1; RLB-v1 is structural to the sliding-window implementation and is exercised by the drift-then-recovery smoke at the bound (§6). Reproducible via `python -m project_ghost.examples.violation_matrix`; the script’s exit code is 1 iff any false negative occurs.

```

"all_properties_hold": false,
"properties": {
  "BAUD-v1": { "holds": false, "violation_count": 12,
               "cycles_precondition_held": 6, "cycles_total": 10 },
  "ERUR-v1": { "holds": true, ... },
  "MD-v1": { "holds": true, ... },
  "RLB-v1": { "holds": true, ... },
  "FPB-v1": { "holds": true, ... }
}
}
$ echo $?
1

```

The verifier detects 12 individual postcondition violations across 6 cycles where BAUD’s precondition fires (6 cycles $\times$ 2 postconditions). Exit code 1. The other four properties continue to hold — the bug is localised to BAUD’s conditional behaviour, and the verifier’s reports show this precisely. This demonstrates detection capacity for contribution C3 and differential failure-mode visibility across the property set.

8.3 Parametric policy evaluation

To demonstrate stability under variation of the reference calibrator parameters, we ran the closed-loop smoke under three (M, K) pairs and three trace lengths $n \in \{10, 50, 200\}$. All 9 combinations pass all 5 v1 properties evaluated in this experiment (BAUD-v1, ERUR-v1, MD-v1, RLB-v1, FPB-v1; the two v2 variants are not part of this matrix). Verifier runtime is linear in trace length and policy-insensitive. Reproducible via `docs/paper/scripts/measure_metrics.py`.

8.4 Policy-agnostic verifier, policy-specific preconditions

To probe whether the verifier generalises beyond the reference calibration policy, we ran the closed-loop smoke under two structurally distinct calibrators in addition to the reference:

- `MahalanobisDowngradePolicy( $M=4, K=2$ )` — reference; the recovery latency bound applies.
- `EWMADowngradePolicy( $\alpha=0.5, \text{min}=3, \text{thr}=0.3$ )` — exponentially-weighted moving average over the dirty indicator. The recovery latency bound does not apply.
- `PerAxisHysteresisDowngradePolicy( $\text{up}=3.0$ )` — per-axis Mahalanobis distance with hysteresis.

Policy (M, K)	n	MCAP (B)	Smoke (ms)	Verifier total (ms)	BAUD fire frac	All HOLDS
(4, 2) reference	10	6 552	15.3	20.8	0.60	✓
(4, 2) reference	50	18 481	24.3	99.7	0.92	✓
(4, 2) reference	200	64 699	100.5	405.8	0.98	✓
(3, 1) sensitive	10	6 542	5.6	20.6	0.70	✓
(3, 1) sensitive	50	18 475	34.0	100.2	0.94	✓
(3, 1) sensitive	200	64 717	102.7	399.1	0.99	✓
(5, 3) lax	10	6 553	5.6	20.6	0.50	✓
(5, 3) lax	50	18 484	23.4	100.7	0.90	✓
(5, 3) lax	200	64 700	104.4	406.2	0.98	✓

Table 4: Parametric evaluation across three calibrator parameterisations and three trace lengths. Verifier timing is the mean of 5 replicates with one warm-up. All 9 combinations report all 5 v1 properties HOLDS; v2 variants are not part of this experiment.

The verifier was executed unchanged on all three resulting MCAPs. Per-property results (verifier parameterised with the *reference’s* $M=4, K=2$):

Policy	BAUD	ERUR	MD	RLB	FPB
MahalanobisDowngradePolicy($M=4, K=2$) ref.	OK	OK	OK	OK	OK
EWMADowngradePolicy($\alpha=0.5$)	OK	VIOL	OK	OK	OK
PerAxisHysteresisDowngradePolicy	OK	VIOL	OK	OK	OK

Table 5: Policy-comparison matrix. The verifier reads each MCAP without modification; ERUR-v1 violations on the alternative policies are informative, not bugs (see discussion).

The ERUR violations are informative, not bugs. Three observations: (1) the verifier is genuinely policy-agnostic — all three policies share the same Protocol and MCAP schema; (2) MD-v1 holds on all three policies by independent obligation (monotonicity is enforced per-policy); (3) BAUD-v1 and ERUR-v1 are parameterised on the reference policy’s (M, K), so running the verifier with reference parameters against EWMA / PerAxis traces asks “did this trace behave like a reference ($M=4, K=2$) policy would have?” — the alternative policies do not always agree, and ERUR therefore sometimes violates.

The contribution that flows from this observation: the verifier remains useful as a third-party safety check for any calibrator, *but the property parameters must match the operator’s policy contract*, not blindly inherit the reference’s. A future ADR-0037 could state ERUR abstractly over `policy.precondition(history)`; v0.2.x keeps the property concrete and visible.

8.5 Realistic-shape scenarios

To demonstrate the verifier handles drift profiles beyond the sustained-drift / single-recovery patterns, we run three additional scenarios whose ground-truth functions are shaped after failure modes documented in the VIO/SLAM evaluation literature.

- **gps_denial**: 6 drift cycles + 44 recovery (transient regime; the recovery latency bound applies).
- **slow_biased_drift**: 50 cycles of low-magnitude chronic drift; FPB fire fraction climbs to 0.92.
- **cascading_failure**: 30 cycles in three phases — stationary, position-drift, position+yaw-drift.

Honest scope: shape-realistic, not data-real. The scenarios are deterministic synthetic profiles informed by the literature, not extracted from real flight telemetry. A genuine flight-data evaluation requires an adapter from PX4 ULog or ROSBag to the Ghost pipeline inputs; the

Scenario	Cycles	BAUD	ERUR	MD	RLB	FPB	fire_frac
gps_denial	50	OK	OK	OK	OK	OK	0.64
slow_biased_drift	50	OK	OK	OK	OK	OK	0.92
cascading_failure	30	OK	OK	OK	OK	OK	0.60

Table 6: Realistic-shape scenarios: all five v1 properties hold under the reference policy (BAUD-v1, ERUR-v1, MD-v1, RLB-v1, FPB-v1). Reproducible via `python -m project_ghost.examples.realistic_scenarios`.

roadmap is `docs/paper/venues/dataset_integration.md`. The scenarios here establish that the verifier and property set generalise to non-trivial failure shapes; full flight-data validation is future work.

8.6 Comparison against RTAMT: capability matrix, not race

The comparison matrix of §2.4 differentiates Ghost from RTAMT [19] qualitatively. A natural follow-up is to run them head-to-head on the same MCAP and compare verdicts plus wall-clock time. We attempted that benchmark and preserve the script for reproducibility, but **we do not treat its result as a competitive comparison**: Ghost and RTAMT encode different properties on the same trace, so a verdict difference does not establish a defect in either tool. The script `docs/paper/scripts/benchmark_vs_rtamt.py` is preserved for reproducibility; its output lives in `docs/paper/outputs/benchmark_vs_rtamt.json`.

Instead, Table 7 states the *capabilities* the two tools offer over the same MCAP, evaluated by their published feature sets (RTAMT 0.3.5 from PyPI; Ghost v0.2.5). The matrix reflects our reading of each project’s documentation and source as of mid-2026; a more recent RTAMT release may close some rows, and we welcome correction from the RTAMT maintainers. This framing is what we believe a reader can defend without entering an arms race about which STL encoding “really” represents BAUD-v1.

Capability	Ghost v0.2.5	RTAMT 0.3.5
Native property language	Python predicate over MCAP schema	STL
Reads MCAP directly	Yes (<code>MCAPReplayReader</code>)	No (user extracts signals)
Counts of K -in- W as a single formula	Yes (intrinsic)	No (auxiliary counters needed)
Robustness semantics	No (verdict only)	Yes (real-valued)
Arbitrary user-defined STL	Out of scope	Yes (the tool’s purpose)
Bug-detection over Ghost’s reference pipeline	Demonstrated in §8.2	Requires re-encoding per property
Distribution	PyPI + OIDC-signed wheel	PyPI source distribution
Typed per-property report	Yes	No (robustness/time)

Table 7: Capability matrix Ghost vs RTAMT. The two tools are complementary, not direct competitors: RTAMT for declarative STL over arbitrary signals with quantitative robustness; Ghost for a content-addressed CLI verifier for a specific supervisor with hand-stated predicates.

On performance, the raw measurement on the reference 50-cycle smoke is: Ghost’s `verify_baud` returns in 23 ms (mean of 5 replicates); RTAMT’s monitor evaluates its STL formula on the pre-extracted signals in 0.15 ms, with signal extraction from the MCAP adding ~20 ms of parsing on the user side. The two numbers measure different things and we report them only to give the reader a sense of order of magnitude.

8.7 The verifier on real flight telemetry

The verifier was executed unchanged on real flight telemetry. This is the single sentence whose absence the prior versions of this paper had to apologise for.

v0.2.5 lets us write it.

What this section ships in v0.2.5. A real PX4 ULog from the PX4/pyulog test fixtures (`test/sample_log_small.ulg`, ~921 KB, PX4 v1.10-era SITL flight, BSD-3 via PX4), bundled in the source repository at `docs/paper/data/sample.ulg` with SHA-256 `68d1020f...` (the PyPI wheel ships the verifier code only; data files are kept in the repo for size reasons — reproducing §8.7 requires a `git clone` alongside the `pip install`). An end-to-end orchestrator `project_ghost.adapters.real_ulog_smoke.run_real_ulog_smoke` reads the ULog via `parse_ulog_pose_samples`, subsamples it to Ghost’s 10 Hz cycle rate, drives the **unmodified** closed-loop pipeline (fusion → assessment → calibration → decision → actuation → forward prediction → divergence), materialises a Ghost-schema MCAP, and runs the five property verifiers against it. A CLI driver at `docs/paper/scripts/verify_real_ulog.py` runs the end-to-end flow on any `.ulg` file. Three integration tests in `tests/adapters/test_real_ulog_smoke.py` pin the end-to-end outcome.

Read this before the verdict table: scope of the ground-truth source. The orchestrator uses the ULog’s own EKF2 estimate as both the agent’s belief and the (vacuous) oracle ground truth, so the all-HOLDS row that follows is **vacuous as a safety claim** — it shows the verifier runs end-to-end on real telemetry, not that the contracts hold over an independent reference. A non-vacuous ground truth (motion capture, RTK GPS, post-flight optimised solution) is candidate ADR-0037; the **Sim, not hardware** clause of §9 remains intact for the strong reading. The non-vacuous claim of this real-flight section comes in §8.8 (discrimination), not here.

Field	Value
Pose samples extracted by the adapter	636
Ghost cycles run	71
MCAP SHA-256	49fd0a48...720a4591
BAUD-v1	HOLDS (vacuously)
ERUR-v1	HOLDS (vacuously)
MD-v1	HOLDS (vacuously)
RLB-v1	HOLDS (vacuously)
FPB-v1	HOLDS (vacuously; fire_fraction = 0.9437)

Table 8: Verdict bundle on the bundled real PX4 ULog (self-consistent ground truth; see scope note above).

The structural fact this section establishes is:

The verifier was executed unchanged on real PX4 v1.10 flight telemetry, in CI, with a deterministic MCAP output reproducible from a single shell command.

That is the load-bearing sentence of this section — not the verdict row.

8.8 Discrimination on real flight telemetry

The previous subsection establishes that the verifier *runs* on real telemetry. It does not, on its own, establish that the verifier *catches* anything on real telemetry — the all-HOLDS row could be produced by a vacuous verifier as easily as by a correct one. This subsection closes that gap.

The experiment. On the *same* real PX4 ULog as §8.7, we re-run the closed-loop pipeline twice more, each time substituting *one* buggy component imported verbatim from the §8.2 violation matrix. The fusion oracle, the MCAP schema, the verifier and the ULog input are held identical to the nominal run; only one named component differs per buggy case.

Verdict delta on the bundled real PX4 ULog. v0.2.5 expands the experiment from two buggy categories to all six categories of the violation matrix (§8.2). Each row substitutes exactly

one named component imported verbatim from the synthetic matrix; fusion oracle, MCAP schema, verifier, and ULog input are held identical across rows.

Run	Exp. violator	BAUD	ERUR	MD	RLB	FPB
nominal (reference policies)	—	HOLDS	HOLDS	HOLDS	HOLDS	HOLDS
calibrator_no_downgrade	BAUD-v1	VIOL.	HOLDS	HOLDS	HOLDS	HOLDS
calibrator_invents_confidence	MD-v1	VIOL.	HOLDS	VIOL.	HOLDS	HOLDS
decision_proceeds_anyway	BAUD-v1	VIOL.	HOLDS	HOLDS	HOLDS	HOLDS
decision_never_proceeds	ERUR-v1	HOLDS	VIOL.	HOLDS	HOLDS	HOLDS
actuation_non_safe_reason	BAUD-v1	VIOL.	HOLDS	HOLDS	HOLDS	HOLDS
fpb_threshold_exceeded	FPB-v1	HOLDS	HOLDS	HOLDS	HOLDS	VIOL.

Table 9: Verdict delta on the bundled real PX4 ULog. 6/6 categories flip the expected property; 5/6 are isolated. The one non-isolated row (`calibrator_invents_confidence`) is a true co-violation: a calibrator that lies about confidence breaks both the Mahalanobis downgrade contract and the abstain-under-drift contract together. The verifier reports both.

Reproducibility. End-to-end runnable from `pip install 'project-ghost[adapters]==0.2.5'`:

```
python docs/paper/scripts/verify_real_ulog_discriminate.py \
  --ulog docs/paper/data/sample.ulg \
  --out-dir docs/paper/outputs/real_ulog_discrim
```

Exit code is 0 iff every buggy category flips its expected property. Six integration tests pin the experiment in CI (`tests/adapters/test_real_ulog_discrimination.py`).

Why this answers the residual critique. On the same physical flight, swapping any of six named reference components for its one-line buggy counterpart flips the verdict on the property that component most directly attacks. The synthetic violation-matrix detections of §8.2 transfer to real telemetry on this ULog for the bug categories whose precondition the real flight’s drift pattern exercises.

Generalisation to a 3-ULog corpus

The result above rests on *one* PX4 SITL ULog. v0.2.5 addresses the "single dataset" reviewer attack by expanding the experiment to a **corpus of three structurally distinct PX4 ULogs** drawn from PX4’s public test fixtures (BSD-3 licensed, license-clean, no vendor mediation needed for reproduction):

ULog	Pose samples	Duration (s)	FPB fire_fraction
sample.ulg (the §8.8 anchor)	636	6.5	0.9437
corpus/sample_appended.ulg	1110	112.6	0.9800
corpus/sample_logging_tagged.ulg	1268	10.1	0.0000

Table 10: 3-ULog corpus. Spans a $16\times$ duration range and includes one log whose recorded segment is largely stationary (`fire_fraction` = 0). We chose not to filter that log out: the corpus is the PX4 public test set as-shipped, and a paper that hand-picks logs where every property fires would be cherry-picked by definition.

The **corpus detection matrix** is regenerated by CI on every push and emitted as `docs/paper/outputs/multi_matrix.json` (self-describing: `schema_version`, per-ULog diagnostics, both matrices). YES = the verifier flips the predicted property on that ULog; NO = the property holds across nominal and buggy:

This is **informative non-discrimination**, not a verifier failure. The four HOLDS-everywhere categories all share a precondition that BAUD-v1’s drift signal must fire at least once. On a

Bug category	sample	appended	logging_tagged
calibrator_no_downgrade	YES	YES	NO
calibrator_invents_confidence	YES	YES	YES
decision_proceeds_anyway	YES	YES	NO
decision_never_proceeds	YES	YES	YES
actuation_non_safe_reason	YES	YES	NO
fpb_threshold_exceeded	YES	YES	NO

Table 11: Corpus detection matrix. 12/18 cells discriminate. On the two **active** ULogs (*fire_fraction* > 0.9) the matrix is fully green: 6/6 categories flip the expected property on each. On the **stationary** ULog (*fire_fraction* = 0), 4/6 categories report HOLDS.

log where the agent is largely stationary and the stationary belief never diverges from GT, that precondition is vacuously satisfied for both nominal and buggy producers, and the property correctly reports HOLDS for both. The remaining two (*calibrator_invents_confidence*, *decision_never_proceeds*) do not require the drift signal to fire and correctly flip on all three ULogs. The verifier is therefore doing what it claims: it flags exactly those producer bugs whose precondition the ULog actually exercises. The "independent GT source" mitigation is the topic of §8.8 (v0.2.5).

Run `python docs/paper/scripts/run_multi_olog_corpus.py` to regenerate the matrix; six integration tests in `tests/adapters/test_real_olog_corpus.py` pin the matrix shape, the active-ULog invariant, the stationary-ULog SITL-GT auto-detect invariant (§8.8), and the JSON artefact schema.

The buggy substitution is at the policy layer; no buggy run flew anything. Generalising across **non-PX4** flight stacks (ROSBAG, ArduPilot, EuRoC) remains scope for the wider ADR-0037 roadmap.

Independent GT closes the stationary-ULog gap (v0.2.5)

The stationary-ULog row reported above is the residual gap v0.2.5 closes. The §8.8.1 pipeline reconstructed GT from the same ULog’s *vehicle_local_position* topic — the agent’s own EKF2 estimate. On a stationary segment that estimate barely moves (~2 mm x-range) and any drift-preconditioned property HOLDS vacuously. The ULog *sample_logging_tagged.ulg*, however, carries *vehicle_local_position_groundtruth* and *vehicle_attitude_groundtruth* emitted directly by the PX4 SITL simulator and *independent of EKF2*. The GT pose on that ULog has ~33 mm x-range — sub-cm hover oscillation EKF2 hid.

v0.2.5 adds `project_ghost.adapters.px4_olog`. `GroundTruthSource` (EKF2_FALLBACK, SITL_SIMULATOR) and an auto-detector that upgrades a ULog to SITL whenever both GT topics are present. The pose adapter, MCAP schema, and verifier are unchanged — only the GT source flips.

Metric	EKF2_FALLBACK	SITL_SIMULATOR
FPB <i>fire_fraction</i>	0.0000	0.8585
Categories that discriminate	2 / 6	6 / 6
<i>all_discriminate</i>	False	True

Table 12: A/B on *sample_logging_tagged.ulg*, same buggy components and same verifier. Swapping the GT source from the agent’s own EKF2 estimate to the SITL simulator’s true pose lifts the precondition-fire rate from 0 to 0.86 and closes 4 of the 6 vacuously-HOLDS rows of §8.8.

The refreshed 3-ULog corpus matrix (with auto-detect on by default) is fully green: 18/18 cells discriminate. 15/18 isolate — the 3 non-isolated cells are all *calibrator_invents_confidence*,

the same BAUD-v1 $\wedge$ MD-v1 co-violation from §8.8. Two of the three ULogs still use EKF2_FALLBACK (`sample.ulg`, `sample_appended.ulg`); their columns are green because those flights are not stationary (*fire_fraction* $\approx$ 0.94 / 0.98) and the precondition fires under circular GT anyway. The `matrix.json` artefact records the `groundtruth_source` per ULog so a reviewer can verify which rows used independent GT vs the circular fallback.

What §8.8 does not yet close. Real-hardware ULogs without SITL GT topics still rely on EKF2 fallback with the same vacuous-HOLDS risk on stationary segments; motion-capture and RTK-GPS sources are enumerated in the `GroundTruthSource` enum but unimplemented. ROSBag, ArduPilot, and EuRoC adapters remain open under ADR-0037.

8.9 Determinism across replicates and machines

Within a single machine, replicate runs produce byte-identical MCAPs. **Cross-machine byte-equality of the MCAP** is enforced by a CI job: the reference smoke runs on a `{ubuntu-latest, windows-latest}` matrix, each runner publishes the SHA-256 of its MCAP and of its canonicalised property-report JSON (sorted keys, `mcap_path` dropped to absorb platform path-separator differences), and the aggregator step `diffs` the two files. Any disagreement fails the build.

9 Threats to validity

9.1 Construct validity

Our key construct is the property class *epistemic safety contract* (§3). The threat is that the class is so broadly defined that any property could be called “epistemic”. We mitigate by (a) the formal Protocol definition (§3.1) which enforces a triple (`property_version`, `scope`, `verifier`) with non-empty claims and does-not-claim tuples, and (b) the seven shipped contracts which exemplify the class concretely. A reviewer can attempt to register a vacuous contract and observe that the framework’s invariants reject it.

9.2 Internal validity

The Python verifier and the TLA+ specification could disagree. Until v0.2.5 this was acknowledged “by inspection”. ADR-0043 closes the bridge for RLB-v1 with a mechanical Hypothesis conformance test (§6.4); ADR-0046 extends the closure to BAUD-v1, ERUR-v1, MD-v1, and FPB-v1 against the `BaudErur.tla` and `Fpb.tla` semantics. The two v2 contracts (ERUR-v2 and FPB-v2) remain open: ERUR-v2 is parametric over a `DriftPreconditionProvider` Protocol and TLA+-side coverage would require re-implementing each policy’s predicate; FPB-v2’s statistical bound conformance is out of scope for the structural conformance harness. The two open bridges are the remaining internal-validity threat we explicitly disclose.

9.3 External validity

The discrimination experiment uses three PX4 SITL ULogs from the upstream pyulog test fixtures. We chose not to filter the stationary ULog (§8.8); the SITL GT auto-detection (§8.8) closes it mechanically. The external-validity threat is generalisation to non-PX4 flight stacks and to real hardware. ADR-0037 documents the open extension to ROSBag / EuRoC and to motion capture / RTK GPS GT sources.

9.4 Conclusion validity

The mechanical proofs (Lean 4, TLA+/TLC) ground every quantitative claim. Lemma 4 of unbounded RLB-v1 ships as a documented `sorry` in Lean 4 (ADR-0042); we explicitly do not claim a SMT-checked TLAPS proof, only a mechanically-reduced statement. The hand proof

of Lemma 4 is available for human audit (`docs/proofs/Rlb_unbounded_handproof.md`); the remaining conclusion-validity threat is a manual-proof error in Lemma 4, which the Lean 4 follow-up (ADR-0044) would eliminate.

10 Known gaps and limitations

- **Sim, not hardware.** MCAPs come from a simulated overconfidence trap, not real flight logs. Real-world claims require a HAL backend and a hardware campaign. v0.2.5 ships the PX4 ULog adapter and exercises it on a 3-ULog SITL corpus (§8.8); ROSBag / EuRoC adapters and a non-PX4 stack remain open under ADR-0037.
- **Reference policies only.** The TLA+ proofs and property semantics target specific reference policies. Non-reference policies would need their own ADRs, verifier specialisations, and TLA+ specs.
- **Bounded TLC, near-full unbounded coverage.** TLC is exhaustive at each configured W . v0.2.5 ships four artefacts (§6.4, ADR-0038 + ADR-0042): (1) parametric TLC sweep over $W \in \{4, 8, 16\}$, (2) rigorous hand proof of the unbounded theorem, (3) refined TLAPS outline, and (4) **Lean 4 mechanical proofs** – the partition theorem $BAUD \oplus ERUR$ is **fully verified with no sorry**; unbounded RLB-v1 has 9 mechanically verified lemmas + Theorem 1 statement reduced to a single load-bearing `cleanAfterDirty_count` (Lemma 4) that ships as a documented `sorry`. The Lean 4 discharge of Lemma 4 is the ADR-0044 follow-up.
- **Python $\leftrightarrow$ TLA+ bridge – mechanically closed (ADR-0043).** The previous "by inspection" caveat is closed in v0.2.5 by a Hypothesis-checked conformance test that re-implements the verifier core and the TLA+ state machine from their respective sources (no shared code) and asserts they agree on `INV_RLB` for every trace Hypothesis synthesises (~ 600 random traces + 4 pinned paper examples per run, under 1 s on every push). Any future divergence between the verifier and the spec fails the test before it ships. The template extends to `BAUD` / `ERUR` / `MD` / `FPB` as follow-up per-property ADRs.
- **Statistical FPB shipped, scope narrow.** FPB-v2 (ADR-0039, v0.2.5) ships closed-form Hoeffding and exact Clopper-Pearson one-sided upper bounds (§3). The remaining honest gap: FPB-v2 does not validate the iid Bernoulli assumption Clopper-Pearson invokes, does not adjust for multiple-testing across parameter sweeps, and reports only a one-sided bound. Wilson-score and two-sided variants are deferred amendments.
- **Vacuous holds on stationary ULogs (closed in v0.2.5 for SITL, open for hardware).** §8.8 reported the vacuous-HOLDS rows under EKF2-circular GT. §8.8 closes that gap for any ULog with SITL GT topics by auto-detecting the independent track — the refreshed corpus matrix is 18/18 green. The remaining honest gap: real-hardware ULogs without SITL GT still rely on EKF2 fallback. The `groundtruth_source` field surfaces the fallback so a reviewer cannot mistake it for verification; motion-capture / RTK-GPS sources are enumerated but unimplemented.

11 Future work

- TLA+ spec for FPB-v1 closing the formal-verification coverage of the full property set.
- **ADR-0044 candidate:** discharge Lemma 4 (`cleanAfterDirty_count`) in Lean 4 (v0.2.5 ADR-0042 ships the rest of the unbounded RLB-v1 package; Lemma 4 is the only `sorry` remaining). May benefit from `mathlib`'s `List.IsPrefix` machinery.

- **ADR-0045 (accepted, v0.2.5):** Epistemic Safety Contract framework (§3.1). Formalises the property class as a Python Protocol + registry of seven shipped contracts; 8 framework-level invariants pinned in `test_framework_invariants.py`.
- **ADR-0046 candidate:** extend the Python $\leftrightarrow$ TLA+ bridge conformance template (ADR-0043) from RLB-v1 to the other six shipped contracts (framework registry enumerates them; template is reusable per property).
- Optional TLAPS-mechanical discharge of unbounded RLB-v1 for contributors who prefer the TLA+ ecosystem (§6.4 ships the outline; Lean 4 provides the alternative discharge route in v0.2.5).
- HAL backend campaign lifting the reproducibility surface from simulation to flight logs.
- Conformance suite populating the `conformance` pytest marker with the HAL contract.

12 Conclusion

Autonomous agents should have verifiable contracts on their own epistemic posture, and those contracts should ship as executable citations a third party can falsify. That is the load-bearing proposition this paper exists to defend.

Epistemic safety contracts are a property class adjacent to but distinct from STL-style predicates over signals and from POMDP- style belief monitoring (§1.2): they verify obligations the agent must satisfy about how it relates to its own uncertainty — degrade, recover, bound, and act. Project Ghost ships five such contracts for a reference autonomy supervisor (BAUD, ERUR, MD, RLB, FPB), packages each together with a content-addressed run and a pure-function verifier as an executable safety citation, and demonstrates that the verifier discriminates real PX4 flight telemetry against named regressions (§8.8).

What we *do not* claim: that epistemic contracts subsume STL or shielding (they answer a different question); that this is the maximal contract set (FPB-v1 can be tightened, contracts on sensor-fusion provenance or actuation budgets remain to be written); that we have a unique licensing claim on the term (it overlaps with how epistemic-logic, doxastic-logic and self-assessment communities have used adjacent vocabulary).

What we *do* claim: that the framing is operationally defensible — the artifact is re-runnable from `pip install project-ghost==0.2.5`; the verdict on real PX4 flight telemetry is reproducible from a single shell command; the cited artefact *is* the falsification mechanism.

Use of AI tools (disclosure)

This paper was prepared with the assistance of Anthropic’s Claude AI as a coding pair-programmer and editorial reviewer. The conceptual contributions, the formal property definitions, the seven epistemic safety contracts, the experimental design, the reproducibility approach, and all final decisions are the author’s. AI assistance was used for code generation under supervision, for drafting technical prose in English, and for translating the long-form paper to Spanish and Chinese. All theorems, claims, citations, and bibliographic references were independently verified by the author against their primary sources before submission. The author takes full responsibility for the content of this paper.

References

- [1] Mohammed Alshiekh, Roderick Bloem, Rüdiger Ehlers, Bettina Könighofer, Scott Niekum, and Ufuk Topcu. Safe reinforcement learning via shielding. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32, 2018. doi:[10.1609/aaai.v32i1.11797](https://doi.org/10.1609/aaai.v32i1.11797).
- [2] Ezio Bartocci, Luca Bortolussi, Michele Loreti, Laura Nenzi, and Simone Silvetti. MoonLight: A lightweight tool for monitoring spatio-temporal properties. In *Runtime Verification (RV)*, 2020.
- [3] Ezio Bartocci, Luca Bortolussi, Michele Loreti, Laura Nenzi, and Simone Silvetti. MoonLight: A lightweight tool for monitoring spatio-temporal properties. *International Journal on Software Tools for Technology Transfer (STTT)*, 2023.
- [4] Ezio Bartocci and Yliès Falcone, editors. *Lectures on Runtime Verification*, volume 10457 of *Lecture Notes in Computer Science*. Springer, 2018.
- [5] Steven Carr, Nils Jansen, Sebastian Junges, and Ufuk Topcu. Safe reinforcement learning via shielding under partial observability. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, 2023. doi:[10.1609/aaai.v37i12.26723](https://doi.org/10.1609/aaai.v37i12.26723).
- [6] C. J. Clopper and E. S. Pearson. The use of confidence or fiducial limits illustrated in the case of the binomial. *Biometrika*, 26(4):404–413, 1934.
- [7] Denis Cousineau, Damien Doligez, Leslie Lamport, Stephan Merz, Daniel Ricketts, and Hernán Vanzetto. TLA+ proofs. In *International Symposium on Formal Methods (FM)*, pages 147–154, 2012. doi:[10.1007/978-3-642-32759-9_14](https://doi.org/10.1007/978-3-642-32759-9_14).
- [8] Leonardo de Moura and Sebastian Ullrich. The Lean 4 theorem prover and programming language. In *Automated Deduction (CADE)*, pages 625–635, 2021. doi:[10.1007/978-3-030-79876-5_37](https://doi.org/10.1007/978-3-030-79876-5_37).
- [9] Alexandre Donzé and Oded Maler. Robust satisfaction of temporal logic over real-valued signals. *Formal Methods in System Design*, 37(2-3):103–119, 2013.
- [10] Foxglove Studio. MCAP: A self-contained file format for heterogeneous timestamped data. <https://mcap.dev/>, 2022.
- [11] Wassily Hoeffding. Probability inequalities for sums of bounded random variables. *Journal of the American Statistical Association*, 58(301):13–30, 1963.
- [12] Jeff Huang, Cansu Erdogan, Yi Zhang, Brandon Moore, Qingzhou Luo, Aravind Sundaresan, and Grigore Roşu. ROSRV: Runtime verification for robots. In *Runtime Verification (RV)*, 2014.
- [13] Rolf Isermann. *Fault-Diagnosis Systems: An Introduction from Fault Detection to Fault Tolerance*. Springer, 2006.
- [14] Alex Kendall and Yarin Gal. What uncertainties do we need in Bayesian deep learning for computer vision? In *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.
- [15] Ron Koymans. Specifying real-time properties with metric temporal logic. *Real-Time Systems*, 2:255–299, 1990.
- [16] Hadas Kress-Gazit, Georgios E. Fainekos, and George J. Pappas. Where’s Waldo? sensor-based temporal logic motion planning. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 3116–3121, 2007. doi:[10.1109/ROBOT.2007.363949](https://doi.org/10.1109/ROBOT.2007.363949).

- [17] Leslie Lamport. *Specifying Systems: The TLA+ Language and Tools for Hardware and Software Engineers*. Addison-Wesley, 2002.
- [18] Oded Maler and Dejan Nickovic. Monitoring temporal properties of continuous signals. In *Formal Techniques, Modelling and Analysis of Timed and Fault-Tolerant Systems (FORMATS) and Formal Techniques in Real-Time and Fault-Tolerant Systems (FTRTFT) Joint International Conferences*, pages 152–166, 2004. doi:[10.1007/978-3-540-30206-3_12](https://doi.org/10.1007/978-3-540-30206-3_12).
- [19] Dejan Niković, Tomoya Yamaguchi, Alexandre Donzé, Takumi Akazaki, and Bardh Hoxha. RTAMT: Online robustness monitors from STL. In *Automated Technology for Verification and Analysis (ATVA)*, 2020.
- [20] Dejan Niković, Tomoya Yamaguchi, Alexandre Donzé, Takumi Akazaki, and Bardh Hoxha. RTAMT: Online robustness monitors from STL. *International Journal on Software Tools for Technology Transfer (STTT)*, 2023.
- [21] PX4 Development Team. PX4 Autopilot: Open-source flight control software, ULog format. https://docs.px4.io/main/en/dev_log/ulog_file_format.html, 2024.
- [22] The mathlib Community. mathlib4: The Lean 4 mathematical library. <https://github.com/leanprover-community/mathlib4>, 2024.
- [23] Sebastian Thrun, Wolfram Burgard, and Dieter Fox. *Probabilistic Robotics*. MIT Press, 2005.
- [24] Vladimir Vovk, Alex Gammerman, and Glenn Shafer. *Algorithmic Learning in a Random World*. Springer, 2005.
- [25] Tichakorn Wongpiromsarn, Ufuk Topcu, and Richard M. Murray. Receding horizon temporal logic planning. *IEEE Transactions on Automatic Control*, 57:2817–2830, 2012.