

原 忘记 mysql 数据库连接密码（解决方案）

2018年05月29日 12:35:34 [csdn_小东](#) 阅读数：3833 [更多](#)

简单粗暴：直接修改密码。

本次操作所有需要用到的密令行：

```
bin>net stop mysql
```

```
bin>mysqld --skip-grant-tables
```

```
bin>mysql
```

```
mysql>use mysql
```

```
mysql>update user set password=password("123456") where user="root";
```

```
mysql>flush privileges;
```

```
mysql>quit
```



```
bin>mysqldadmin -u root -p shutdown
```

```
bin>net start mysql
```

如果你不是大神，看不懂这命令行是干嘛用，请直接看下面的图文详解。

↓↓


1.进入 mysql 的 bin 目录下，打开 cmd，关闭 mysql 数据库。

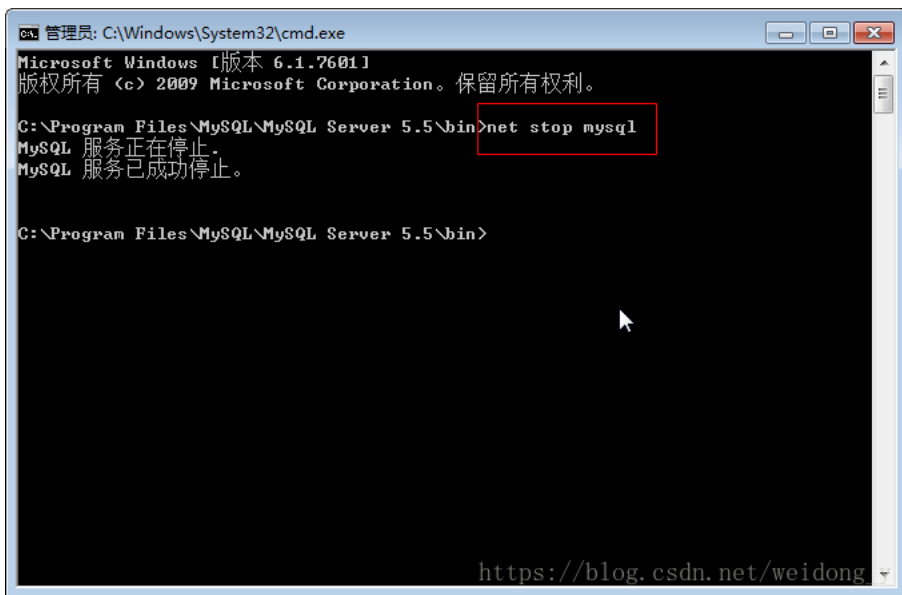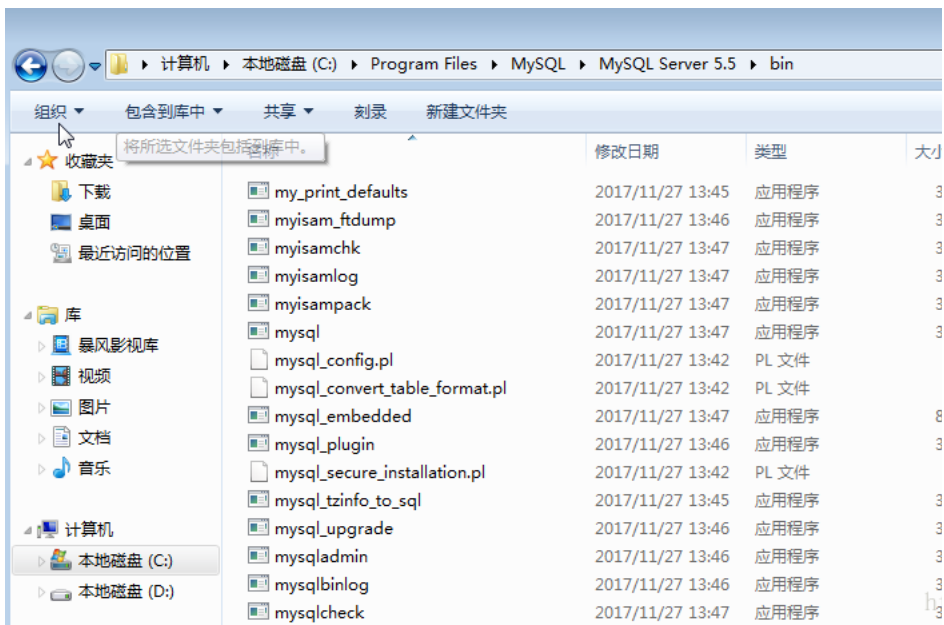

2. 输入 `mysqld --skip-grant-tables` 回车。

(--skip-grant-tables 的意思是启动 MySQL 服务的时候跳过权限表认证)

注意：这时候，刚刚打开的 cmd 窗口已经不能使用了。重新再 bin 目录下打开一个新的 cmd 窗口进：

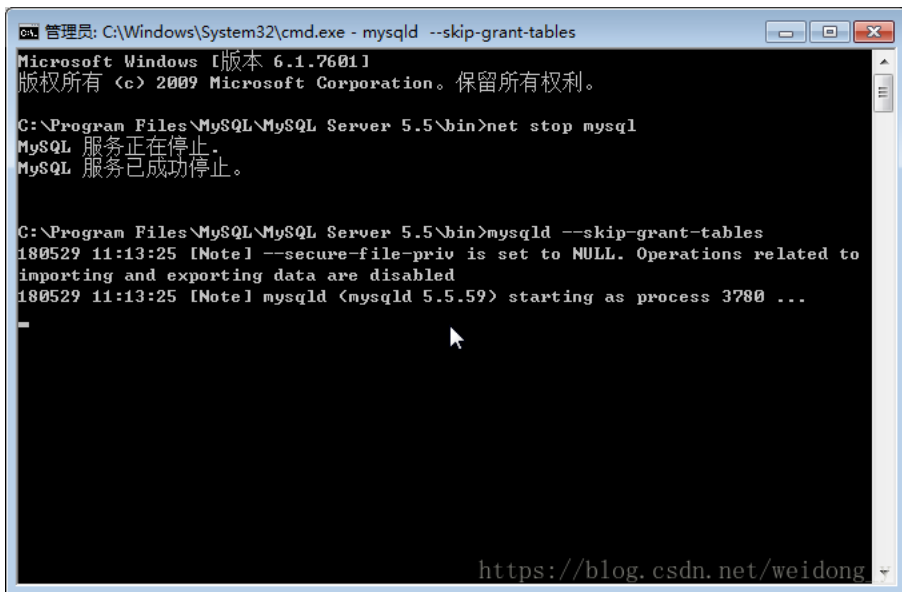

管理员: C:\Windows\System32\cmd.exe - mysqld --skip-grant-tables

Microsoft Windows [版本 6.1.7601]
版权所有 (c) 2009 Microsoft Corporation。保留所有权利。

C:\Program Files\MySQL\MySQL Server 5.5\bin>net stop mysql
MySQL 服务正在停止。
MySQL 服务已成功停止。

C:\Program Files\MySQL\MySQL Server 5.5\bin>mysqld --skip-grant-tables
180529 11:13:25 [Note] --secure-file-priv is set to NULL. Operations related to
importing and exporting data are disabled
180529 11:13:25 [Note] mysqld (mysqld 5.5.59) starting as process 3780 ...

<https://blog.csdn.net/weidong>

3.重新打开一个 cmd 窗口。输入 mysql 回车。下面是成功后的显示图。



管理员: C:\Windows\System32\cmd.exe - mysql

Microsoft Windows [版本 6.1.7601]
版权所有 (c) 2009 Microsoft Corporation。保留所有权利。

C:\Program Files\MySQL\MySQL Server 5.5\bin>mysql
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 1
Server version: 5.5.59 MySQL Community Server (GPL)

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>

<https://blog.csdn.net/weidong>

4.连接权限数据库: use mysql

```
管理员: C:\Windows\System32\cmd.exe - mysql
Microsoft Windows [版本 6.1.7601]
版权所有 (c) 2009 Microsoft Corporation。保留所有权利。

C:\Program Files\MySQL\MySQL Server 5.5\bin>mysql
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 1
Server version: 5.5.59 MySQL Community Server <GPL>

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> use mysql
Database changed
mysql>
```

<https://blog.csdn.net/weidong>

5.修改数据库连接密码:

```
update user set password=password("123456") where user="root";
```

注释: 这里的“123456”为新密码, 请根据自己的需求, 输入新的密码。注意语句后面的“;”不能遗漏。

```
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> use mysql
Database changed
mysql> update user set password=password("123456") where user="root";
Query OK, 2 rows affected (0.01 sec)
Rows matched: 2 Changed: 2 Warnings: 0
mysql>
```

<https://blog.csdn.net/weidong>

6.刷新权限 (必须步骤)

```
flush privileges;
```

```
Rows matched: 2 Changed: 2 Warnings: 0

mysql> flush privileges;
Query OK, 0 rows affected (0.02 sec)
mysql>
```

<https://blog.csdn.net/weidong>

7.退出 mysql

```
mysql> flush privileges;  
Query OK, 0 rows affected (0.02 sec)  
  
mysql> quit  
Bye  
  
C:\Program Files\MySQL\MySQL Server 5.5\bin>
```

8.修改 root 密码后，需要执行下面的语句和新修改的密码。不然开启 mysql 时会出错。

mysqladmin -u root -p shutdown

```
命令提示符: C:\Windows\system32\cmd.exe  
Microsoft Windows [版本 6.1.7601]  
版权所有 (c) 2009 Microsoft Corporation。保留所有权利。  
  
C:\Program Files\MySQL\MySQL Server 5.5\bin>mysqladmin -u root -p shutdown  
Enter password: *****
```

9.重启 mysql

```
C:\Program Files\MySQL\MySQL Server 5.5\bin>net start mysql  
MySQL 服务正在启动。  
MySQL 服务已经启动成功。
```