

SSRG — A SIMPLE PIPELINE TO ASSESS GENETIC DIVERSITY BETWEEN BACTERIAL GENOMES

SSRG MANUAL – VERSION 0.5 (EARLY DRAFT)

AUGUST 14, 2018

Pombert lab, Illinois Tech

TABLE OF CONTENTS

Overview	2
Workflows	2
Dependencies	4
Installation	4
Command line usage	5
Quick reference – Read mapping	5
Quick reference – Genetic distance estimation	5
Detailed options	5
<i>Read mapping</i>	
queryNCBI.pl	Downloads data automatically from GenBank..... 5
SSRG.pl	Synthetic Short Read Generator..... 6
get_SNPs.pl	Read mapping/variant calling..... 6
sort_stats.pl	Table generator 8
synonymy.pl	Sort synonymous/non-synonymous SNPs..... 8
count_SNPs.pl	Quick metrics 8
<i>Genetic distances</i>	
run_Mash.pl	Perl wrapper for MASH..... 9
MashToDistanceCSV.pl	Generates distance matrices from MASH outputs 9
MashR_plotter.pl	Plots distance matrices..... 9

OVERVIEW

The SSRG pipeline was created as a simple, focused tool to investigate SNPs between prokaryote genomes. The pipeline uses the common SNP-calling approach of read-mapping against references, standardizes experimental conditions for more accurate SNP comparisons, and integrates ubiquitous methodologies for both analysis and visualization. The unique feature of the SSRG pipeline resides in the creation of synthetic short reads from complete or draft genomes, which can then be fed to the read mapping/variant calling tools. Note that this approach works only for haploid genomes. Alternatively, users can also select any compatible FASTQ datasets to use with the pipeline.

Assessing the genetic diversity between genomes often involves the calculation of single nucleotide polymorphisms (SNPs) and insertions/deletions (indels). This is usually done by mapping short accurate sequencing reads from one or more species against a reference genome, from which variants are called. This approach works well when short read data from published genomes are available in public repositories, which is not always the case, especially now that bacterial genome sequencing is shifting towards the use of long read technologies. While genomes and/or long reads can be aligned against each other, the results are often suboptimal when the investigated chromosomes are highly reorganized, which can cause the mapping to fail. A simple solution to this problem is to deconstruct the genomes or long reads into shorter fragments, a shotgun approach, and to use these smaller synthetic reads as input for mapping.

Deconstructing genomes into synthetic reads has the following advantages:

- This approach allows the comparisons of genomes for which sequencing read datasets are not available in public repositories.
- This approach helps standardize datasets by providing reads with the exact same parameters. For example, genomes generated from illumina, PacBio and/or Nanopore data can now be compared without fuss.
- Because bases from complete or draft genomes have been queried multiple times by the sequencing depth, the underlying confidence in the base being called is thus higher than from a single sequencing read. This in turn leads to fewer false positives caused by sequencing errors.

The SSRG pipeline currently can:


- 1) Download genomes automatically from NCBI using a CSV/Tab-delimited list of desired OTUs
- 2) Calculate pairwise SNPs between FASTQ sequences and reference genomes using standard read mapping approaches.
- 3) Run Mash (<https://github.com/marbl/Mash>; Ondov et al. 2016. DOI: 10.1186/s13059-016-0997-x) and plot the estimated genetic distances as heatmaps, neighbor-joining trees, or clusters (using dimensionality reduction techniques).

WORKFLOWS

The SSRG pipeline features two independent workflows:

- I. Read-mapping/variant calling
- II. Genetic distances estimation

Users interested in point mutations should use the read-mapping/variant calling workflow. Users only interested in genetic distances should use the genetic distances estimation workflow. This workflow is based on MASH, an excellent and fast tool developed by Ondov *et al.* [Ondov BD, Treangen TJ, Mallonee AB, Bergman NH, Koren S, Phillippy AM (2016) Fast genome and metagenome distance estimation using MinHash. *Genome Biol* 17:132. DOI: 10.1186/s13059-016-0997-x]. The Mash workflow does not identify point mutations.

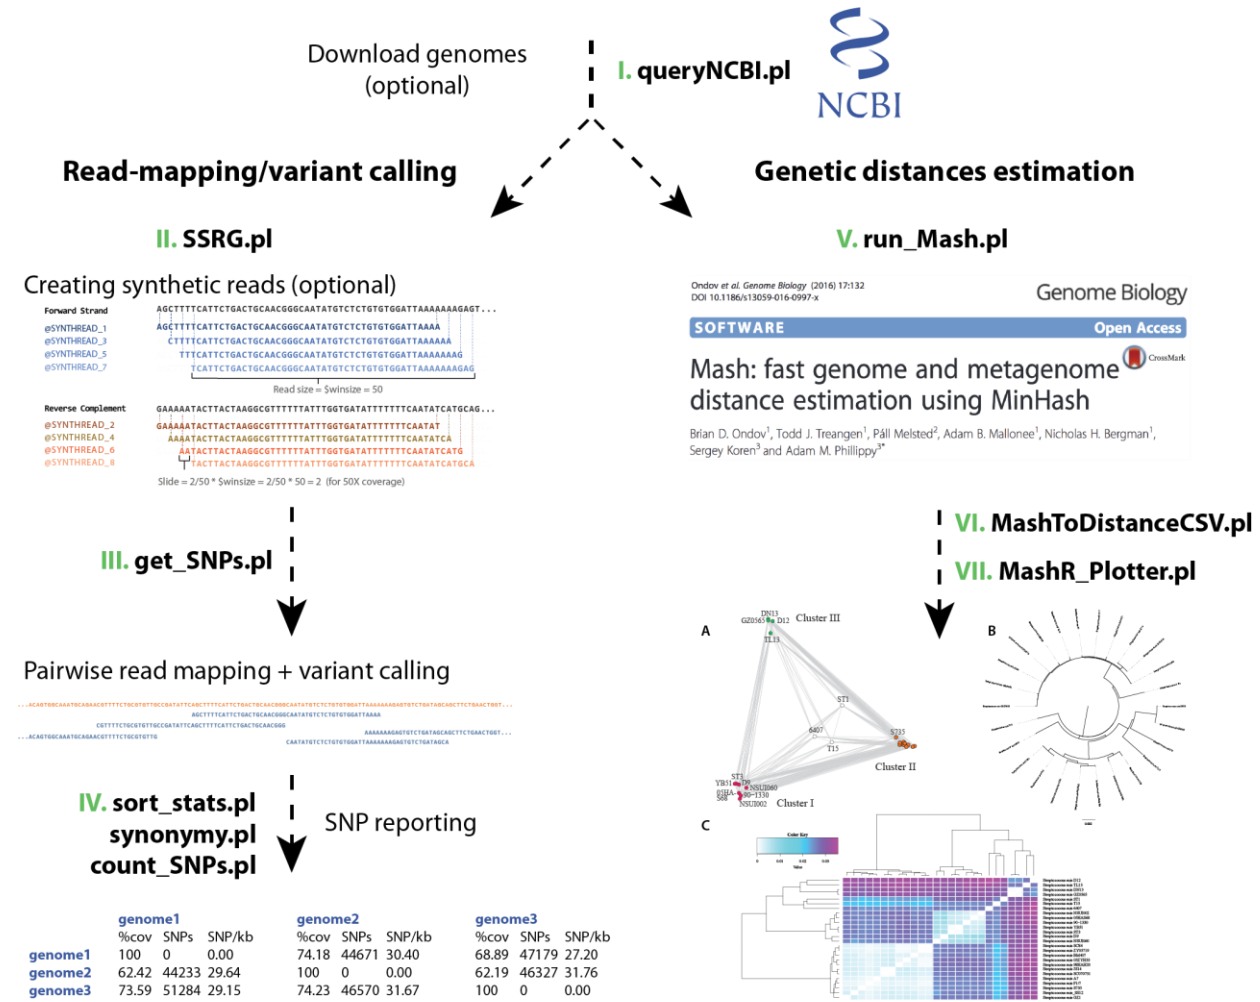

DEPENDENCIES

General

- Perl 5

Read mapping (RM)/variant calling (VC)

At least one RM and VC tools are required for SNP calling, others RM and VC are optional

- Samtools version 1.3.1+ <http://www.htslib.org/>
- BWA (RM) <http://bio-bwa.sourceforge.net/>
- Bowtie2 (RM) <http://bowtie-bio.sourceforge.net/bowtie2/index.shtml>
- HISAT2 (RM) <https://ccb.jhu.edu/software/hisat2/index.shtml>
- Bcftools 1.3.1+ (VC) <http://www.htslib.org/>
- FreeBayes (VC) <https://github.com/ekg/freebayes>
- VarScan2 (VC) <https://github.com/dkoboldt/varscan>
- Java (for VarScan)

Genetic distance estimations

- R
- Mash <https://github.com/marbl/Mash>

INSTALLATION

On Fedora/Red Hat

```
sudo dnf install perl R bwa boost boost-devel zlib zlib-devel gsl gsl-devel autoconf automake \
java-1.?.?-openjdk java-1.?.?-openjdk-devel
```

Downloading/installing from GitHub

1. git clone --recursive <https://github.com/PombertLab/SNPs.git>
2. chmod a+x SNPs/*.pl; chmod a+x SNPs/*/*.pl
3. Install the scripts in your \$PATH (e.g. by adding to your ~/.bash_profile). To install for all users, you can create a shell script in /etc/profile.d/ on most Linux systems: e.g.
sudo export PATH=\$PATH:/path/to/SNPs" >> /etc/profile.d/SSRG.sh;\n sudo export PATH=\$PATH:/path/to/SNPs/SSRG/" >>/etc/profile.d/SSRG.sh;\n sudo export PATH=\$PATH:/path/to/SNPs/MASH/" >> /etc/profile.d/SSRG.sh;\n sudo export PATH=\$PATH:/path/to/SNPs/Tools/NCBI/" >> /etc/profile.d/SSRG.sh;\n * Replace /path/to/SNPs by your installation directory

OPTIONAL

1. If desired, update the VarScan default location in the corresponding line in get_SNPs.pl, i.e. **my \$varjar = '/opt/varscan/VarScan.v2.4.3.jar';**
This can also be changed from the command line with the -var option
2. If dependencies are not installed in your \$PATH, you can alternatively insert the installation directories (e.g. \$samtools = '/opt/samtools-1.3.1/bin/') at the top of get_SNPs.pl to reflect your settings.

Installing R packages dependencies

To install R packages for all users, type the following:

- 1) `sudo R`
- 2) `install.packages c("gplots", "ggplot2", "ggfortify", "RColorBrewer", "plotly", "ape", "Rtsne")`
- 3) `quit()`

COMMAND LINE USAGE

QUICK REFERENCE – READ MAPPING

- I. `get_SNPs.pl -fa *.fasta -fq *.fastq` ## Performs read mapping/variant calling

Optional

- I. `queryNCBI.pl -fa -l genome_list.csv` ## Downloads genomes from NCBI
II. `SSRG.pl -f *.fasta` ## Creates FASTQ reads for each genome
III. `sort_stats.pl -s *.stats -o table_name` ## Creates a tab-delimited table
IV. `synonymy.pl -fa reference.fasta -gff reference.gff -vcf *.vcf`
sorts syn/non-synonymous SNPs

QUICK REFERENCE – GENETIC DISTANCE ESTIMATION

- I. `run_Mash.pl -f *.fasta -o Mash.txt` ## Runs MASH
II. `MashToDistanceCSV.pl Mash.txt` ## Converts the output of MASH to
a distance matrix
III. `MashR_plotter.pl -i Mash.mashdist.csv -o image_01` ## Plots the distance matrix using R

DETAILED OPTIONS

queryNCBI.pl Downloads data automatically from GenBank

This script downloads data from the GenBank database using as input a TAB/CSV-delimited list generated from NCBI's Genome Assembly and Annotation reports. For example;

- 1) go to <http://www.ncbi.nlm.nih.gov/genome/genomes/159?>
- 2) click on the Download Table link in the upper right corner of the webpage

USAGE

`queryNCBI.pl [OPTIONS] -l genome_list.csv`

OPTIONS

- `-fa (--fasta)` Retrieve fasta files
`-l (--list)` TAB/CSV-delimited list
`-gb (--genbank)` Retrieve GenBank annotation files
`-p (--protein)` Retrieve protein sequences
`-g (--gene)` Retrieve gene sequences
`-cds` Retrieve protein coding sequences

SSRG.pl Synthetic Short Read Generator

This script deconstructs draft or complete genomes into separate sets of FASTQ reads of desired length (default 100). This is particularly useful to perform standardized read mapping analyses and to palliate for missing short read data.

USAGE

SSRG.pl [options] -f *.fasta

EXAMPLE (simple)

SSRG.pl -f *.fasta

EXAMPLE (advanced)

SSRG.pl -f *.fasta -r 250 -i 350 -s 20 -m rand -c 25

OPTIONS

-v (--version)	Display SSRG.pl version number
-f (--fasta)	Fasta/multifasta input file
-r (--readsize)	Synthetic reads size [default: 100]
-m (--mode)	Sliding windows or random selection (slide or rand) [default: rand]
-t (--type)	Single or paired ends (se or pe) [default: pe]
-i (--insert)	Insert size for pe [default: 250]
-s (--sdev)	Insert size standard deviation percentage [default: 10]
-c (--coverage)	Set sequencing depth [default: 50]
-qs (--qscore)	Quality score associated with each base [default: 30]
-q64	Used the old Illumina Q64 FastQ format instead of the default Q33 Sanger/Illumina 1.8+ encoding

get_SNPs.pl Read mapping/variant calling

This script performs read mapping between FASTQ datasets and reference genomes in FASTA format using user-selectable read mappers and variant callers. This script also generates read mapping and coverage statistics.

USAGE

perl get_SNPs.pl [options]

EXAMPLE (simple)

get_SNPs.pl -fa *.fasta -fq *.fastq

EXAMPLE (advanced)

get_SNPs.pl --fasta *.fasta --fastq *.fastq --mapper bowtie2 --caller varscan2 --var ./VarScan.v2.4.3.jar\ --threads 16

EXAMPLE (paired ends)

get_SNPs.pl --fasta *.fasta --pe1 *R1.fastq --pe2 *R2.fastq --X 1000 --mapper bowtie2 --caller freebayes\ --threads 16

EXAMPLE (read-mapping only)

get_SNPs.pl --fasta *.fasta --pe1 *R1.fastq --pe2 *R2.fastq --X 1000 --mapper bowtie2 --rmo --bam --threads 16

OPTIONS

- h (--help) Display the list of options
- v (--version) Display the script version

Mapping options

- fa (--fasta) Reference genome(s) in fasta file
- fq (--fastq) Fastq reads (single ends) to be mapped against reference(s)
- pe1 Fastq reads #1 (paired ends) to be mapped against reference(s)
- pe2 Fastq reads #2 (paired ends) to be mapped against reference(s)
- X Maximum paired ends insert size (for bowtie2) [default: 750]
- mapper Read mapping tool: bwa, bowtie2 or hisat2 [default: bowtie2]
- algo BWA mapping algorithm: bwasw, mem, samse [default: bwasw]
- threads Number of processing threads [default: 16]
- bam Keeps BAM files generated
- sam Keeps SAM files generated; SAM files can be quite large
- rmo (--read_mapping_only) Do not perform variant calling; useful when only interested in bam/sam files and/or mapping stats
- ns (--no_stats) Do not calculate stats; stats can take a while to compute for large eukaryote genomes

Variant caller options

- caller [default: varscan2] ## Variant caller: varscan2, bcftools or freebayes
- type [default: snp] ## snp, indel, or both
- ploidy [default: 1] ## FreeBayes/BCFtools option; set ploidy (if needed)

VarScan2 parameters (see <http://dkoboldt.github.io/varscan/using-variant.html>)

- var [default: /opt/varsan/VarScan.v2.4.3.jar] ## Which varscan jar file to use
- mc (--min-coverage) [default: 15] ## Min. read depth at a position to make a call
- mr (--min-reads2) [default: 5] ## Min. supporting reads to call variants
- maq (--min-avg-qual) [default: 28] ## Minimum base quality to count a read
- mvf (--min-var-freq) [default: 0.2] ## Minimum variant allele frequency threshold
- mhom (--min-freq-for-hom) [default: 0.75] ## Minimum frequency to call homozygote
- pv (--p-value) [default: 1e-02] ## P-value threshold for calling variants
- sf (--strand-filter) [default: 0] ## 0 or 1; 1 ignores variants with >90% support
from a single strand

MASH Genetic distances, OPTIONAL - see Ondov et al. DOI: 10.1186/s13059-016-0997-x

- mh Evaluate genetic distances using Mash ## Quick; does not require read mapping...
- out Output file name [default: Mash.txt]
- sort Sort Mash output by decreasing order of similarity

sort_stats.pl Table generator

This script generates a tab-delimited (TSV) or comma-separated (CSV) table from the statistics files (*.stats) generated by get_SNPs.pl. This table can be imported using standard spreadsheet tools like MS Excel or LibreOffice Calc.

USAGE

sort_stats.pl -s *.stats -o output_name

OPTIONS

-h (--help) Display this list of options
-v (--version) Display script version
-s (--stats) Stats files obtained from get_SNPs.pl
-o (--output) Desired table output name; extension will be appended
-f (--format) Desired table format, tsv or csv [Default: tsv]

synonymy.pl Sorts synonymous/non-synonymous SNPs

This script sorts point mutations per type (CDS, tRNA, rRNA or intergenic). If present in a CDS, the script can also differentiate between synonymous or non-synonymous, if applicable. Requires VCF files, a reference genome, and its annotation in gff format. NOTE: Genes with introns are not yet supported.

USAGE

synonymy.pl -gcode 1 -fa reference.fasta -gff reference.gff -vcf *.vcf -o table_name

OPTIONS

-h (--help) Display this list of options
-v (--version) Display script version
-fa (--fasta) Reference genome in fasta format
-gff (--gff) Reference genome annotation in GFF format
-vcf (--vcf) SNPs in Variant Calling Format (VCF)
-o (--output) Table prefix [Default: synonymy] The .features/.intergenic suffixes and .tsv file extension will be added automatically.
-gc (--gcode) NCBI genetic code; e.g.:
 1 - The Standard Code
 2 - The Vertebrate Mitochondrial Code
 3 - The Yeast Mitochondrial Code
 4 - The Mold, Protozoan, Coelenterate Mitochondrial Code
 and Mycoplasma/Spiroplasma Code
 11 - The Bacterial, Archaeal and Plant Plastid Code

NOTE - For complete list; see <https://www.ncbi.nlm.nih.gov/Taxonomy/Utils/wprintgc.cgi>

count_SNPs.pl Quick metrics

This script counts and summarizes the number of variants found in the user-specified VCF files. Very limited in scope.

USAGE

count_SNPs.pl OUTPUT_PREFIX *.vcf ## OUTPUT_PREFIX = Desired file name output prefix.

run_Mash.pl Perl wrapper for MASH

This script runs MASH on a specified set of fasta files.

USAGE

```
perl run_Mash.pl [options]
```

EXAMPLE

```
run_Mash.pl --fasta *.fasta --out Mash.txt --sort
```

OPTIONS

-f (--fasta)	Reference genome(s) in fasta file
-o (--out)	Output file name
-s (--sort)	Sort Mash output by decreasing order of similarity

MashToDistanceCSV.pl Generates distance matrices from MASH outputs

This script converts the table output from MASH into a distance matrix suitable for downstream analyses.

USAGE

```
MashToDistanceCSV.pl Mash.txt
```

MashR_plotter.pl Plots distance matrices

This script plots distances matrices created with MashToDistanceCSV.pl. Users can specify the type (cluster, phylogenetic tree, or heatmap) and various options defined below. Clusters plots are generated using dimensionality reduction techniques. Phylogenetic trees are restricted to distance methods. Requires R.

USAGE

```
MashR_plotter.pl [OPTIONS]
```

EXAMPLE (simple)

```
MashR_plotter.pl -i Mash.mashdist.csv -o image_01
```

EXAMPLE (advanced)

```
MashR_plotter.pl -type cluster -m tsne -i Mash.mashdist.csv -R Mash.R -t pdf -o image_01 -pe 30 -it 500
```

OPTIONS

--help (-h)	Display this list of options
--type (-t)	Plot type: cluster, tree, heatmap [Default: cluster]
--method (-m)	Dimensionality reduction method for clusters (mds, tsne) [Default: mds]
--input (-i)	Input file [Default: Mash.mashdist.csv]
--rscript (-R)	R script output name generated [Default: Mash.R]
--format (-f)	Image format (pdf, svg, jpeg, png) [Default: pdf]
--output (-o)	Output plot name [Default: plot]
--resolution (-res)	Resolution (in DPI) [Default: 300]
--labels (-lb)	Displays labels

Clustering options

--cluster (-cl) Clustering method (pam, fanny, kmeans, clara) [Default: pam]
--nclust (-nc) Number of clusters desired [Default: 10]

t-SNE options

--perplexity (-pe) Perplexity [Default: 30]
--iterations (-it) Maximum number of iterations [Default: 500]
--dimensions (-di) Number of dimensions [Default: 2]
--cmode (cm) Color mode: rainbow, heat, terrain, topo, cm or none [Default: rainbow]

Phylogenetic tree options

--treetype (-tt) Tree type: phylogram, cladogram, fan, unrooted or radial [Default: phylogram]
--distmeth (-dm) Distance method: nj (neighbor-joining) or upgma [Default: nj]
--outgroup (-og) Desired outgroup from the distance matrix (e.g. -og outgroup_name)
--newick (-nw) Phylogenetic tree output in Newick format [Default: tree.tre]

Heatmap options

--colors Desired library(RColorBrewer) colors in order of decreasing similarity [Default: white yellow red]
--shades Number of color shades desired [Default: 300]
--separator (-sep) Switch off row/column separators
--clcol Switch off column clustering
--clrow Switch off row clustering

R plotter options

--width (-wd) Plot width [Default: 16]
--height (-he) Plot height [Default: 10]
--fonts Fonts [Default: Times]
--fontsize (-fs) Plot font size [Default: 16]
--symbol (-pch) R Plot PCH Symbols (for cluster graphs) [Default: 1]
--edges (-ed) Draw edges (for cluster graphs)
--xrange (-x) X-axis width (for cluster graphs) [Default: 0.005]