

SSRG — A SIMPLE PIPELINE TO ASSESS GENETIC DIVERSITY BETWEEN BACTERIAL GENOMES

SSRG MANUAL – VERSION 0.1 (A VERY EARLY DRAFT...)

JUNE 4, 2017

TABLE OF CONTENTS

Overview	2
Workflows	2
Dependencies.....	4
Installation	4
Command line usage.....	5
Quick reference – Read mapping.....	5
Quick reference – Genetic distance estimation.....	5
Detailed options.....	5
queryNCBI.pl Downloads data automatically from GenBank.....	5
SSRG.pl Synthetic Short Read Generator	6
get_SNPs.pl Read mapping/variant calling	6
sort_stats.pl Table generator	7
syn.pl Sort synonymous/non-synonymous SNPs	7
count_SNPs.pl Quick metrics	8
run_Mash.pl Perl wrapper for MASH.....	8
MashToDistanceCSV.pl Generates distance matrices from MASH outputs	8
MashR_plotter.pl Plots distance matrices	8

OVERVIEW

The SSRG pipeline was created as a simple, focused tool to investigate SNPs between prokaryote genomes. The pipeline uses the common SNP-calling approach of read-mapping against references, standardizes experimental conditions for more accurate SNP comparisons, and integrates ubiquitous methodologies for both analysis and visualization. The unique feature of the SSRG pipeline resides in the creation of synthetic short reads from complete or draft genomes, which can then be fed to the read mapping/variant calling tools. Note that this approach works only for haploid genomes. Alternatively, users can also select any compatible FASTQ datasets to use with the pipeline.

Assessing the genetic diversity between genomes often involves the calculation of single nucleotide polymorphisms (SNPs) and insertions/deletions (indels). This is usually done by mapping short accurate sequencing reads from one or more species against a reference genome, from which variants are called. This approach works well when short read data from published genomes are available in public repositories, which is not always the case, especially now that bacterial genome sequencing is shifting towards the use of long read technologies. While genomes and/or long reads can be aligned against each other, the results are often suboptimal when the investigated chromosomes are highly reorganized, which can cause the mapping to fail. A simple solution to this problem is to deconstruct the genomes or long reads into shorter fragments, a shotgun approach, and to use these smaller synthetic reads as input for mapping.

Deconstructing genomes into synthetic reads has the following advantages:

- This approach allows the comparisons of genomes for which sequencing read datasets are not available in public repositories.
- This approach helps standardize datasets by providing reads with the exact same parameters. For example, genomes generated from illumina, PacBio and/or Nanopore data can now be compared without fuss.
- Because bases from complete or draft genomes have been queried multiple times by the sequencing depth, the underlying confidence in the base being called is thus higher than from a single sequencing read. This in turn leads to fewer false positives caused by sequencing errors.

The SSRG pipeline currently can:


- 1) Download genomes automatically from NCBI using a CSV/Tab-delimited list of desired OTUs
- 2) Calculate pairwise SNPs between FASTQ sequences and reference genomes using standard read mapping approaches.
- 3) Run Mash (<https://github.com/marbl/Mash>; Ondov et al. 2016. DOI: 10.1186/s13059-016-0997-x) and plot the estimated genetic distances as heatmaps, neighbor-joining trees, or clusters (using dimensionality reduction techniques).

WORKFLOWS

The SSRG pipeline features two independent workflows:

- I. Read-mapping/variant calling
- II. Genetic distances estimation

Users interested in point mutations should use the read-mapping/variant calling workflow. Users only interested in genetic distances should use the genetic distances estimation workflow. This workflow is based on MASH, an excellent and fast tool developed by Ondov *et al.* [Ondov BD, Treangen TJ, Mallonee AB, Bergman NH, Koren S, Phillippy AM (2016) Fast genome and metagenome distance estimation using MinHash. *Genome Biol* 17:132. DOI: 10.1186/s13059-016-0997-x]. The Mash workflow does not identify point mutations.

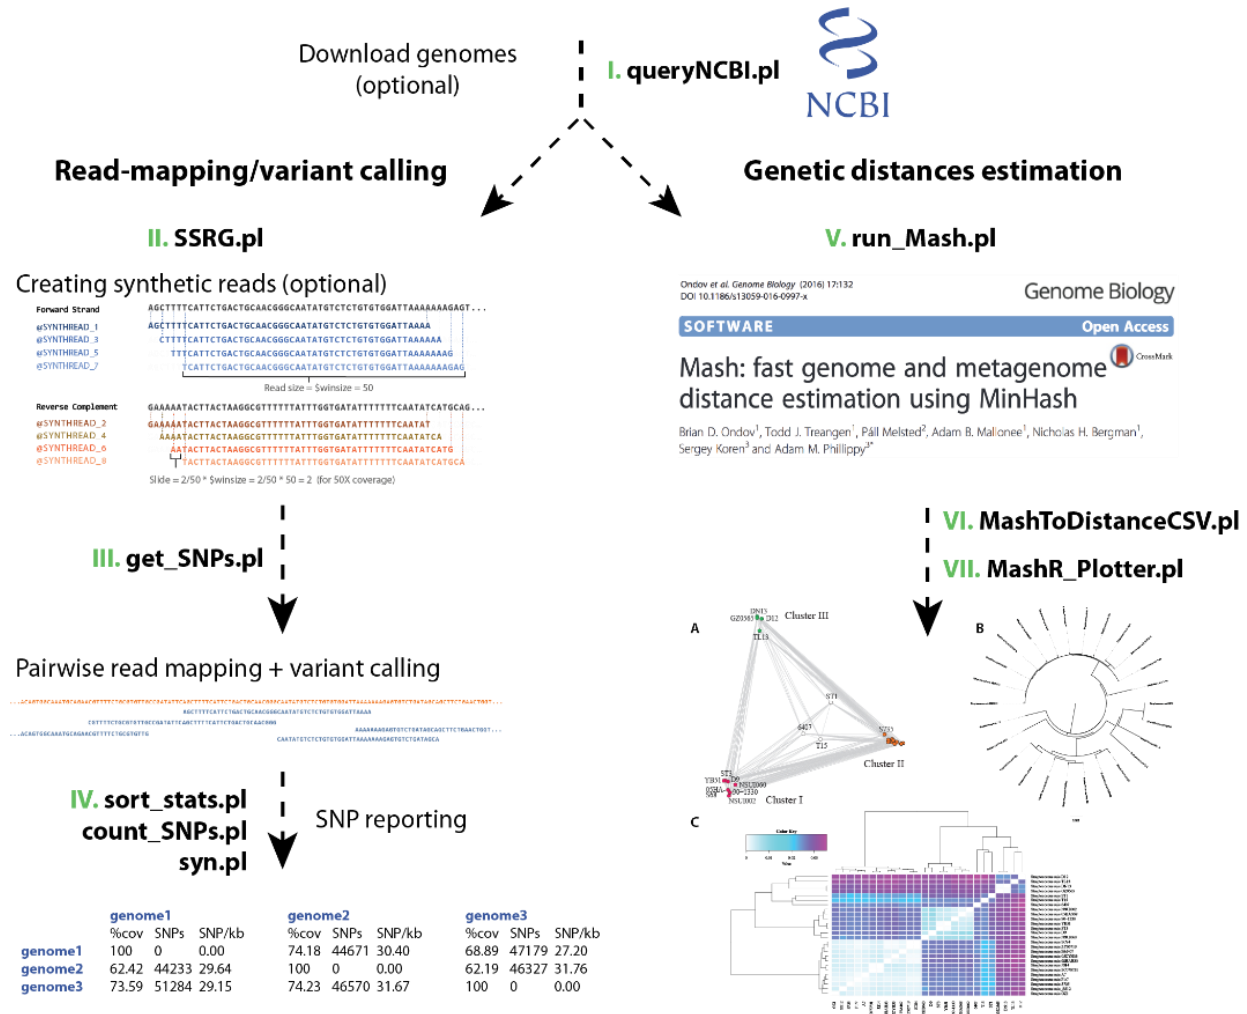

DEPENDENCIES

General

- Perl 5

Read mapping (RM)/variant calling (VC)

At least one RM and VC tools are required for SNP calling, others RM and VC are optional

- Samtools version 1.3.1+ <http://www.htslib.org/>
- BWA (RM) <http://bio-bwa.sourceforge.net/>
- Bowtie2 (RM) <http://bowtie-bio.sourceforge.net/bowtie2/index.shtml>
- HISAT2 (RM) <https://ccb.jhu.edu/software/hisat2/index.shtml>
- Bcftools 1.3.1+ (VC) <http://www.htslib.org/>
- FreeBayes (VC) <https://github.com/ekg/freebayes>
- VarScan2 (VC) <https://github.com/dkoboldt/varscan>
- Java (for VarScan)

Genetic distance estimations

- R
- Mash <https://github.com/marbl/Mash>

INSTALLATION

On Fedora/Red Hat

```
sudo dnf install perl R bwa boost boost-devel zlib zlib-devel gsl gsl-devel autoconf automake \
java-1.?.?-openjdk java-1.?.?-openjdk-devel
```

On Ubuntu/Debian

Downloading/installing from GitHub

1. git clone --recursive <https://github.com/PombertLab/SNPs.git>
2. chmod a+x SNPs/*.pl; chmod a+x SNPs/*/*.pl
3. Install the scripts in your \$PATH (e.g. by adding to your ~/.bash_profile). To install for all users, you can create a shell script in /etc/profile.d/ on most Linux systems: e.g.
sudo export PATH=\$PATH:/path/to/SNPs" >> /etc/profile.d/SSRG.sh;\n
sudo export PATH=\$PATH:/path/to/SNPs/SSRG/" >>/etc/profile.d/SSRG.sh;\n
sudo export PATH=\$PATH:/path/to/SNPs/MASH/" >> /etc/profile.d/SSRG.sh;\n
sudo export PATH=\$PATH:/path/to/SNPs/Tools/NCBI/" >> /etc/profile.d/SSRG.sh;\n
* Replace /path/to/SNPs by your installation directory

OPTIONAL

1. If desired, update the VarScan version in the corresponding line at the top of get_SNPs.pl; i.e.
my \$varjar = 'VarScan.v2.4.3.jar';
2. If dependencies are not installed in your \$PATH, you can alternatively insert installation directories (e.g. \$samtools = '/opt/samtools-1.3.1/bin/') at the top of get_SNPs.pl to reflect your settings.

Installing R packages dependencies

To install R packages for all users, type the following:

- 1) `sudo R`
- 2) `install.packages c("gplots", "ggplot2", "ggfortify", "RColorBrewer", "plotly", "ape", "Rtsne")`
- 3) `quit()`

COMMAND LINE USAGE

QUICK REFERENCE – READ MAPPING

- I. `get_SNPs.pl -fa *.fasta -fq *.fastq` **## Performs read mapping/variant calling**

Optional

- I. `queryNCBI.pl -fa -l genome_list.csv` **## Downloads genomes from NCBI**
- II. `SSRG.pl *.fasta` **## Creates FASTQ reads for each genome**
- III. `sort_stats.pl *.stats` **## Creates a tab-delimited table**
- IV. `syn.pl -fa reference.fasta -gff reference.gff -vcf *.vcf`
sort syn/ on-synonymous snps

QUICK REFERENCE – GENETIC DISTANCE ESTIMATION

- I. `run_Mash.pl --fasta *.fasta --out Mash.txt` **## Runs MASH**
- II. `MashToDistanceCSV.pl Mash.txt` **## Converts the output of MASH to
a distance matrix**
- III. `MashR_plotter.pl -i Mash.mashdist.csv -o image_01` **## Plots the distance matrix using R**

DETAILED OPTIONS

queryNCBI.pl Downloads data automatically from GenBank

This script downloads data from the GenBank database using as input a TAB/CSV-delimited list generated from NCBI's Genome Assembly and Annotation reports. For example;

- 1) go to <http://www.ncbi.nlm.nih.gov/genome/genomes/159?>
- 2) click on the Download Table link in the upper right corner of the webpage

USAGE

`queryNCBI.pl [OPTIONS] -l genome_list.csv`

OPTIONS

- `-fa (--fasta)` Retrieve fasta files
- `-l (--list)` TAB/CSV-delimited list
- `-gb (--genbank)` Retrieve GenBank annotation files
- `-p (--protein)` Retrieve protein sequences
- `-g (--gene)` Retrieve gene sequences
- `-cds` Retrieve protein coding sequences

SSRG.pl **Synthetic Short Read Generator**

This script deconstructs draft or complete genomes into separate sets of FASTQ reads of desired length (default 100). This is particularly useful to perform standardized read mapping analyses and to palliate for missing short read data.

USAGE

```
perl SSRG.pl [options] *.fasta
```

OPTIONS

-r (--readsize)	Synthetic reads size [default: 100]. Minimum size required for 50X coverage: 25 nt. Minimum size required for 100X coverage: 50 nt.
-c100 (--cov100)	Set sequencing depth to 100X [default: 50].
-qs (--qscore)	Quality score associated with each base [default: 30].
-q64	Old Illumina Q64 FastQ format [default: Q33 (Sanger)].

get_SNPs.pl **Read mapping/variant calling**

This script performs read mapping between FASTQ datasets and reference genomes in FASTA format using user-selectable read mappers and variant callers. This script also generates read mapping and coverage statistics.

USAGE

```
perl get_SNPs.pl [options]
```

EXAMPLE (simple)

```
get_SNPs.pl -fa *.fasta -fq *.fastq
```

EXAMPLE (advanced)

```
get_SNPs.pl --fasta *.fasta --fastq *.fastq --mapper bowtie2 --caller freebayes --threads 16
```

EXAMPLE (paired ends)

```
get_SNPs.pl --fasta *.fasta --pe1 *R1.fastq --pe2 *R2.fastq --X 1000 --mapper bowtie2 --caller freebayes \
--threads 16
```

OPTIONS

-h (--help)	Display this list of options
-------------	------------------------------

Genetic distances

-mh	Evaluate genetic distances using Mash (Ondov et al. DOI: 10.1186/s13059-016-0997-x)
-out	Output file name [default: Mash.txt]
-sort	Sort Mash output by decreasing order of similarity

Mapping options

-fa (--fasta)	Reference genome(s) in fasta file
-fq (--fastq)	Fastq reads (single ends) to be mapped against reference(s)
-pe1	Fastq reads #1 (paired ends) to be mapped against reference(s)

-pe2 Fastq reads #2 (paired ends) to be mapped against reference(s)
 -X Maximum paired ends insert size (for bowtie2) [default: 750]
 -mapper Read mapping tool: bwa, bowtie2 or hisat2 [default: bowtie2]
 -caller Variant caller: varscan2, bcftools or freebayes [default: varscan2]
 -algo BWA mapping algorithm: bwasw, mem, samse [default: bwasw]
 -threads Number of processing threads [default: 16]
 -bam Keeps BAM files generated
 -sam Keeps SAM files generated; SAM files can be quite large

VarScan2 parameters (see <http://dkoboldt.github.io/varscan/using-varscan.html>)

-indel	Calculates indels	## Runs mpileup2indel
-mc (--min-coverage)	[default: 15]	## Min. read depth at a position to make a call
-mr (--min-reads2)	[default: 5]	## Min. supporting reads to call variants
-maq (--min-avg-qual)	[default: 28]	## Minimum base quality to count a read
-mvf (--min-var-freq)	[default: 0.2]	## Minimum variant allele frequency threshold
-mhom (--min-freq-for-hom)	[default: 0.75]	## Minimum frequency to call homozygote
-pv (--p-value)	[default: 1e-02]	## P-value threshold for calling variants
-sf (--strand-filter)	[default: 0]	## 0 or 1; 1 ignores variants with >90% support ## from a single strand

FreeBayes/BCFtools (see <https://github.com/ekg/freebayes/>;
<https://samtools.github.io/bcftools/bcftools.html>)

-ploidy [default: 1] ## Change ploidy (if needed)

sort_stats.pl Table generator

This script generates a tab-delimited table from the statistics files (*.stats) generated by get_SNPs.pl.
 This table can be imported using standard spreadsheet tools like MS Excel or LibreOffice Calc.

USAGE

sort_stats.pl *.stats

syn.pl Sort synonymous/non-synonymous SNPs

This script sorts point mutations per type (CDS, tRNA, rRNA or intergenic). If present in a CDS, the script can also differentiate between synonymous or non-synonymous, if applicable. Requires VCF files, a reference genome, and its annotations

USAGE

syn.pl -fa reference.fasta -gff reference.gff -vcf *.vcf

count_SNPs.pl **Quick metrics**

This script counts and summarizes the number of variants found in the user-specified VCF files. Very limited in scope.

USAGE

count_SNPs.pl OUTPUT_PREFIX *.vcf

OUTPUT_PREFIX = Desired file name output prefix.

run_Mash.pl **Perl wrapper for MASH**

This script runs MASH on a specified set of fasta files.

USAGE

perl run_Mash.pl [options]

EXAMPLE

run_Mash.pl --fasta *.fasta --out Mash.txt --sort

OPTIONS

--fasta	Reference genome(s) in fasta file
--out	Output file name
--sort	Sort Mash output by decreasing order of similarity

MashToDistanceCSV.pl **Generates distance matrices from MASH outputs**

This script converts the table output from MASH into a distance matrix suitable for downstream analyses.

USAGE

MashToDistanceCSV.pl Mash.txt

MashR_plotter.pl **Plots distance matrices**

This script plots distances matrices created with MashToDistanceCSV.pl. Users can specify the type (cluster, phylogenetic tree, or heatmap) and various options defined below. Clusters plots are generated using dimensionality reduction techniques. Phylogenetic trees are restricted to distance methods. Requires R.

USAGE

MashR_plotter.pl [OPTIONS]

EXAMPLE (simple)

MashR_plotter.pl -i Mash.mashdist.csv -o image_01

EXAMPLE (advanced)

MashR_plotter.pl -type cluster -m tsne -i Mash.mashdist.csv -R Mash.R -t pdf -o image_01 -pe 30 -it 500

OPTIONS

--help (-h)	Display this list of options
-------------	------------------------------

--type (-t) Plot type: cluster, tree, heatmap [Default: cluster]
 --method (-m) Dimensionality reduction method for clusters (mds, tsne) [Default: mds]
 --input (-i) Input file [Default: Mash.mashdist.csv]
 --rscript (-R) R script output name generated [Default: Mash.R]
 --format (-f) Image format (pdf, svg, jpeg, png) [Default: pdf]
 --output (-o) Output plot name [Default: plot]
 --resolution (-res) Resolution (in DPI) [Default: 300]
 --labels (-lb) Displays labels

Clustering options

--cluster (-cl) Clustering method (pam, fanny, kmeans, clara) [Default: pam]
 --nclust (-nc) Number of clusters desired [Default: 10]

t-SNE options

--perplexity (-pe) Perplexity [Default: 30]
 --iterations (-it) Maximum number of iterations [Default: 500]
 --dimensions (-di) Number of dimensions [Default: 2]
 --cmode (cm) Color mode: rainbow, heat, terrain, topo, cm or none [Default: rainbow]

Phylogenetic tree options

--treetype (-tt) Tree type: phylogram, cladogram, fan, unrooted or radial [Default: phylogram]
 --distmeth (-dm) Distance method: nj (neighbor-joining) or upgma [Default: nj]
 --outgroup (-og) Desired outgroup from the distance matrix (e.g. -og outgroup_name)
 --newick (-nw) Phylogenetic tree output in Newick format [Default: tree.tre]

Heatmap options

--colors Desired library(RColorBrewer) colors in order of decreasing similarity [Default: white yellow red]
 --shades Number of color shades desired [Default: 300]
 --separator (-sep) Switch off row/column separators
 --clcol Switch off column clustering
 --clrow Switch off row clustering

R plotter options

--width (-wd) Plot width [Default: 16]
 --height (-he) Plot height [Default: 10]
 --fonts Fonts [Default: Times]
 --fontsize (-fs) Plot font size [Default: 16]
 --symbol (-pch) R Plot PCH Symbols (for cluster graphs) [Default: 1]
 --edges (-ed) Draw edges (for cluster graphs)
 --xrange (-x) X-axis width (for cluster graphs) [Default: 0.005]