



**Conceptos y comandos básicos de la replicación en bases de datos NoSQL**  
**&**  
**Pruebas e informe de replicación en Bases de Datos NoSQL**

**Asignatura**

Bases de Datos Avanzadas

**Presenta**

Jhony Steven Villareal Noguera

**Docente**

Jorge Castañeda


Ipiales – Nariño

2024

## **Requerimientos No Funcionales**

- ✓ El sistema de replicación debe poseer como mínimo 3 nodos.
- ✓ Cada uno de los nodos deben estar configurados sobre una misma replica.
- ✓ Cada uno de los nodos dispondrán de un mismo hostname, pero ocuparán diferentes puertos de conexión.
- ✓ La distribución de los nodos será maestro y esclavos, siendo así que un nodo tendrá el rol maestro, siendo este el principal y los otros nodos serán esclavos, siendo estos secundarios.
- ✓ Cada uno de los nodos deben tener acceso a la base de datos “TorneoDeportivoFutsal”, junto con sus colecciones y documentos.
- ✓ Cada uno de los nodos dispondrá de carpetas de destino para el almacenamiento de los datos y la replicación de estos, y serán asignadas correspondientes a cada uno de los nodos.
- ✓ Cada uno de los nodos ocuparan una disponibilidad, para cuando el nodo maestro falle, logren reemplazarlo y sean asignados como nodos primarios.

- Se han construido tres diferentes carpetas, que serán ocupadas cada una para cada uno de los nodos, para el almacenamiento de la información correspondiente a las bases de datos.

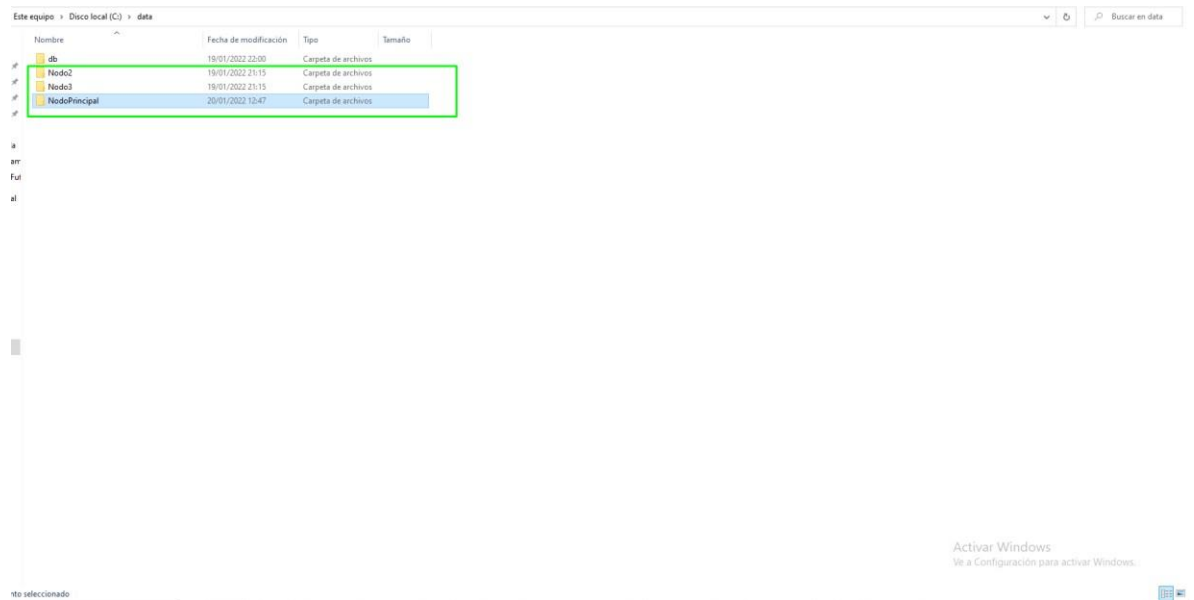

- Construimos el nodo maestro y los dos nodos esclavos, sobre la misma replica definida en el nodo maestro, y cada nodo será construido con diferentes puertos.

## Nodo Maestro

```

C:\Program Files\MongoDB\Server\4.2\bin>mongo --port 27017 --replicat rs0 --dbpath "C:\data\Node0Principal"
2022-01-20T12:44:00.366+0500 I CONTROL [main] Automatically disabling TLS 1.0, to force-enable TLS 1.0 specify --sslDisabledProtocols 'none'
2022-01-20T12:44:00.725+0500 I STORAGE [initandlisten] WiredTiger open config: create,cache_size=60M,cache_overflow=(file_max=0),session_max=3000,eviction=(threads_min=4,threads_max=4),config_base=false,statistics=(fast),log=(enable=true,archive=true,path=journal,compressor=snappy),file_manager=(close_idle_time=10000,close_scan_interval=10,close_handle_minimum=250),statistics_log=(wait=0),verbose=(recovery_progress,checkpoint_progress),wiredtiger_message=([64270040e342333][6472214072657880]),txn-recovery: Set global recovery timestamp: (0, 0)
2022-01-20T12:44:00.726+0500 I CONTROL [initandlisten] targetArch: Windows 7/Windows Server 2008 R2
2022-01-20T12:44:00.726+0500 I CONTROL [initandlisten] db version 4.2.6
2022-01-20T12:44:00.726+0500 I CONTROL [initandlisten] git version: 203648408bf1691764c23c1b5f5f6db352f8
2022-01-20T12:44:00.726+0500 I CONTROL [initandlisten] allocator: tcmalloc
2022-01-20T12:44:00.726+0500 I CONTROL [initandlisten] modules: none
2022-01-20T12:44:00.726+0500 I CONTROL [initandlisten] build environment:
2022-01-20T12:44:00.726+0500 I CONTROL [initandlisten] distmd5: 2012plsa
2022-01-20T12:44:00.726+0500 I CONTROL [initandlisten] target_arch: x86_64
2022-01-20T12:44:00.726+0500 I CONTROL [initandlisten] options: { net: { port: 27017 }, replication: { replicat: "rs0" }, storage: { dbpath: "C:\data\Node0Principal" } }
2022-01-20T12:44:00.748+0500 I STORAGE [initandlisten] WiredTiger open config: create,cache_size=60M,cache_overflow=(file_max=0),session_max=3000,eviction=(threads_min=4,threads_max=4),config_base=false,statistics=(fast),log=(enable=true,archive=true,path=journal,compressor=snappy),file_manager=(close_idle_time=10000,close_scan_interval=10,close_handle_minimum=250),statistics_log=(wait=0),verbose=(recovery_progress,checkpoint_progress),wiredtiger_message=([64270040e342333][6472214072657880]),txn-recovery: Set global recovery timestamp: (0, 0)
2022-01-20T12:44:01.098+0500 I RECOVERY [initandlisten] WiredTiger recoveryTimestamp: Ts: Timestamp(0, 0)
2022-01-20T12:44:01.222+0500 I STORAGE [initandlisten] Timestamp monitor starting
2022-01-20T12:44:01.265+0500 I CONTROL [initandlisten] ** WARNING: Access control is not enabled for the database.
2022-01-20T12:44:01.266+0500 I CONTROL [initandlisten] ** Read and write access to data and configuration is unrestricted.
2022-01-20T12:44:01.267+0500 I CONTROL [initandlisten]
2022-01-20T12:44:01.268+0500 I CONTROL [initandlisten] ** WARNING: This server is bound to localhost.
2022-01-20T12:44:01.268+0500 I CONTROL [initandlisten] ** Remote systems will be unable to connect to this server.
2022-01-20T12:44:01.268+0500 I CONTROL [initandlisten] ** Start the server with --bind_ip address to specify which IP
2022-01-20T12:44:01.269+0500 I CONTROL [initandlisten] ** addresses it should serve responses from, or with --bind_ip all to
2022-01-20T12:44:01.269+0500 I CONTROL [initandlisten] ** bind to all interfaces. If this behavior is desired, start the
2022-01-20T12:44:01.278+0500 I CONTROL [initandlisten] ** server with --bind_ip 127.0.0.1 to disable this warning.
2022-01-20T12:44:01.278+0500 I SHARDING [initandlisten] Marking collection local.system.replicat as collection version: cunshaded
2022-01-20T12:44:01.278+0500 I SHARDING [initandlisten] File Control is enabled on this deployment.
2022-01-20T12:44:01.277+0500 I SHARDING [initandlisten] Marking collection admin.system.roles as collection version: cunshaded
2022-01-20T12:44:01.277+0500 I SHARDING [initandlisten] Marking collection admin.system.sessions as collection version: cunshaded
2022-01-20T12:44:01.274+0500 I STORAGE [initandlisten] createCollection: local.startup_log with generated UUID: 5f5ebb3d-79c7-4806-93b3-48d0c7b8d4dc and options: { capped: true, size: 10485760 }
2022-01-20T12:44:01.464+0500 I INDEX [initandlisten] index build: done building index_id on ns local.startup_log
2022-01-20T12:44:01.464+0500 I SHARDING [initandlisten] Marking collection local.startup_log as collection version: cunshaded
2022-01-20T12:44:01.839+0500 I FTDC [initandlisten] Failed to initialize Performance Counters for FTDC: WindowsPdhError: PdhExpandCounterPath failed with "El objeto especificado no se encontró en el equipo." for counter "Processor
\Local\%s\%s\Time
2022-01-20T12:44:01.839+0500 I FTDC [initandlisten] Initializing full-time diagnostic data capture with directory "C:\data\Node0Principal\diagnostic.data"
2022-01-20T12:44:01.861+0500 I STORAGE [initandlisten] createCollection: local.replicat.oplog.truncateAfterPoint with generated UUID: 80777295-a6b8-46f5-9c43-400f73f048f and options: {}
2022-01-20T12:44:01.869+0500 I INDEX [initandlisten] index build: done building index_id on ns local.replicat.oplog.truncateAfterPoint
2022-01-20T12:44:01.998+0500 I STORAGE [initandlisten] createCollection: local.replicat.minvalid with generated UUID: 1088e1a1-411c-4c9e-b943-d57e4ee0b02d and options: {}
2022-01-20T12:44:02.142+0500 I REPL [initandlisten] Did not find local initialized voted for document at startup.
2022-01-20T12:44:02.142+0500 I SHARDING [initandlisten] Marking collection local.oplog.rs as collection version: cunshaded
2022-01-20T12:44:02.142+0500 I REPL [initandlisten] Marking collection local.replicat.minvalid as collection version: cunshaded
2022-01-20T12:44:02.142+0500 I REPL [initandlisten] (fcd) Rollback ID is not initialized yet.
2022-01-20T12:44:02.143+0500 I STORAGE [initandlisten] createCollection: local.replicat.election with generated UUID: efc88b2d-0961-413b-97c7-4d5c5ef7eb and options: {}
2022-01-20T12:44:02.265+0500 I SHARDING [initandlisten] Marking collection local.replicat.election as collection version: cunshaded
2022-01-20T12:44:02.267+0500 I REPL [initandlisten] Did not find local initialized voted for document at startup.
2022-01-20T12:44:02.268+0500 I REPL [initandlisten] Did not find local Rollback ID document at startup. Creating one.
2022-01-20T12:44:02.269+0500 I STORAGE [initandlisten] createCollection: local.system.rollback_id with generated UUID: dea118a-3b46-4a16-9027-c0756e248aa and options: {}
2022-01-20T12:44:02.373+0500 I SHARDING [initandlisten] index build: done building index_id on ns local.system.rollback_id
2022-01-20T12:44:02.373+0500 I SHARDING [initandlisten] Marking collection local.system.rollback_id as collection version: cunshaded
2022-01-20T12:44:02.373+0500 I REPL [initandlisten] Initializing local kind no replication ID
2022-01-20T12:44:02.376+0500 I REPL [initandlisten] Did not find local replica set configuration document at startup; NothingDocument: Did not find replica set configuration document in local.system.replicat
2022-01-20T12:44:02.379+0500 I CONTROL [initandlisten] LogicalSessionCacheRefresh Sessions collection is not set up; waiting until next sessions refresh interval: Replication has not yet been configured Active Windows
2022-01-20T12:44:02.388+0500 I SHARDING [initandlisten] LogicalSessionCacheRefresh Marking collection config.system.sessions as collection version: cunshaded
2022-01-20T12:44:02.388+0500 I NETWORK [initandlisten] (listener) Listening on 127.0.0.1
2022-01-20T12:44:02.388+0500 I CONTROL [initandlisten] LogicalSessionCacheRefresh Sessions collection is not set up; waiting until next sessions refresh interval: config.system.sessions does not exist
2022-01-20T12:44:02.388+0500 I NETWORK [initandlisten] (listener) waiting for connections on port 27017

```

## Nodo Esclavo 2

```

C:\Program Files\MongoDB\Server\4.2\bin>mongo --port 27027 --replicat rs0 --dbpath "C:\data\Node02"
2022-01-20T12:52:42.401+0500 I CONTROL [main] Automatically disabling TLS 1.0, to force-enable TLS 1.0 specify --sslDisabledProtocols 'none'
2022-01-20T12:52:42.444+0500 I STORAGE [initandlisten] WiredTiger open config: create,cache_size=60M,cache_overflow=(file_max=0),session_max=3000,eviction=(threads_min=4,threads_max=4),config_base=false,statistics=(fast),log=(enable=true,archive=true,path=journal,compressor=snappy),file_manager=(close_idle_time=10000,close_scan_interval=10,close_handle_minimum=250),statistics_log=(wait=0),verbose=(recovery_progress,checkpoint_progress),wiredtiger_message=([64270040e342333][6472214072657880]),txn-recovery: Set global recovery timestamp: (0, 0)
2022-01-20T12:52:42.449+0500 I CONTROL [initandlisten] targetArch: Windows 7/Windows Server 2008 R2
2022-01-20T12:52:42.449+0500 I CONTROL [initandlisten] db version 4.2.6
2022-01-20T12:52:42.449+0500 I CONTROL [initandlisten] git version: 203648408bf1691764c23c1b5f5f6db352f8
2022-01-20T12:52:42.449+0500 I CONTROL [initandlisten] allocator: tcmalloc
2022-01-20T12:52:42.449+0500 I CONTROL [initandlisten] modules: none
2022-01-20T12:52:42.449+0500 I CONTROL [initandlisten] build environment:
2022-01-20T12:52:42.449+0500 I CONTROL [initandlisten] distmd5: 2012plsa
2022-01-20T12:52:42.449+0500 I CONTROL [initandlisten] target_arch: x86_64
2022-01-20T12:52:42.453+0500 I CONTROL [initandlisten] options: { net: { port: 27027 }, replication: { replicat: "rs0" }, storage: { dbpath: "C:\data\Node02" } }
2022-01-20T12:52:42.453+0500 I STORAGE [initandlisten] WiredTiger open config: create,cache_size=60M,cache_overflow=(file_max=0),session_max=3000,eviction=(threads_min=4,threads_max=4),config_base=false,statistics=(fast),log=(enable=true,archive=true,path=journal,compressor=snappy),file_manager=(close_idle_time=10000,close_scan_interval=10,close_handle_minimum=250),statistics_log=(wait=0),verbose=(recovery_progress,checkpoint_progress),wiredtiger_message=([64270040e342333][6472214072657880]),txn-recovery: Set global recovery timestamp: (0, 0)
2022-01-20T12:52:42.768+0500 I STORAGE [initandlisten] WiredTiger recoveryTimestamp: Ts: Timestamp(0, 0)
2022-01-20T12:52:42.935+0500 I CONTROL [initandlisten] Timestamp monitor starting
2022-01-20T12:52:43.193+0500 I CONTROL [initandlisten] ** WARNING: Access control is not enabled for the database.
2022-01-20T12:52:43.193+0500 I CONTROL [initandlisten] ** Read and write access to data and configuration is unrestricted.
2022-01-20T12:52:43.193+0500 I CONTROL [initandlisten]
2022-01-20T12:52:43.194+0500 I CONTROL [initandlisten] ** WARNING: This server is bound to localhost.
2022-01-20T12:52:43.195+0500 I CONTROL [initandlisten] ** Remote systems will be unable to connect to this server.
2022-01-20T12:52:43.195+0500 I CONTROL [initandlisten] ** Start the server with --bind_ip address to specify which IP
2022-01-20T12:52:43.197+0500 I CONTROL [initandlisten] ** addresses it should serve responses from, or with --bind_ip all to
2022-01-20T12:52:43.197+0500 I CONTROL [initandlisten] ** bind to all interfaces. If this behavior is desired, start the
2022-01-20T12:52:43.198+0500 I CONTROL [initandlisten] ** server with --bind_ip 127.0.0.1 to disable this warning.
2022-01-20T12:52:43.198+0500 I SHARDING [initandlisten] Marking collection local.system.replicat as collection version: cunshaded
2022-01-20T12:52:43.198+0500 I SHARDING [initandlisten] File Control is enabled on this deployment.
2022-01-20T12:52:43.203+0500 I SHARDING [initandlisten] Marking collection admin.system.roles as collection version: cunshaded
2022-01-20T12:52:43.203+0500 I SHARDING [initandlisten] Marking collection admin.system.sessions as collection version: cunshaded
2022-01-20T12:52:43.198+0500 I STORAGE [initandlisten] createCollection: local.startup_log with generated UUID: c1d6f81e-60d3-414a-babb-fb4d0fc39df and options: { capped: true, size: 10485760 }
2022-01-20T12:52:43.394+0500 I INDEX [initandlisten] index build: done building index_id on ns local.startup_log
2022-01-20T12:52:43.394+0500 I SHARDING [initandlisten] Marking collection local.startup_log as collection version: cunshaded
2022-01-20T12:52:43.729+0500 I FTDC [initandlisten] Failed to initialize Performance Counters for FTDC: WindowsPdhError: PdhExpandCounterPath failed with "El objeto especificado no se encontró en el equipo." for counter "Memory\Av
ailable Bytes
2022-01-20T12:52:43.729+0500 I FTDC [initandlisten] Initializing full-time diagnostic data capture with directory "C:\data\Node02\diagnostic.data"
2022-01-20T12:52:43.731+0500 I STORAGE [initandlisten] createCollection: local.replicat.oplog.truncateAfterPoint with generated UUID: b095f292-09af-4d1b-800d-e58d9ef90c9 and options: {}
2022-01-20T12:52:43.935+0500 I INDEX [initandlisten] index build: done building index_id on ns local.replicat.oplog.truncateAfterPoint
2022-01-20T12:52:43.935+0500 I STORAGE [initandlisten] createCollection: local.replicat.minvalid with generated UUID: b4e182f7-d20c-4873-9d74-4379eabb95f and options: {}
2022-01-20T12:52:44.118+0500 I INDEX [initandlisten] index build: done building index_id on ns local.replicat.minvalid
2022-01-20T12:52:44.119+0500 I SHARDING [initandlisten] Marking collection local.oplog.rs as collection version: cunshaded
2022-01-20T12:52:44.121+0500 I SHARDING [initandlisten] Marking collection local.replicat.minvalid as collection version: cunshaded
2022-01-20T12:52:44.122+0500 I REPL [initandlisten] createCollection: local.replicat.election with generated UUID: 074313c9-09e2-43d6-bd26-cf4d2ab2cc35 and options: {}
2022-01-20T12:52:44.310+0500 I INDEX [initandlisten] index build: done building index_id on ns local.replicat.election
2022-01-20T12:52:44.312+0500 I REPL [initandlisten] Marking collection local.replicat.election as collection version: cunshaded
2022-01-20T12:52:44.312+0500 I REPL [initandlisten] Did not find local initialized voted for document at startup.
2022-01-20T12:52:44.314+0500 I REPL [initandlisten] Did not find local Rollback ID document at startup. Creating one.
2022-01-20T12:52:44.314+0500 I STORAGE [initandlisten] createCollection: local.system.rollback_id with generated UUID: 4e17298-9a41-4be3-9fc2-a2a855396aae and options: {}
2022-01-20T12:52:44.580+0500 I INDEX [initandlisten] index build: done building index_id on ns local.system.rollback_id
2022-01-20T12:52:44.580+0500 I SHARDING [initandlisten] Marking collection local.system.rollback_id as collection version: cunshaded
2022-01-20T12:52:44.580+0500 I REPL [initandlisten] Initialized the rollback ID to 1
2022-01-20T12:52:44.531+0500 I REPL [initandlisten] Did not find local replica set configuration document at startup; NothingDocument: Did not find replica set configuration document in local.system.replicat
2022-01-20T12:52:44.531+0500 I SHARDING [initandlisten] LogicalSessionCacheRefresh Sessions collection is not set up; waiting until next sessions refresh interval: Replication has not yet been configured Active Windows
2022-01-20T12:52:44.531+0500 I SHARDING [initandlisten] LogicalSessionCacheRefresh Marking collection config.system.sessions as collection version: cunshaded
2022-01-20T12:52:44.531+0500 I CONTROL [initandlisten] (listener) Listening on 127.0.0.1
2022-01-20T12:52:44.531+0500 I NETWORK [initandlisten] (listener) waiting for connections on port 27027

```

## Nodo Esclavo 3

```

C:\Program Files\MongoDB\Server\4.2\bin>mongo --port 27037 --replset rs0 --dbpath="C:\data\mongo"
2022-01-20T12:55:16.973+0000 I CONTROL [main] Automatically disabling TLS 1.0, to force-enable 1.0 specify --sslDisabledProtocols 'none'
2022-01-20T12:55:16.984-0000 W ASIO [main] NO TransportLayer configured during NetworkInterface startup
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] MongoDB starting : pid=27037 dbpath=C:\data\mongo 64-bit host=DESKTOP-2Q941HA
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] targetMinOS: Windows 7/Windows Server 2008 R2
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] db version v4.2.6
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] git version: 28b6480a8fa16097e4c33cb5f5efdbb352f8
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] allocator: tcmalloc
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] modules: none
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] build environment:
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] distmod: win32plus
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] distarch: x86_64
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] target_arch: x86_64
2022-01-20T12:55:16.985-0000 I CONTROL [initandlisten] options: { net: { port: 27037 }, replication: { replset: "rs0" }, storage: { dbpath: "C:\data\mongo" } }
2022-01-20T12:55:17.007-0000 I STORAGE [initandlisten] WiredTiger open config: create,cache_size=268m,cache_overhead=10,file_ext=.wt,session_max=3880, eviction=(threads_min=4,threads_max=4),config_base=false,statistics=(fast),log=(enable=true,archive=true,path=journal,compressor=snappy),file_manager=(close_idle_time=100000,close_scan_interval=10,close_handle_minimum=250),statistics_log=(wait=0),verbose=[recovery_progress,checkpoint_progress],
2022-01-20T12:55:17.145-0000 I RECOVERY [initandlisten] WiredTiger message [64279131f;19c504][12216:14071687657088], txn-recover: Set global recovery timestamp: (0, 0)
2022-01-20T12:55:17.545-0000 I STORAGE [initandlisten] Timestamp monitor starting
2022-01-20T12:55:17.581-0000 I CONTROL [initandlisten]
2022-01-20T12:55:17.581-0000 I CONTROL [initandlisten] ** WARNING: Access control is not enabled for the database.
2022-01-20T12:55:17.581-0000 I CONTROL [initandlisten] ** Read and write access to data and configuration is unrestricted.
2022-01-20T12:55:17.587-0000 I CONTROL [initandlisten]
2022-01-20T12:55:17.587-0000 I CONTROL [initandlisten] ** WARNING: This server is bound to localhost.
2022-01-20T12:55:17.588-0000 I CONTROL [initandlisten] ** Remote systems will be unable to connect to this server.
2022-01-20T12:55:17.588-0000 I CONTROL [initandlisten] ** Start the server with --bind_ip <address> to specify which IP
2022-01-20T12:55:17.588-0000 I CONTROL [initandlisten] ** addresses it should serve responses from, or with --bind_ip_all to
2022-01-20T12:55:17.591-0000 I CONTROL [initandlisten] ** bind to all interfaces. If this behavior is desired, start the
2022-01-20T12:55:17.591-0000 I CONTROL [initandlisten] ** server with --bind_ip 127.0.0.1 to disable this warning.
2022-01-20T12:55:17.592-0000 I CONTROL [initandlisten]
2022-01-20T12:55:17.594-0000 I SHARDING [initandlisten] Marking collection local.system.replset as collection version: cunsharded
2022-01-20T12:55:17.595-0000 I STORAGE [initandlisten] Flow Control is enabled on this deployment.
2022-01-20T12:55:17.596-0000 I SHARDING [initandlisten] Marking collection admin.system.roles as collection version: cunsharded
2022-01-20T12:55:17.596-0000 I SHARDING [initandlisten] Marking collection admin.system.version as collection version: cunsharded
2022-01-20T12:55:17.596-0000 I STORAGE [initandlisten] createcollection: local.startup_log with generated UUID: 02ef60e0-b6a4-4518-8745-3d020604487b and options: { capped: true, size: 10485760 }
2022-01-20T12:55:17.611-0000 I INDEX [initandlisten] Index build: done building index_id on ns local.startup_log
2022-01-20T12:55:17.612-0000 I SHARDING [initandlisten] Marking collection local.startup_log as collection version: cunsharded
2022-01-20T12:55:18.182-0000 I FTDC [initandlisten] Failed to initialize Performance Counters for FTDC. WindowsError: PdhExpandCounterPath failed with 'El objeto especificado no se encontró en el equipo.' for counter 'Processor
_total\% Idle Time'
2022-01-20T12:55:18.182-0000 I FTDC [initandlisten] Initializing full-time diagnostic data capture with directory 'C:\data\mongo\diagnostic.data'
2022-01-20T12:55:18.334-0000 I STORAGE [initandlisten] createcollection: local.replset.oplogtruncateAfterPoint with generated UUID: a09760b0-544f-462b-b568-5b4f2906280c and options: {}
2022-01-20T12:55:18.353-0000 I INDEX [initandlisten] Index build: done building index_id on ns local.replset.oplogtruncateAfterPoint
2022-01-20T12:55:18.562-0000 I INDEX [initandlisten] Index build: done building index_id on ns local.replset.minvalid
2022-01-20T12:55:18.562-0000 I SHARDING [initandlisten] Marking collection local.replset.minvalid as collection version: cunsharded
2022-01-20T12:55:18.562-0000 I SHARDING [initandlisten] Marking collection local.replset.election with generated UUID: b0228021-b464-488d-8d1c-4a2075ad9759 and options: {}
2022-01-20T12:55:18.753-0000 I INDEX [initandlisten] Index build: done building index_id on ns local.replset.election
2022-01-20T12:55:18.753-0000 I SHARDING [initandlisten] Marking collection local.replset.election as collection version: cunsharded
2022-01-20T12:55:18.755-0000 I REPL [initandlisten] Did not find local initialized voted for document at startup.
2022-01-20T12:55:18.755-0000 I REPL [initandlisten] Did not find local Rollback ID document at startup. Creating one.
2022-01-20T12:55:18.755-0000 I STORAGE [initandlisten] createcollection: local.system.rollback_id with generated UUID: 8a1bd508-85d6-4974-a04e-75fbd42c90d1 and options: {}
2022-01-20T12:55:18.886-0000 I INDEX [initandlisten] Index build: done building index_id on ns local.system.rollback_id
2022-01-20T12:55:18.887-0000 I SHARDING [initandlisten] Marking collection local.system.rollback_id as collection version: cunsharded
2022-01-20T12:55:18.889-0000 I SHARDING [initandlisten] Initialized the rollback ID to 1
2022-01-20T12:55:18.894-0000 I REPL [initandlisten] Did not find local replica set configuration document at startup; NoMatchingDocument: Did not find replica set configuration document in local.system.replset
2022-01-20T12:55:18.898-0000 I CONTROL [LogicalSessionCacheRefresh] Sessions collection is not set up; waiting until next session refresh interval: Replication has not yet been configured
2022-01-20T12:55:18.898-0000 I SHARDING [LogicalSessionCacheRefresh] Marking collection config.system.sessions as collection version: cunsharded
2022-01-20T12:55:18.898-0000 I NETWORK [listener] Listening on 127.0.0.1
2022-01-20T12:55:18.898-0000 I CONTROL [LogicalSessionCacheRefresh] Sessions collection is not set up; waiting until next sessions reap interval: config.system.sessions does not exist
2022-01-20T12:55:18.898-0000 I NETWORK [listener] waiting for connections on port 27037
2022-01-20T12:55:19.003-0000 I SHARDING [fsck] Marking collection local.oplog.rs as collection version: cunsharded

```

- Ahora comenzaremos inicializando la réplica construida sobre el nodo maestro, de tal manera que:

```

> rs.initiate()
{
  "info2" : "no configuration specified. Using a default configuration for the set",
  "me" : "localhost:27017",
  "ok" : 1,
  "$clusterTime" : {
    "clusterTime" : Timestamp(1642701767, 1),
    "signature" : {
      "hash" : BinData(0,"AAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA"),
      "keyId" : NumberLong(0)
    }
  },
  "operationTime" : Timestamp(1642701767, 1)
}

```

- Aquí debemos añadir y configurar los nodos esclavos, dejándole así la prioridad mayor al nodo maestro.

```

rs0:SECONDARY> rs.add({host: "127.0.0.1:27027", priority: 0, votes: 0})
{
  "ok" : 1,
  "$clusterTime" : {
    "clusterTime" : Timestamp(1642701892, 1),
    "signature" : {
      "hash" : BinData(0,"AAAAAAAAAAAAAAAAAAAAAAAAAAAA="),
      "keyId" : NumberLong(0)
    }
  },
  "operationTime" : Timestamp(1642701892, 1)
}
rs0:PRIMARY> rs.add({host: "127.0.0.1:27037", priority: 0, votes: 0})
{
  "ok" : 1,
  "$clusterTime" : {
    "clusterTime" : Timestamp(1642701917, 1),
    "signature" : {
      "hash" : BinData(0,"AAAAAAAAAAAAAAAAAAAAAAAAAAAA="),
      "keyId" : NumberLong(0)
    }
  },
  "operationTime" : Timestamp(1642701917, 1)
}

```

- Gracias a este comando podremos conocer el estado de cada uno de los nodos creados.

```

rs0:PRIMARY> rs.status()
{
  "set" : "rs0",
  "date" : ISODate("2022-01-20T18:05:38.687Z"),
  "myState" : 1,
  "term" : NumberLong(1),
  "syncingTo" : "",
  "syncSourceHost" : "",
  "syncSourceId" : -1,
  "heartbeatIntervalMillis" : NumberLong(2000),
  "majorityVoteCount" : 1,
  "writeMajorityCount" : 1,
  "optimes" : {
    "lastCommittedOpTime" : {
      "ts" : Timestamp(1642701937, 1),
      "t" : NumberLong(1)
    },
    "lastCommittedWallTime" : ISODate("2022-01-20T18:05:37.705Z"),
    "readConcernMajorityOpTime" : {
      "ts" : Timestamp(1642701937, 1),
      "t" : NumberLong(1)
    },
    "readConcernMajorityWallTime" : ISODate("2022-01-20T18:05:37.705Z"),
    "appliedOpTime" : {
      "ts" : Timestamp(1642701937, 1),
      "t" : NumberLong(1)
    },
    "durableOpTime" : {
      "ts" : Timestamp(1642701937, 1),
      "t" : NumberLong(1)
    },
    "lastAppliedWallTime" : ISODate("2022-01-20T18:05:37.705Z"),
    "lastDurableWallTime" : ISODate("2022-01-20T18:05:37.705Z")
  },
  "lastStableRecoveryTimestamp" : Timestamp(1642701887, 1),
  "lastStableCheckpointTimestamp" : Timestamp(1642701887, 1),
  "electionCandidateMetrics" : {
    "lastElectionReason" : "electionTimeout",
    "lastElectionDate" : ISODate("2022-01-20T18:02:47.487Z"),
    "electionTerm" : NumberLong(1),
    "lastCommittedOpTimeAtElection" : {
      "ts" : Timestamp(0, 0),
      "t" : NumberLong(-1)
    },
    "lastSeenOpTimeAtElection" : {
      "ts" : Timestamp(1642701767, 1),
      "t" : NumberLong(-1)
    },
    "numVotesNeeded" : 1,
    "priorityAtElection" : 1,
    "electionTimeoutMillis" : NumberLong(10000),
    "newTermStartDate" : ISODate("2022-01-20T18:02:47.685Z"),
    "wMajorityWriteAvailabilityDate" : ISODate("2022-01-20T18:02:47.759Z")
  },

```

## Nodo Maestro



```

    "members" : [
      {
        "_id" : 0,
        "name" : "localhost:27017",
        "health" : 1,
        "state" : 1,
        "stateStr" : "PRIMARY",
        "uptime" : 1298,
        "optime" : {
          "ts" : Timestamp(1642701937, 1),
          "t" : NumberLong(1)
        },
        "optimeDate" : ISODate("2022-01-20T18:05:37Z"),
        "syncingTo" : "",
        "syncSourceHost" : "",
        "syncSourceId" : -1,
        "infoMessage" : "",
        "electionTime" : Timestamp(1642701767, 2),
        "electionDate" : ISODate("2022-01-20T18:02:47Z"),
        "configVersion" : 3,
        "self" : true,
        "lastHeartbeatMessage" : ""
      },
    ],

```

## Nodo Esclavo 2

```

    {
      "_id" : 1,
      "name" : "127.0.0.1:27027",
      "health" : 1,
      "state" : 2,
      "stateStr" : "SECONDARY",
      "uptime" : 46,
      "optime" : {
        "ts" : Timestamp(1642701927, 1),
        "t" : NumberLong(1)
      },
      "optimeDurable" : {
        "ts" : Timestamp(1642701927, 1),
        "t" : NumberLong(1)
      },
      "optimeDate" : ISODate("2022-01-20T18:05:27Z"),
      "optimeDurableDate" : ISODate("2022-01-20T18:05:27Z"),
      "lastHeartbeat" : ISODate("2022-01-20T18:05:37.552Z"),
      "lastHeartbeatRecv" : ISODate("2022-01-20T18:05:37.556Z"),
      "pingMs" : NumberLong(0),
      "lastHeartbeatMessage" : "",
      "syncingTo" : "localhost:27017",
      "syncSourceHost" : "localhost:27017",
      "syncSourceId" : 0,
      "infoMessage" : "",
      "configVersion" : 3
    },

```

## Nodo Esclavo 3



```
{
  "_id" : 2,
  "name" : "127.0.0.1:27037",
  "health" : 1,
  "state" : 2,
  "stateStr" : "SECONDARY",
  "uptime" : 21,
  "optime" : {
    "ts" : Timestamp(1642701927, 1),
    "t" : NumberLong(1)
  },
  "optimeDurable" : {
    "ts" : Timestamp(1642701927, 1),
    "t" : NumberLong(1)
  },
  "optimeDate" : ISODate("2022-01-20T18:05:27Z"),
  "optimeDurableDate" : ISODate("2022-01-20T18:05:27Z"),
  "lastHeartbeat" : ISODate("2022-01-20T18:05:37.555Z"),
  "lastHeartbeatRecv" : ISODate("2022-01-20T18:05:37.028Z"),
  "pingMs" : NumberLong(0),
  "lastHeartbeatMessage" : "",
  "syncingTo" : "127.0.0.1:27027",
  "syncSourceHost" : "127.0.0.1:27027",
  "syncSourceId" : 1,
  "infoMessage" : "",
  "configVersion" : 3
}
```

- Gracias al siguiente comando, lograremos conocer la configuración que corresponde a cada uno de los nodos.

```

rs0:PRIMARY> rs.conf()
{
  "_id" : "rs0",
  "version" : 3,
  "protocolVersion" : NumberLong(1),
  "writeConcernMajorityJournalDefault" : true,
  "members" : [
    {
      "_id" : 0,
      "host" : "localhost:27017",
      "arbiterOnly" : false,
      "buildIndexes" : true,
      "hidden" : false,
      "priority" : 1,
      "tags" : {

      },
      "slaveDelay" : NumberLong(0),
      "votes" : 1
    },
    {
      "_id" : 1,
      "host" : "127.0.0.1:27027",
      "arbiterOnly" : false,
      "buildIndexes" : true,
      "hidden" : false,
      "priority" : 0,
      "tags" : {

      },
      "slaveDelay" : NumberLong(0),
      "votes" : 0
    },
    {
      "_id" : 2,
      "host" : "127.0.0.1:27037",
      "arbiterOnly" : false,
      "buildIndexes" : true,
      "hidden" : false,
      "priority" : 0,
      "tags" : {

      },
      "slaveDelay" : NumberLong(0),
      "votes" : 0
    }
  ],
  "settings" : {
    "chainingAllowed" : true,
    "heartbeatIntervalMillis" : 2000,
    "heartbeatTimeoutSecs" : 10,
    "electionTimeoutMillis" : 10000,
    "catchUpTimeoutMillis" : -1,
    "catchUpTakeoverDelayMillis" : 30000,
    "getLastErrorModes" : {

    },
    "getLastErrorDefaults" : {
      "w" : 1,
      "wtimeout" : 0
    },
    "replicaSetId" : ObjectId("61e9a3c67ffe1c9cc878b971")
  }
}

```

- Ahora será necesario definir los nodos que no son maestro como esclavos, para que estos logren tener acceso a las bases de datos del nodo maestro.

```

C:\Program Files\MongoDB\Server\4.2\bin>mongo --port 27027
MongoDB shell version v4.2.6
connecting to: mongodb://127.0.0.1:27027/?compressors=disabled&gssapiServiceName=mongodb
Implicit session: session { "id" : UUID("77a72d02-22e7-4a01-bb50-6493845843da") }
MongoDB server version: 4.2.6
Server has startup warnings:
2022-01-20T12:52:43.190-0500 I CONTROL [initandlisten]
2022-01-20T12:52:43.190-0500 I CONTROL [initandlisten] ** WARNING: Access control is not enabled for the database.
2022-01-20T12:52:43.191-0500 I CONTROL [initandlisten] ** Read and write access to data and configuration is unrestricted.
2022-01-20T12:52:43.193-0500 I CONTROL [initandlisten]
2022-01-20T12:52:43.194-0500 I CONTROL [initandlisten] ** WARNING: This server is bound to localhost.
2022-01-20T12:52:43.194-0500 I CONTROL [initandlisten] ** Remote systems will be unable to connect to this server.
2022-01-20T12:52:43.195-0500 I CONTROL [initandlisten] ** Start the server with --bind_ip <address> to specify which IP
2022-01-20T12:52:43.196-0500 I CONTROL [initandlisten] ** addresses it should serve responses from, or with --bind_ip_all to
2022-01-20T12:52:43.197-0500 I CONTROL [initandlisten] ** bind to all interfaces. If this behavior is desired, start the
2022-01-20T12:52:43.198-0500 I CONTROL [initandlisten] ** server with --bind_ip 127.0.0.1 to disable this warning.
2022-01-20T12:52:43.198-0500 I CONTROL [initandlisten]
---
Enable MongoDB's free cloud-based monitoring service, which will then receive and display
metrics about your deployment (disk utilization, CPU, operation statistics, etc).

The monitoring data will be available on a MongoDB website with a unique URL accessible to you
and anyone you share the URL with. MongoDB may use this information to make product
improvements and to suggest MongoDB products and deployment options to you.

To enable free monitoring, run the following command: db.enableFreeMonitoring()
To permanently disable this reminder, run the following command: db.disableFreeMonitoring()
---

rs0:SECONDARY> show dbs
2022-01-20T13:34:57.546-0500 E QUERY [js] uncaught exception: Error: listDatabases failed:{
  "operationTime" : Timestamp(1642703687, 1),
  "ok" : 0,
  "errmsg" : "not master and slaveOk=false",
  "code" : 13435,
  "codeName" : "NotMasterNoSlaveOk",
  "$clusterTime" : {
    "clusterTime" : Timestamp(1642703687, 1),
    "signature" : {
      "hash" : BinData(0,"AAAAAAAAAAAAAAAAAAAAAAAAAAAA="),
      "keyId" : NumberLong(0)
    }
  }
} :
_getErrorWithCode@src/mongo/shell/utils.js:25:13
Mongo.prototype.getDBs@src/mongo/shell/mongo.js:135:19
Mongo.prototype.getDBs@src/mongo/shell/mongo.js:87:12
shellHelper.show@src/mongo/shell/utils.js:906:13
shellHelper@src/mongo/shell/utils.js:790:15
@(shellhelp2):1:1
rs0:SECONDARY> rs.slaveok()
2022-01-20T13:35:31.502-0500 E QUERY [js] uncaught exception: TypeError: rs.slaveok is not a function :
@(shell):1:1
rs0:SECONDARY> rs.slaveOk()
rs0:SECONDARY> show dbs
admin 0.000GB
config 0.000GB
local 0.000GB
rs0:SECONDARY>

```

```

C:\Program Files\MongoDB\Server\4.2\bin>mongo --port 27037
MongoDB shell version v4.2.6
connecting to: mongodb://127.0.0.1:27037/?compressors=disabled&gssapiServiceName=mongodb
Implicit session: session { "id" : UUID("38520718-7a2e-4f3f-80ad-20001997733b") }
MongoDB server version: 4.2.6
Server has startup warnings:
2022-01-20T12:55:17.583-0500 I CONTROL [initandlisten]
2022-01-20T12:55:17.583-0500 I CONTROL [initandlisten] ** WARNING: Access control is not enabled for the database.
2022-01-20T12:55:17.585-0500 I CONTROL [initandlisten] ** Read and write access to data and configuration is unrestricted.
2022-01-20T12:55:17.586-0500 I CONTROL [initandlisten]
2022-01-20T12:55:17.587-0500 I CONTROL [initandlisten] ** WARNING: This server is bound to localhost.
2022-01-20T12:55:17.588-0500 I CONTROL [initandlisten] ** Remote systems will be unable to connect to this server.
2022-01-20T12:55:17.589-0500 I CONTROL [initandlisten] ** Start the server with --bind_ip <address> to specify which IP
2022-01-20T12:55:17.590-0500 I CONTROL [initandlisten] ** addresses it should serve responses from, or with --bind_ip_all to
2022-01-20T12:55:17.590-0500 I CONTROL [initandlisten] ** bind to all interfaces. If this behavior is desired, start the
2022-01-20T12:55:17.591-0500 I CONTROL [initandlisten] ** server with --bind_ip 127.0.0.1 to disable this warning.
2022-01-20T12:55:17.592-0500 I CONTROL [initandlisten]
---
Enable MongoDB's free cloud-based monitoring service, which will then receive and display
metrics about your deployment (disk utilization, CPU, operation statistics, etc).


The monitoring data will be available on a MongoDB website with a unique URL accessible to you
and anyone you share the URL with. MongoDB may use this information to make product
improvements and to suggest MongoDB products and deployment options to you.

To enable free monitoring, run the following command: db.enableFreeMonitoring()
To permanently disable this reminder, run the following command: db.disableFreeMonitoring()
---

rs0:SECONDARY> show dbs
2022-01-20T13:36:33.798-0500 E QUERY [js] uncaught exception: Error: listDatabases failed:{
  "operationTime" : Timestamp(1642703787, 1),
  "ok" : 0,
  "errmsg" : "not master and slaveOk=false",
  "code" : 13435,
  "codeName" : "NotMasterNoSlaveOk",
  "$clusterTime" : {
    "clusterTime" : Timestamp(1642703787, 1),
    "signature" : {
      "hash" : BinData(0,"AAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA"),
      "keyId" : NumberLong(0)
    }
  }
} :
_getErrorWithCode@src/mongo/shell/utils.js:25:13
Mongo.prototype.getDBs/<@src/mongo/shell/mongo.js:135:19
Mongo.prototype.getDBs@src/mongo/shell/mongo.js:87:12
shellHelper.show@src/mongo/shell/utils.js:906:13
shellHelper@src/mongo/shell/utils.js:790:15
@(shellhelp2):1:1
rs0:SECONDARY> rs.slaveOk()
rs0:SECONDARY> show dbs
admin 0.000GB
config 0.000GB
local 0.000GB
rs0:SECONDARY>

```

## Muestra grafica de replicación y base de datos del torneo deportivo

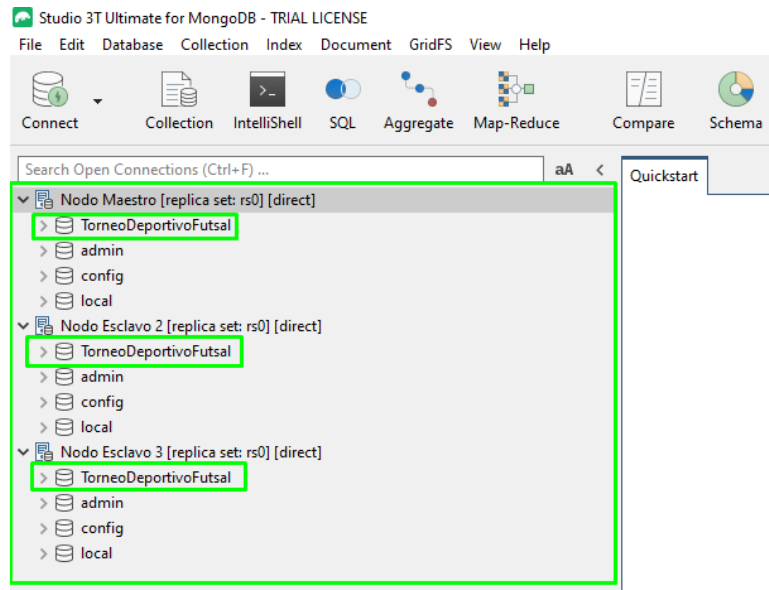

▼  Nodo Maestro [replica set: rs0] [direct]

>  TorneoDeportivoFutsal

>  admin

>  config


>  local


Connection: Nodo Maestro [replica set: rs0] [direct]


Server(s):  
localhost:27017 - Online [PRIMARY]


Server version: 4.2.6


[Refresh](#)

▼  Nodo Esclavo 2 [replica set: rs0] [direct]

>  TorneoDeportivoFutsal

>  admin

>  config

>  local

Connection: Nodo Esclavo 2 [replica set: rs0] [direct]

Server(s):  
127.0.0.1:27027 - Online [SECONDARY]

Server version: 4.2.6

[Refresh](#)

▼  Nodo Esclavo 3 [replica set: rs0] [direct]

>  TorneoDeportivoFutsal

>  admin

>  config


>  local

Connection: Nodo Esclavo 3 [replica set: rs0] [direct]

Server(s):  
127.0.0.1:27037 - Online [SECONDARY]

Server version: 4.2.6

[Refresh](#)

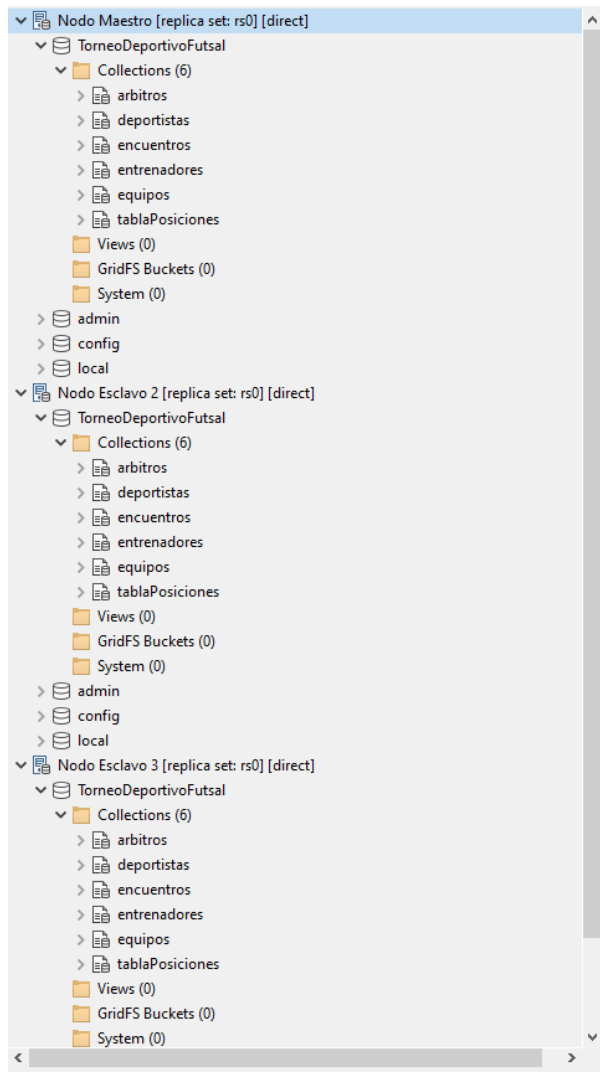

- **Diagrama de la estrategia de Maestro – Esclavo**




- Nuestra estrategia maestro-esclavo está caracterizada principalmente en poseer 3 nodos, donde uno de ellos será el nodo primario y el resto serán secundarios, nuestro nodo principal será el encargado de la escritura y lectura de los datos, para luego lograr la replicación sobre los nodos secundarios, tendiendo así la sincronización de los cambios reflejados sobre los datos. Como también cabe mencionar que nuestros nodos secundarios estarán dispuestos a ser el reemplazo del nodo principal, dado el caso que este se desconecte o falle.



## Casos de prueba

- ✓ En primer lugar, se validará la disponibilidad del orden de los nodos, y en una situación donde el nodo maestro caiga, se desconecte o falle, para que luego el nodo esclavo 2 reciba las responsabilidades del nodo maestro.

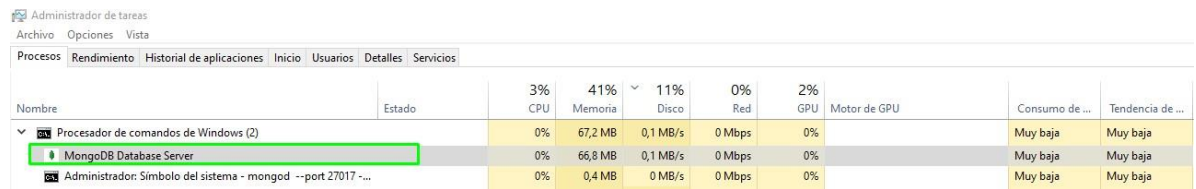

Administrador de tareas									
Procesos Rendimiento Historial de aplicaciones Inicio Usuarios Detalles Servicios									
Nombre	Estado	3% CPU	41% Memoria	11% Disco	0% Red	2% GPU		Consumo de ...	Tendencia de ...
Procesador de comandos de Windows (2)		0%	67,2 MB	0,1 MB/s	0 Mbps	0%		Muy baja	Muy baja
MongoDB Database Server		0%	66,8 MB	0,1 MB/s	0 Mbps	0%		Muy baja	Muy baja
Administrador Símbolo del sistema - mongod --port 27017 -...		0%	0,4 MB	0 MB/s	0 Mbps	0%		Muy baja	Muy baja

Finalizamos el servidor de mongo que está ejecutando nuestro nodo maestro, esto simulando una caída, desconexión o fallo de este.

```
{
  "members": [
    {
      "_id": 0,
      "name": "localhost:27017",
      "health": 0,
      "state": 0,
      "stateStr": "(not reachable/healthy)",
      "uptime": 0,
      "optime": {
        "ts": Timestamp(0, 0),
        "t": NumberLong(-1)
      },
      "optimeDurable": {
        "ts": Timestamp(0, 0),
        "t": NumberLong(-1)
      },
      "optimeDate": ISODate("1970-01-01T00:00:00Z"),
      "optimeDurableDate": ISODate("1970-01-01T00:00:00Z"),
      "lastHeartbeat": ISODate("2022-01-21T01:04:51.538Z"),
      "lastHeartbeatTo": ISODate("2022-01-21T01:03:12.603Z"),
      "pings": NumberLong(0),
      "lastHeartbeatMessage": "Error connecting to localhost:27017 (127.0.0.1:27017) :: caused by :: No se puede establecer una conexión ya que el equipo de destino denegó expresamente dicha conexión.",
      "syncingTo": "",
      "syncSourceHost": "",
      "syncSourceId": -1,
      "infoMessage": "",
      "configVersion": -1
    }
  ],
}
```

Para luego poder visualizar que uno de los nodos esclavos, ahora hace el papel del maestro, motivo de la caída del nodo principal.

```

{
  "_id" : 1,
  "name" : "127.0.0.1:27027",
  "health" : 1,
  "state" : 2,
  "stateStr" : "SECONDARY",
  "uptime" : 7105,
  "optime" : {
    "ts" : Timestamp(1642729690, 1),
    "t" : NumberLong(4)
  },
  "optimeDurable" : {
    "ts" : Timestamp(1642729680, 1),
    "t" : NumberLong(4)
  },
  "optimeDate" : ISODate("2022-01-21T01:48:10Z"),
  "optimeDurableDate" : ISODate("2022-01-21T01:48:00Z"),
  "lastHeartbeat" : ISODate("2022-01-21T01:48:10.494Z"),
  "lastHeartbeatRecv" : ISODate("2022-01-21T01:48:10.246Z"),
  "pingMs" : NumberLong(0),
  "lastHeartbeatMessage" : "",
  "syncingTo" : "127.0.0.1:27037",
  "syncSourceHost" : "127.0.0.1:27037",
  "syncSourceId" : 2,
  "infoMessage" : "",
  "configVersion" : 8
},
{
  "_id" : 2,
  "name" : "127.0.0.1:27037",
  "health" : 1,
  "state" : 1,
  "stateStr" : "PRIMARY",
  "uptime" : 7107,
  "optime" : {
    "ts" : Timestamp(1642729690, 1),
    "t" : NumberLong(4)
  },
  "optimeDate" : ISODate("2022-01-21T01:48:10Z"),
  "syncingTo" : "",
  "syncSourceHost" : "",
  "syncSourceId" : -1,
  "infoMessage" : "",
  "electionTime" : Timestamp(1642729598, 1),
  "electionDate" : ISODate("2022-01-21T01:45:08Z"),
  "configVersion" : 8,
  "self" : true,
  "lastHeartbeatMessage" : ""
},
{
  "ok" : 1,
  "clusterTime" : {
    "clusterTime" : Timestamp(1642729690, 1),
    "signature" : {
      "hash" : BinData(9,"AAAAAAAAAAAAAAAAAAAAAAAA"),
      "keyId" : NumberLong(0)
    }
  },
  "operationTime" : Timestamp(1642729690, 1)
}
rs0:PRIMARY>

```

Y cuando se vuelve a reestablecer la conexión del servidor, nuevamente se asignarán los roles que han sido declarados desde un principio, de tal forma que:

```

C:\Program Files\MongoDB\Server\4.2\bin>mongo --port 27017
MongoDB shell version v4.2.6
connecting to: mongodb://127.0.0.1:27017/?compressors=disabled&gssapiServiceName=mongodb
Implicit session: session { "id" : UUID("5f321d29-e666-4c18-a1a9-311c44207990") }
MongoDB server version: 4.2.6
Server has startup warnings:
2022-01-20T20:54:31.735-0500 I CONTROL [initandlisten]
2022-01-20T20:54:31.735-0500 I CONTROL [initandlisten] ** WARNING: Access control is not enabled for the database.
2022-01-20T20:54:31.735-0500 I CONTROL [initandlisten] **      Read and write access to data and configuration is unrestricted.
2022-01-20T20:54:31.735-0500 I CONTROL [initandlisten]
2022-01-20T20:54:31.735-0500 I CONTROL [initandlisten] ** WARNING: This server is bound to localhost.
2022-01-20T20:54:31.735-0500 I CONTROL [initandlisten] **      Remote systems will be unable to connect to this server.
2022-01-20T20:54:31.735-0500 I CONTROL [initandlisten] **      Start the server with --bind_ip <address> to specify which IP
2022-01-20T20:54:31.736-0500 I CONTROL [initandlisten] **      addresses it should serve responses from, or with --bind_ip_all to
2022-01-20T20:54:31.736-0500 I CONTROL [initandlisten] **      bind to all interfaces. If this behavior is desired, start the
2022-01-20T20:54:31.736-0500 I CONTROL [initandlisten] **      server with --bind_ip 127.0.0.1 to disable this warning.
2022-01-20T20:54:31.736-0500 I CONTROL [initandlisten]
---
Enable MongoDB's free cloud-based monitoring service, which will then receive and display
metrics about your deployment (disk utilization, CPU, operation statistics, etc).

The monitoring data will be available on a MongoDB website with a unique URL accessible to you
and anyone you share the URL with. MongoDB may use this information to make product
improvements and to suggest MongoDB products and deployment options to you.

To enable free monitoring, run the following command: db.enableFreeMonitoring()
To permanently disable this reminder, run the following command: db.disableFreeMonitoring()
---
rs0:PRIMARY>

```

```

    },
    "members" : [
      {
        "_id" : 0,
        "name" : "localhost:27017",
        "health" : 1,
        "state" : 1,
        "stateStr" : "PRIMARY",
        "uptime" : 72,
        "optime" : {
          "ts" : Timestamp(1642730142, 1),
          "t" : NumberLong(5)
        },
        "optimeDate" : ISODate("2022-01-21T01:55:42Z"),
        "syncingTo" : "",
        "syncSourceHost" : "",
        "syncSourceId" : -1,
        "infoMessage" : "",
        "electionTime" : Timestamp(1642730082, 1),
        "electionDate" : ISODate("2022-01-21T01:54:42Z"),
        "configVersion" : 8,
        "self" : true,
        "lastHeartbeatMessage" : ""
      },
      {
        "_id" : 1,
        "name" : "127.0.0.1:27027",
        "health" : 1,
        "state" : 2,
        "stateStr" : "SECONDARY",
        "uptime" : 70,
        "optime" : {
          "ts" : Timestamp(1642730132, 1),
          "t" : NumberLong(5)
        },
        "optimeDurable" : {
          "ts" : Timestamp(1642730132, 1),
          "t" : NumberLong(5)
        },
        "optimeDate" : ISODate("2022-01-21T01:55:32Z"),
        "optimeDurableDate" : ISODate("2022-01-21T01:55:32Z"),
        "lastHeartbeat" : ISODate("2022-01-21T01:55:42.571Z"),
        "lastHeartbeatRecv" : ISODate("2022-01-21T01:55:42.423Z"),
        "pingMs" : NumberLong(0),
        "lastHeartbeatMessage" : "",
        "syncingTo" : "127.0.0.1:27037",
        "syncSourceHost" : "127.0.0.1:27037",
        "syncSourceId" : 2,
        "infoMessage" : "",
        "configVersion" : 8
      },
      {
        "_id" : 2,
        "name" : "127.0.0.1:27037",
        "health" : 1,
        "state" : 2,
        "stateStr" : "SECONDARY",
        "uptime" : 70,
        "optime" : {
          "ts" : Timestamp(1642730132, 1),
          "t" : NumberLong(5)
        }
      }
    ]
  }
}

```

- ✓ En segundo lugar, se validará la redundancia de los datos y que, al momento de realizar registros sobre el nodo maestro, luego estos sean sincronizados con los nodos esclavos sin poseer la duplicidad de la información.

```

C:\> Administrador: Símbolo del sistema - mongo --port 27017
rs0:PRIMARY> db
test
rs0:PRIMARY> use TorneoDeportivoFutsal
switched to db TorneoDeportivoFutsal
rs0:PRIMARY> show collections
arbitros
deportistas
encuentros
entrenadores
equipos
tablaPosiciones
rs0:PRIMARY> db.equipos.insert({"Nombre":"Tigers Run", "Ciudad":"Manizales", "Año":2001})
WriteResult({ "nInserted" : 1 })
rs0:PRIMARY> db.equipos.insert({"Nombre":"Warriors NC", "Ciudad":"Barranquilla", "Año":1989})
WriteResult({ "nInserted" : 1 })
rs0:PRIMARY>

```

Sabemos que hemos insertado dos equipos nuevos para la colección de nuestra base de datos, y es así que como resultado se deben visualizar sobre el nodo maestro, y haberse sincronizado sobre sus nodos esclavos.

Nodo Maestro (localhost:27017) > TorneoDeportivoFutsal > equipos

Query: {}

Projection: {}

Skip:

Result Query Code Explain

Documents 1 to 4

equipos > Año

_id	Nombre	Ciudad	Año
[id] 61d74d8233c9f0...	Rangers Sa	Medellin	1990
[id] 61d74da233c9f0...	Dinamit Out	Bogotá	1992
[id] 61ea1af7b3ebbe...	Tigers Run	Manizales	2001
[id] 61ea1c5cb3ebb...	Warriors NC	Barranquilla	1989

Nodo Esclavo 2 (127.0.0.1:27027) > TorneoDeportivoFutsal > equipos

Query {}

Projection {}

Skip

Result

Query Code

Explain

50

Documents 1 to 4

equipos > Nombre

_id	Nombre	Ciudad	Año
61d74d8233c9f0...	Rangers Sa	Medellin	1990
61d74da233c9f0...	Dinamit Out	Bogotá	1992
61ea1af7b3ebbe...	Tigers Run	Manizales	2001
61ea1c5cb3ebb...	Warriors NC	Barranquilla	1989

Nodo Esclavo 3 (127.0.0.1:27037) > TorneoDeportivoFutsal > equipos

Query {}

Projection {}

Skip

Result

Query Code

Explain

50

Documents 1 to 4

equipos > Nombre

_id	Nombre	Ciudad	Año
61d74d8233c9f0...	Rangers Sa	Medellin	1990
61d74da233c9f0...	Dinamit Out	Bogotá	1992
61ea1af7b3ebbe...	Tigers Run	Manizales	2001
61ea1c5cb3ebb...	Warriors NC	Barranquilla	1989

- ✓ En conclusión, hemos logrado validar el funcionamiento de nuestra estrategia “maestro-esclavo”, tanto por parte de la disponibilidad como la redundancia de la información, encontramos que dado el momento en el que nuestro nodo maestro falle, estarán los nodos esclavos dispuestos a elegir y decidir quién lo reemplaza para seguir la operación, como también al momento de usar el comando “insert”, desde nuestro nodo maestro, se evidencia la sincronización con los otros dos nodos y se realizan la cantidad de registros correspondiente evitando la duplicidad de los mismos.

## **Bibliografía**

- Sarasa, A. (2016). Introducción a las bases de datos NoSQL usando MongoDB. Editorial UOC. (Capítulo 7- Replicación)
- <https://www.youtube.com/watch?v=gSD594Cvgy8>