

UV LED TO18 Series



FEATURES

- UVA, UVB, UVC Wavelength Support
- Broad, Wide, Medium Field of View
- Flat Window and Lens Options
- Standard 2-lead TO-18 Hermetic Package

TO18 SERIES SPECIFICATIONS

Model Number	Description	Window Type	Viewing Angle (Half Max.)(Deg.)
OD265T18	UVC 265nm LED in TO18 Package with Flat Window	Flat	110
OD265T18M	UVC 265nm LED in TO18 Package Medium View Lens	Lens	25
OD265T18W	UVC 265nm LED in TO18 Package Wide View Lens	Lens	40
OD280T18	UVC 280nm LED in TO18 Package with Flat Window	Flat	110
OD280T18M	UVC 280nm LED in TO18 Package Medium View Lens	Lens	25
OD280T18W	UVC 280nm LED in TO18 Package Wide View Lens	Lens	40
OD310T18	UVB 310nm LED in TO18 Package with Flat Window	Flat	110
OD310T18M	UVB 310nm LED in TO18 Package Medium View Lens	Lens	25
OD310T18W	UVB 310nm LED in TO18 Package Wide View Lens	Lens	40
OD325T18	UVA 325nm LED in TO18 Package with Flat Window	Flat	110
OD325T18M	UVA 325nm LED in TO18 Package Medium View Lens	Lens	25
OD325T18W	UVA 325nm LED in TO18 Package Wide View Lens	Lens	40
OD340T18	UVA 340nm LED in TO18 Package with Flat Window	Flat	110
OD340T18M	UVA 340nm LED in TO18 Package Medium View Lens	Lens	25
OD340T18W	UVA 340nm LED in TO18 Package Wide View Lens	Lens	40

UV LED TO18 Series


TYPICAL ELECTRO-OPTICAL CHARACTERISTICS AT 25°C

Model Number	$\lambda_p \pm 5\text{nm}$	Radiant Flux Output Power (mW)	I_F (mA)	V_F (V)
OD265T18	265	0.7	20	7
OD265T18M	265	0.7	20	7
OD265T18W	265	0.7	20	7
OD280T18	280	1.3	20	6.5
OD280T18M	280	1.1	20	6.5
OD280T18W	280	1.3	20	6.5
OD310T18	310	0.7	20	6
OD310T18M	310	0.6	20	6
OD310T18W	310	0.6	20	6
OD325T18	325	1.1	20	4.5
OD325T18M	325	0.9	20	4.5
OD325T18W	325	1.1	20	4.5
OD340T18	340	1.1	20	4
OD340T18M	340	1.1	20	4
OD340T18W	340	1.1	20	4


UV LED TO18 Series

PACKAGE INFORMATION

TO18 Flat Window

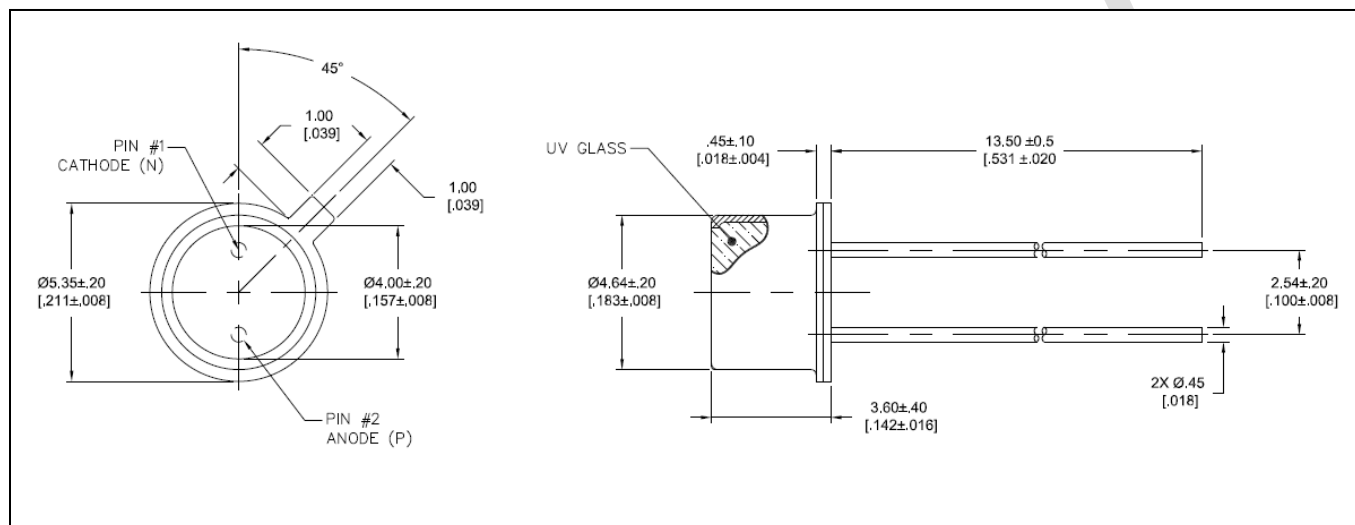


TO18 Lens Medium Angle

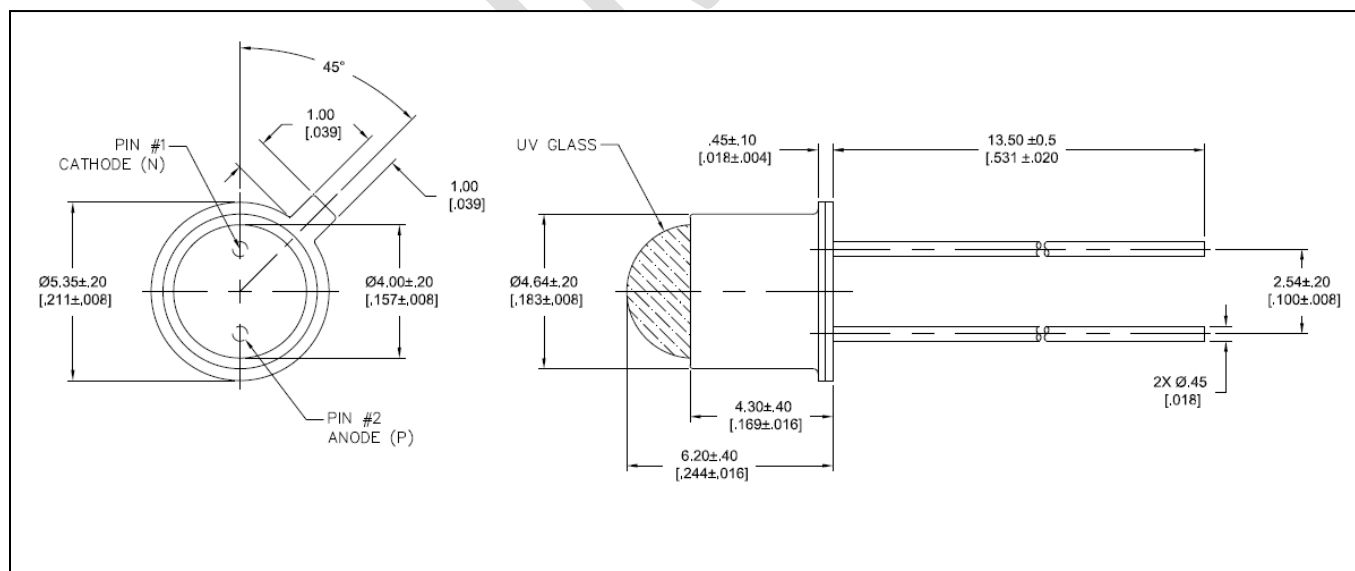

UV LED TO18 Series

TO18 Lens Wide Angle

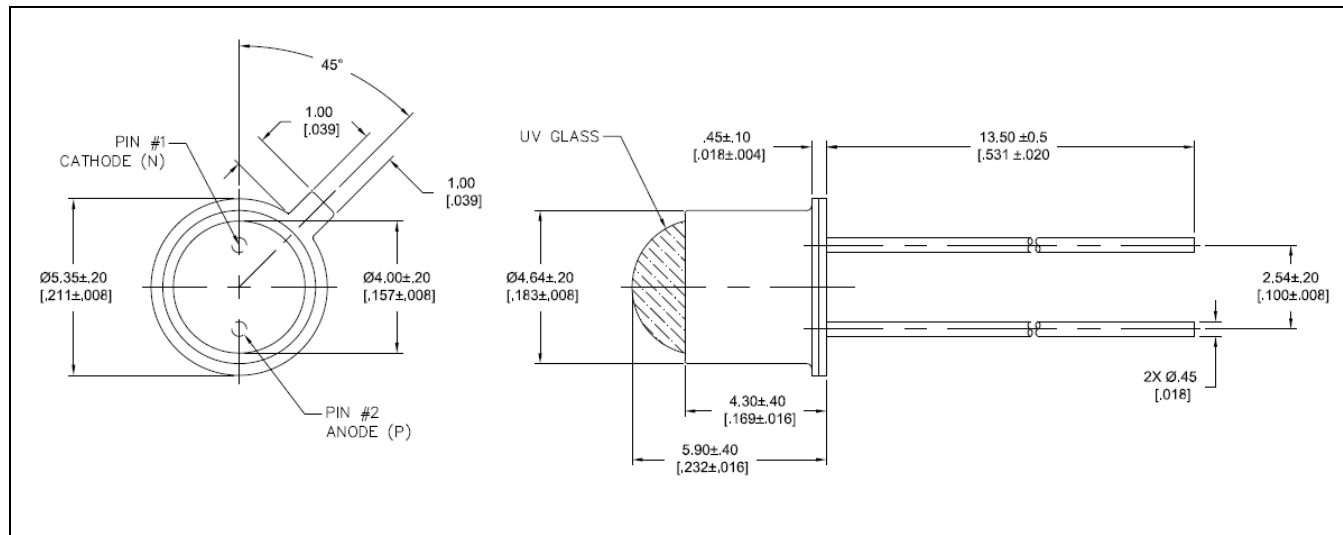

ORDERING INFORMATION

- OD2500** UVC 265nm LED in TO18 Package with Flat Window Shipped in ESD Vacuum Formed Tray
- OD2501** UVC 265nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray
- OD2502** UVC 265nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray
- OD2503** UVC 280nm LED in TO18 Package with Flat Window Shipped in ESD Vacuum Formed Tray
- OD2504** UVC 280nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray
- OD2505** UVC 280nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray
- OD2506** UVB 310nm LED in TO18 Package with Flat Window Shipped in ESD Vacuum Formed Tray
- OD2507** UVB 310nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray
- OD2508** UVB 310nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray
- OD2509** UVA 325nm LED in TO18 Package with Flat Window Shipped in ESD Vacuum Formed Tray
- OD2510** UVA 325nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray
- OD2511** UVA 325nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray
- OD2512** UVA 340nm LED in TO18 Package with Flat Window Shipped in ESD Vacuum Formed Tray
- OD2513** UVA 340nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray
- OD2514** UVA 340nm LED in TO18 Package with Medium View Lens Shipped in ESD Vacuum Formed Tray



1260 Calle Suerte, Camarillo, California 93012
Phone: (805) 499-0335, Fax: (805) 499-8108
Email: sales@optodiode.com, Website: www.optodiode.com