

final_17

March 26, 2023

```
[1]: #!pip install torch torchvision
%matplotlib inline
import matplotlib.pyplot as plt
import numpy as np
import torch
import torchvision
import torchvision.transforms as transforms
import torch.nn as nn
import torch.nn.functional as F
import torch.optim as optim
```

Prepare for Dataset

```
[2]: transform = transforms.Compose(
    [transforms.ToTensor(),
     transforms.Normalize((0.5, 0.5, 0.5), (0.5, 0.5, 0.5))])

trainset = torchvision.datasets.CIFAR100(root='./data', train=True,
                                         download=True, transform=transform)
trainloader = torch.utils.data.DataLoader(trainset, batch_size=15,
                                           shuffle=True, num_workers=2)

testset = torchvision.datasets.CIFAR100(root='./data', train=False,
                                         download=True, transform=transform)
testloader = torch.utils.data.DataLoader(testset, batch_size=4,
                                          shuffle=False, num_workers=2)

classes = ('apple', 'aquarium_fish', 'baby', 'bear', 'beaver',
           'bed', 'bee', 'beetle', 'bicycle', 'bottle', 'bowl',
           'boy', 'bridge', 'bus', 'butterfly', 'camel', 'can',
           'castle', 'caterpillar', 'cattle', 'chair',
           'chimpanzee', 'clock', 'cloud', 'cockroach', 'couch',
           'crab', 'crocodile', 'cup', 'dinosaur', 'dolphin',
           'elephant', 'flatfish', 'forest', 'fox', 'girl',
           'hamster', 'house', 'kangaroo', 'keyboard', 'lamp',
           'lawn_mower', 'leopard', 'lion', 'lizard', 'lobster',
           'man', 'maple_tree', 'motorcycle', 'mountain', 'mouse',
           'mushroom', 'oak_tree', 'orange', 'orchid', 'otter',
```

```

    'palm_tree', 'pear', 'pickup_truck', 'pine_tree', 'plain',
    'plate', 'poppy', 'porcupine', 'possum', 'rabbit', 'raccoon',
    'ray', 'road', 'rocket', 'rose', 'sea', 'seal', 'shark',
    'shrew', 'skunk', 'skyscraper', 'snail', 'snake', 'spider',
    'squirrel', 'streetcar', 'sunflower', 'sweet_pepper', 'table',
    'tank', 'telephone', 'television', 'tiger', 'tractor', 'train',
    'trout', 'tulip', 'turtle', 'wardrobe', 'whale', 'willow_tree',
    'wolf', 'woman', 'worm')

#classes = ('plane', 'car', 'bird', 'cat',
#           'deer', 'dog', 'frog', 'horse', 'ship', 'truck')

```


Files already downloaded and verified
Files already downloaded and verified

```

[3]: # The function to show an image.
def imshow(img):
    img = img / 2 + 0.5     # Unnormalize.
    npimg = img.numpy()
    plt.imshow(np.transpose(npimg, (1, 2, 0)))
    plt.show()

# Get some random training images.
dataiter = iter(trainloader)
images, labels = next(dataiter)
# Show images.
imshow(torchvision.utils.make_grid(images))
# Print labels.
print(' '.join('%5s' % classes[labels[j]] for j in range(4)))

```

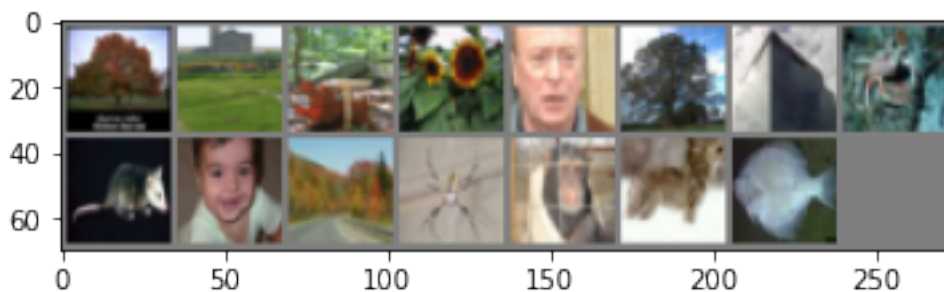

oak_tree castle mushroom sunflower

Choose a Device

```

[4]: # If there are GPUs, choose the first one for computing. Otherwise use CPU.
device = torch.device("cuda:0" if torch.cuda.is_available() else "cpu")

```

```
print(device)
# If 'cuda:0' is printed, it means GPU is available.
```

cuda:0

Network Definition

```
[5]: class Net(nn.Module):
    def __init__(self):
        super(Net, self).__init__()
        self.conv1 = nn.Conv2d(in_channels=3, out_channels=64, kernel_size=3,
padding=1)
        self.bn1 = nn.BatchNorm2d(64)
        self.pool1 = nn.AvgPool2d(kernel_size=2, stride=2)
        self.relu1 = nn.ReLU()
        self.conv2 = nn.Conv2d(64, 128, 3, padding=1)
        self.bn2 = nn.BatchNorm2d(128)
        self.pool2 = nn.AvgPool2d(kernel_size=2, stride=2)
        self.relu2 = nn.ReLU()
        self.conv3 = nn.Conv2d(128, 256, 3, padding=1)
        self.bn3 = nn.BatchNorm2d(256)
        self.pool3 = nn.AvgPool2d(kernel_size=2, stride=2)
        self.relu3 = nn.SELU()
        self.fc1 = nn.Linear(256 * 4 * 4, 1024)
        self.bn4 = nn.BatchNorm1d(1024)
        self.relu4 = nn.SELU()
        self.fc2 = nn.Linear(1024, 100)

    def forward(self, x):
        x = self.pool1(self.relu1(self.conv1(x)))
        x = self.pool2(self.relu2(self.conv2(x)))
        x = self.pool3(self.relu3(self.conv3(x)))
        x = x.view(-1, 256 * 4 * 4)
        x = self.relu4(self.fc1(x))
        x = self.fc2(x)
        return x

net = Net()      # Create the network instance.
net.to(device)  # Move the network parameters to the specified device.
```

```
[5]: Net(
  (conv1): Conv2d(3, 64, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1))
  (bn1): BatchNorm2d(64, eps=1e-05, momentum=0.1, affine=True,
track_running_stats=True)
  (pool1): AvgPool2d(kernel_size=2, stride=2, padding=0)
  (relu1): ReLU()
```

```

(conv2): Conv2d(64, 128, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1))
(bn2): BatchNorm2d(128, eps=1e-05, momentum=0.1, affine=True,
track_running_stats=True)
(pool2): AvgPool2d(kernel_size=2, stride=2, padding=0)
(rel2): ReLU()
(conv3): Conv2d(128, 256, kernel_size=(3, 3), stride=(1, 1), padding=(1, 1))
(bn3): BatchNorm2d(256, eps=1e-05, momentum=0.1, affine=True,
track_running_stats=True)
(pool3): AvgPool2d(kernel_size=2, stride=2, padding=0)
(rel3): SELU()
(fc1): Linear(in_features=4096, out_features=1024, bias=True)
(bn4): BatchNorm1d(1024, eps=1e-05, momentum=0.1, affine=True,
track_running_stats=True)
(rel4): SELU()
(fc2): Linear(in_features=1024, out_features=100, bias=True)
)

```

Optimizer and Loss Function

```

[6]: # We use cross-entropy as loss function.
loss_func = nn.CrossEntropyLoss()
# We use stochastic gradient descent (SGD) as optimizer.
#opt = optim.SGD(net.parameters(), lr=0.0001, momentum=0.9)
opt = optim.Adam(net.parameters(), lr=0.0001)

```

Training Procedure

```

[7]: import sys
from tqdm.notebook import tqdm

avg_losses = [] # Avg. losses.
epochs = 8 # Total epochs.
print_freq = 500 # Print frequency.

for epoch in range(epochs): # Loop over the dataset multiple times.
    running_loss = 0.0 # Initialize running loss.
    for i, data in enumerate(tqdm(trainloader), 0):
        # Get the inputs.
        inputs, labels = data

        # Move the inputs to the specified device.
        inputs, labels = inputs.to(device), labels.to(device)

        # Zero the parameter gradients.
        opt.zero_grad()

        # Forward step.

```

```

outputs = net(inputs)
loss = loss_func(outputs, labels)

# Backward step.
loss.backward()

# Optimization step (update the parameters).
opt.step()

# Print statistics.
running_loss += loss.item()
if i % print_freq == print_freq - 1: # Print every several mini-batches.
    avg_loss = running_loss / print_freq
    print('[epoch: {}], i: {:5d}] avg mini-batch loss: {:.3f}'.
    ↪format(epoch, i, avg_loss),flush=True)
    sys.stdout.flush()
    avg_losses.append(avg_loss)
    running_loss = 0.0

print('Finished Training.')

```

```

0%|          | 0/3334 [00:00<?, ?it/s]
[epoch: 0, i:   499] avg mini-batch loss: 4.132
[epoch: 0, i:   999] avg mini-batch loss: 3.750
[epoch: 0, i:  1499] avg mini-batch loss: 3.564
[epoch: 0, i:  1999] avg mini-batch loss: 3.400
[epoch: 0, i:  2499] avg mini-batch loss: 3.318
[epoch: 0, i:  2999] avg mini-batch loss: 3.209

0%|          | 0/3334 [00:00<?, ?it/s]
[epoch: 1, i:   499] avg mini-batch loss: 3.054
[epoch: 1, i:   999] avg mini-batch loss: 2.984
[epoch: 1, i:  1499] avg mini-batch loss: 2.949
[epoch: 1, i:  1999] avg mini-batch loss: 2.892
[epoch: 1, i:  2499] avg mini-batch loss: 2.843
[epoch: 1, i:  2999] avg mini-batch loss: 2.838

0%|          | 0/3334 [00:00<?, ?it/s]
[epoch: 2, i:   499] avg mini-batch loss: 2.691
[epoch: 2, i:   999] avg mini-batch loss: 2.690
[epoch: 2, i:  1499] avg mini-batch loss: 2.665
[epoch: 2, i:  1999] avg mini-batch loss: 2.614
[epoch: 2, i:  2499] avg mini-batch loss: 2.662
[epoch: 2, i:  2999] avg mini-batch loss: 2.578

0%|          | 0/3334 [00:00<?, ?it/s]
[epoch: 3, i:   499] avg mini-batch loss: 2.469

```

```
[epoch: 3, i: 999] avg mini-batch loss: 2.463
[epoch: 3, i: 1499] avg mini-batch loss: 2.449
[epoch: 3, i: 1999] avg mini-batch loss: 2.433
[epoch: 3, i: 2499] avg mini-batch loss: 2.440
[epoch: 3, i: 2999] avg mini-batch loss: 2.465
```

```
0%|          | 0/3334 [00:00<?, ?it/s]
```

```
[epoch: 4, i: 499] avg mini-batch loss: 2.303
[epoch: 4, i: 999] avg mini-batch loss: 2.302
[epoch: 4, i: 1499] avg mini-batch loss: 2.303
[epoch: 4, i: 1999] avg mini-batch loss: 2.318
[epoch: 4, i: 2499] avg mini-batch loss: 2.273
[epoch: 4, i: 2999] avg mini-batch loss: 2.286
```

```
0%|          | 0/3334 [00:00<?, ?it/s]
```

```
[epoch: 5, i: 499] avg mini-batch loss: 2.123
[epoch: 5, i: 999] avg mini-batch loss: 2.165
[epoch: 5, i: 1499] avg mini-batch loss: 2.141
[epoch: 5, i: 1999] avg mini-batch loss: 2.168
[epoch: 5, i: 2499] avg mini-batch loss: 2.174
[epoch: 5, i: 2999] avg mini-batch loss: 2.130
```

```
0%|          | 0/3334 [00:00<?, ?it/s]
```

```
[epoch: 6, i: 499] avg mini-batch loss: 2.020
[epoch: 6, i: 999] avg mini-batch loss: 2.006
[epoch: 6, i: 1499] avg mini-batch loss: 2.023
[epoch: 6, i: 1999] avg mini-batch loss: 2.028
[epoch: 6, i: 2499] avg mini-batch loss: 2.037
[epoch: 6, i: 2999] avg mini-batch loss: 1.980
```


```
0%|          | 0/3334 [00:00<?, ?it/s]
```

```
[epoch: 7, i: 499] avg mini-batch loss: 1.859
[epoch: 7, i: 999] avg mini-batch loss: 1.899
[epoch: 7, i: 1499] avg mini-batch loss: 1.878
[epoch: 7, i: 1999] avg mini-batch loss: 1.920
[epoch: 7, i: 2499] avg mini-batch loss: 1.921
[epoch: 7, i: 2999] avg mini-batch loss: 1.912
```

Finished Training.

Training Loss Curve


```
[8]: plt.plot(avg_losses)
plt.xlabel('mini-batch index / {}'.format(print_freq))
plt.ylabel('avg. mini-batch loss')
plt.show()
```

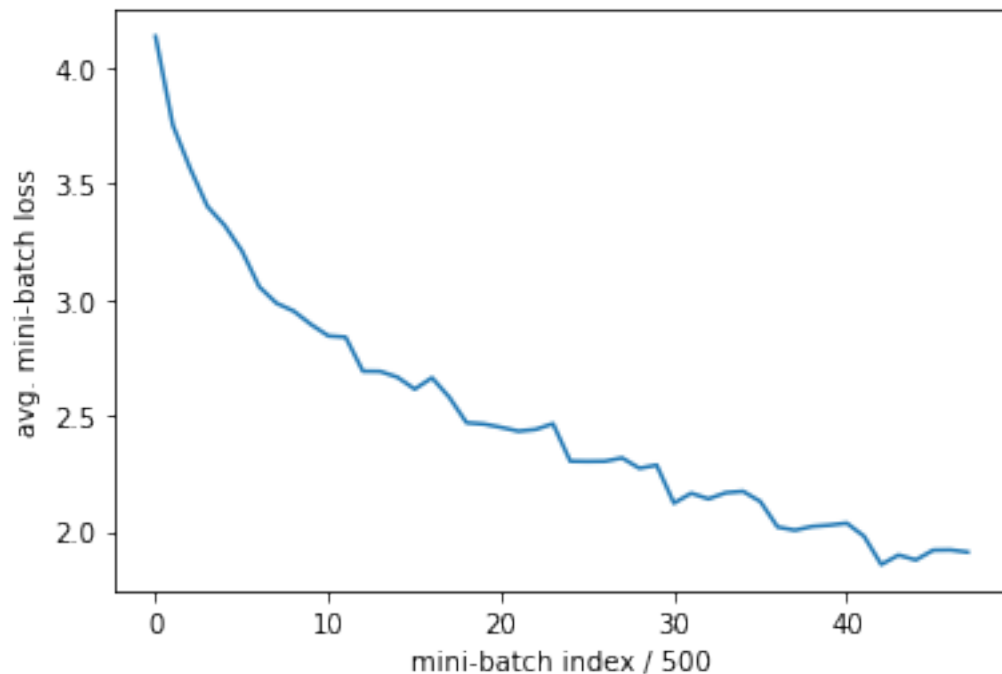

Evaluate on Test Dataset

```
[9]: # Check several images.
dataiter = iter(testloader)
images, labels = next(dataiter)
imshow(torchvision.utils.make_grid(images))
print('GroundTruth: ', ' '.join('%5s' % classes[labels[j]] for j in range(4)))
outputs = net(images.to(device))
_, predicted = torch.max(outputs, 1)

print('Predicted: ', ' '.join('%5s' % classes[predicted[j]]
                               for j in range(4)))
```

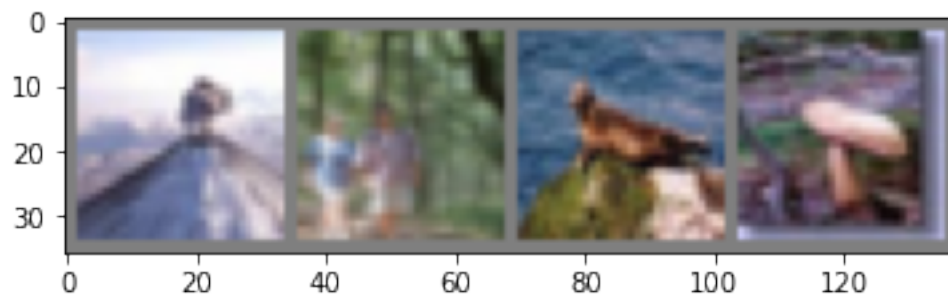

GroundTruth: mountain forest seal mushroom
Predicted: mountain squirrel lobster mushroom

```
[10]: # Get test accuracy.
correct = 0
total = 0
with torch.no_grad():
    for data in testloader:
        images, labels = data
        images, labels = images.to(device), labels.to(device)
        outputs = net(images)
        _, predicted = torch.max(outputs.data, 1)
        total += labels.size(0)
        correct += (predicted == labels).sum().item()

print('Accuracy of the network on the 10000 test images: %d %%' % (
    100 * correct / total))
```

Accuracy of the network on the 10000 test images: 42 %

```
[11]: # Get test accuracy for each class.
class_correct = [0] * len(classes)
class_total = [0] * len(classes)
with torch.no_grad():
    for data in testloader:
        images, labels = data
        images, labels = images.to(device), labels.to(device)
        outputs = net(images)
        _, predicted = torch.max(outputs, 1)
        c = (predicted == labels).squeeze()
        for i in range(len(labels)):
            label = labels[i]
            class_correct[label] += c[i].item()
            class_total[label] += 1

for i in range(len(classes)):
    print('Accuracy of %5s : %2d %%' % (
        classes[i], 100 * class_correct[i] / class_total[i]))
```

Accuracy of apple : 62 %
Accuracy of aquarium_fish : 58 %
Accuracy of baby : 29 %
Accuracy of bear : 13 %
Accuracy of beaver : 29 %
Accuracy of bed : 41 %
Accuracy of bee : 39 %
Accuracy of beetle : 42 %
Accuracy of bicycle : 46 %

Accuracy of bottle : 53 %
Accuracy of bowl : 31 %
Accuracy of boy : 31 %
Accuracy of bridge : 41 %
Accuracy of bus : 51 %
Accuracy of butterfly : 35 %
Accuracy of camel : 29 %
Accuracy of can : 34 %
Accuracy of castle : 66 %
Accuracy of caterpillar : 29 %
Accuracy of cattle : 32 %
Accuracy of chair : 72 %
Accuracy of chimpanzee : 64 %
Accuracy of clock : 28 %
Accuracy of cloud : 66 %
Accuracy of cockroach : 55 %
Accuracy of couch : 34 %
Accuracy of crab : 52 %
Accuracy of crocodile : 26 %
Accuracy of cup : 54 %
Accuracy of dinosaur : 33 %
Accuracy of dolphin : 46 %
Accuracy of elephant : 42 %
Accuracy of flatfish : 39 %
Accuracy of forest : 41 %
Accuracy of fox : 43 %
Accuracy of girl : 16 %
Accuracy of hamster : 46 %
Accuracy of house : 38 %
Accuracy of kangaroo : 45 %
Accuracy of keyboard : 56 %
Accuracy of lamp : 37 %
Accuracy of lawn_mower : 72 %
Accuracy of leopard : 27 %
Accuracy of lion : 51 %
Accuracy of lizard : 20 %
Accuracy of lobster : 27 %
Accuracy of man : 28 %
Accuracy of maple_tree : 42 %
Accuracy of motorcycle : 71 %
Accuracy of mountain : 58 %
Accuracy of mouse : 11 %
Accuracy of mushroom : 35 %
Accuracy of oak_tree : 63 %
Accuracy of orange : 82 %
Accuracy of orchid : 51 %
Accuracy of otter : 7 %
Accuracy of palm_tree : 45 %

Accuracy of pear : 32 %
Accuracy of pickup_truck : 36 %
Accuracy of pine_tree : 43 %
Accuracy of plain : 74 %
Accuracy of plate : 53 %
Accuracy of poppy : 43 %
Accuracy of porcupine : 43 %
Accuracy of possum : 34 %
Accuracy of rabbit : 27 %
Accuracy of raccoon : 40 %
Accuracy of ray : 32 %
Accuracy of road : 74 %
Accuracy of rocket : 65 %
Accuracy of rose : 45 %
Accuracy of sea : 63 %
Accuracy of seal : 16 %
Accuracy of shark : 57 %
Accuracy of shrew : 19 %
Accuracy of skunk : 82 %
Accuracy of skyscraper : 68 %
Accuracy of snail : 14 %
Accuracy of snake : 17 %
Accuracy of spider : 35 %
Accuracy of squirrel : 11 %
Accuracy of streetcar : 49 %
Accuracy of sunflower : 71 %
Accuracy of sweet_pepper : 29 %
Accuracy of table : 25 %
Accuracy of tank : 50 %
Accuracy of telephone : 55 %
Accuracy of television : 55 %
Accuracy of tiger : 39 %
Accuracy of tractor : 63 %
Accuracy of train : 57 %
Accuracy of trout : 57 %
Accuracy of tulip : 40 %
Accuracy of turtle : 18 %
Accuracy of wardrobe : 64 %
Accuracy of whale : 45 %
Accuracy of willow_tree : 30 %
Accuracy of wolf : 44 %
Accuracy of woman : 35 %
Accuracy of worm : 32 %

[12]: *# One of the changes I made was that I added another layer in the network
that takes the output from the second convolutional layer, applies ReLU
↪activation,*

```
# and passes it through a 2x2 AvgPool layer to capture more relationships.  
# I also reduced the learning rate of the optimizer to half (0.0005) which  
# which allowed the optimizer to take smaller steps towards the minimum of  
# the loss function which might allow for a better chance of finding the global  
↪min of loss.
```