

This is unreleased documentation for Serverpod **Next** version.

For up-to-date documentation, see the [latest version](#) (4.0.0).

3..25.3

WORKING WITH USERS

 Copy as Markdown

Working with users

INFO

This page documents the legacy `serverpod_auth` module. To move an existing app to the current authentication framework, see [Migrate from legacy auth](#).

It's a common task to read or update user information on your server. You can always retrieve the id of a signed-in user through the session object.

```
var userId = session.authenticated?.userId;
```

If you sign in users through the auth module, you will be able to retrieve more information through the static methods of the `Users` class.

```
var userInfo = await Users.findUserById(session, userId!);
```


The `UserInfo` is automatically populated when the user signs in. Different data may be available depending on which method was used for authentication.


TIP

The `Users` class contains many other convenient methods for working with users. You can find the full documentation [here](#).

Displaying or editing user images

The module has built-in methods for handling a user's basic settings, including uploading new pro



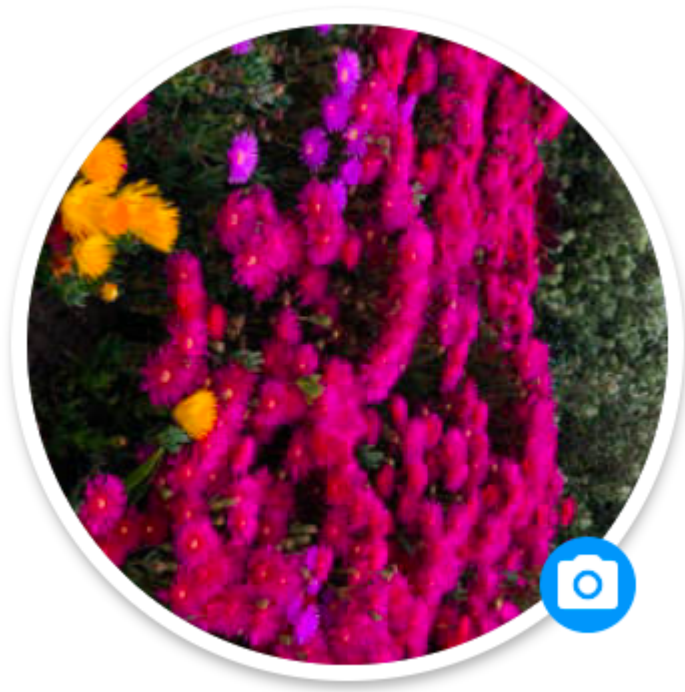

To display a user's profile picture, use the `CircularUserImage` widget and pass a `UserInfo` retrieved from the `SessionManager`.

To edit a user profile image, use the `UserImageButton` widget. It will automatically fetch the signed-in user's profile picture and communicate with the server.