

This is unreleased documentation for Serverpod **Next** version.

For up-to-date documentation, see the [latest version](#) (4.0.0).

3..25.3.3

APPLE

 Copy as Markdown

Apple sign-in

INFO

This page documents the legacy `serverpod_auth` module. To move an existing app to the current authentication framework, see [Migrate from legacy auth](#).

Sign-in with Apple, requires that you have a subscription to the [Apple developer program](#), even if you only want to test the feature in development mode.

A comprehensive tutorial covering Sign in with Apple is available [here](#).

NOTE

Right now, we have official support for iOS and MacOS for Sign in with Apple.

CAUTION

You need to install the auth module before you continue, see [Setup](#).

Server-side configuration

Set `appleClientIds` on `AuthConfig` to the client identifiers your server accepts Sign in with Apple tokens for: your app's bundle IDs and any services IDs. Sign in with Apple is disabled until this is set, so every sign-in request fails.

```
auth.AuthConfig.set(auth.AuthConfig(  
  appleClientIds: {'com.example.myapp'},  
));
```



If you already call `AuthConfig.set`, add `appleClientId` to that call, because `set` replaces the whole configuration. See [Setup](#) for where to set `AuthConfig`.


Client-side configuration


Add the dependency to your `pubspec.yaml` in your flutter project.

```
dependencies:  
  ...  
  serverpod_auth_apple_flutter: 4.0.0
```

Config

Enable the sign-in with Apple capability in your Xcode project, this is the same type of configuration for your iOS and MacOS projects respectively.

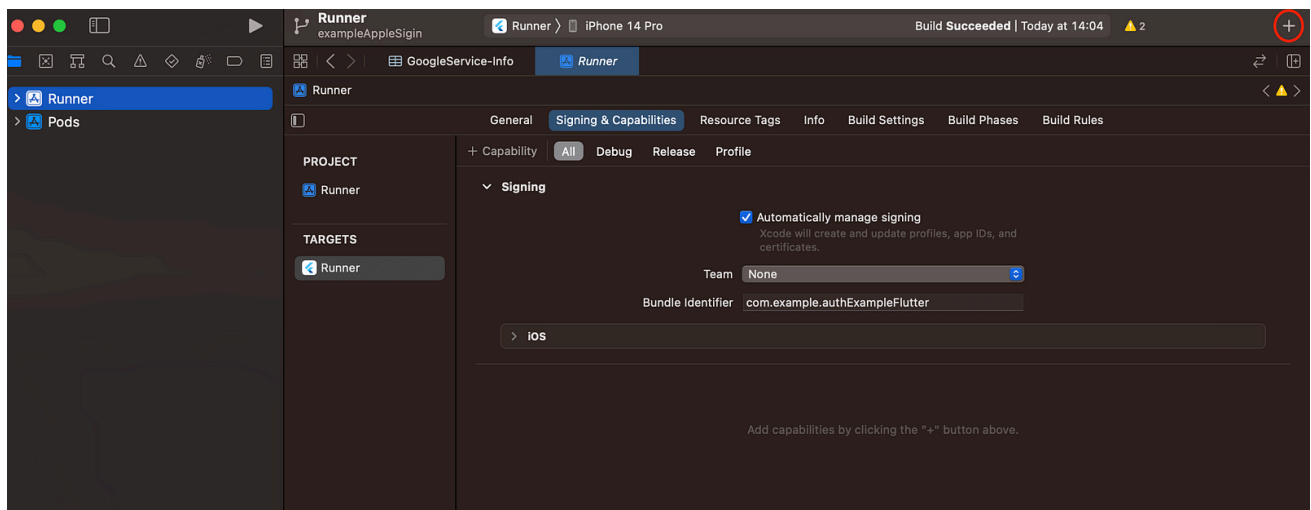

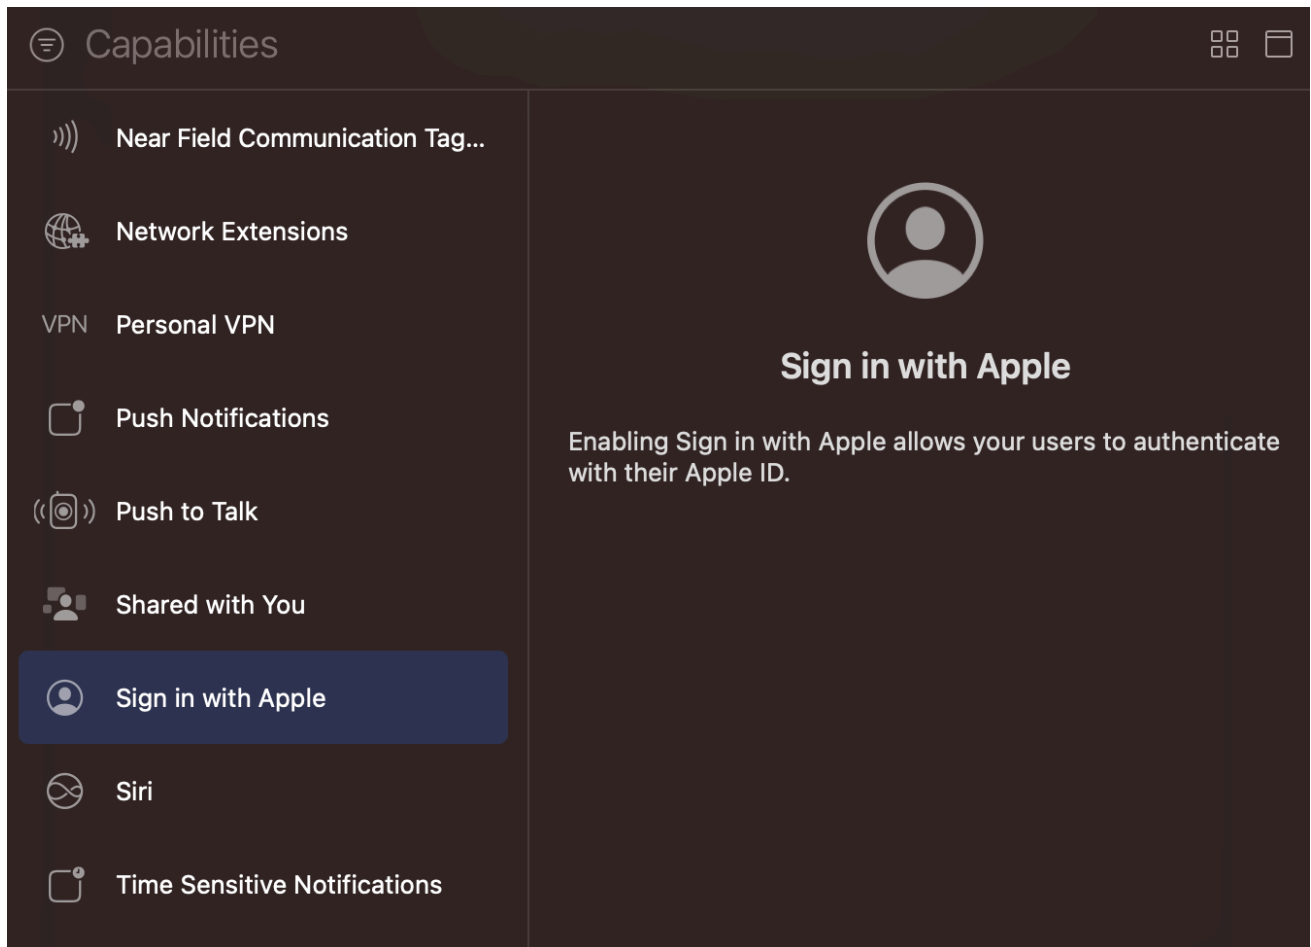


Sign in button

`serverpod_auth_apple_flutter` package comes with the widget `SignInWithAppleButton` that renders a nice Sign in with Apple button and triggers the native sign-in UI.

```
import 'package:serverpod_auth_apple_flutter/serverpod_auth_apple_flutter.dart';

SignInWithAppleButton(
  caller: client.modules.auth,
);
```

The `SignInWithAppleButton` widget takes a `caller` parameter that you pass in the authentication module from your Serverpod client, in this case, `client.modules.auth`.

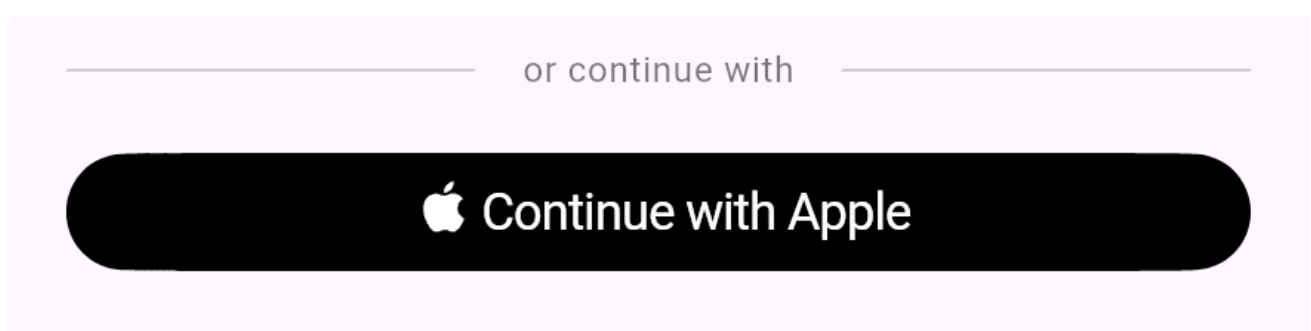

Extra

The `serverpod_auth_apple_flutter` implements the sign-in logic using [sign_in_with_apple](#). The documentation for this package should in most cases also apply to the Serverpod integration.

Note that Sign in with Apple may not work on some versions of the Simulator (iOS 13.5 works). This issue doesn't affect real devices.