Q1.

Question **1**

Correct

Mark 2.00 out of 2.00

Flag question

Enter well-formed XML corresponding to the following XSD file:

```
<?xml version="1.0"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
        targetNamespace="http://www.juicers.org"
        xmlns="http://www.juicers.org"
        elementFormDefault="qualified">
  <xsd:element name="juicers">
    <xsd:complexType>
      <xsd:sequence>
        <xsd:element ref="juicer" minOccurs="0" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>
  <xsd:element name="juicer">
    <xsd:complexType>
      <xsd:sequence>
        <xsd:element ref="name"/>
        <xsd:element ref="image"/>
        <xsd:element ref="description"/>
        <xsd:element ref="warranty" minOccurs="0"/>
        <xsd:element ref="weight" minOccurs="0"/>
        <xsd:element ref="cost" maxOccurs="unbounded"/>
        <xsd:element ref="retailer"/>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>
  <xsd:element name="name" type="xsd:string"/>
  <xsd:element name="image" type="xsd:string"/>
  <xsd:element name="description" type="xsd:string"/>
  <xsd:element name="warranty" type="xsd:string"/>
  <xsd:element name="weight" type="xsd:string"/>
  <xsd:element name="cost" type="xsd:string"/>
  <xsd:element name="retailer" type="xsd:string"/>
</xsd:schema>
```

Answer:

```
<?xml version="1.0" encoding="UTF-8"?>
<juicers xmlns="http://www.juicers.org">
  <juicer>
    <name>jils</name>
    <image>url</image>
    <description>this is jils</description>
    <warranty>10</warranty>
    <weight>54</weight>
    <cost>1000</cost>
    <retailer>Amazon</retailer>
  </juicer>
</juicers>
```

Q2.

Question **2**

Correct

Mark 2.00 out of 2.00

Flag question

Create a valid XML instance document corresponding to the following schema:

```
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
<xs:element name="Course">
  <xs:complexType>
  <xs:all>
    <xs:element name="Title" type="xs:string"/>
    <xs:element name="Credits" type="xs:string" fixed="4" minOccurs="0"/>
    </xs:all>
  </xs:complexType>
</xs:element>
</xs:schema>
```

Answer:

```
<?xml version="1.0" encoding="UTF-8"?>
<Course>
   <Title>Database Systems</Title>
   <Credits>4</Credits>
</Course>
```

Q3.

```
<?xml version="1.0" encoding="UTF-8"?>
<schema
   xmlns="http://www.w3.org/2001/XMLSchema"
   xmlns:contacts="http://www.example.com/contacts"
   targetNamespace="”http://www.example.com/contacts” elementFormDefault="qualified">

   <element name="contacts">
      <complexType>
         <sequence>
            <element name="contact" minOccurs="0" maxOccurs="unbounded">
               <complexType>
                  <sequence>
                     <element name="name" type="contacts:NameType"/>
                     <element name="location" type="contacts:LocationType"/>
                     <element name="phone" type="string"/>
                     <element name="knows" type="contacts:KnowsType"/>
                     <element name="description" type="contacts:DescriptionType"/>
                  </sequence>
               </complexType>
            </element>
         </sequence>
      </complexType>
   </element>
   <complexType name="NameType">
      <group ref="contacts:NameGroup"/>
   </complexType>
   <group name="NameGroup">
      <sequence>
         <element name="first" type="string" minOccurs="1" maxOccurs="unbounded"/>
         <element name="middle" type="string" minOccurs="0" maxOccurs="1"/>
         <element name="last" type="string"/>
      </sequence>
   </group>

   <complexType name="LocationType">
      <choice minOccurs="0" maxOccurs="unbounded">
         <element name="address" type="string"/>
         <sequence>
            <element name="latitude" type="string"/>
            <element name="longitude" type="string"/>
         </sequence>
      </choice>
   </complexType>

   <complexType name="KnowsType"/>

   <complexType name="DescriptionType" mixed="true">
      <choice minOccurs="0" maxOccurs="unbounded">
         <element name="em" type="string"/>
         <element name="strong" type="string"/>
         <element name="br" type="string"/>
      </choice>
   </complexType>

</schema>
```

Answer:

```
<contacts xmlns="http://www.example.com/contacts">
  <contact>
    <name>
      <first>"jils"</first>
      <last>"patel"</last>
    </name>
    <location>
    </location>
    <phone>"9876543210"</phone>
    <knows></knows>
    <description>this is<em>hello</em>world <strong>from
xml</strong><br></br></description>
  </contact>
</contacts>
```

Q4.

Question **4**

Correct

Mark 1.00 out of 1.00

Flag question

Enter any well-formed XML

Answer:

```
<?xml version="1.0" encoding="UTF-8"?>
<student>
<id>101</id>
<name>jils</name>
<course>cse</course>
</student>
```

Q5.

Question **5**
Not answered
Marked out of 10.00
Flag question

Create XSD for the following schema.

IMPORTANT: Do NOT specify targetNameSpace in your schema.

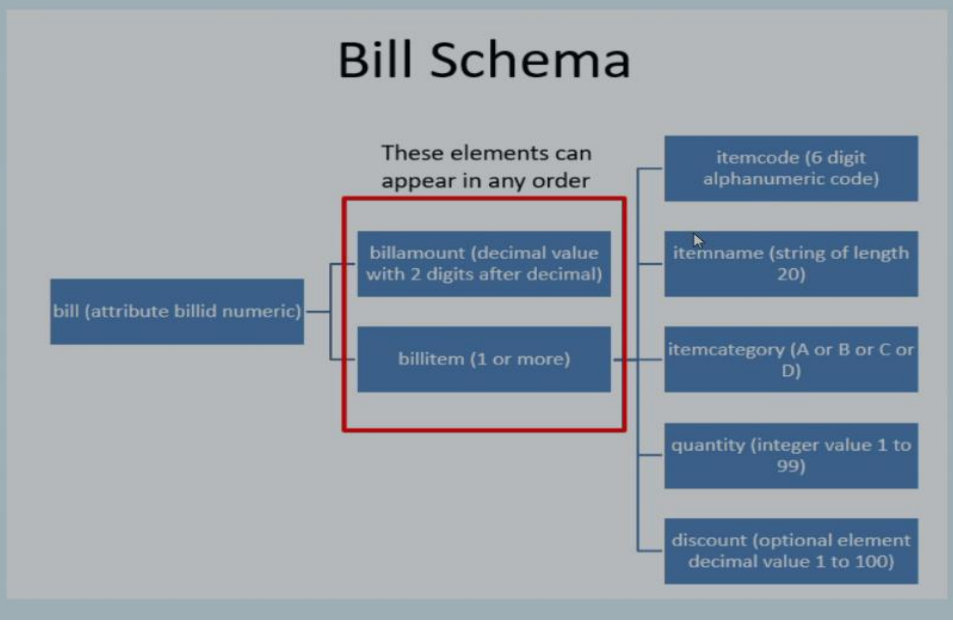

```xml
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">

  <xs:element name="bill">
      <xs:complexType>
         <xs:choice maxOccurs="unbounded">
            <xs:element name="billitem">
               <xs:complexType>
                  <xs:sequence>
                     <xs:element name="itemcode" type="xs:string"/>
                     <xs:element name="itemname" type="xs:string"/>
                     <xs:element name="itemcategory">
                        <xs:simpleType>
                           <xs:restriction base="xs:string">
                              <xs:enumeration value="A"/>
                              <xs:enumeration value="B"/>
                              <xs:enumeration value="C"/>
                              <xs:enumeration value="D"/>
                           </xs:restriction>
                        </xs:simpleType>
                     </xs:element>
                     <xs:element name="quantity" type="xs:integer"/>
                     <xs:element name="discount"
                                 type="xs:decimal"
                                 minOccurs="0"/>
                  </xs:sequence>
               </xs:complexType>
            </xs:element>
            <xs:element name="billamount"
                        type="xs:decimal"/>

         </xs:choice>
         <xs:attribute name="billid"
                       type="xs:integer"
                       use="required"/>
      </xs:complexType>
   </xs:element>
</xs:schema>
```