

# "चला तर, Coding शिक् आपल्या भाषेत!"



# **Marathi Coding Shala**

@MarathiCodingShala · 2.06K subscribers · 12 videos

नमस्कार मित्रांनो! 🔌 🙏 ...more

youtube.com/channel/UCUc5mUOo3xqzlgXFCaIFkbw and 2 more links

Customize channel

Manage videos

View channel stats



## Welcome to JK Restaurant

49

- 1. Pizza 🔊
- 2. Burger 🥌
- 3. Pasta 🥯
- 4. Sandwich 🥪

4. Sandwich 🦠

You have ordered Burger.

Enter your choice (1-4):

```
#include <stdio.h>
int main() {
    int choice;
    // Menu dikhana
    printf(" Welcome to JK Restaurant \n");
    printf("1. Pizza\n");
    printf("2. Burger\n");
    printf("3. Pasta\n");
    printf("4. Sandwich\n");
    printf("Enter your choice (1-4): ");
    scanf("%d", &choice);
```

```
// Switch-case logic
switch (choice) {
    case 1:
        printf("You have ordered Pizza. \n");
        break;
    case 2:
        printf("You have ordered Burger. \n");
        break;
    case 3:
        printf("You have ordered Pasta. \n");
        break;
    case 4:
        printf("You have ordered Sandwich. \n");
        break;
    default:
        printf("Invalid choice! Please select between 1 to 4.\n");
return 0;
```

```
#include <stdio.h> // For input/output functions
#include <stdlib.h> // For exit function
int main() {
    int ch;
    printf("\nPress 1: Addition");
    printf("\nPress 2: Subtraction");
    printf("\nPress 3: Multiplication");
    printf("\nPress 4: EXIT");
    printf("\nEnter your choice: ");
    scanf("%d", &ch);
    switch (ch) {
        case 1: {
            int a, b;
            printf("Enter first number: ");
            scanf("%d", &a);
            printf("Enter second number: ");
            scanf("%d", &b);
            int c = a + b;
            printf("Addition is = %d\n", c);
            break; // important!
```

Simple Calculator using Switch Case in C

```
int a, b;
    printf("Enter first number: ");
    scanf("%d", &a);
    printf("Enter second number: ");
    scanf("%d", &b);
   int c = a - b;
    printf("Subtraction is = %d\n", c);
   break;
case 3: {
   int a, b;
    printf("Enter first number: ");
    scanf("%d", &a);
    printf("Enter second number: ");
    scanf("%d", &b);
   int c = a * b;
    printf("Multiplication is = %d\n", c);
    break;
```

case 2: {

```
case 4: {
        printf("Exiting the program.\n");
       exit(0); // exit the program
   default: {
        printf("Invalid Choice, please select number from 1 to 4\n");
return 0;
```

```
while(1){
  printf("JK");
```

### While(1) kelyavar kay hoil

```
int main() {
   int ch;
    printf("\nPress 1: Addition");
    printf("\nPress 2: Subtraction");
    printf("\nPress 3: Multiplication");
    printf("\nPress 4: EXIT");
while(1){
    printf("\nEnter your choice: ");
    scanf("%d", &ch);
    switch (ch) {
        case 1: {
            int a, b;
            printf("Enter first number: ");
            scanf("%d", &a);
            printf("Enter second number: ");
            scanf("%d", &b);
```

printf("Addition is = %d\n", c);

int c = a + b;

break; // important!

```
case 2: {
   int a, b;
    printf("Enter first number: ");
    scanf("%d", &a);
    printf("Enter second number: ");
    scanf("%d", &b);
    int c = a - b;
    printf("Subtraction is = %d\n", c);
    break;
case 3: {
   int a, b;
    printf("Enter first number: ");
    scanf("%d", &a);
    printf("Enter second number: ");
    scanf("%d", &b);
    int c = a * b;
    printf("Multiplication is = %d\n", c);
    break;
```

```
case 4: {
       printf("Exiting the program.\n");
       exit(0); // exit the program
   default: {
       printf("Invalid Choice, please select number from 1 to 4\n");
return 0;
```

#### **By Using Function**

```
void add(){
           int a, b;
            printf("Enter first number: ");
            scanf("%d", &a);
            printf("Enter second number: ");
            scanf("%d", &b);
            printf("Addition is = %d\n", c);
void sub(){
            int a, b;
            printf("Enter first number: ");
            scanf("%d", &a);
            printf("Enter second number: ");
            scanf("%d", &b);
            int c = a - b;
            printf("Subtraction is = %d\n", c);
```

```
int a, b;
            printf("Enter first number: ");
            scanf("%d", &a);
            printf("Enter second number: ");
            scanf("%d", &b);
            int c = a * b;
            printf("Multiplication is = %d\n", c);
int main() {
    int ch;
    printf("\nPress 1: Addition");
    printf("\nPress 2: Subtraction");
    printf("\nPress 3: Multiplication");
    printf("\nPress 4: EXIT");
```

void mul(){

```
while(1){}
                                                            default: {
                                                               printf("Invalid Choice, please select number from 1 to 4\n");
    printf("\nEnter your choice: ");
    scanf("%d", &ch);
    switch (ch) {
                                                          return 0;
         case 1: {
             add();
             break; // important!
         case 2: {
             sub();
             break;
         case 3: {
             mul();
             break;
         case 4: {
             printf("Exiting the program.\n");
             exit(0); // exit the program
```





marathi\_coding\_shala Follow Message

360 following

48 posts

jayesh kande


Faculty @ CoDing SeeKho Coding | College Exams | Placement Prep

YouTuber –Marathi Coding shala -Jk Coding... more

**5,221** followers



Kbt engineering college nashik

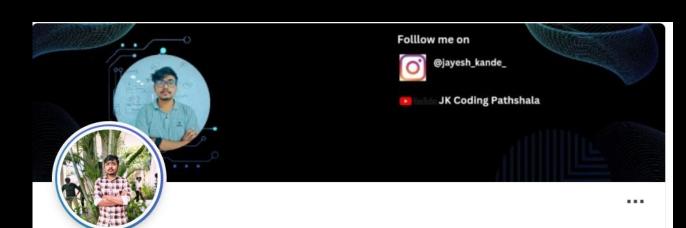

#### Jayesh Kande

Faculty at Coding Seekho (Offline + Online)|IT Engineering |

Aspiring Web Developer | Java Enthusiast | Data Structures & Algorithms | Proficient in C, C++, Java, and MERN Stack |

AI + Web Dev

Nashik, Maharashtra, India · Contact Info

725 followers · 500+ connections



## **JK Coding Pathshala**

@jayeshkande9215 · 1.16K subscribers · 149 videos

Welcome to JK Coding Pathshala! ...more

youtube.com/channel/UC474QOAov9dTP9Y1nZwupqw and 3 more links



Join

View channel stats

