


QfO SwissTrees: HMM refinement, candidate expansion and reconciliation

Corrected-release inputs (984,137 genes) | 18 reference families | development-exposed analysis

P = profile refinement; C = candidate expansion; R = reconciliation. Cells show P C R (0: off, 1: on).

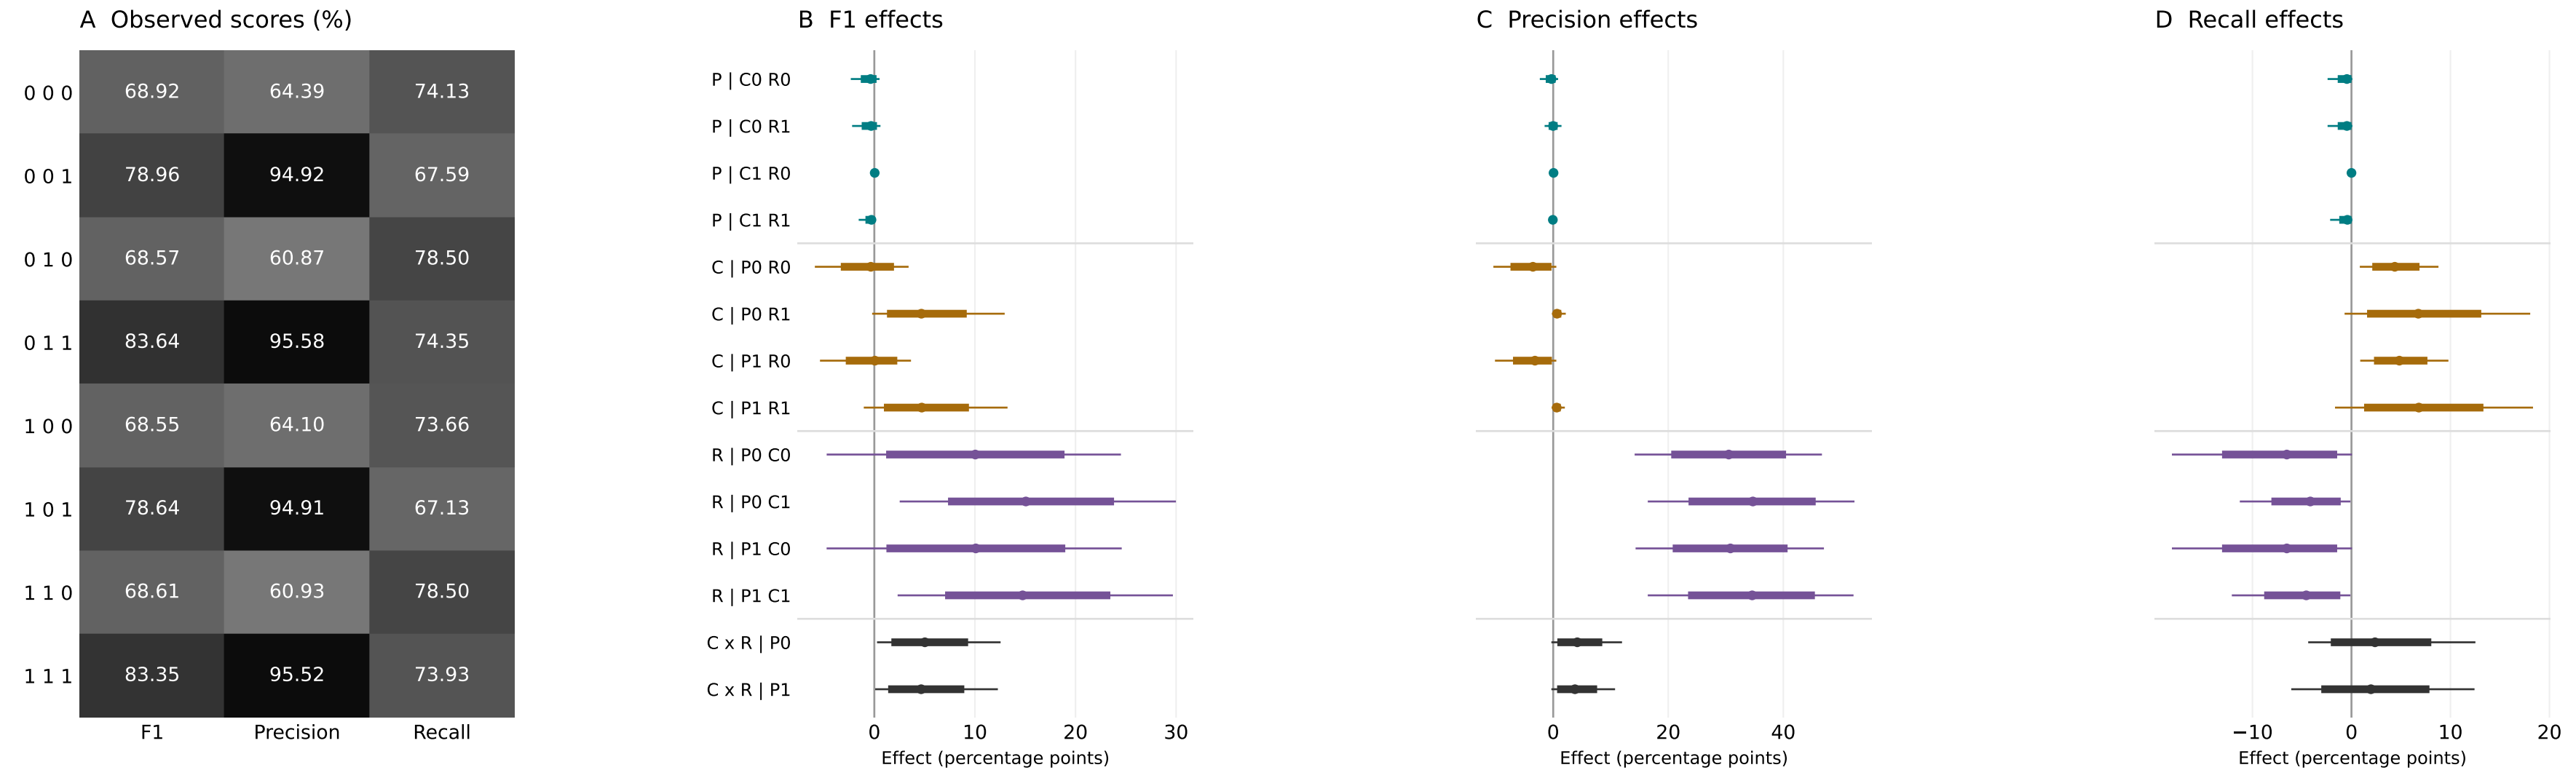

Rows: P (teal), C (ochre), R (purple): on minus off, holding other factors fixed. Final rows: C x R interactions (gray).

Thick: nominal 95% CI. Thin: Bonferroni CI across 42 endpoints. 100,000 paired family draws; seed 20260922.

F1 is the harmonic mean of macro precision and recall, recomputed per draw. 4/14 adjusted F1 intervals exclude zero.

Profile-off retains initial HMM search. R changes group-derived pairs to native inferred pairs, not only group splitting.

No independent validation, selection adjustment, or intervals for other QfO endpoints or the secondary mean.