

James Letts


CSC 621 Database Management

Professor Babak Forouraghi

09/22/2026

Assignment 2

- ER diagram for csvs

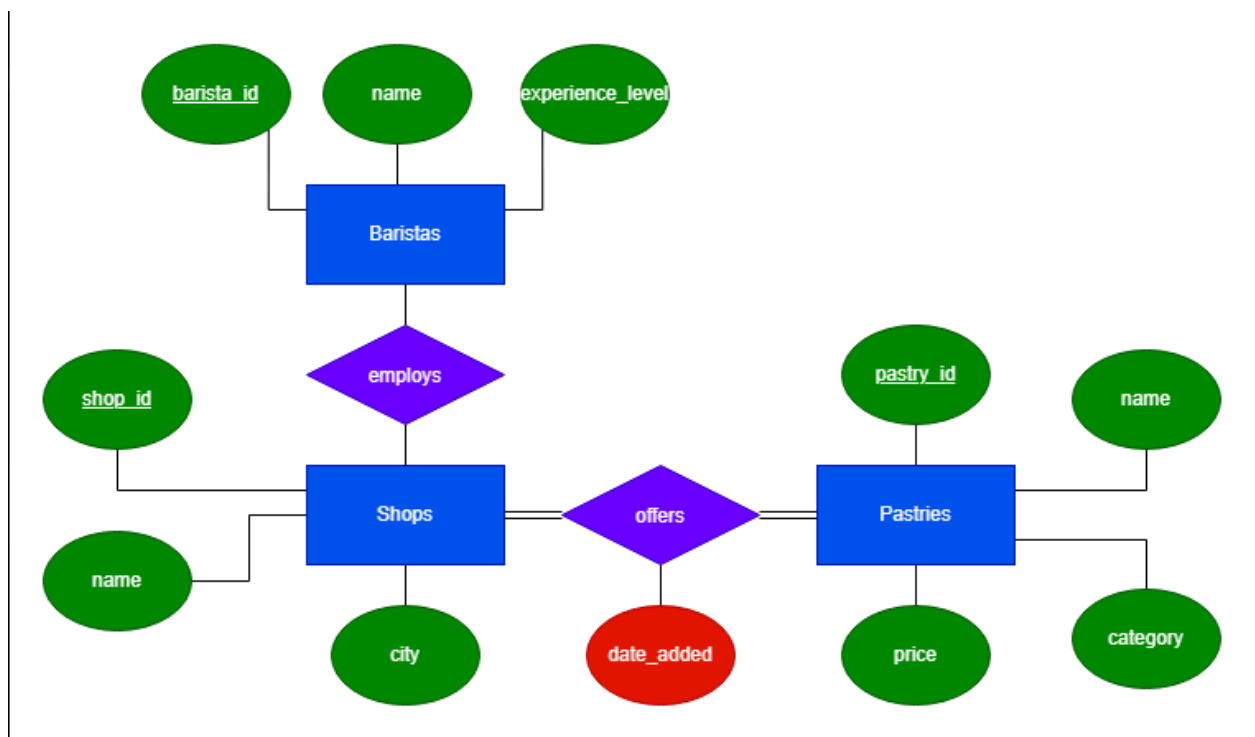

- Code for SQL queries with screenshot of results

-- 1.

```
select p.category, ROUND(avg(p.price), 2) as average_price from pastries p
group by p.category;
```

	category	average_price
▶	Pastry	4.67
	Muffin	3.62
	Bakery	4.25
	Scone	3.85
	Breakfast	8
	Cake	3.88

-- 2.

```
select b.experience_level, count(b.name) as experience_count from baristas b
group by b.experience_level;
```

	experience_level	experience_count
▶	Junior	2
	Senior	2
	Mid-Level	2

-- 3.

```
select s.city, count(s.name) as shop_density from shops s
group by s.city;
```

	city	shop_density
▶	Seattle	1
	Portland	1
	Austin	1
	Chicago	1
	Denver	1
	Boston	1

-- 4.

```
select p.category, max(p.price) as max_price from pastries p
group by p.category;
```

	category	max_price
►	Pastry	5.5
	Muffin	3.75
	Bakery	4.25
	Scone	3.85
	Breakfast	8.5
	Cake	4

-- 5.

```
select o.shopID, count(o.pastryID) as pastry_options from offers o
group by o.shopID;
```

	shopID	pastry_options
►	1	2
	2	2
	3	2
	4	2
	5	2
	6	2

-- 6.

```
select p.category, p.name, p.price from pastries p
where p.price in (
select max(p.price)from pastries p
group by p.category
)
group by p.name, p.category, p.price;
```

	category	name	price
►	Pastry	Almond Croissant	5.5
	Muffin	Blueberry Muffin	3.75
	Bakery	Cinnamon Roll	4.25
	Pastry	Apple Turnover	4
	Scone	Chocolate Scone	3.85
	Scone	Blueberry Scone	3.85
	Breakfast	Breakfast Burrito	8.5
	Cake	Lemon Loaf	4
	Cake	Pound Cake	3.75

-- 7.

```
select distinct o.shopID
from offers o
left join pastries p on o.pastryID = p.pastryID
where p.price > (
select avg(p.price) from pastries p
)
group by o.shopID;
```

	shopID
▶	1
	5

-- 8.

```
select o.shopID, o.pastryID
from offers o
where o.date_added = (
select min(o.date_added) from offers o
)
group by o.shopID, o.pastryID;
```

	shopID	pastryID
▶	1	1

-- 9.

```
select distinct o.shopID from offers o
group by o.shopID
having count(o.pastryID) = (
select count(o.pastryID) from offers o
```

```
group by o.shopID
```

```
limit 1
```

```
);
```

	shopID
▶	1
	2
	3
	4
	5
	6

```
-- 10.
```

```
select b.name from baristas b
```

```
left join employs e on b.baristaID = e.baristaID
```

```
where b.baristaID in (
```

```
select e.baristaID from employs e
```

```
where e.shopID = 1
```

```
)
```

```
group by b.name;
```

	name
▶	Emma Watson
	Liam Chen