

Cucumber Report

Jan 8, 2024, 12:04:13 PM

Start : Jan 08, 12:04:08.416 PM

End : Jan 08, 12:04:13.183 PM

Duration : 4.767 s

Features

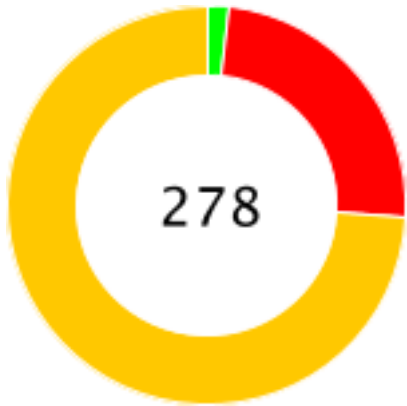
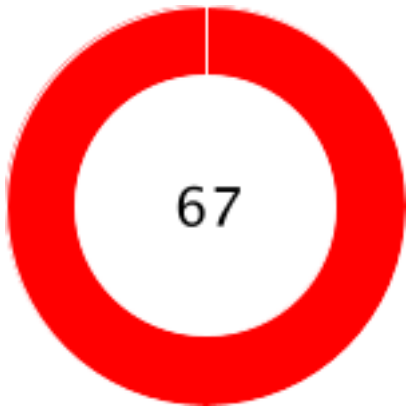
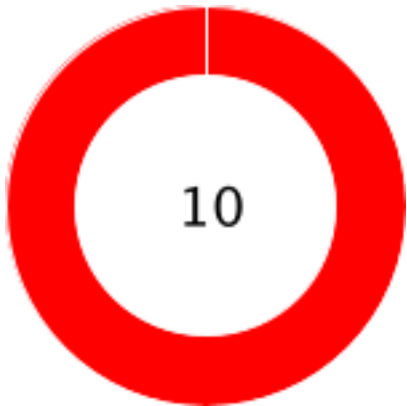
Scenarios

Steps

PASSED - 0
FAILED - 10
SKIPPED - 0

PASSED - 0
FAILED - 67
SKIPPED - 0

PASSED - 5
FAILED - 67
SKIPPED - 206



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Home Page</u>	2.890 s	1	0	1	0	11	0	1	10
<u>Registration page</u>	0.146 s	1	0	1	0	4	0	1	3
<u>Login Feature</u>	0.136 s	1	0	1	0	3	0	1	2
<u>feature to test navigation for Array</u>	0.308 s	15	0	15	0	45	0	15	30
<u>Data Structure Introduction Page</u>	0.080 s	4	0	4	0	16	0	4	12
<u>Linked List</u>	0.185 s	3	0	3	0	18	2	3	13
<u>Stack Page</u>	0.121 s	8	0	8	0	34	0	8	26
<u>Testing Queue Module</u>	0.152 s	4	0	4	0	16	3	4	9
<u>Testing tree module</u>	0.323 s	28	0	28	0	123	0	28	95
<u>To test Graph Module</u>	0.127 s	2	0	2	0	8	0	2	6

#	Feature Name	Scenario Name
1	<u>Home Page</u>	<u>The user should redirected to Register page</u>
2	<u>Registration page</u>	<u>User should be able to register</u>
3	<u>Login Feature</u>	<u>User should able to Signin</u>
4	<u>feature to test navigation for Array</u>	<u>validate login</u>
5		<u>Validate getting started is working</u>
6		<u>Validate arrays in python page is working</u>
7		<u>Validate "tryEditor with a Run button to test" is working</u>
8		<u>Validate "Arrays using List" is working</u>
9		<u>Validate "Arrays using List try Editor" is working</u>
10		<u>Validate "Basic Operations in List" page is working</u>
11		<u>Validate "Basic Operations in List Try Here" is working</u>
12		<u>Validate "Applications of Array" page is working</u>
13		<u>Validate "tryEditor in Applications of Arrays page" is working</u>

#	Feature Name	Scenario Name
14	<u>feature to test navigation for Array</u>	<u>Validating "Practice Questions" page in Array.</u>
15		<u>Validating prcatice question 1</u>
16		<u>Validating prcatice question 2</u>
17		<u>Validating prcatice question 3</u>
18		<u>Validating prcatice question 4</u>
19	<u>Data Structure Introduction Page</u>	<u>User entered valid login details on Login Page and logged in</u>
20		<u>Moving to Validate "Time Complexity" page</u>
21		<u>Validating "Time Complexity" textarea</u>
22		<u>Validating "Practice Question" page of datastructure</u>
23	<u>Linked List</u>	<u>User should be able to type in python code in text editor in Linked List module</u>
24		<u>User should be able to type in python code in text editor of Types of Linked list and Impliment Link list in python</u>

#	Feature Name	Scenario Name
25	<u>Linked List</u>	<u>User should be able to type in python code in text editor of Traversal, Insertion and Deletion</u>
26	<u>Stack Page</u>	<u>User entered valid login details on Login Page and logged in</u>
27		<u>Moving to Validate "Operations in Stack" page</u>
28		<u>Validating "Operations in Stack" textarea</u>
29		<u>Moving to Validate "Implimentation" page</u>
30		<u>Validating "Implimentation" textarea</u>
31		<u>Moving to Validate "Applications" page</u>
32		<u>Validating "Applications" textarea</u>
33		<u>Validating "Practice Questions" page</u>
34	<u>Testing Queue Module</u>	<u>To Validate Implimentation of Queue</u>
35		<u>To validate Implimentation using collections</u>
36		<u>To validate implimentation using array</u>

#	Feature Name	Scenario Name
37	<u>Testing Queue Module</u>	<u>To validate Queue operations</u>
38	<u>Testing tree module</u>	<u>Validating "Dropdown" for tree page</u>
39		<u>Validating "Overview of Trees" page</u>
40		<u>Validating "TryEditor" textarea in overview page</u>
41		<u>Moving to Validate "Terminologies" page</u>
42		<u>Validating "Terminologies" textarea</u>
43		<u>Moving to Validate "Types of Trees" page</u>
44		<u>Validating "Types of Tree" textarea</u>
45		<u>Moving to Validate "Tree Traversals" page</u>
46		<u>Validating "Tree Traversals" textarea in tree traversals page</u>
47		<u>Moving to Validate "Traversals-Illustration" page</u>
48		<u>Validating "Traversals-Illustration" textarea in traversal illustration page</u>
49		<u>Moving to Validate "Binary Trees" page</u>

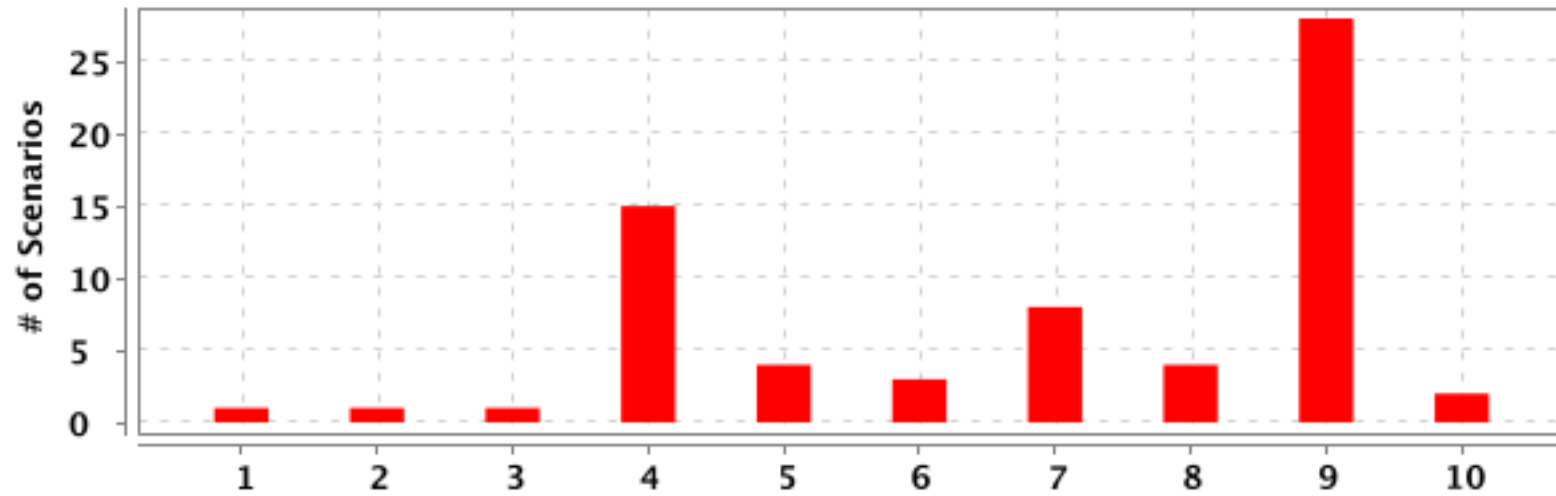
#	Feature Name	Scenario Name
50	<u>Testing tree module</u>	<u>Validating "Binary Trees" textarea in binary tree page</u>
51		<u>Moving to Validate "Types of Binary Trees" page</u>
52		<u>Validating "Types of Binary Trees" textarea in types of binary tree page</u>
53		<u>Moving to Validate "Implimentation in Python" page</u>
54		<u>Validating "Implimentation in Python" textarea in implimentation in python page</u>
55		<u>Moving to Validate "Binary Tree Traversals" page</u>
56		<u>Validating "Binary Tree Traversals" textarea in binary tree traversals page</u>
57		<u>Moving to Validate "Implementation of Binary Trees" page</u>
58		<u>Validating "Implementation of Binary Trees" textarea</u>
59		<u>Moving to Validate "Application of Binary Trees" page</u>
60		<u>Validating "Application of Binary Trees" textarea</u>
61		<u>Moving to Validate "Binary Search Trees" page</u>

#	Feature Name	Scenario Name
62	<u>Testing tree module</u>	<u>Validating "Binary Search Trees" textarea</u>
63		<u>Moving to Validate "Implementation of BTS" page</u>
64		<u>Validating "Implementation of BTS" textarea</u>
65		<u>Validating "Practice Question" page</u>
66	<u>To test Graph Module</u>	<u>To validate Graph module</u>
67		<u>To validate Graph Representation</u>

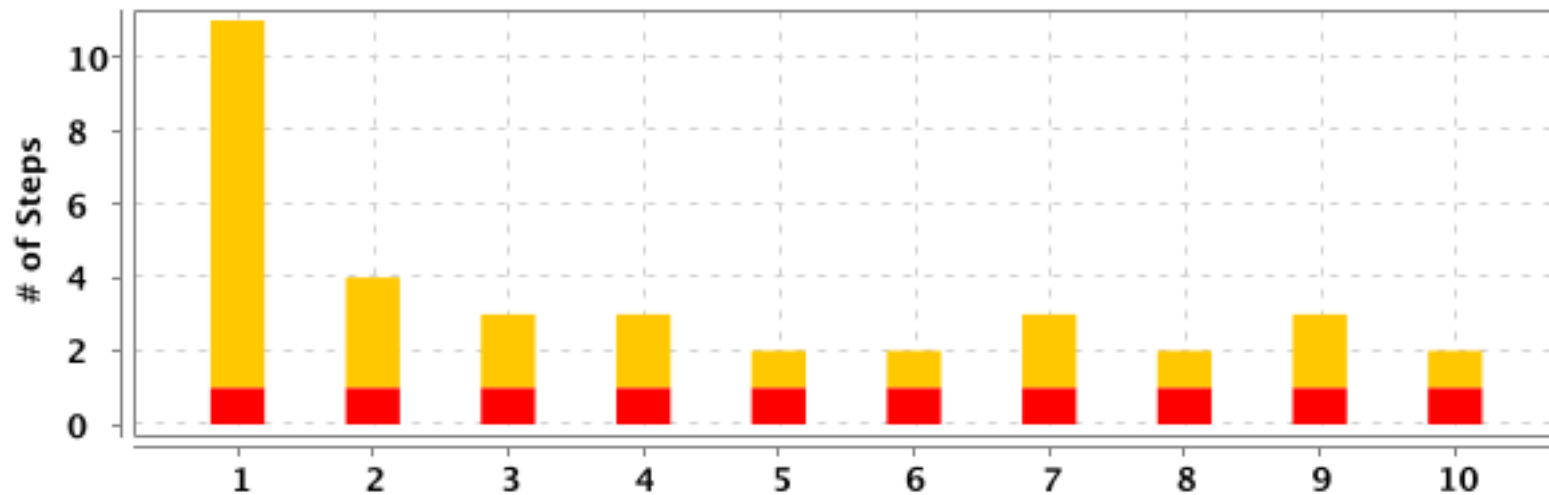
TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@DS_1	1	0	1	0	1	0	1	0
@DS_2	1	0	1	0	1	0	1	0
@DS_3	1	0	1	0	1	0	1	0
@DS_4	1	0	1	0	1	0	1	0
@LL_1	1	0	1	0	1	0	1	0
@LL_2	1	0	1	0	1	0	1	0
@LL_3	1	0	1	0	1	0	1	0
@SS_1	1	0	1	0	1	0	1	0
@SS_2	1	0	1	0	1	0	1	0
@SS_3	1	0	1	0	1	0	1	0
@SS_4	1	0	1	0	1	0	1	0
@SS_5	1	0	1	0	1	0	1	0
@SS_6	2	0	2	0	1	0	1	0
@SS_7	1	0	1	0	1	0	1	0
@Q_1	1	0	1	0	1	0	1	0
@Q_2	1	0	1	0	1	0	1	0
@Q_3	1	0	1	0	1	0	1	0

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Q_4	1	0	1	0	1	0	1	0
@TS_1	1	0	1	0	1	0	1	0
@TS_2	1	0	1	0	1	0	1	0
@TS_3	1	0	1	0	1	0	1	0
@TS_4	1	0	1	0	1	0	1	0
@TS_5	1	0	1	0	1	0	1	0
@TS_6	1	0	1	0	1	0	1	0
@TS_7	1	0	1	0	1	0	1	0
@TS_8	1	0	1	0	1	0	1	0
@TS_9	1	0	1	0	1	0	1	0
@TS_10	1	0	1	0	1	0	1	0
@TS_11	1	0	1	0	1	0	1	0
@TS_12	1	0	1	0	1	0	1	0
@TS_13	1	0	1	0	1	0	1	0
@TS_14	1	0	1	0	1	0	1	0
@TS_15	1	0	1	0	1	0	1	0
@TS_16	1	0	1	0	1	0	1	0

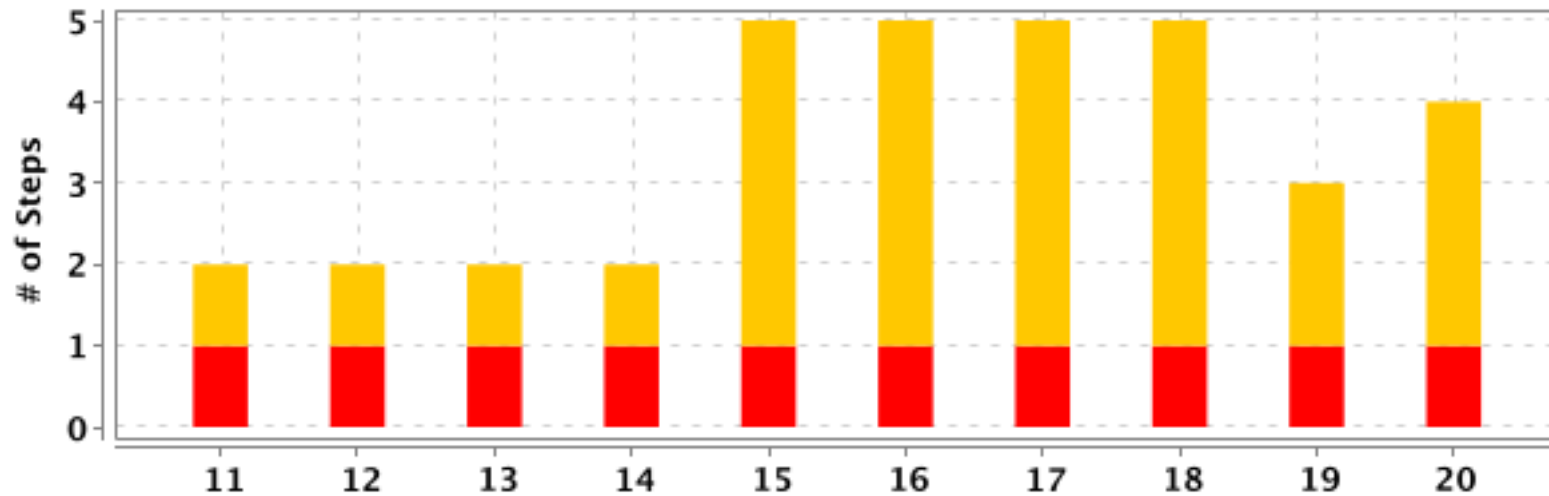
TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@TS_17	1	0	1	0	1	0	1	0
@TS_18	1	0	1	0	1	0	1	0
@TS_19	1	0	1	0	1	0	1	0
@TS_20	1	0	1	0	1	0	1	0
@TS_21	1	0	1	0	1	0	1	0
@TS_22	1	0	1	0	1	0	1	0
@TS_23	1	0	1	0	1	0	1	0
@TS_24	1	0	1	0	1	0	1	0
@TS_25	1	0	1	0	1	0	1	0
@TS_26	1	0	1	0	1	0	1	0
@TS_27	1	0	1	0	1	0	1	0
@TS_28	1	0	1	0	1	0	1	0
@G_1	1	0	1	0	1	0	1	0
@G_2	1	0	1	0	1	0	1	0



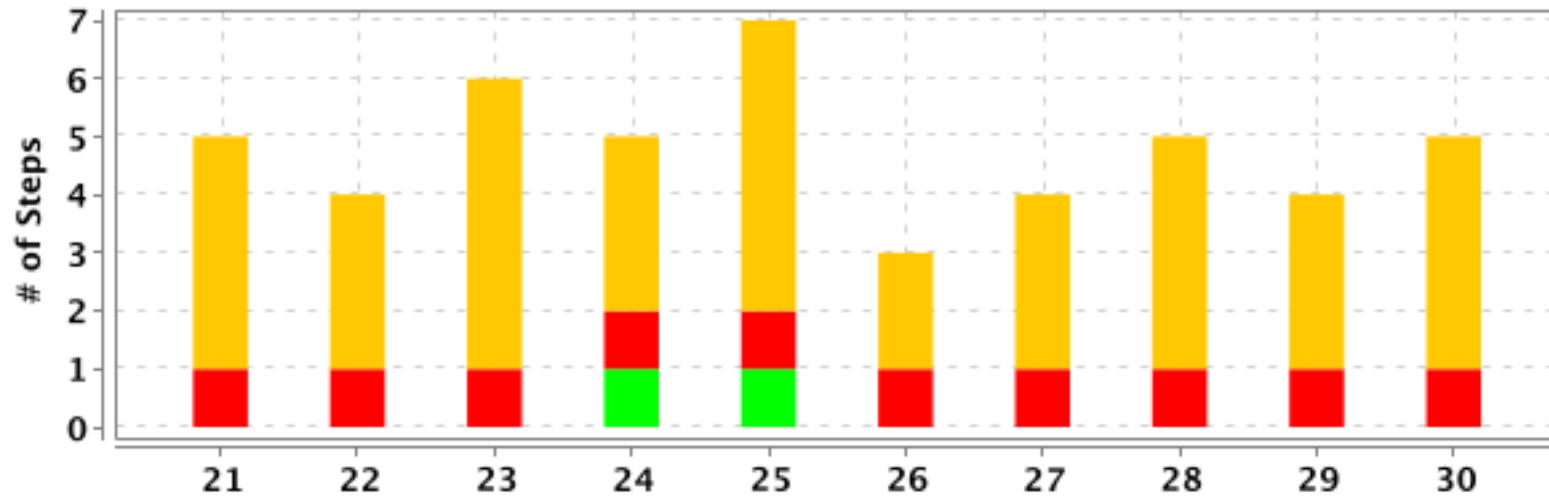
#	Feature Name	T	P	F	S	Duration
1	<u>Home Page</u>	1	0	1	0	2.890 s
2	<u>Registration page</u>	1	0	1	0	0.146 s
3	<u>Login Feature</u>	1	0	1	0	0.136 s
4	<u>feature to test navigation for Array</u>	15	0	15	0	0.308 s
5	<u>Data Structure Introduction Page</u>	4	0	4	0	0.080 s
6	<u>Linked List</u>	3	0	3	0	0.185 s
7	<u>Stack Page</u>	8	0	8	0	0.121 s
8	<u>Testing Queue Module</u>	4	0	4	0	0.152 s
9	<u>Testing tree module</u>	28	0	28	0	0.323 s
10	<u>To test Graph Module</u>	2	0	2	0	0.127 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Home Page</u>	<u>The user should redirected to Register page</u>	11	0	1	10	2.887 s
2	<u>Registration page</u>	<u>User should be able to register</u>	4	0	1	3	0.145 s
3	<u>Login Feature</u>	<u>User should able to Signin</u>	3	0	1	2	0.136 s
4	<u>feature to test navigation for Array</u>	<u>validate login</u>	3	0	1	2	0.012 s
5		<u>Validate getting started is working</u>	2	0	1	1	0.004 s
6		<u>Validate arrays in python page is working</u>	2	0	1	1	0.007 s
7		<u>Validate "tryEditor with a Run button to test" is working</u>	3	0	1	2	0.006 s
8		<u>Validate "Arrays using List" is working</u>	2	0	1	1	0.005 s
9		<u>Validate "Arrays using List try Editor" is working</u>	3	0	1	2	0.007 s
10		<u>Validate "Basic Operations in List" page is working</u>	2	0	1	1	0.005 s

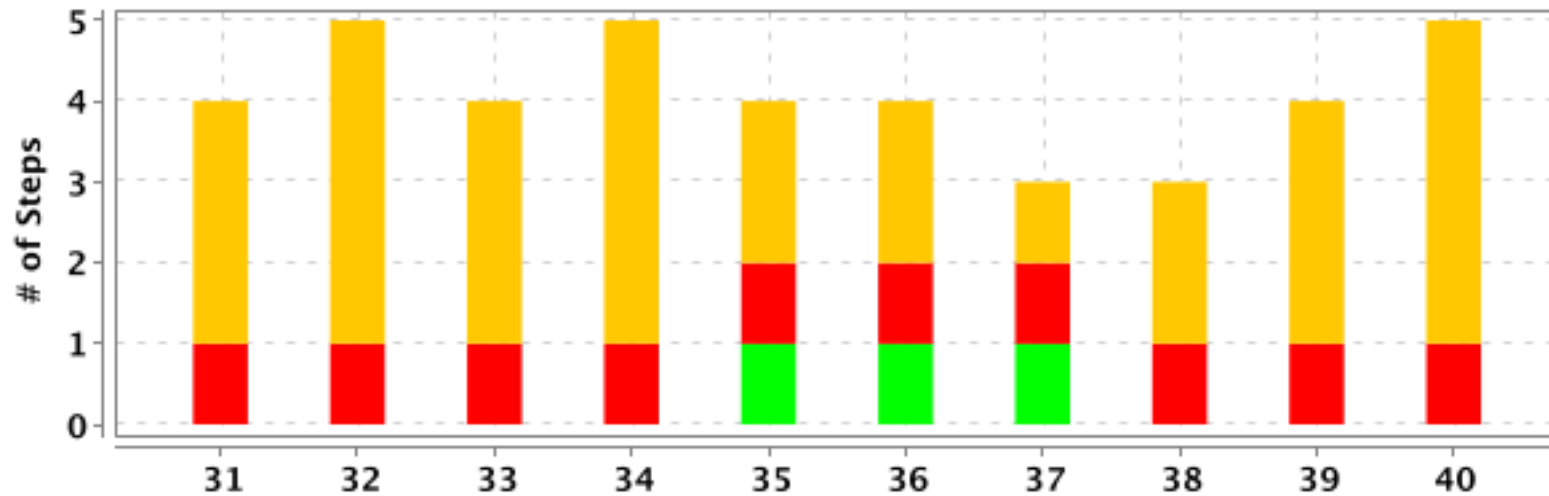


#	Feature Name	Scenario Name	T	P	F	S	Duration
11	<u>feature to test navigation for Array</u>	<u>Validate "Basic Operations in List Try Here" is working</u>	2	0	1	1	0.007 s
12		<u>Validate "Applications of Array" page is working</u>	2	0	1	1	0.004 s
13		<u>Validate "tryEditor in Applications of Arrays page" is working</u>	2	0	1	1	0.004 s
14		<u>Validating "Practice Questions" page in Array.</u>	2	0	1	1	0.005 s
15		<u>Validating prcatice question 1</u>	5	0	1	4	0.008 s
16		<u>Validating prcatice question 2</u>	5	0	1	4	0.010 s
17		<u>Validating prcatice question 3</u>	5	0	1	4	0.009 s
18		<u>Validating prcatice question 4</u>	5	0	1	4	0.012 s
19	<u>Data Structure Introduction Page</u>	<u>User entered valid login details on Login Page and logged in</u>	3	0	1	2	0.007 s
20		<u>Moving to Validate "Time Complexity" page</u>	4	0	1	3	0.007 s

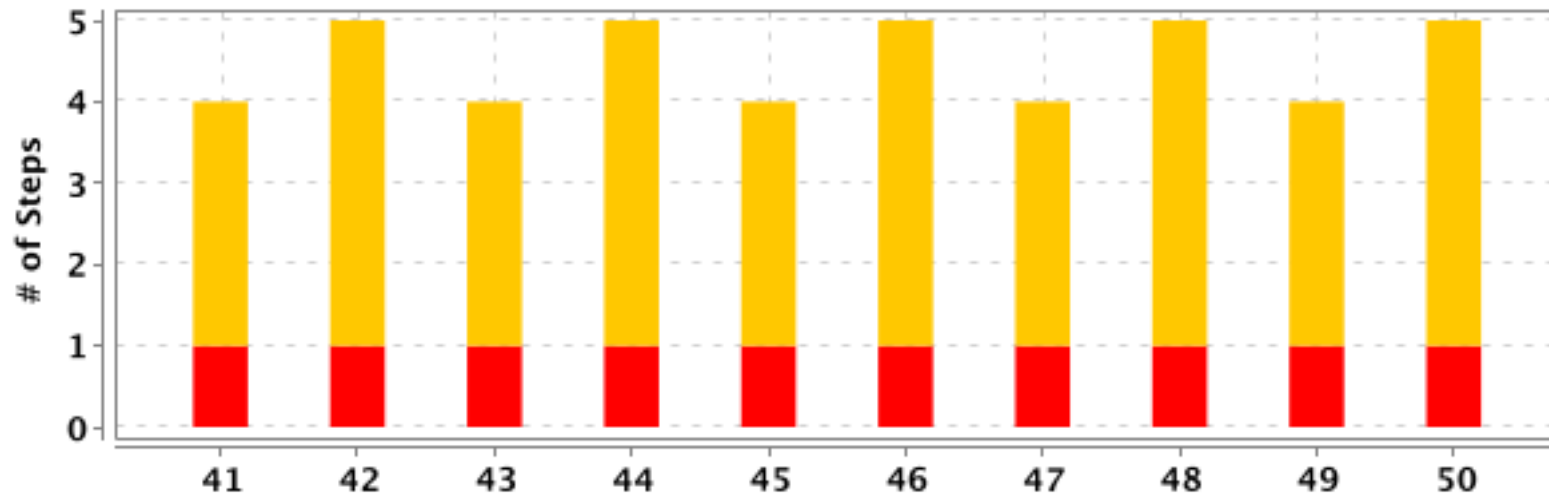


#	Feature Name	Scenario Name	T	P	F	S	Duration
21	<u>Data Structure Introduction Page</u>	<u>Validating "Time Complexity" textarea</u>	5	0	1	4	0.007 s
22		<u>Validating "Practice Question" page of datastructure</u>	4	0	1	3	0.007 s
23	<u>Linked List</u>	<u>User should be able to type in python code in text editor in Linked List module</u>	6	0	1	5	0.149 s
24		<u>User should be able to type in python code in text editor of Types of Linked list and Impliment Link list in python</u>	5	1	1	3	0.007 s
25		<u>User should be able to type in python code in text editor of Traversal,Insertion and Deletion</u>	7	1	1	5	0.006 s
26	<u>Stack Page</u>	<u>User entered valid login details on Login Page and logged in</u>	3	0	1	2	0.006 s
27		<u>Moving to Validate "Operations in Stack" page</u>	4	0	1	3	0.004 s
28		<u>Validating "Operations in Stack" textarea</u>	5	0	1	4	0.008 s
29		<u>Moving to Validate "Implimentation" page</u>	4	0	1	3	0.005 s

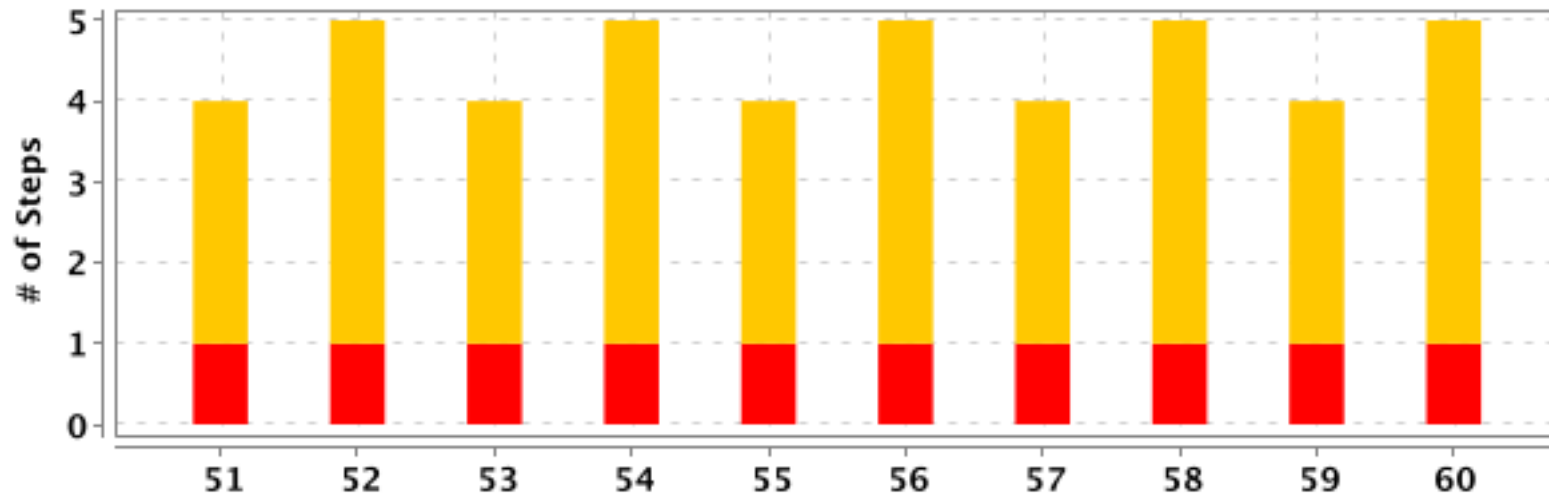
#	Feature Name	Scenario Name	T	P	F	S	Duration
30		<u>Validating "Implimentation" textarea</u>	5	0	1	4	0.005 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
31	<u>Stack Page</u>	<u>Moving to Validate "Applications" page</u>	4	0	1	3	0.005 s
32		<u>Validating "Applications" textarea</u>	5	0	1	4	0.006 s
33		<u>Validating "Practice Questions" page</u>	4	0	1	3	0.005 s
34	<u>Testing Queue Module</u>	<u>To Validate Implimentation of Queue</u>	5	0	1	4	0.123 s
35		<u>To validate Implimentation using collections</u>	4	1	1	2	0.004 s
36		<u>To validate implimentation using array</u>	4	1	1	2	0.002 s
37		<u>To validate Queue operations</u>	3	1	1	1	0.002 s
38	<u>Testing tree module</u>	<u>Validating "Dropdown" for tree page</u>	3	0	1	2	0.005 s
39		<u>Validating "Overview of Trees" page</u>	4	0	1	3	0.005 s
40		<u>Validating "TryEditor" textarea in overview page</u>	5	0	1	4	0.005 s

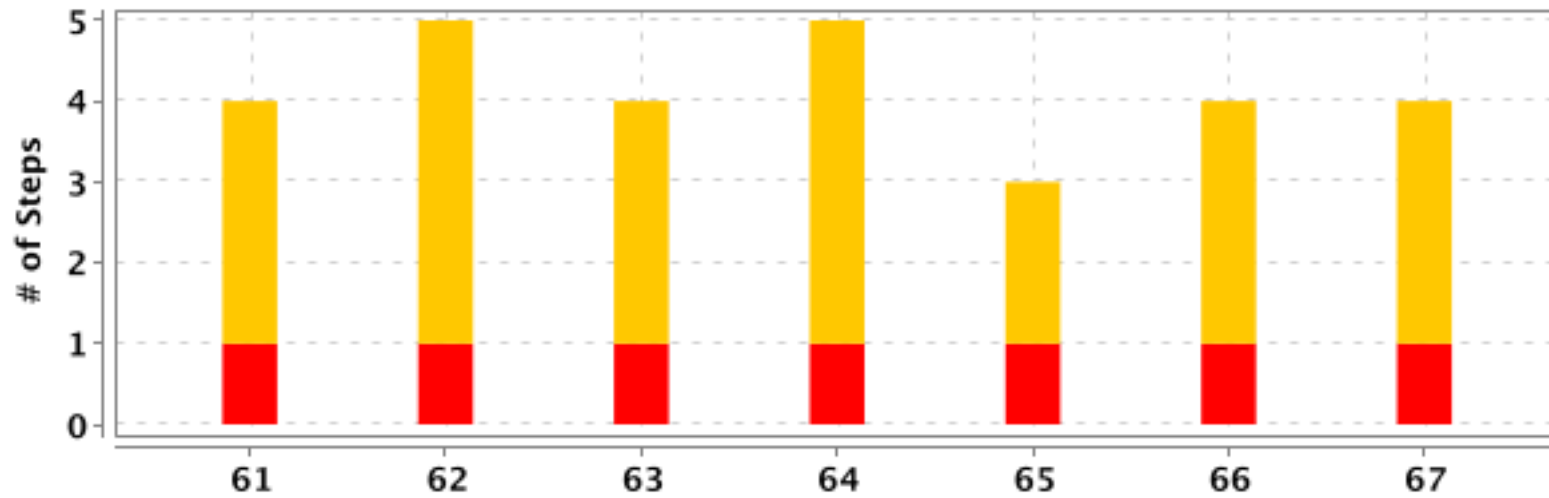


#	Feature Name	Scenario Name	T	P	F	S	Duration
41	<u>Testing tree module</u>	<u>Moving to Validate "Terminologies" page</u>	4	0	1	3	0.005 s
42		<u>Validating "Terminologies" textarea</u>	5	0	1	4	0.006 s
43		<u>Moving to Validate "Types of Trees" page</u>	4	0	1	3	0.007 s
44		<u>Validating "Types of Tree" textarea</u>	5	0	1	4	0.003 s
45		<u>Moving to Validate "Tree Traversals" page</u>	4	0	1	3	0.003 s
46		<u>Validating "Tree Traversals" textarea in tree traversal page</u>	5	0	1	4	0.003 s
47		<u>Moving to Validate "Traversals-Illustration" page</u>	4	0	1	3	0.004 s
48		<u>Validating "Traversals-Illustration" textarea in traversal illustration page</u>	5	0	1	4	0.005 s
49		<u>Moving to Validate "Binary Trees" page</u>	4	0	1	3	0.002 s
50		<u>Validating "Binary Trees" textarea in binary tree page</u>	5	0	1	4	0.004 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
51	<u>Testing tree module</u>	<u>Moving to Validate "Types of Binary Trees" page</u>	4	0	1	3	0.006 s
52		<u>Validating "Types of Binary Trees" textarea in types of binary tree page</u>	5	0	1	4	0.008 s
53		<u>Moving to Validate "Implimentation in Python" page</u>	4	0	1	3	0.004 s
54		<u>Validating "Implimentation in Python" textarea in implimentation in python page</u>	5	0	1	4	0.005 s
55		<u>Moving to Validate "Binary Tree Traversals" page</u>	4	0	1	3	0.003 s
56		<u>Validating "Binary Tree Traversals" textarea in binary tree traversals page</u>	5	0	1	4	0.005 s
57		<u>Moving to Validate "Implementation of Binary Trees" page</u>	4	0	1	3	0.003 s
58		<u>Validating "Implementation of Binary Trees" textarea</u>	5	0	1	4	0.003 s
59		<u>Moving to Validate "Application of Binary Trees" page</u>	4	0	1	3	0.003 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
60		<u>Validating "Application of Binary Trees" textarea</u>	5	0	1	4	0.005 s

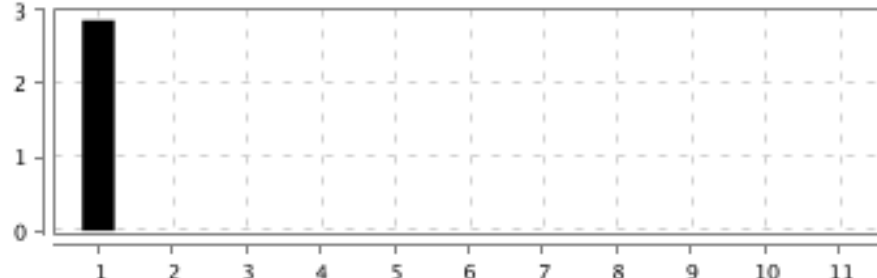



#	Feature Name	Scenario Name	T	P	F	S	Duration
61	<u>Testing tree module</u>	<u>Moving to Validate "Binary Search Trees" page</u>	4	0	1	3	0.003 s
62		<u>Validating "Binary Search Trees" textarea</u>	5	0	1	4	0.003 s
63		<u>Moving to Validate "Implementation of BTS" page</u>	4	0	1	3	0.003 s
64		<u>Validating "Implementation of BTS" textarea</u>	5	0	1	4	0.003 s
65		<u>Validating "Practice Question" page</u>	3	0	1	2	0.002 s
66	<u>To test Graph Module</u>	<u>To validate Graph module</u>	4	0	1	3	0.115 s
67		<u>To validate Graph Representation</u>	4	0	1	3	0.004 s

Home Page

FAILED	DURATION - 2.890 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 11 Pass - 0 Fail - 1 Skip - 10	
/ 12:04:08.416 PM // 12:04:11.306 PM /					

The user should redirected to Register page

<div>FAILED</div> <div>DURATION - 2.887 s</div>		<div></div>	<div>Steps</div> <div>Total - 11</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 10</div>	<div></div>
<div>/ 12:04:08.419 PM // 12:04:11.306 PM /</div>				
<div>Home Page</div>				

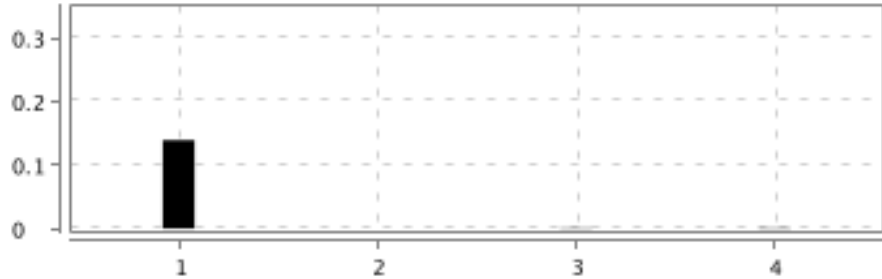

#	Step / Hook Details	Status	Duration
1	<p>Given The user opens Home Page</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'Vijays-Mac-mini.attlocal.net', ip: '192.168.1.69' Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '21.0.1' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}]}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:237) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:164) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:152) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:133)</pre>	FAILED	2.862 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:128) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:113) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:103) at newalgoutilities.BaseClass.launchApp(BaseClass.java:56) at stepDefinitions.HomePageSteps.the_user_opens_home_page(HomePageSteps.java:20) at ?.The user opens Home Page(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/01..homepage.feature:4) * Not displayable characters are replaced by '?'.		
2	When User clicks Data Structure dropdown	SKIPPED	0.001 s
3	Then It should see six different data structure entried in dropdown	SKIPPED	0.001 s
4	When The user clicks any of the Get Started buttons below the data structures	SKIPPED	0.001 s
5	Then It should alert the user with a message "You are not logged in"	SKIPPED	0.001 s
6	When The user selects any data structures item from the drop down without Sign in	SKIPPED	0.001 s
7	Then It should alert the user with a message "You are not logged in"here	SKIPPED	0.001 s
8	When The user clicks Sign in	SKIPPED	0.001 s
9	Then The user should be redirected to Sign in page	SKIPPED	0.000 s
10	When The user clicks Register	SKIPPED	0.000 s
11	Then The user should be redirected to Register form	SKIPPED	0.000 s

Registration page



FAILED	DURATION - 0.146 s	Scenarios		Steps	
/ 12:04:11.391 PM // 12:04:11.537 PM /		Total - 1		Total - 4	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 3	

User should be able to register

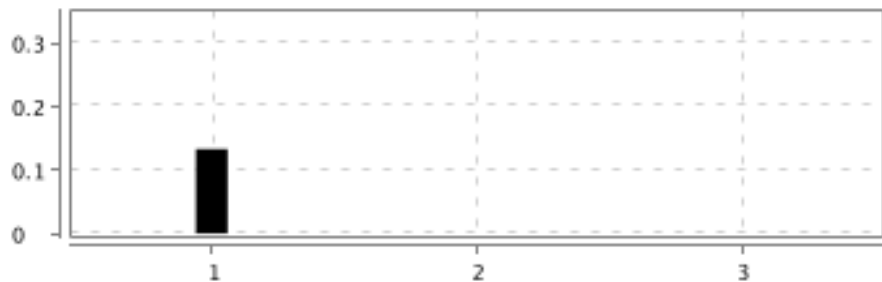

<div>FAILED</div> <div>DURATION - 0.145 s</div>		<div></div>	<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	<div></div>
/ 12:04:11.392 PM // 12:04:11.537 PM /				
Registration page				

#	Step / Hook Details	Status	Duration
1	<p>Given User is on Registration page</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'Vijays-Mac-mini.attlocal.net', ip: '192.168.1.69' Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '21.0.1' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:237) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:164) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:152) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:133) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:128) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:113) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:103) at newalgoutilities.BaseClass.launchApp(BaseClass.java:56) at stepDefinitions.RegistrationSteps.user_is_on_registration_page(RegistrationSteps.java:19) at ?.User is on Registration page(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/02..registration.feature:4) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.139 s
2	When User enters "Username", "Password" and "ConfPassword"	SKIPPED	0.000 s
3	Then User click on Register button and then signin button	SKIPPED	0.001 s
4	Then User should be able to Register successfully and navigate to login	SKIPPED	0.001 s

Login Feature

FAILED	DURATION - 0.136 s	Scenarios		Steps	
/ 12:04:11.582 PM // 12:04:11.718 PM /		Total - 1 Pass - 0 Fail - 1 Skip - 0		Total - 3 Pass - 0 Fail - 1 Skip - 2	



User should able to Signin

<div>FAILED</div> <div>DURATION - 0.136 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
<div>/ 12:04:11.582 PM // 12:04:11.718 PM /</div>				
<div>Login Feature</div>				

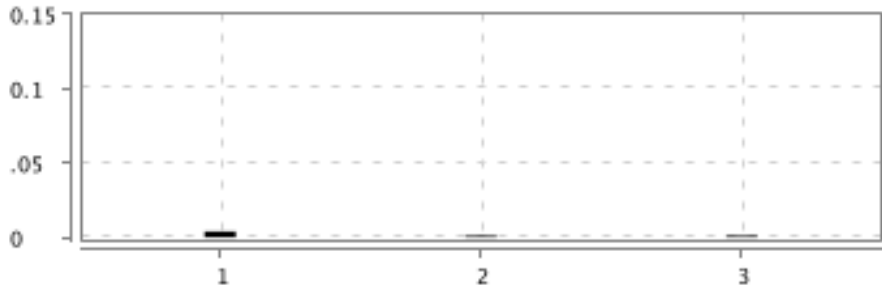

#	Step / Hook Details	Status	Duration
1	<p>Given The user is in the Sign in page</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'Vijays-Mac-mini.attlocal.net', ip: '192.168.1.69' Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '21.0.1' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}]}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:237) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:164) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:152) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:133) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:128)</pre>	FAILED	0.133 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:113) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:103) at newalgoutilities.BaseClass.launchApp(BaseClass.java:56) at stepDefinitions.LoginPageSteps.the_user_is_in_the_sign_in_page(LoginPageSteps.java:19) at ?.The user is in the Sign in page(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/03..login.feature:4) * Not displayable characters are replaced by '?'.		
2	Then User enters Valid "username" and "password"	SKIPPED	0.000 s
3	Then User will able to navigate to homapage	SKIPPED	0.000 s

feature to test navigation for Array

FAILED	DURATION - 0.308 s	Scenarios		Steps	
/ 12:04:11.754 PM // 12:04:12.062 PM /		Total - 15		Total - 45	
		Pass - 0		Pass - 0	
		Fail - 15		Fail - 15	
		Skip - 0		Skip - 30	

validate login

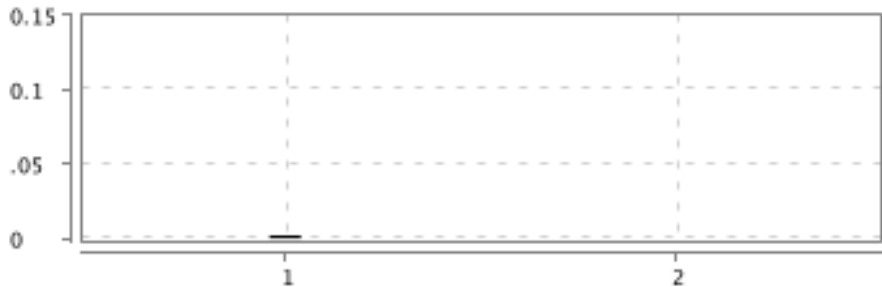

FAILED	DURATION - 0.012 s		Steps	
/ 12:04:11.754 PM // 12:04:11.766 PM /			Total - 3	
feature to test navigation for Array			Pass - 0	
			Fail - 1	
			Skip - 2	

#	Step / Hook Details	Status	Duration
1	Given The user is in homepage	FAILED	0.004 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		

#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When the user gives proper loginid, password	SKIPPED	0.001 s
3	Then the user is logged in	SKIPPED	0.001 s

Validate getting started is working

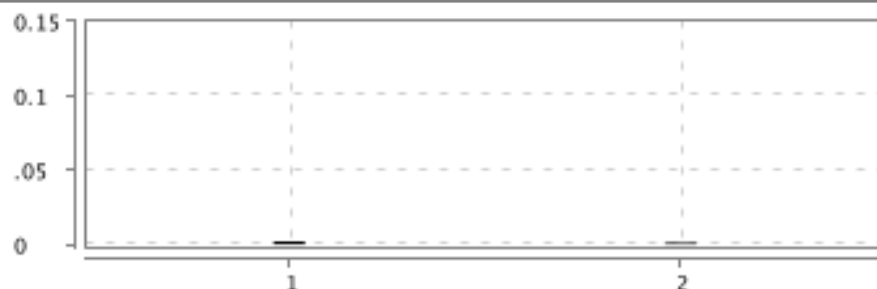

FAILED DURATION - 0.004 s / 12:04:11.779 PM // 12:04:11.783 PM / feature to test navigation for Array		Steps Total - 2 Pass - 0 Fail - 1 Skip - 1	
---	---	--	--

#	Step / Hook Details	Status	Duration
1	When user clicks on Get Started button io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	Then user be directed to Array Data Structure page	SKIPPED	0.000 s

Validate arrays in python page is working

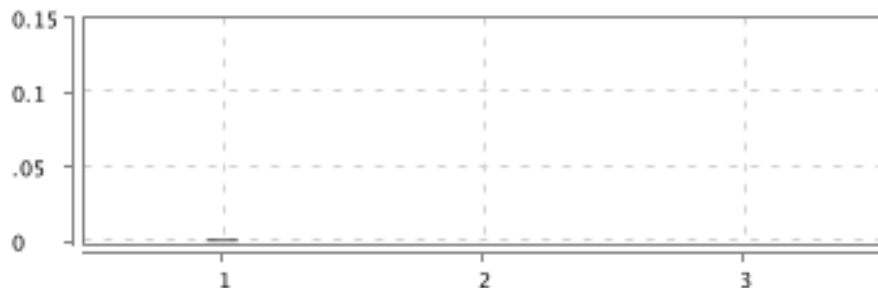

FAILED		DURATION - 0.007 s			Steps Total - 2 Pass - 0 Fail - 1 Skip - 1	
/ 12:04:11.795 PM // 12:04:11.802 PM /						
feature to test navigation for Array						

#	Step / Hook Details	Status	Duration
1	When The user clicks Arrays in Python button	FAILED	0.002 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) </p>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	Then The user should be redirected to Arrays in Python page	SKIPPED	0.001 s

Validate "tryEditor with a Run button to test" is working

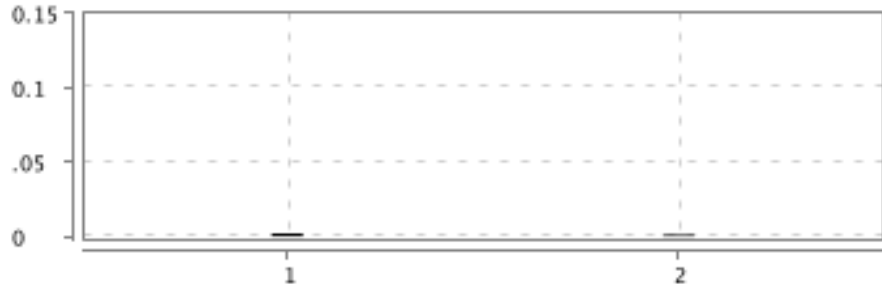

FAILED DURATION - 0.006 s / 12:04:11.816 PM // 12:04:11.822 PM / feature to test navigation for Array		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
---	--	--	---

#	Step / Hook Details	Status	Duration
1	When The user is in the Arrays in Python page after logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) </p>		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	And The user clicks "Try Here" button in Arrays in Python page	SKIPPED	0.000 s
3	Then The user should be redirected to a page having an tryEditor with a Run button on arrays to test	SKIPPED	0.000 s

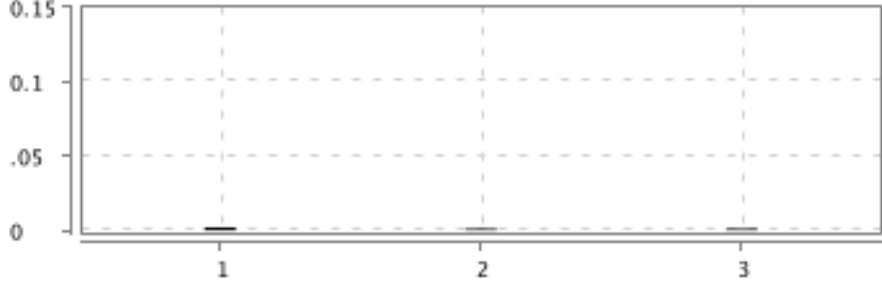

Validate "Arrays using List" is working

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 12:04:11.837 PM // 12:04:11.842 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When The user clicks "Arrays using List" button io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then The user should be redirected to "Arrays using List" page	SKIPPED	0.001 s

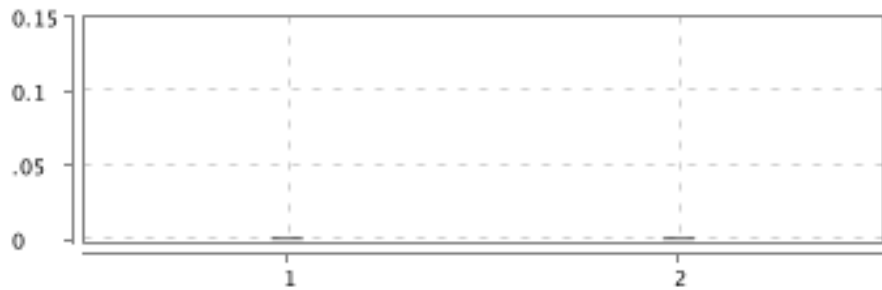

Validate "Arrays using List try Editor" is working

FAILED	DURATION - 0.007 s		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 12:04:11.853 PM // 12:04:11.860 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When The user is in the Arrays using List page after logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	And The user clicks "Try Here" button in Arrays using List page	SKIPPED	0.001 s
3	Then The user should be redirected to a arrays page having an tryEditor with a Run button to test	SKIPPED	0.001 s

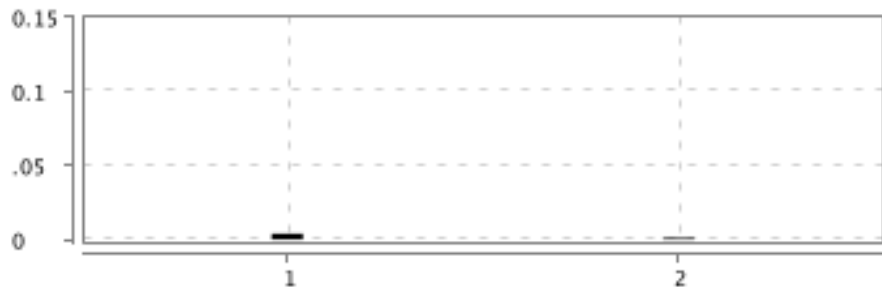

Validate "Basic Operations in List" page is working

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 12:04:11.873 PM // 12:04:11.878 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When The user clicks "Basic Operations in List" button io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then The user should be redirected to "Basic Operations in List" page	SKIPPED	0.001 s

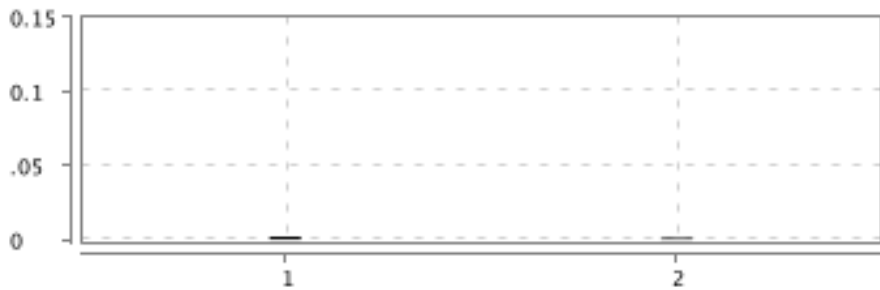

Validate "Basic Operations in List Try Here" is working

<div>FAILED</div> <div>DURATION - 0.007 s</div>			<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 12:04:11.896 PM // 12:04:11.903 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When The user clicks "Try Here" button in Arrays using List page io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then The user should be redirected to a Basic operations page having an tryEditor with a Run button to test	SKIPPED	0.001 s

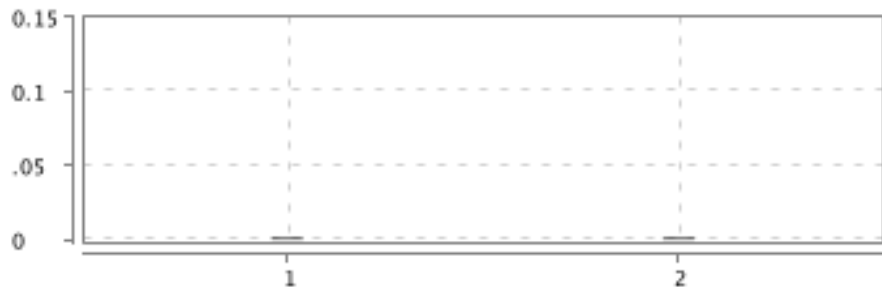

Validate "Applications of Array" page is working

<div>FAILED</div> <div>DURATION - 0.004 s</div>			<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 12:04:11.914 PM // 12:04:11.918 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When The user clicks "Applications of Array" button io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then The user should be redirected to "Applications of Array" page	SKIPPED	0.001 s

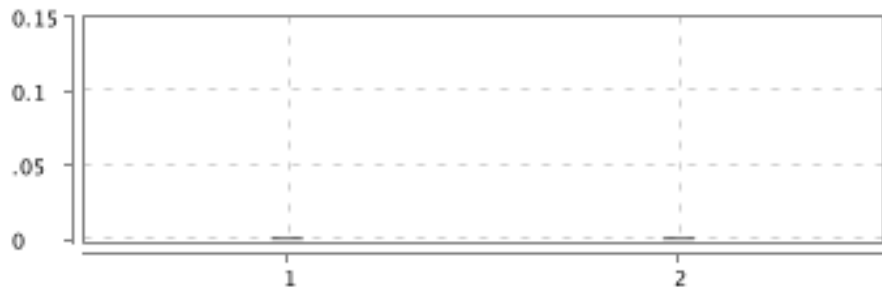

Validate "tryEditor in Applications of Arrays page" is working

<div>FAILED</div> <div>DURATION - 0.004 s</div>			<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 12:04:11.928 PM // 12:04:11.932 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When The user clicks "Try Here" button in Applications of Arrays page io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then The user should be redirected to a applications arrays page having an tryEditor with a Run button to test	SKIPPED	0.001 s

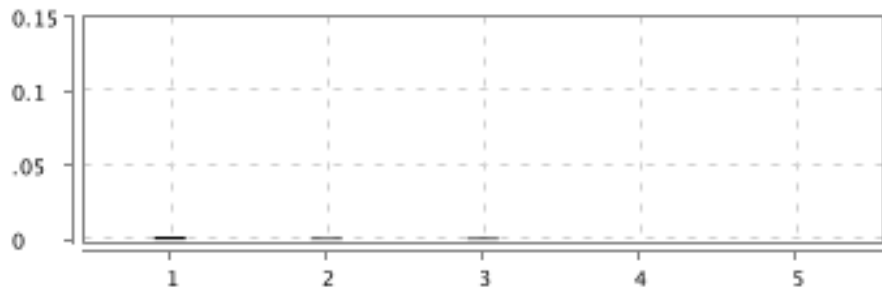

Validating "Practice Questions" page in Array.

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 12:04:11.944 PM // 12:04:11.949 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When User clicks on Practice questions link in array page. io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then user should see four different questions.	SKIPPED	0.001 s

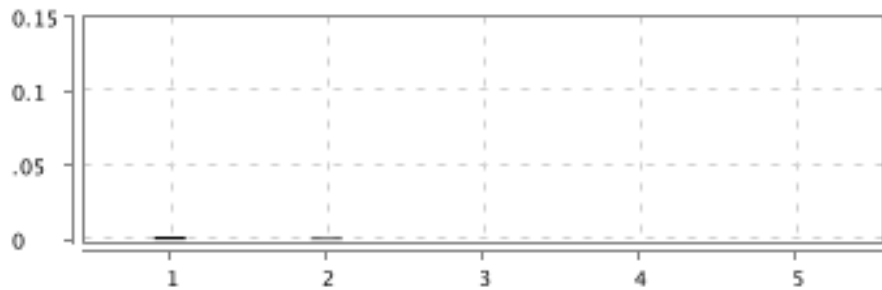

Validating practice question 1

<div>FAILED</div> <div>DURATION - 0.008 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:11.967 PM // 12:04:11.975 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When user click on Search the array link io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then user should be in question 1 page	SKIPPED	0.001 s
3	And user send the solution code to textarea in Search the array	SKIPPED	0.001 s
4	Then user click on run and user should see output in Search the array	SKIPPED	0.000 s
5	Then user click submit user should see submission sucessful in Search the array	SKIPPED	0.000 s

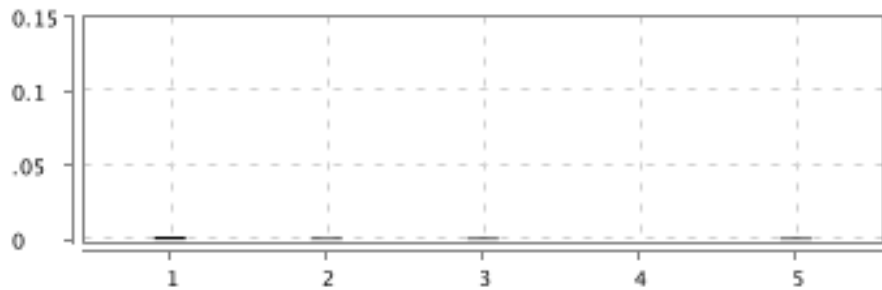

Validating prcatice question 2

<div>FAILED</div> <div>DURATION - 0.010 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:11.989 PM // 12:04:11.999 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When user click on Max Consecutive ones io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then user should be in question 2 page	SKIPPED	0.001 s
3	And user send the solution code to textarea in Max Consecutive ones	SKIPPED	0.000 s
4	Then user click on run and user should see output in Max Consecutive ones	SKIPPED	0.000 s
5	Then user click submit user should see submission sucessful in Max Consecutive ones	SKIPPED	0.000 s

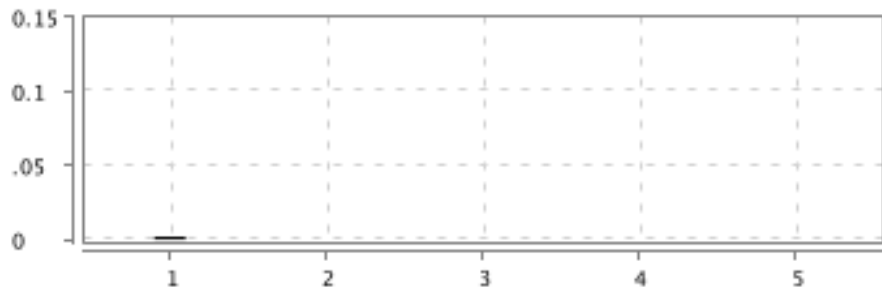

Validating prcatice question 3

<div>FAILED</div> <div>DURATION - 0.009 s</div>		<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	<div></div>
/ 12:04:12.017 PM // 12:04:12.026 PM /				
feature to test navigation for Array				

#	Step / Hook Details	Status	Duration
1	When user click on Find Numbers with Even Number of Digits io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then user should be in question 3 page	SKIPPED	0.001 s
3	And user send the solution code to textarea in Find Numbers with Even Number of Digits	SKIPPED	0.001 s
4	Then user click on run and user should see output in Find Numbers with Even Number of Digits	SKIPPED	0.000 s
5	Then user click submit user should see submission sucessful in Find Numbers with Even Number of Digits	SKIPPED	0.001 s



Validating prcatice question 4

<div>FAILED</div> <div>DURATION - 0.012 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.050 PM // 12:04:12.062 PM /				
feature to test navigation for Array				

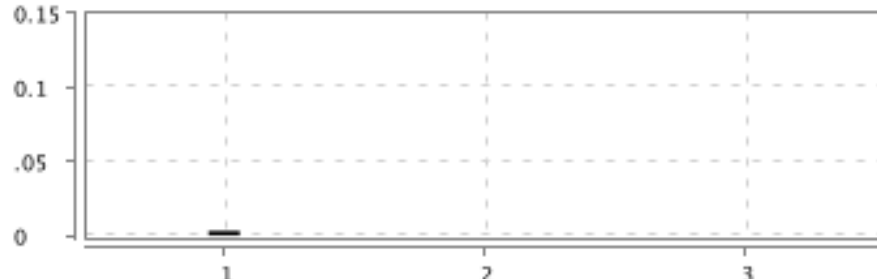

#	Step / Hook Details	Status	Duration
1	When user click on Squares of a sorted Array io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.ArraySteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LoginPagePom.<init>(LoginPagePom.java:35) at stepDefinitions.ArraySteps.<init>(ArraySteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	Then user should be in question 4 page	SKIPPED	0.000 s
3	And user send the solution code to textarea in Squares of a sorted Array	SKIPPED	0.000 s
4	Then user click on run and user should see output in Squares of a sorted Array	SKIPPED	0.000 s
5	Then user click submit user should see submission sucessful in Squares of a sorted Array	SKIPPED	0.000 s

Data Structure Introduction Page

FAILED	DURATION - 0.080 s	Scenarios		Steps	
/ 12:04:12.087 PM // 12:04:12.167 PM /		Total - 4 Pass - 0 Fail - 4 Skip - 0		Total - 16 Pass - 0 Fail - 4 Skip - 12	

User entered valid login details on Login Page and logged in

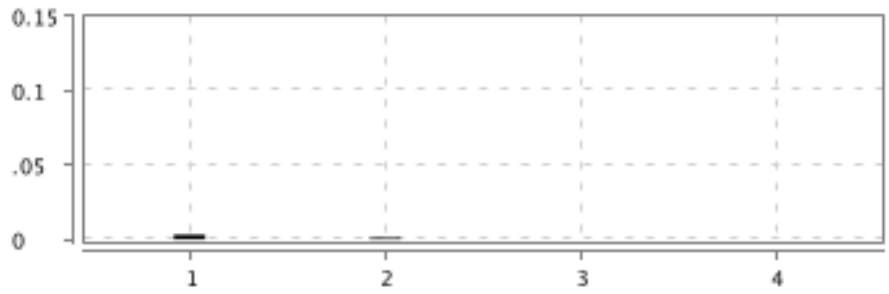

<div>FAILED</div> <div>DURATION - 0.007 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
<div>/ 12:04:12.087 PM // 12:04:12.094 PM /</div>				
<div>Data Structure Introduction Page</div>				
<div>@DS_1</div>				

#	Step / Hook Details	Status	Duration
1	<p>Given User is on sign in Page of DSAlgo Portal</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.DataStructSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) </pre>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.DataStructPom.<init>(DataStructPom.java:35) at stepDefinitions.DataStructSteps.<init>(DataStructSteps.java:18) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		

#	Step / Hook Details	Status	Duration
2	When User entered valid Username as "Selenium2023" and Password as "Texas@2023"	SKIPPED	0.000 s
3	Then User is logged in successfully and directed to Home page of DsAlgo Portal	SKIPPED	0.000 s

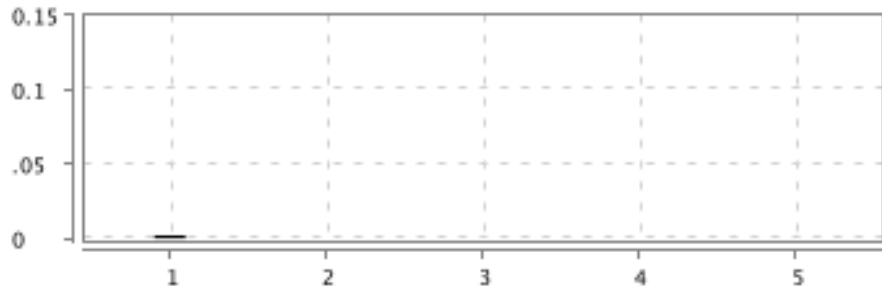

Moving to Validate "Time Complexity" page

FAILED DURATION - 0.007 s / 12:04:12.109 PM // 12:04:12.116 PM / Data Structure Introduction Page @DS_2		Steps Total - 4 Pass - 0 Fail - 1 Skip - 3	
--	--	--	---

#	Step / Hook Details	Status	Duration
1	Given user is on Data Structure page after navigating from getstarted io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.DataStructSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.DataStructPom.<init>(DataStructPom.java:35) at stepDefinitions.DataStructSteps.<init>(DataStructSteps.java:18) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Time Complexity	SKIPPED	0.001 s
3	And user navigated to Time Complexity	SKIPPED	0.000 s
4	Then user click on Try Here button in Time Complexity page	SKIPPED	0.000 s

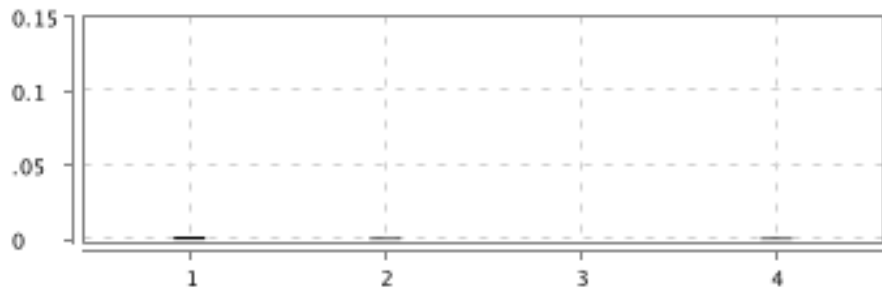

Validating "Time Complexity" textarea

FAILED		DURATION - 0.007 s			Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 12:04:12.134 PM // 12:04:12.141 PM /						
Data Structure Introduction Page						
@DS_3						

#	Step / Hook Details	Status	Duration
1	<p>Given user is in TryEditor textarea in Time Complexity page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.DataStructSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.DataStructPom.<init>(DataStructPom.java:35) at stepDefinitions.DataStructSteps.<init>(DataStructSteps.java:18) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user send valid code and click run in Time Complexity page	SKIPPED	0.000 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.000 s



Validating "Practice Question" page of datastructure

FAILED	DURATION - 0.007 s		<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.160 PM // 12:04:12.167 PM /				
Data Structure Introduction Page				
@DS_4				

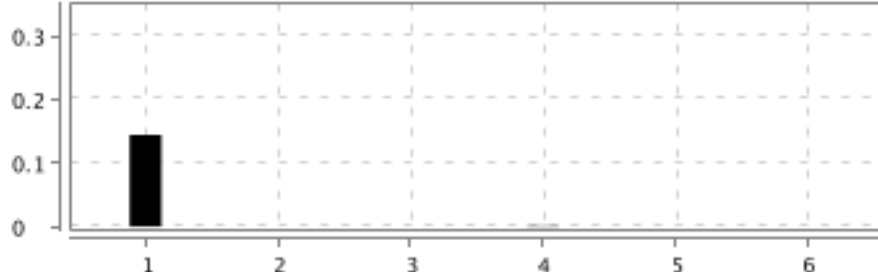

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Time Complexity after navigating backs from textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.DataStructSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.DataStructPom.<init>(DataStructPom.java:35) at stepDefinitions.DataStructSteps.<init>(DataStructSteps.java:18) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on practice questions page on datastructures page	SKIPPED	0.001 s
3	And user should navigate to practice questions page	SKIPPED	0.000 s
4	Then user movie back and quit browser	SKIPPED	0.001 s

Linked List

FAILED	DURATION - 0.185 s	Scenarios Total - 3 Pass - 0 Fail - 3 Skip - 0		Steps Total - 18 Pass - 2 Fail - 3 Skip - 13	
/ 12:04:12.193 PM // 12:04:12.378 PM /					

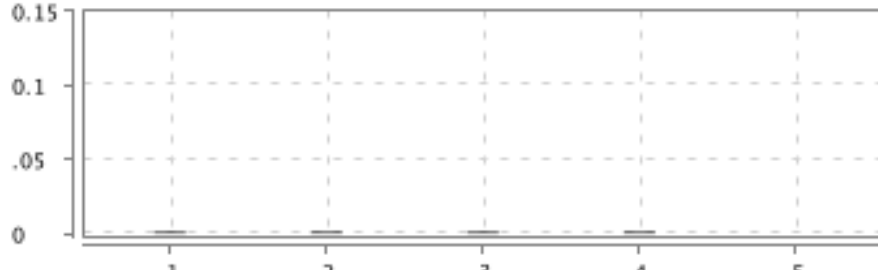

User should be able to type in python code in text editor in Linked List module

FAILED	DURATION - 0.149 s		Steps Total - 6 Pass - 0 Fail - 1 Skip - 5	
/ 12:04:12.193 PM // 12:04:12.342 PM /				
Linked List				
@LL_1				

#	Step / Hook Details	Status	Duration
1	<p>Given User is in Home Page</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'Vijays-Mac-mini.attlocal.net', ip: '192.168.1.69' Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '21.0.1' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}]}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:237) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:164) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:152) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:133) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:128) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:113) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:103)</pre>	FAILED	0.144 s

#	Step / Hook Details	Status	Duration
	at newalgoutilities.BaseClass.launchApp(BaseClass.java:56) at stepDefinitions.LinkedListSteps.user_is_in_home_page(LinkedListSteps.java:20) at ?.User is in Home Page(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/06..LinkedList.feature:4) * Not displayable characters are replaced by '?'.		
2	When User clicks on Linked List button and enters in the Module	SKIPPED	0.000 s
3	Then User clicks Introduction from Topics covered and then user scrolls down and clicks on Try here button	SKIPPED	0.000 s
4	Then User will type in python code and hit run button	SKIPPED	0.001 s
5	Then user navigate to back and clicks on Creating Linked List then user scrolls down and clicks on Try here button	SKIPPED	0.000 s
6	Then User will type in python code,hit run button and user navigate to back	SKIPPED	0.000 s

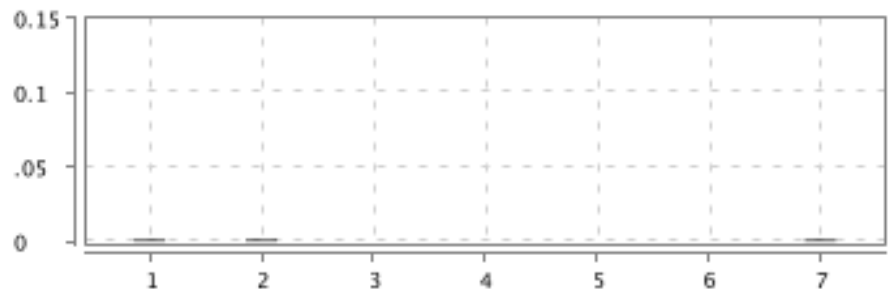

User should be able to type in python code in text editor of Types of Linked list and Impliment Link list in python

FAILED DURATION - 0.007 s / 12:04:12.355 PM // 12:04:12.362 PM / Linked List @LL_2		Steps Total - 5 Pass - 1 Fail - 1 Skip - 3	
---	--	--	---

#	Step / Hook Details	Status	Duration
1	Given User is in the Linked List Module	PASSED	0.001 s
2	When User clicks on Types of Linked list button and then user scrolls down and clicks on Try here button java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LinkedListPom.<init>(LinkedListPom.java:56) at stepDefinitions.LinkedListSteps. user_clicks_on_types_of_linked_list_button_and_then_user Scrolls down and clicks on try here button(LinkedListSteps.java:85) at ?.User clicks on Types of Linked list button and then user scrolls down and clicks on Try here button(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/06..LinkedList.feature:13) * Not displayable characters are replaced by '?'.	FAILED	0.001 s
3	Then User will type in python code and hit run button and user navigate to back	SKIPPED	0.001 s



#	Step / Hook Details	Status	Duration
4	Then user clicks on Implement Link list in python and clicks on Try here button	SKIPPED	0.001 s
5	Then User will type in python code and hit run button and user navigate to back	SKIPPED	0.000 s

User should be able to type in python code in text editor of Traversal, Insertion and Deletion

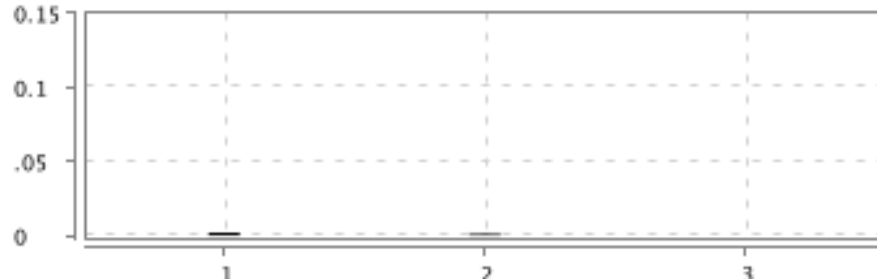

<div>FAILED</div> <div>DURATION - 0.006 s</div>			<div>Steps</div> <div>Total - 7</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 5</div>	
/ 12:04:12.372 PM // 12:04:12.378 PM /				
Linked List				
@LL_3				

#	Step / Hook Details	Status	Duration
1	Given User is inside Linked List Module	PASSED	0.001 s
2	When User clicks on Traversal button and then user scrolls down and clicks on Try here button <pre> java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.LinkedListPom.<init>(LinkedListPom.java:56) at stepDefinitions.LinkedListSteps. user_clicks_on_traversal_button_and_then_user_scrolls_down_and_clicks_on_try_here_button(LinkedListSteps.java:119) at ?.User clicks on Traversal button and then user scrolls down and clicks on Try here button(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/06..LinkedList.feature:20) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.001 s
3	Then User will type in python code and hit run button then user navigate to back	SKIPPED	0.000 s
4	Then user clicks on Inserion button and user scrolls down then clicks on Try here button	SKIPPED	0.000 s
5	Then User will type in python code and hit run button and user navigate to back	SKIPPED	0.000 s
6	Then User clicks on Deletion button and then user scrolls down and clicks on Try here button	SKIPPED	0.000 s
7	Then User will type in python code and hit run button	SKIPPED	0.001 s

Stack Page

FAILED	DURATION - 0.121 s	Scenarios Total - 8 Pass - 0 Fail - 8 Skip - 0		Steps Total - 34 Pass - 0 Fail - 8 Skip - 26	
/ 12:04:12.394 PM // 12:04:12.515 PM /					

User entered valid login details on Login Page and logged in

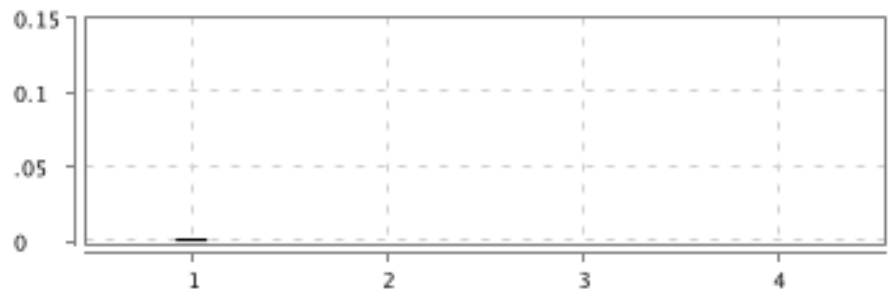

<div>FAILED</div> <div>DURATION - 0.006 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
<div>/ 12:04:12.394 PM // 12:04:12.400 PM /</div>				
<div>Stack Page</div>				
<div>@SS_1</div>				

#	Step / Hook Details	Status	Duration
1	Given User is on sign in Page of DSAIgo Portal io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.DataStructSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.DataStructPom.<init>(DataStructPom.java:35) at stepDefinitions.DataStructSteps.<init>(DataStructSteps.java:18) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		

#	Step / Hook Details	Status	Duration
2	When User entered valid Username as "Selenium2023" and Password as "Texas@2023"	SKIPPED	0.001 s
3	Then User is logged in successfully and directed to Home page of DsAlgo Portal	SKIPPED	0.000 s

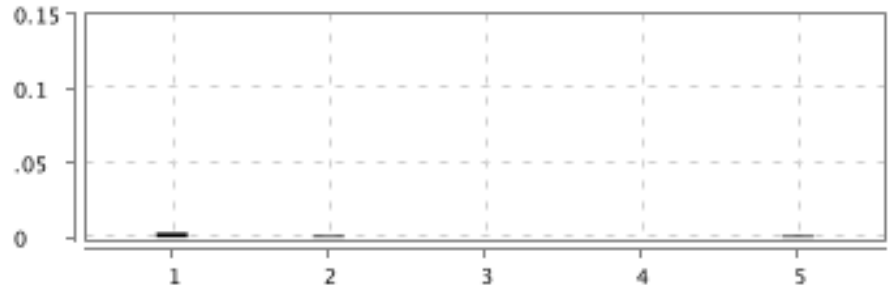

Moving to Validate "Operations in Stack" page

<div>FAILED</div> <div>DURATION - 0.004 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.410 PM // 12:04:12.414 PM /				
Stack Page				
@SS_2				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Stack page after navigating form getstarted</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.StackSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) </pre>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.StackPom.<init>(StackPom.java:32) at stepDefinitions.StackSteps.<init>(StackSteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Operations in Stack	SKIPPED	0.000 s
3	And user navigated to Operations in Stack	SKIPPED	0.000 s
4	Then user click on Try Here button in Operations in Stack page	SKIPPED	0.000 s

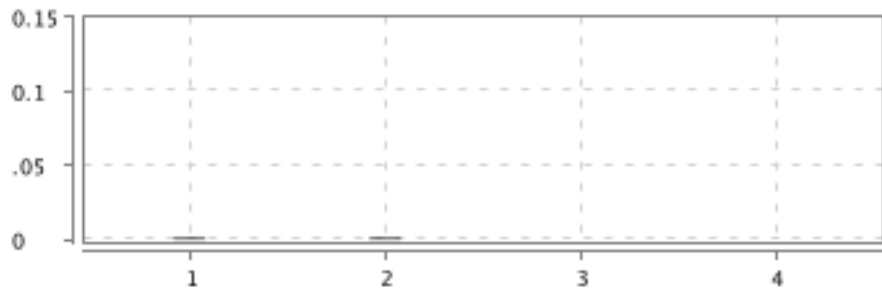

Validating "Operations in Stack" textarea

<div>FAILED</div> <div>DURATION - 0.008 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.431 PM // 12:04:12.439 PM /				
Stack Page				
@SS_3				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in TryEditor textarea in Operations in Stack page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.StackSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.StackPom.<init>(StackPom.java:32) at stepDefinitions.StackSteps.<init>(StackSteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user send valid code and click run in Operations in Stack page	SKIPPED	0.001 s
3	Then code should get execute and display output	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.001 s

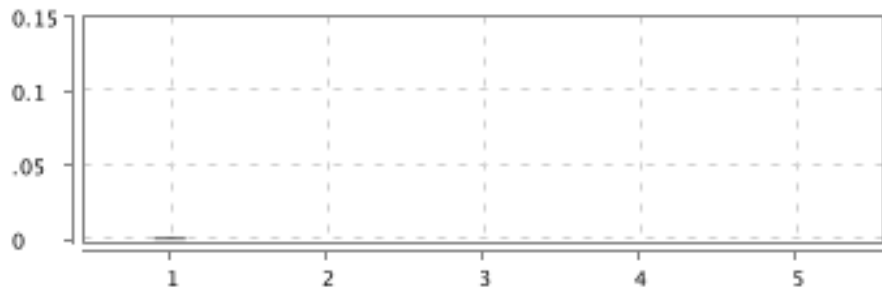

Moving to Validate "Implimentation" page

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.451 PM // 12:04:12.456 PM /				
Stack Page				
@SS_4				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Implimentation page after navigating form getstarted</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.StackSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.StackPom.<init>(StackPom.java:32) at stepDefinitions.StackSteps.<init>(StackSteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Implimentation link in Stack	SKIPPED	0.001 s
3	And user navigated to Implimentation in Stack	SKIPPED	0.000 s
4	Then user click on Try Here button in Implimentation page	SKIPPED	0.000 s

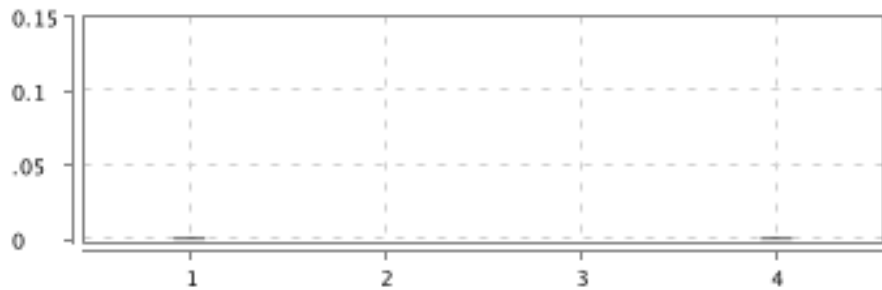

Validating "Implimentation" textarea

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.467 PM // 12:04:12.472 PM /				
Stack Page				
@SS_5				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in TryEditor textarea in Operations in Implimentation page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.StackSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.StackPom.<init>(StackPom.java:32) at stepDefinitions.StackSteps.<init>(StackSteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user send valid code and click run in Implimentation page	SKIPPED	0.000 s
3	Then code should get execute and display output	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.000 s

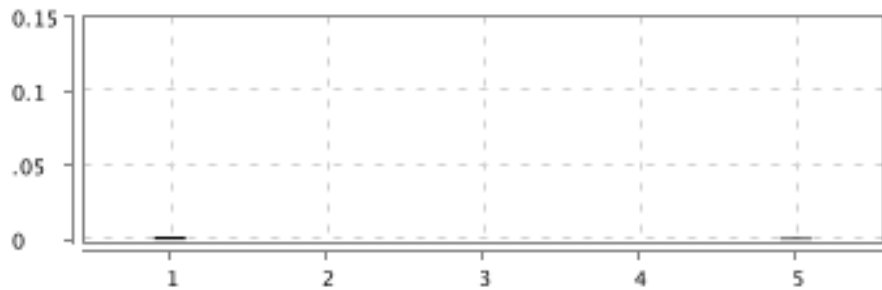

Moving to Validate "Applications" page

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.483 PM // 12:04:12.488 PM /				
Stack Page				
@SS_6				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Applications page after navigating form getstarted</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.StackSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.StackPom.<init>(StackPom.java:32) at stepDefinitions.StackSteps.<init>(StackSteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Applications link in Stack	SKIPPED	0.000 s
3	And user navigated to Applications in Stack	SKIPPED	0.000 s
4	Then user click on Try Here button in Applications page	SKIPPED	0.001 s

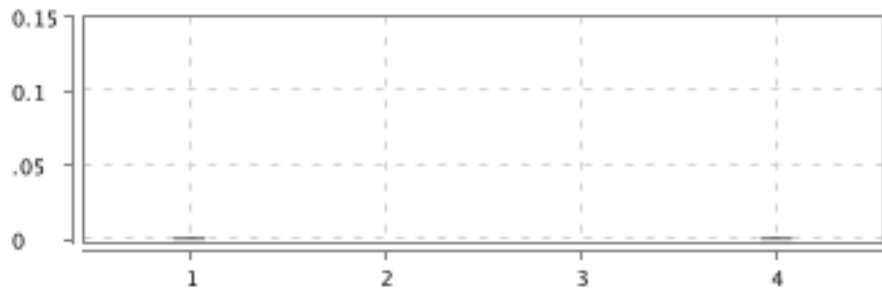

Validating "Applications" textarea

<div>FAILED</div> <div>DURATION - 0.006 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.497 PM // 12:04:12.503 PM /				
Stack Page				
@SS_7				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in TryEditor textarea in Applications page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.StackSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.StackPom.<init>(StackPom.java:32) at stepDefinitions.StackSteps.<init>(StackSteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user send valid code and click run in Applications page	SKIPPED	0.000 s
3	Then code should get execute and display output	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.001 s



Validating "Practice Questions" page

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.510 PM // 12:04:12.515 PM /				
Stack Page				
@SS_6				

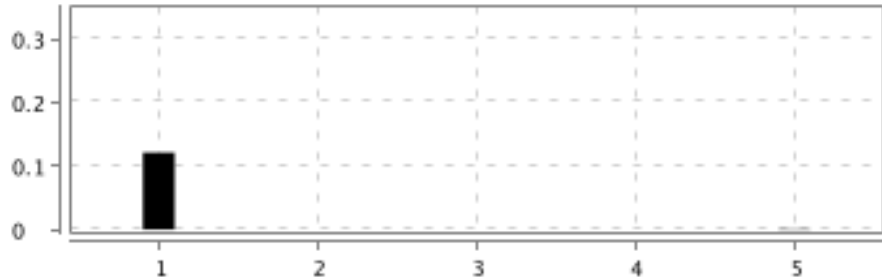

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Applications page after navigating backs from textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.StackSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.StackPom.<init>(StackPom.java:32) at stepDefinitions.StackSteps.<init>(StackSteps.java:15) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on practice questions page on stack page	SKIPPED	0.000 s
3	And user should navigate to practice questions page of stack	SKIPPED	0.000 s
4	Then user movie back and quit browser	SKIPPED	0.001 s

Testing Queue Module

FAILED	DURATION - 0.152 s	Scenarios Total - 4 Pass - 0 Fail - 4 Skip - 0		Steps Total - 16 Pass - 3 Fail - 4 Skip - 9	
/ 12:04:12.535 PM // 12:04:12.687 PM /					

To Validate Implimentation of Queue

<div>FAILED</div> <div>DURATION - 0.123 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.535 PM // 12:04:12.658 PM /				
Testing Queue Module				
@Q_1				

#	Step / Hook Details	Status	Duration
1	<p>Given User is in the DsAlgo Home Page</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'Vijays-Mac-mini.attlocal.net', ip: '192.168.1.69' Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '21.0.1' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}]}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:237) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:164) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:152) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:133) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:128) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:113) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:103)</pre>	FAILED	0.121 s

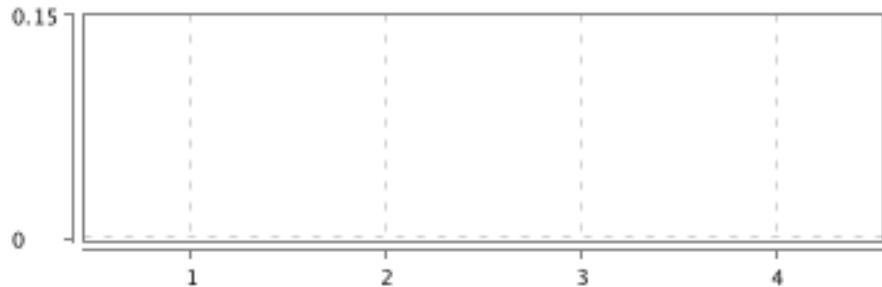

#	Step / Hook Details	Status	Duration
	at newalgoutilities.BaseClass.launchApp(BaseClass.java:56) at stepDefinitions.QueueSteps.user_is_in_the_ds_algo_home_page(QueueSteps.java:25) at ?.User is in the DsAlgo Home Page(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/08..Queue.feature:4) * Not displayable characters are replaced by '?'.		
2	When User clicks on Get Started Queue button enters in Module	SKIPPED	0.000 s
3	Then User clicks on Implimentation and then TryHere button	SKIPPED	0.000 s
4	Then User type in python code and hit run button	SKIPPED	0.000 s
5	Then User navigates to back	SKIPPED	0.001 s

To validate Implimentation using collections

FAILED DURATION - 0.004 s / 12:04:12.666 PM // 12:04:12.670 PM / Testing Queue Module @Q_2		Steps Total - 4 Pass - 1 Fail - 1 Skip - 2	
---	--	--	--

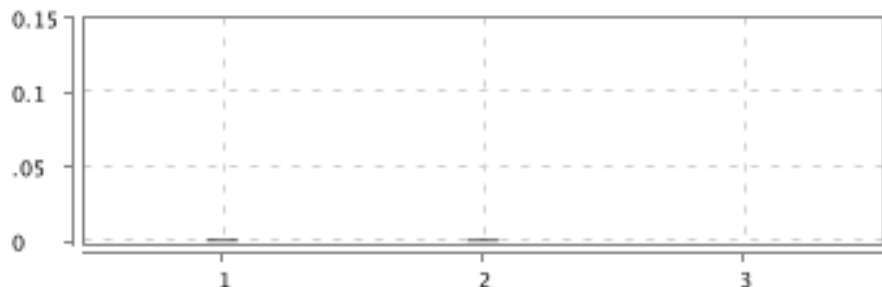

#	Step / Hook Details	Status	Duration
1	Given User is in the queue page	PASSED	0.001 s
2	When User clicks on Implimentation using collections and then TryHere button java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.QueuePom.<init>(QueuePom.java:50) at stepDefinitions.QueueSteps.user_clicks_on_implimentation_using_collections_and_then_try_here_button(QueueSteps.java:91) at ?.User clicks on Implimentation using collections and then TryHere button(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/08..Queue.feature:12) * Not displayable characters are replaced by '?'.	FAILED	0.001 s
3	Then User type in python code and after that hit run button	SKIPPED	0.000 s
4	Then User navigates to back	SKIPPED	0.001 s

To validate implimentation using array

<div>FAILED</div> <div>DURATION - 0.002 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:04:12.676 PM // 12:04:12.678 PM /				
Testing Queue Module				
@Q_3				



#	Step / Hook Details	Status	Duration
1	Given User is inside queue module	PASSED	0.000 s
2	When User clicks on implimentation using array and then TryHerebutton java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.QueuePom.<init>(QueuePom.java:50) at stepDefinitions.QueueSteps.user_clicks_on_implimentation_using_array_and_then_try_herebutton(QueueSteps.java:123) at ?.User clicks on implimentation using array and then TryHerebutton(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/08..Queue.feature:18) * Not displayable characters are replaced by '?'.	FAILED	0.000 s
3	Then User type in python code and then hit run button	SKIPPED	0.000 s
4	Then User navigates to the back	SKIPPED	0.000 s

To validate Queue operations

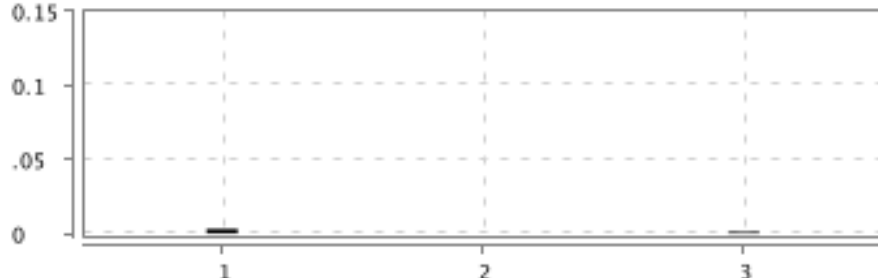

<div>FAILED</div> <div>DURATION - 0.002 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 12:04:12.685 PM // 12:04:12.687 PM /				
Testing Queue Module				
@Q_4				

#	Step / Hook Details	Status	Duration
1	Given User is inside module	PASSED	0.001 s
2	When User clicks on Queue operations and TryHere java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.QueuePom.<init>(QueuePom.java:50) at stepDefinitions.QueueSteps.user_clicks_on_queue_operations_and_try_here(QueueSteps.java:164) at ?.User clicks on Queue operations and TryHere(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/08..Queue.feature:24) * Not displayable characters are replaced by '?'. 	FAILED	0.001 s
3	Then User type in python code, then hit run button	SKIPPED	0.000 s

Testing tree module

FAILED	DURATION - 0.323 s	Scenarios Total - 28 Pass - 0 Fail - 28 Skip - 0		Steps Total - 123 Pass - 0 Fail - 28 Skip - 95	
/ 12:04:12.724 PM // 12:04:13.047 PM /					

Validating "Dropdown" for tree page

FAILED	DURATION - 0.005 s		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 12:04:12.724 PM // 12:04:12.729 PM /				
Testing tree module				
@TS_1				

#	Step / Hook Details	Status	Duration
1	Given user is in home page after login io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user choose tree form dropdown menu	SKIPPED	0.000 s
3	Then user redirected to tree home page	SKIPPED	0.001 s

Validating "Overview of Trees" page

FAILED DURATION - 0.005 s / 12:04:12.737 PM // 12:04:12.742 PM / Testing tree module @TS_2		Steps Total - 4 Pass - 0 Fail - 1 Skip - 3	
---	--	--	--

#	Step / Hook Details	Status	Duration
1	Given user is in tree page after selecting tree from dropdown <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) </pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on the Overview of trees link	SKIPPED	0.001 s
3	And user redirected to the Overview page	SKIPPED	0.000 s
4	Then user click on Try Here button in overview page	SKIPPED	0.000 s

Validating "TryEditor" textarea in overview page

FAILED DURATION - 0.005 s / 12:04:12.752 PM // 12:04:12.757 PM / Testing tree module @TS_3		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
--	--	--	--

#	Step / Hook Details	Status	Duration
1	Given user is in TryEditor textarea of overview page <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) </pre>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		

#	Step / Hook Details	Status	Duration
	Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user send valid code and click run in overview page	SKIPPED	0.000 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.001 s
5	Then should display error through alert.	SKIPPED	0.000 s

Moving to Validate "Terminologies" page

FAILED DURATION - 0.005 s / 12:04:12.768 PM // 12:04:12.773 PM / Testing tree module @TS_4		Steps Total - 4 Pass - 0 Fail - 1 Skip - 3	
---	--	--	--

#	Step / Hook Details	Status	Duration
1	Given user is on Overview page after naviagting from overview texteditor io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException </p>		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user click on Terminologies link	SKIPPED	0.001 s
3	And user navigated to "Termonologies" page	SKIPPED	0.000 s
4	Then user click on Try Here button in Terminologies page	SKIPPED	0.000 s

Validating "Terminologies" textarea

FAILED DURATION - 0.006 s / 12:04:12.784 PM // 12:04:12.790 PM / Testing tree module @TS_5		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
--	--	--	--

#	Step / Hook Details	Status	Duration
1	Given user is in Terminologies TryEditor textarea io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)		

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user send valid code and click run in terminologies page	SKIPPED	0.000 s
3	Then code should get execute and display out	SKIPPED	0.001 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.001 s

Moving to Validate "Types of Trees" page

FAILED DURATION - 0.007 s / 12:04:12.799 PM // 12:04:12.806 PM / Testing tree module @TS_6		Steps Total - 4 Pass - 0 Fail - 1 Skip - 3	
---	--	--	--

#	Step / Hook Details	Status	Duration
1	Given user is on terminologies page after navigating from terminologies text area io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) </pre>		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user click on Types of Trees	SKIPPED	0.000 s
3	And user navigated to Types of trees page	SKIPPED	0.000 s
4	Then user click on Try Here button in Types of trees page	SKIPPED	0.001 s

Validating "Types of Tree" textarea

FAILED DURATION - 0.003 s / 12:04:12.815 PM // 12:04:12.818 PM / Testing tree module @TS_7		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
---	--	--	--

#	Step / Hook Details	Status	Duration
1	Given user is in Types of trees page TryEditor textarea io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set</p>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user send valid code and click run in types of tree page	SKIPPED	0.000 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.000 s

Moving to Validate "Tree Traversals" page

FAILED DURATION - 0.003 s / 12:04:12.826 PM // 12:04:12.829 PM / Testing tree module @TS_8		Steps Total - 4 Pass - 0 Fail - 1 Skip - 3	
---	--	--	--

#	Step / Hook Details	Status	Duration
1	Given user is on Types of trees page after navigating form types of tree text area io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set</p> <p>at org.openqa.selenium.internal.Require.nonNull(Require.java:60)</p>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user click on Tree Traverslas	SKIPPED	0.000 s
3	And user navigated to Tree Traversals page	SKIPPED	0.001 s
4	Then user click on Try Here button in tree traverals page	SKIPPED	0.000 s

Validating "Tree Traversals" textarea in tree traverals page

FAILED DURATION - 0.003 s / 12:04:12.835 PM // 12:04:12.838 PM / Testing tree module @TS_9		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
---	--	--	--

#	Step / Hook Details	Status	Duration
1	Given user is in Tree traversals TryEditor textarea io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) </p>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user send valid code and click run in tree traversals page	SKIPPED	0.001 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.000 s

Moving to Validate "Traversals-Illustration" page

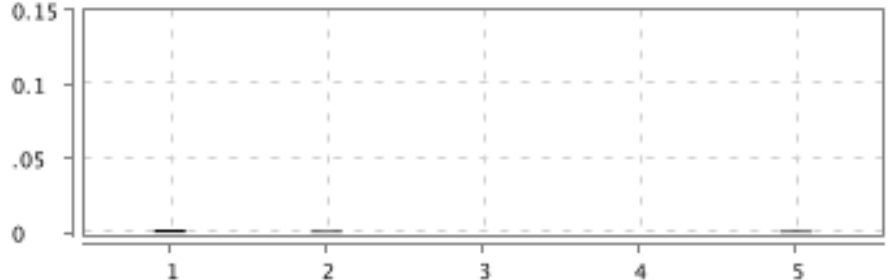

FAILED DURATION - 0.004 s / 12:04:12.846 PM // 12:04:12.850 PM / Testing tree module @TS_10		Steps Total - 4 Pass - 0 Fail - 1 Skip - 3	
--	--	--	--

#	Step / Hook Details	Status	Duration
1	Given user is on Tree Traversals page after navigating from tree traversals textarea io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set</p> <p>at org.openqa.selenium.internal.Require.nonNull(Require.java:60)</p> <p>at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93)</p> <p>at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74)</p> <p>at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43)</p>		

#	Step / Hook Details	Status	Duration
	at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user click on Traverslas-Illustration	SKIPPED	0.001 s
3	And user navigated to Traversals-Illustration page	SKIPPED	0.000 s
4	Then user click on Try Here button in traversal illustration page	SKIPPED	0.000 s

Validating "Traversals-Illustration" textarea in traversal illustration page

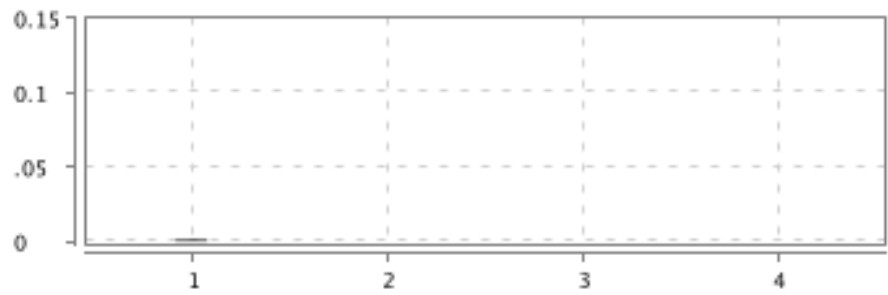

FAILED DURATION - 0.005 s / 12:04:12.857 PM // 12:04:12.862 PM / Testing tree module @TS_11		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
--	--	--	---

#	Step / Hook Details	Status	Duration
1	Given user is in Traversals Illustation TryEditor textarea io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user send valid code and click run in traversals Illustration	SKIPPED	0.001 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.001 s

Moving to Validate "Binary Trees" page

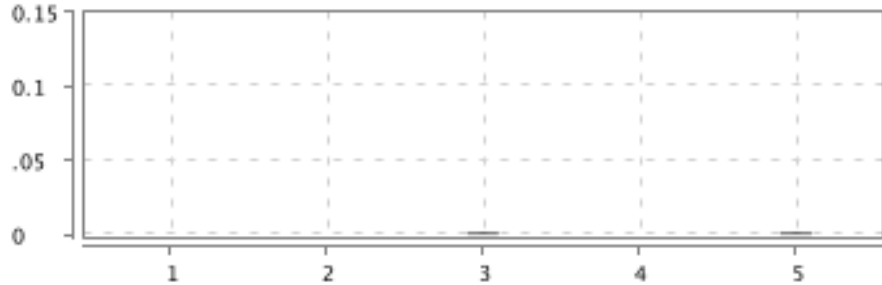

<div>FAILED</div> <div>DURATION - 0.002 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.868 PM // 12:04:12.870 PM /				
Testing tree module				
@TS_12				

#	Step / Hook Details	Status	Duration
1	Given user is on Traversals-Illustration page after navigating from textarea io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		

#	Step / Hook Details	Status	Duration
2	When user click on Binary Trees	SKIPPED	0.000 s
3	And user navigated to Binary Tress page	SKIPPED	0.000 s
4	Then user click on Try Here button in binary tree page	SKIPPED	0.000 s

Validating "Binary Trees" textarea in binary tree page

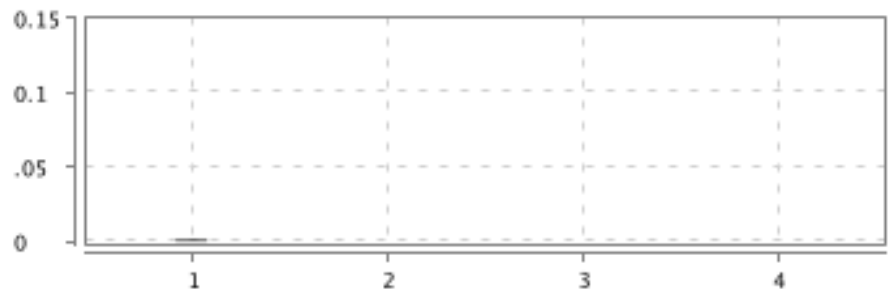

<div>FAILED</div> <div>DURATION - 0.004 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.875 PM // 12:04:12.879 PM /				
Testing tree module				
@TS_13				

#	Step / Hook Details	Status	Duration
1	Given user is in Binary Trees TryEditor textarea io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user send valid code and click run in binary tree	SKIPPED	0.000 s
3	Then code should get execute and display out	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.001 s

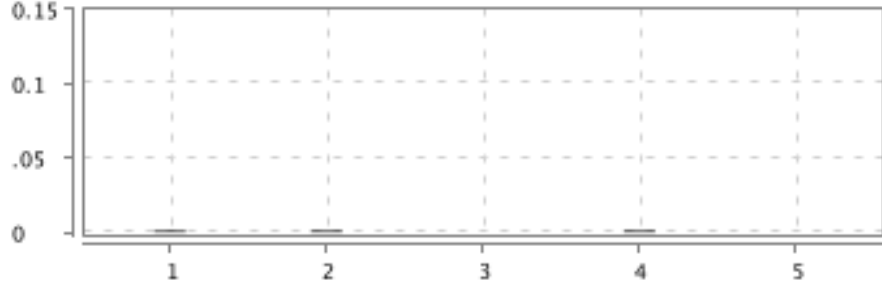

Moving to Validate "Types of Binary Trees" page

<div>FAILED</div> <div>DURATION - 0.006 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.885 PM // 12:04:12.891 PM /				
Testing tree module				
@TS_14				

#	Step / Hook Details	Status	Duration
1	Given user is on Binary Trees page after navigating from textarea io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Types of Binary Trees	SKIPPED	0.000 s
3	And user navigated to Types of Binary Tress page	SKIPPED	0.000 s
4	Then user click on Try Here button in types of binary tree page	SKIPPED	0.000 s

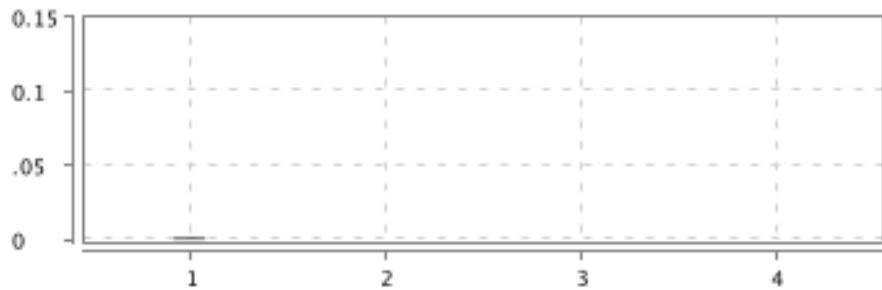

Validating "Types of Binary Trees" textarea in types of binary tree page

FAILED		DURATION - 0.008 s			Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 12:04:12.901 PM // 12:04:12.909 PM /						
Testing tree module						
@TS_15						

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Types of binary Trees TryEditor textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user send valid code and click run in types of binary tree	SKIPPED	0.001 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.001 s
5	Then should display error through alert	SKIPPED	0.000 s

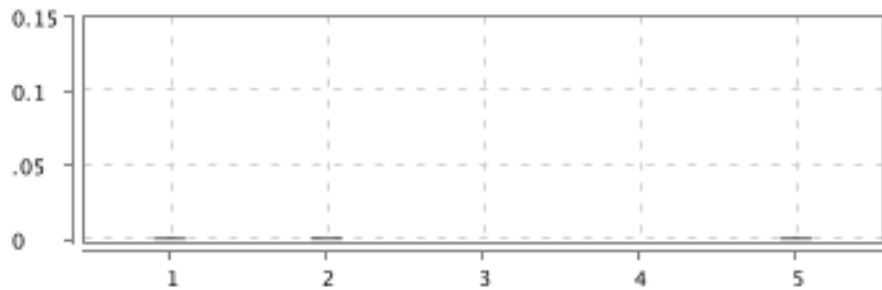

Moving to Validate "Implimentation in Python" page

<div>FAILED</div> <div>DURATION - 0.004 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.920 PM // 12:04:12.924 PM /				
Testing tree module				
@TS_16				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Types of Binary Trees page after navigating from textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Implimentation in Python	SKIPPED	0.000 s
3	And user navigated to Implimentation in Python page	SKIPPED	0.000 s
4	Then user click on Try Here button in implimentation in python page	SKIPPED	0.000 s

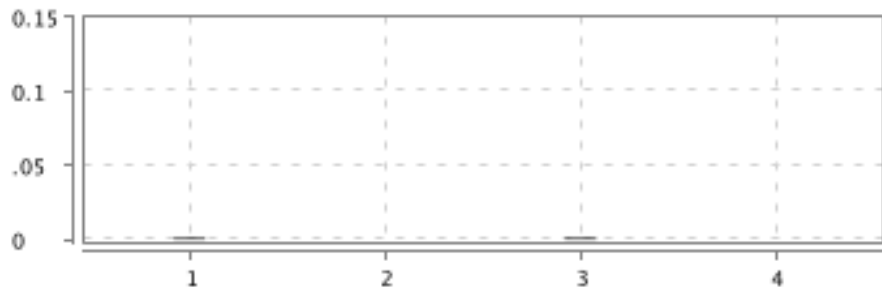

Validating "Implimentation in Python" textarea in implimentation in python page

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.934 PM // 12:04:12.939 PM /				
Testing tree module				
@TS_17				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in implimentaion in python TryEditor textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user send valid code and click run inimplimentation in python	SKIPPED	0.001 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.001 s

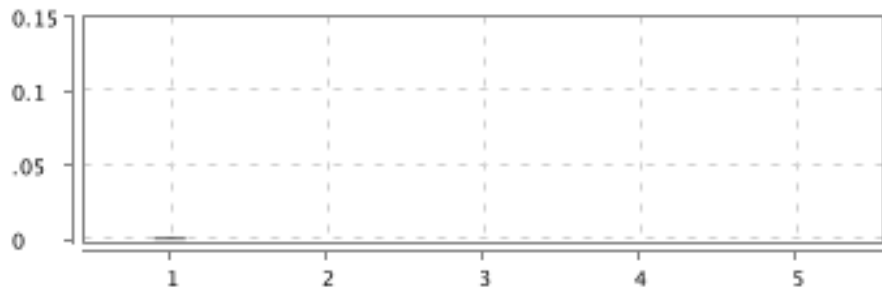

Moving to Validate "Binary Tree Traversals" page

<div>FAILED</div> <div>DURATION - 0.003 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.946 PM // 12:04:12.949 PM /				
Testing tree module				
@TS_18				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Implimentaion in Python page after navigating from textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Binary Tree Traversals	SKIPPED	0.000 s
3	And user navigated to Binary Tree Traversals page	SKIPPED	0.001 s
4	Then user click on Try Here button in binary tree traversals page	SKIPPED	0.000 s

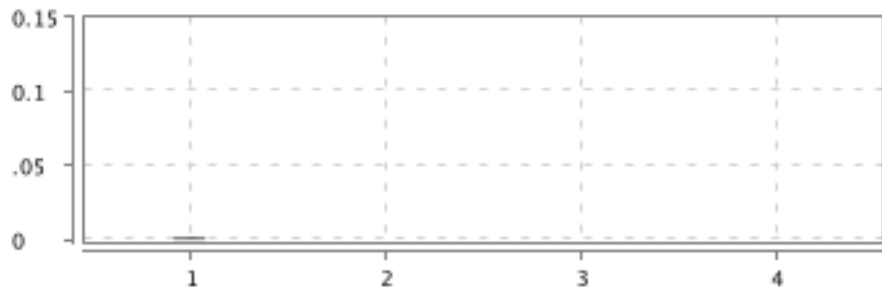

Validating "Binary Tree Traversals" textarea in binary tree traversals page

FAILED	DURATION - 0.005 s		<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.958 PM // 12:04:12.963 PM /				
Testing tree module				
@TS_19				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in binary tree traversals TryEditor textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user send valid code and click run in binary tree traversals	SKIPPED	0.000 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.000 s

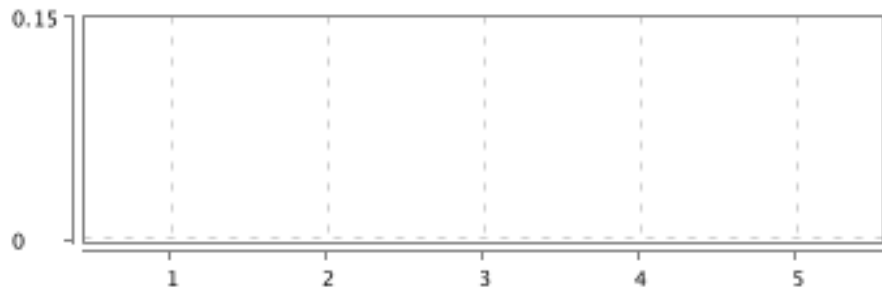

Moving to Validate "Implementation of Binary Trees" page

<div>FAILED</div> <div>DURATION - 0.003 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.970 PM // 12:04:12.973 PM /				
Testing tree module				
@TS_20				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Binary Tree Traversals page after navigating from textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Implemenation of Binary Trees	SKIPPED	0.000 s
3	And user navigated to Implementation of Binary Trees page	SKIPPED	0.000 s
4	Then user click on Try Here button in Implementation of Binary Trees page	SKIPPED	0.000 s

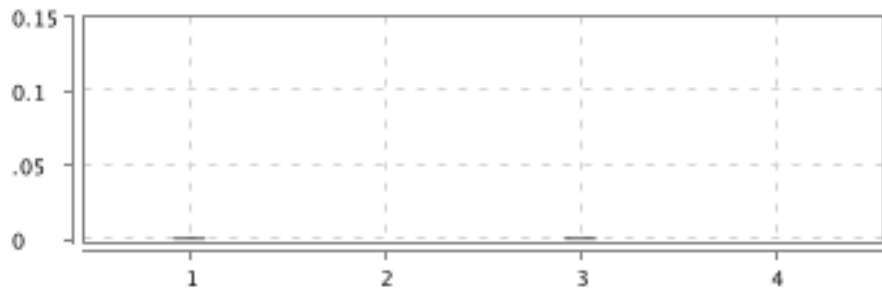

Validating "Implementation of Binary Trees" textarea

<div>FAILED</div> <div>DURATION - 0.003 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.979 PM // 12:04:12.982 PM /				
Testing tree module				
@TS_21				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Implimentation of binary trees TryEditor textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user send valid code and click run in implementation of binary trees	SKIPPED	0.000 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.000 s

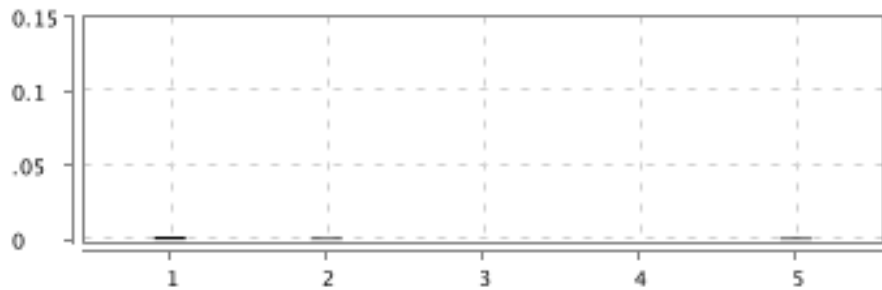

Moving to Validate "Application of Binary Trees" page

FAILED	DURATION - 0.003 s		<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:12.987 PM // 12:04:12.990 PM /				
Testing tree module				
@TS_22				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Implimenation of Binary Trees page after navigating form textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Application of Binary Trees	SKIPPED	0.000 s
3	And user navigated to Application of Binary Trees page	SKIPPED	0.001 s
4	Then user click on Try Here button in Application of Binary Trees page	SKIPPED	0.000 s

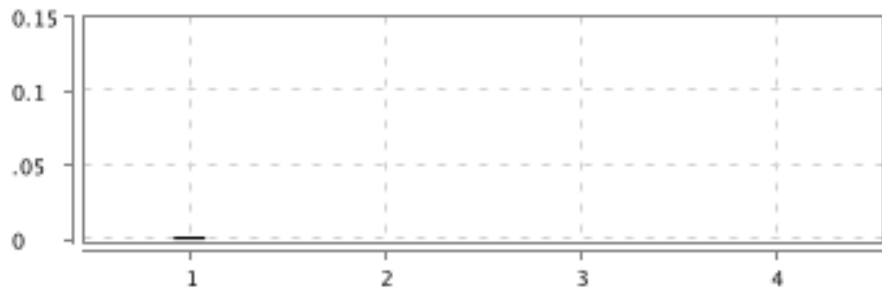

Validating "Application of Binary Trees" textarea

<div>FAILED</div> <div>DURATION - 0.005 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:12.995 PM // 12:04:13.000 PM /				
Testing tree module				
@TS_23				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Application of Binary Trees TryEditor textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user send valid code and click run in application of binary trees	SKIPPED	0.001 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.001 s

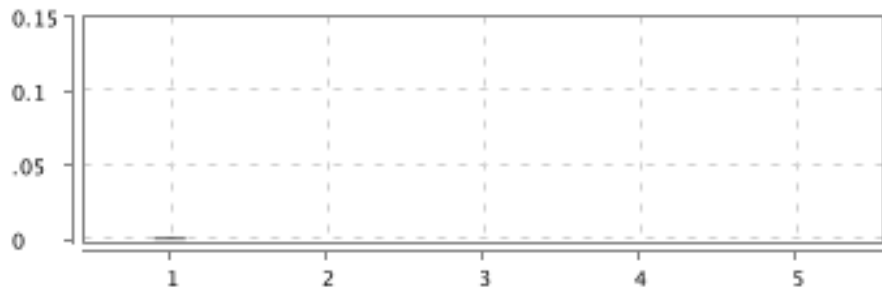

Moving to Validate "Binary Search Trees" page

<div>FAILED</div> <div>DURATION - 0.003 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:13.007 PM // 12:04:13.010 PM /				
Testing tree module				
@TS_24				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Application of Binary Trees page after navigating from textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on Binary Search Trees	SKIPPED	0.000 s
3	And user navigated to "Binary Search Trees" page	SKIPPED	0.000 s
4	Then user click on Try Here button in Binary Search Trees	SKIPPED	0.000 s

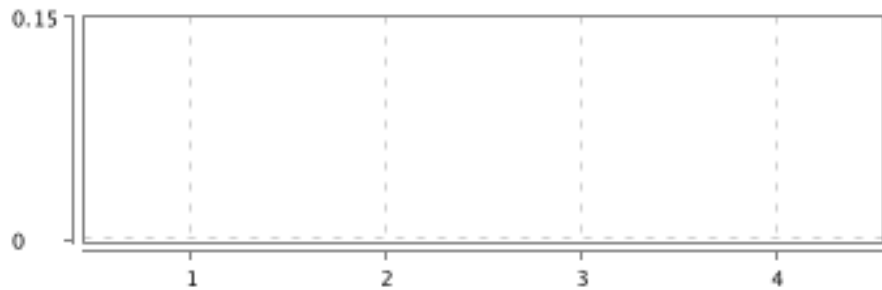

Validating "Binary Search Trees" textarea

<div>FAILED</div> <div>DURATION - 0.003 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:13.016 PM // 12:04:13.019 PM /				
Testing tree module				
@TS_25				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Binary Search Trees TryEditor textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user send valid code and click run in binary search trees page	SKIPPED	0.000 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.000 s

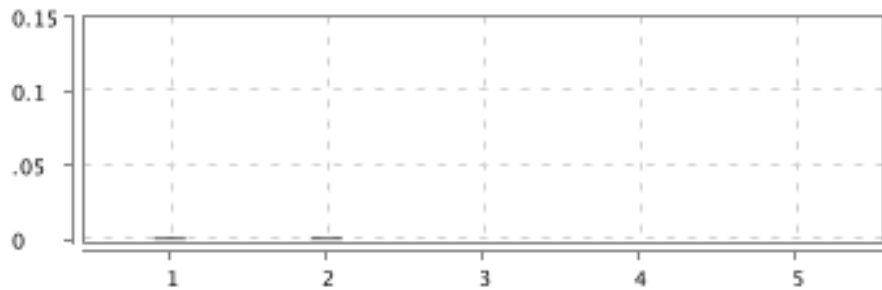

Moving to Validate "Implementation of BTS" page

<div>FAILED</div> <div>DURATION - 0.003 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:04:13.025 PM // 12:04:13.028 PM /				
Testing tree module				
@TS_26				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Binary Search Trees page after navigating form textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When user click on Implementation of BTS	SKIPPED	0.000 s
3	And user navigated to Implementation of BTS page	SKIPPED	0.000 s
4	Then user click on Try Here button in Implementation of BTS page	SKIPPED	0.000 s

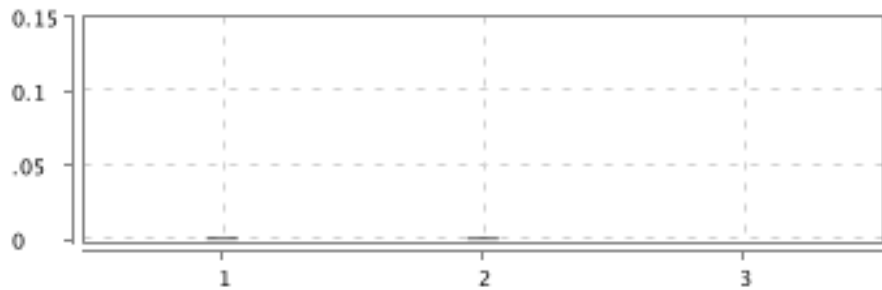

Validating "Implementation of BTS" textarea

<div>FAILED</div> <div>DURATION - 0.003 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:04:13.036 PM // 12:04:13.039 PM /				
Testing tree module				
@TS_27				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in TryEditor textarea in BTS page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user send valid code and click run in BTS page	SKIPPED	0.001 s
3	Then code should get execute and display out	SKIPPED	0.000 s
4	When user send invalid code and click run	SKIPPED	0.000 s
5	Then should display error through alert	SKIPPED	0.000 s



Validating "Practice Question" page

<div>FAILED</div>	<div>DURATION - 0.002 s</div>		<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:04:13.045 PM // 12:04:13.047 PM /				
Testing tree module				
@TS_28				

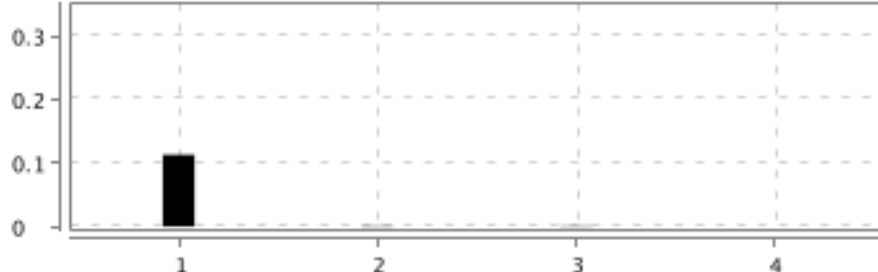

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Implementation of BTS after navigating backs from textarea</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class stepDefinitions.TreePageSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.TreePagePom.<init>(TreePagePom.java:64) at stepDefinitions.TreePageSteps.<init>(TreePageSteps.java:20) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When user click on practice questions page	SKIPPED	0.001 s
3	Then user should navigate to practice questions page	SKIPPED	0.000 s

To test Graph Module

FAILED	DURATION - 0.127 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 8 Pass - 0 Fail - 2 Skip - 6	
/ 12:04:13.056 PM // 12:04:13.183 PM /					

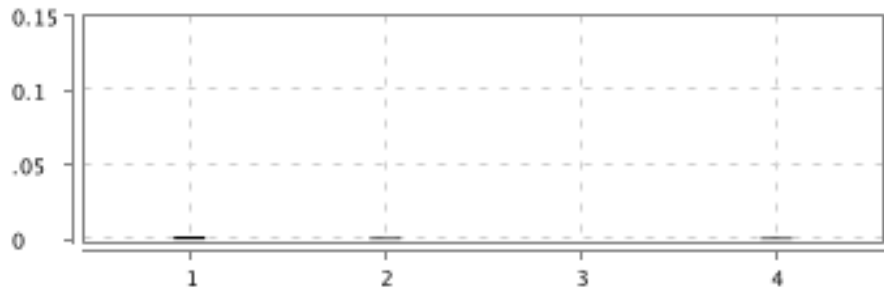

To validate Graph module

FAILED	DURATION - 0.115 s		Steps Total - 4 Pass - 0 Fail - 1 Skip - 3	
/ 12:04:13.056 PM // 12:04:13.171 PM /				
To test Graph Module				
@G_1				

#	Step / Hook Details	Status	Duration
1	<p>Given User is on Home Page</p> <pre>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: Expected browser binary location, but unable to find binary in default location, no 'moz:firefoxOptions.binary' capability provided, and no binary flag set on the command line Host info: host: 'Vijays-Mac-mini.attlocal.net', ip: '192.168.1.69' Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '21.0.1' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {}}]}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:237) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:164) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:157) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:152) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:133) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:128) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:113) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:103)</pre>	FAILED	0.113 s

#	Step / Hook Details	Status	Duration
	at newalgoutilities.BaseClass.launchApp(BaseClass.java:56) at stepDefinitions.GraphPageSteps.user_is_on_home_page(GraphPageSteps.java:20) at ?.User is on Home Page(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/10..graph.feature:4) * Not displayable characters are replaced by '?'.		
2	When User clicks on dropdown and then select graph	SKIPPED	0.001 s
3	Then User clicks on Graph from Topics covered and TryHere button	SKIPPED	0.001 s
4	Then User send the python code, hit run button and revert back	SKIPPED	0.000 s

To validate Graph Representation

FAILED		DURATION - 0.004 s			Steps Total - 4 Pass - 0 Fail - 1 Skip - 3	
/ 12:04:13.179 PM // 12:04:13.183 PM /						
To test Graph Module						
@G_2						

#	Step / Hook Details	Status	Duration
1	Given User is in Graph module java.lang.IllegalArgumentException: Input must be set at org.openqa.selenium.internal.Require.nonNull(Require.java:60) at org.openqa.selenium.support.ui.FluentWait.<init>(FluentWait.java:93) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:74) at org.openqa.selenium.support.ui.WebDriverWait.<init>(WebDriverWait.java:43) at pom.GraphPagePom.<init>(GraphPagePom.java:34) at stepDefinitions.GraphPageSteps.user_is_in_graph_module(GraphPageSteps.java:58) at ?.User is in Graph module(file:///Users/vijayjagabathula/eclipse-workspace/DSALGO_Final-Project-main/src/test/resources/Features/10..graph.feature:10) * Not displayable characters are replaced by '?'.	FAILED	0.002 s
2	When User clicks graph representation button	SKIPPED	0.001 s
3	Then User click on TryHere button	SKIPPED	0.000 s
4	Then User send the python code, hit run button	SKIPPED	0.001 s