ON THIS PAGE



Strings and Characters

A *string* is a series of characters, such as "hello, world" or "albatross". Swift strings are represented by the String type. The contents of a String can be accessed in various ways, including as a collection of Character values.

Swift's String and Character types provide a fast, Unicode-compliant way to work with text in your code. The syntax for string creation and manipulation is lightweight and readable, with a string literal syntax that is similar to C. String concatenation is as simple as combining two strings with the + operator, and string mutability is managed by choosing between a constant or a variable, just like any other value in Swift. You can also use strings to insert constants, variables, literals, and expressions into longer strings, in a process known as string interpolation. This makes it easy to create custom string values for display, storage, and printing.

Despite this simplicity of syntax, Swift's String type is a fast, modern string implementation. Every string is composed of encoding-independent Unicode characters, and provides support for accessing those characters in various Unicode representations.

NOTE

Swift's String type is bridged with Foundation's NSString class. Foundation also extends String to expose methods defined by NSString. This means, if you import Foundation, you can access those NSString methods on String without casting.

For more information about using String with Foundation and Cocoa, see <u>Bridging Between String and NSString</u>.

String Literals

You can include predefined String values within your code as *string literals*. A string literal is a sequence of characters surrounded by double quotation marks (").

Use a string literal as an initial value for a constant or variable:

```
let someString = "Some string literal value"
```

Note that Swift infers a type of String for the someString constant because it's initialized with a string literal value.

Multiline String Literals

If you need a string that spans several lines, use a multiline string literal—a sequence of characters surrounded by three double quotation marks:

```
1 let quotation = """
2 The White Rabbit put on his spectacles. "Where shall I begin,
3 please your Majesty?" he asked.
4 
5 "Begin at the beginning," the King said gravely, "and go on till you come to the end; then stop."
7 """
```

A multiline string literal includes all of the lines between its opening and closing quotation marks. The string begins on the first line after the opening quotation marks (""") and ends on the line before the closing quotation marks, which means that neither of the strings below start or end with a line break:

```
1 let singleLineString = "These are the same."
2 let multilineString = """
3 These are the same.
4 """
```

When your source code includes a line break inside of a multiline string literal, that line break also appears in the string's value. If you want to use line breaks to make your source code easier to read, but you don't want the line breaks to be part of the string's value, write a backslash (\) at the end of those lines:

To make a multiline string literal that begins or ends with a line feed, write a blank line as the first or last line. For example:

```
1 let lineBreaks = """
2
3 This string starts with a line break.
4 It also ends with a line break.
5
6 """
```

A multiline string can be indented to match the surrounding code. The whitespace before the closing quotation marks (""") tells Swift what whitespace to ignore before all of the other lines. However, if you write whitespace at the beginning of a line in addition to what's before the closing quotation marks, that whitespace *is* included.

```
Space ignored

Space ignored

Appears in string

NNN This line doesn't begin with whitespace.

Appears in string

NNN This line begins with four spaces.

NNN This line doesn't begin with whitespace.
```

In the example above, even though the entire multiline string literal is indented, the first and last lines in the string don't begin with any whitespace. The middle line has more indentation than the closing quotation marks, so it starts with that extra four-space indentation.

Special Characters in String Literals

String literals can include the following special characters:

- The escaped special characters \0 (null character), \\ (backslash), \t
 (horizontal tab), \n (line feed), \r (carriage return), \" (double quotation mark) and \' (single quotation mark)
- An arbitrary Unicode scalar value, written as \u{n}, where n is a 1–8 digit hexadecimal number (Unicode is discussed in <u>Unicode</u> below)

The code below shows four examples of these special characters. The wiseWords constant contains two escaped double quotation marks. The dollarSign, blackHeart, and sparklingHeart constants demonstrate the Unicode scalar format:

```
let wiseWords = "\"Imagination is more important than
     knowledge\" - Einstein"
    // "Imagination is more important than knowledge" - Einstein
2
    let dollarSign = "\u{24}"
                                              Unicode scalar
3
                                       // $,
     U+0024
4
    let blackHeart = "\u{2665}"
                                              Unicode scalar
     U+2665
    let sparklingHeart = "\u{1F496}" // \(\foralle{p}\), Unicode scalar
5
      U+1F496
```

Because multiline string literals use three double quotation marks instead of just one, you can include a double quotation mark (") inside of a multiline string literal without escaping it. To include the text """ in a multiline string, escape at least one of the quotation marks. For example:

```
1 let threeDoubleQuotationMarks = """
2 Escaping the first quotation mark \"""
3 Escaping all three quotation marks \"\"\"
```

Extended String Delimiters

You can place a string literal within *extended delimiters* to include special characters in a string without invoking their effect. You place your string within quotation marks (") and surround that with number signs (#). For example, printing the string literal #"Line 1\nLine 2"# prints the line feed escape sequence (\n) rather than printing the string across two lines.

If you need the special effects of a character in a string literal, match the number of number signs within the string following the escape character (\). For example, if your string is #"Line 1\nLine 2"# and you want to break the line, you can use #"Line 1\#nLine 2"# instead. Similarly, ###"Line1\###nLine2"### also breaks the line.

String literals created using extended delimiters can also be multiline string literals. You can use extended delimiters to include the text """ in a multiline string, overriding the default behavior that ends the literal. For example:

```
1 let threeMoreDoubleQuotationMarks = #"""
2 Here are three more double quotes: """
3 """#
```

Initializing an Empty String

To create an empty String value as the starting point for building a longer string, either assign an empty string literal to a variable, or initialize a new String instance with initializer syntax:

Find out whether a String value is empty by checking its Boolean is Empty property:

```
if emptyString.isEmpty {
    print("Nothing to see here")
}
```

```
4 // Prints "Nothing to see here"
```

String Mutability

You indicate whether a particular String can be modified (or *mutated*) by assigning it to a variable (in which case it can be modified), or to a constant (in which case it can't be modified):

```
var variableString = "Horse"
variableString += " and carriage"

// variableString is now "Horse and carriage"

let constantString = "Highlander"
constantString += " and another Highlander"

// this reports a compile-time error - a constant string cannot be modified
```

NOTE

This approach is different from string mutation in Objective-C and Cocoa, where you choose between two classes (NSString and NSMutableString) to indicate whether a string can be mutated.

Strings Are Value Types

Swift's String type is a *value type*. If you create a new String value, that String value is *copied* when it's passed to a function or method, or when it's assigned to a constant or variable. In each case, a new copy of the existing String value is created, and the new copy is passed or assigned, not the original version. Value types are described in <u>Structures and Enumerations Are Value Types</u>.

Swift's copy-by-default String behavior ensures that when a function or method passes you a String value, it's clear that you own that exact String value, regardless of where it came from. You can be confident that the string you are passed won't be modified unless you modify it yourself.

Behind the scenes, Swift's compiler optimizes string usage so that actual copying takes place only when absolutely necessary. This means you always get great performance when working with strings as value types.

Working with Characters

You can access the individual Character values for a String by iterating over the string with a for-in loop:

The for-in loop is described in For-In Loops.

Alternatively, you can create a stand-alone Character constant or variable from a single-character string literal by providing a Character type annotation:

```
let exclamationMark: Character = "!"
```

String values can be constructed by passing an array of Character values as an argument to its initializer:

```
let catCharacters: [Character] = ["C", "a", "t", "!", "
let catString = String(catCharacters)
print(catString)
// Prints "Cat! "
```

Concatenating Strings and Characters

String values can be added together (or *concatenated*) with the addition operator (+) to create a new String value:

```
1 let string1 = "hello"
2 let string2 = " there"
3 var welcome = string1 + string2
4 // welcome now equals "hello there"
```

You can also append a String value to an existing String variable with the addition assignment operator (+=):

```
var instruction = "look over"
instruction += string2
// instruction now equals "look over there"
```

You can append a Character value to a String variable with the String type's append() method:

```
1 let exclamationMark: Character = "!"
2 welcome.append(exclamationMark)
3 // welcome now equals "hello there!"
```

NOTE

You can't append a String or Character to an existing Character variable, because a Character value must contain a single character only.

If you're using multiline string literals to build up the lines of a longer string, you want every line in the string to end with a line break, including the last line. For example:

```
1
     let badStart = """
2
     one
3
     two
     .....
4
     let end = """
5
6
     three
     0.00
7
     print(badStart + end)
8
     // Prints two lines:
9
     // one
10
     // twothree
11
12
     let goodStart = """
13
```

```
14
     one
15
     two
16
     .....
17
     print(goodStart + end)
18
     // Prints three lines:
19
20
     // one
21
     // two
     // three
22
```

In the code above, concatenating badStart with end produces a two-line string, which isn't the desired result. Because the last line of badStart doesn't end with a line break, that line gets combined with the first line of end. In contrast, both lines of goodStart end with a line break, so when it's combined with end the result has three lines, as expected.

String Interpolation

String interpolation is a way to construct a new String value from a mix of constants, variables, literals, and expressions by including their values inside a string literal. You can use string interpolation in both single-line and multiline string literals. Each item that you insert into the string literal is wrapped in a pair of parentheses, prefixed by a backslash (\):

```
1 let multiplier = 3
2 let message = "\(multiplier\) times 2.5 is \
          (Double(multiplier) * 2.5)"
3 // message is "3 times 2.5 is 7.5"
```

In the example above, the value of multiplier is inserted into a string literal as \(multiplier\). This placeholder is replaced with the actual value of multiplier when the string interpolation is evaluated to create an actual string.

The value of multiplier is also part of a larger expression later in the string. This expression calculates the value of Double(multiplier) * 2.5 and inserts the result (7.5) into the string. In this case, the expression is written as \((Double(multiplier)) * 2.5) when it's included inside the string literal.

You can use extended string delimiters to create strings containing characters that would otherwise be treated as a string interpolation. For example:

To use string interpolation inside a string that uses extended delimiters, match the number of number signs before the backslash to the number of number signs at the beginning and end of the string. For example:

```
print(#"6 times 7 is \#(6 * 7)."#)
// Prints "6 times 7 is 42."
```

NOTE

The expressions you write inside parentheses within an interpolated string can't contain an unescaped backslash (\), a carriage return, or a line feed. However, they can contain other string literals.

Unicode

Unicode is an international standard for encoding, representing, and processing text in different writing systems. It enables you to represent almost any character from any language in a standardized form, and to read and write those characters to and from an external source such as a text file or web page. Swift's String and Character types are fully Unicode-compliant, as described in this section.

Unicode Scalar Values

Behind the scenes, Swift's native String type is built from *Unicode scalar values*. A Unicode scalar value is a unique 21-bit number for a character or modifier, such as U+0061 for LATIN SMALL LETTER A ("a"), or U+1F425 for FRONT-FACING BABY CHICK ("\rightarrow").

Note that not all 21-bit Unicode scalar values are assigned to a character—some scalars are reserved for future assignment or for use in UTF-16 encoding. Scalar values that have been assigned to a character typically also have a name, such as LATIN SMALL LETTER A and FRONT—FACING BABY CHICK in the examples above.

Extended Grapheme Clusters

Every instance of Swift's Character type represents a single *extended grapheme cluster*. An extended grapheme cluster is a sequence of one or more Unicode scalars that (when combined) produce a single human-readable character.

Here's an example. The letter é can be represented as the single Unicode scalar é (LATIN SMALL LETTER E WITH ACUTE, or U+00E9). However, the same letter can also be represented as a *pair* of scalars—a standard letter e (LATIN SMALL LETTER E, or U+0065), followed by the COMBINING ACUTE ACCENT scalar (U+0301). The COMBINING ACUTE ACCENT scalar is graphically applied to the scalar that precedes it, turning an e into an é when it's rendered by a Unicode-aware text-rendering system.

In both cases, the letter é is represented as a single Swift Character value that represents an extended grapheme cluster. In the first case, the cluster contains a single scalar; in the second case, it's a cluster of two scalars:

Extended grapheme clusters are a flexible way to represent many complex script characters as a single Character value. For example, Hangul syllables from the Korean alphabet can be represented as either a precomposed or decomposed sequence. Both of these representations qualify as a single Character value in Swift:

```
let precomposed: Character = "\u{D55C}" //
한
let decomposed: Character = "\u{1112}\u{1161}\u{11AB}" //
ㅎ, ㅏ, ㄴ
// precomposed is 한, decomposed is 한
```

Extended grapheme clusters enable scalars for enclosing marks (such as COMBINING ENCLOSING CIRCLE, or U+20DD) to enclose other Unicode scalars as part of a single Character value:

```
1 let enclosedEAcute: Character = "\u{E9}\u{20DD}"
2 // enclosedEAcute is (é)
```

Unicode scalars for regional indicator symbols can be combined in pairs to make a single Character value, such as this combination of REGIONAL INDICATOR SYMBOL LETTER U (U+1F1FA) and REGIONAL INDICATOR SYMBOL LETTER S (U+1F1F8):

```
let regionalIndicatorForUS: Character = "\u{1F1FA}\u{1F1F8}"
// regionalIndicatorForUS is ■
```

Counting Characters

To retrieve a count of the Character values in a string, use the count property of the string:

```
let unusualMenagerie = "Koala , Snail , Penguin ,
Dromedary "
print("unusualMenagerie has \(unusualMenagerie.count)
characters")

// Prints "unusualMenagerie has 40 characters"
```

Note that Swift's use of extended grapheme clusters for Character values means that string concatenation and modification may not always affect a string's character count.

For example, if you initialize a new string with the four-character word cafe, and then append a COMBINING ACUTE ACCENT (U+0301) to the end of the string, the resulting string will still have a character count of 4, with a fourth character of é, not e:

```
var word = "cafe"
print("the number of characters in \(word) is \
    (word.count)")
```

NOTE

Extended grapheme clusters can be composed of multiple Unicode scalars. This means that different characters—and different representations of the same character—can require different amounts of memory to store. Because of this, characters in Swift don't each take up the same amount of memory within a string's representation. As a result, the number of characters in a string can't be calculated without iterating through the string to determine its extended grapheme cluster boundaries. If you are working with particularly long string values, be aware that the count property must iterate over the Unicode scalars in the entire string in order to determine the characters for that string.

The count of the characters returned by the count property isn't always the same as the length property of an NSString that contains the same characters. The length of an NSString is based on the number of 16-bit code units within the string's UTF-16 representation and not the number of Unicode extended grapheme clusters within the string.

Accessing and Modifying a String

You access and modify a string through its methods and properties, or by using subscript syntax.

String Indices

Each String value has an associated *index type*, String. Index, which corresponds to the position of each Character in the string.

As mentioned above, different characters can require different amounts of memory to store, so in order to determine which Character is at a particular position, you must iterate over each Unicode scalar from the start or end of that String. For this reason, Swift strings can't be indexed by integer values.

Use the startIndex property to access the position of the first Character of a String. The endIndex property is the position after the last character in a String. As a result, the endIndex property isn't a valid argument to a string's subscript. If a String is empty, startIndex and endIndex are equal.

You access the indices before and after a given index using the index(before:) and index(after:) methods of String. To access an index farther away from the given index, you can use the index(_:offsetBy:) method instead of calling one of these methods multiple times.

You can use subscript syntax to access the Character at a particular String index.

```
let greeting = "Guten Tag!"
1
    greeting[greeting.startIndex]
2
    // G
3
4
    greeting[greeting.index(before: greeting.endIndex)]
5
    //!
    greeting[greeting.index(after: greeting.startIndex)]
6
7
    let index = greeting.index(greeting.startIndex, offsetBy: 7)
8
    greeting[index]
9
    // a
10
```

Attempting to access an index outside of a string's range or a Character at an index outside of a string's range will trigger a runtime error.

```
greeting[greeting.endIndex] // Error
greeting.index(after: greeting.endIndex) // Error
```

Use the indices property to access all of the indices of individual characters in a string.

```
for index in greeting.indices {
   print("\(greeting[index]) ", terminator: "")
}
// Prints "G u t e n T a g ! "
```

```
NOTE
```

You can use the startIndex and endIndex properties and the index(before:), index(after:), and index(_:offsetBy:) methods on any type that conforms to the Collection protocol. This includes String, as shown here, as well as collection types such as Array, Dictionary, and Set.

Inserting and Removing

To insert a single character into a string at a specified index, use the insert(_:at:) method, and to insert the contents of another string at a specified index, use the insert(contents0f:at:) method.

```
var welcome = "hello"
welcome.insert("!", at: welcome.endIndex)
// welcome now equals "hello!"

welcome.insert(contentsOf: " there", at:
    welcome.index(before: welcome.endIndex))
// welcome now equals "hello there!"
```

To remove a single character from a string at a specified index, use the remove(at:) method, and to remove a substring at a specified range, use the removeSubrange(_:) method:

```
NOTE
```

You can use the insert(_:at:), insert(contents0f:at:), remove(at:), and removeSubrange(_:) methods on any type that conforms to the RangeReplaceableCollection protocol. This includes String, as shown here, as well as collection types such as Array, Dictionary, and Set.

Substrings


When you get a substring from a string—for example, using a subscript or a method like prefix(_:)—the result is an instance of <u>Substring</u>, not another string. Substrings in Swift have most of the same methods as strings, which means you can work with substrings the same way you work with strings. However, unlike strings, you use substrings for only a short amount of time while performing actions on a string. When you're ready to store the result for a longer time, you convert the substring to an instance of String. For example:

```
let greeting = "Hello, world!"
let index = greeting.firstIndex(of: ",") ??
    greeting.endIndex
let beginning = greeting[..<index]
// beginning is "Hello"

// Convert the result to a String for long-term storage.
let newString = String(beginning)</pre>
```

Like strings, each substring has a region of memory where the characters that make up the substring are stored. The difference between strings and substrings is that, as a performance optimization, a substring can reuse part of the memory that's used to store the original string, or part of the memory that's used to store another substring. (Strings have a similar optimization, but if two strings share memory, they are equal.) This performance optimization means you don't have to pay the performance cost of copying memory until you modify either the string or substring. As mentioned above, substrings aren't suitable for long-term storage—because they reuse the storage of the original string, the entire original string must be kept in memory as long as any of its substrings are being used.

In the example above, greeting is a string, which means it has a region of memory where the characters that make up the string are stored. Because beginning is a substring of greeting, it reuses the memory that greeting uses. In contrast, newString is a string—when it's created from the substring, it has its own storage. The figure below shows these relationships:

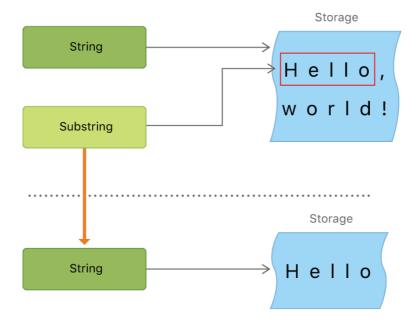

NOTE

Both String and Substring conform to the <u>StringProtocol</u> protocol, which means it's often convenient for string-manipulation functions to accept a StringProtocol value. You can call such functions with either a String or Substring value.

Comparing Strings

Swift provides three ways to compare textual values: string and character equality, prefix equality, and suffix equality.

String and Character Equality

String and character equality is checked with the "equal to" operator (==) and the "not equal to" operator (!=), as described in <u>Comparison Operators</u>:

```
let quotation = "We're a lot alike, you and I."
let sameQuotation = "We're a lot alike, you and I."
if quotation == sameQuotation {
   print("These two strings are considered equal")
}
// Prints "These two strings are considered equal"
```

Two String values (or two Character values) are considered equal if their extended grapheme clusters are *canonically equivalent*. Extended grapheme clusters are canonically equivalent if they have the same linguistic meaning and appearance, even if they're composed from different Unicode scalars behind the scenes.

For example, LATIN SMALL LETTER E WITH ACUTE (U+00E9) is canonically equivalent to LATIN SMALL LETTER E (U+0065) followed by COMBINING ACUTE ACCENT (U+0301). Both of these extended grapheme clusters are valid ways to represent the character é, and so they're considered to be canonically equivalent:

```
// "Voulez-vous un café?" using LATIN SMALL LETTER E WITH
1
      ACUTE
2
    let eAcuteQuestion = "Voulez-vous un caf\u{E9}?"
3
    // "Voulez-vous un café?" using LATIN SMALL LETTER E and
4
      COMBINING ACUTE ACCENT
    let combinedEAcuteQuestion = "Voulez-vous un
5
      caf\u{65}\u{301}?"
6
7
    if eAcuteQuestion == combinedEAcuteQuestion {
8
         print("These two strings are considered equal")
9
    }
    // Prints "These two strings are considered equal"
10
```

Conversely, LATIN CAPITAL LETTER A (U+0041, or "A"), as used in English, is *not* equivalent to CYRILLIC CAPITAL LETTER A (U+0410, or "A"), as used in Russian. The characters are visually similar, but don't have the same linguistic meaning:

```
let latinCapitalLetterA: Character = "\u{41}"

let cyrillicCapitalLetterA: Character = "\u{0410}"

if latinCapitalLetterA != cyrillicCapitalLetterA {
   print("These two characters are not equivalent.")
}

// Prints "These two characters are not equivalent."
```

NOTE

String and character comparisons in Swift are not locale-sensitive.

Prefix and Suffix Equality

To check whether a string has a particular string prefix or suffix, call the string's hasPrefix(_:) and hasSuffix(_:) methods, both of which take a single argument of type String and return a Boolean value.

The examples below consider an array of strings representing the scene locations from the first two acts of Shakespeare's *Romeo and Juliet*:

```
1
    let romeoAndJuliet = [
         "Act 1 Scene 1: Verona, A public place",
2
         "Act 1 Scene 2: Capulet's mansion",
3
         "Act 1 Scene 3: A room in Capulet's mansion",
4
         "Act 1 Scene 4: A street outside Capulet's mansion",
5
         "Act 1 Scene 5: The Great Hall in Capulet's mansion",
6
         "Act 2 Scene 1: Outside Capulet's mansion",
         "Act 2 Scene 2: Capulet's orchard",
8
         "Act 2 Scene 3: Outside Friar Lawrence's cell",
9
         "Act 2 Scene 4: A street in Verona",
10
        "Act 2 Scene 5: Capulet's mansion",
11
        "Act 2 Scene 6: Friar Lawrence's cell"
12
13
    ]
```

You can use the hasPrefix(_:) method with the romeoAndJuliet array to count the number of scenes in Act 1 of the play:

```
var act1SceneCount = 0
for scene in romeoAndJuliet {
    if scene.hasPrefix("Act 1 ") {
        act1SceneCount += 1
    }
}
print("There are \((act1SceneCount) scenes in Act 1")
// Prints "There are 5 scenes in Act 1"
```

Similarly, use the hasSuffix(_:) method to count the number of scenes that take place in or around Capulet's mansion and Friar Lawrence's cell:

```
var mansionCount = 0
```

```
2
    var cellCount = 0
     for scene in romeoAndJuliet {
3
         if scene.hasSuffix("Capulet's mansion") {
4
             mansionCount += 1
5
         } else if scene.hasSuffix("Friar Lawrence's cell") {
6
             cellCount += 1
7
         }
8
9
     }
    print("\(mansionCount) mansion scenes; \(cellCount) cell
10
      scenes")
     // Prints "6 mansion scenes; 2 cell scenes"
11
```

NOTE

The hasPrefix(_:) and hasSuffix(_:) methods perform a character-by-character canonical equivalence comparison between the extended grapheme clusters in each string, as described in String and Character Equality.

Unicode Representations of Strings

When a Unicode string is written to a text file or some other storage, the Unicode scalars in that string are encoded in one of several Unicode-defined *encoding* forms. Each form encodes the string in small chunks known as *code units*. These include the UTF-8 encoding form (which encodes a string as 8-bit code units), the UTF-16 encoding form (which encodes a string as 16-bit code units), and the UTF-32 encoding form (which encodes a string as 32-bit code units).

Swift provides several different ways to access Unicode representations of strings. You can iterate over the string with a for-in statement, to access its individual Character values as Unicode extended grapheme clusters. This process is described in Working with Characters.

Alternatively, access a String value in one of three other Unicode-compliant representations:

- A collection of UTF-8 code units (accessed with the string's utf8 property)
- A collection of UTF-16 code units (accessed with the string's utf16 property)
- A collection of 21-bit Unicode scalar values, equivalent to the string's UTF-32 encoding form (accessed with the string's unicodeScalars property)

Each example below shows a different representation of the following string, which is made up of the characters D, o, g, !! (DOUBLE EXCLAMATION MARK, or Unicode scalar U+203C), and the character (DOG FACE, or Unicode scalar U+1F436):

```
let dogString = "Dog‼��"
```

UTF-8 Representation

You can access a UTF-8 representation of a String by iterating over its utf8 property. This property is of type String.UTF8View, which is a collection of unsigned 8-bit (UInt8) values, one for each byte in the string's UTF-8 representation:

Character	D U+0044	O U+006F	g U+0067	!! U+203C			€€ U+1F436			
UTF-8 Code Unit	68	111	103	226	128	188	240	159	144	182
Position	0	1	2	3	4	5	6	7	8	9

```
for codeUnit in dogString.utf8 {
   print("\(codeUnit\)", terminator: "")
}
print("")
// Prints "68 111 103 226 128 188 240 159 144 182 "
```

In the example above, the first three decimal codeUnit values (68, 111, 103) represent the characters D, o, and g, whose UTF-8 representation is the same as their ASCII representation. The next three decimal codeUnit values (226, 128, 188) are a three-byte UTF-8 representation of the DOUBLE EXCLAMATION MARK character. The last four codeUnit values (240, 159, 144, 182) are a four-byte UTF-8 representation of the DOG FACE character.

UTF-16 Representation

You can access a UTF-16 representation of a String by iterating over its utf16 property. This property is of type String.UTF16View, which is a collection of unsigned 16-bit (UInt16) values, one for each 16-bit code unit in the string's UTF-16 representation:

Character	D U+0044	O g U+006F U+0067		!! U+203C U+1F436		·
UTF-16 Code Unit	68	111	103	8252	55357	56374
Position	0	1	2	3	4	5

```
for codeUnit in dogString.utf16 {
   print("\(codeUnit\) ", terminator: "")
}
print("")
// Prints "68 111 103 8252 55357 56374 "
```

Again, the first three codeUnit values (68, 111, 103) represent the characters D, o, and g, whose UTF-16 code units have the same values as in the string's UTF-8 representation (because these Unicode scalars represent ASCII characters).

The fourth codeUnit value (8252) is a decimal equivalent of the hexadecimal value 203C, which represents the Unicode scalar U+203C for the DOUBLE EXCLAMATION MARK character. This character can be represented as a single code unit in UTF-16.

The fifth and sixth codeUnit values (55357 and 56374) are a UTF-16 surrogate pair representation of the DOG FACE character. These values are a high-surrogate value of U+D83D (decimal value 55357) and a low-surrogate value of U+DC36 (decimal value 56374).

Unicode Scalar Representation

You can access a Unicode scalar representation of a String value by iterating over its unicodeScalars property. This property is of type UnicodeScalarView, which is a collection of values of type UnicodeScalar.

Each UnicodeScalar has a value property that returns the scalar's 21-bit value, represented within a UInt32 value:

Character	D U+0044	0 U+006F	g U+0067	!! U+203C	€ U+1F436
Unicode Scalar Code Unit	68	111	103	8252	128054
Position	0	1	2	3	4

```
for scalar in dogString.unicodeScalars {
   print("\(scalar.value) ", terminator: "")
}
print("")
// Prints "68 111 103 8252 128054 "
```


The value properties for the first three UnicodeScalar values (68, 111, 103) once again represent the characters D, o, and g.

The fourth codeUnit value (8252) is again a decimal equivalent of the hexadecimal value 203C, which represents the Unicode scalar U+203C for the DOUBLE EXCLAMATION MARK character.

The value property of the fifth and final UnicodeScalar, 128054, is a decimal equivalent of the hexadecimal value 1F436, which represents the Unicode scalar U+1F436 for the DOG_FACE character.

As an alternative to querying their value properties, each UnicodeScalar value can also be used to construct a new String value, such as with string interpolation:

```
for scalar in dogString.unicodeScalars {
   print("\(scalar\) ")
}
```



< Basic Operators

<u>Collection Types</u> >

BETA SOFTWARE

This documentation contains preliminary information about an API or technology in development. This information is subject to change, and software implemented according to this documentation should be tested with final operating system software.

Learn more about using Apple's beta software