


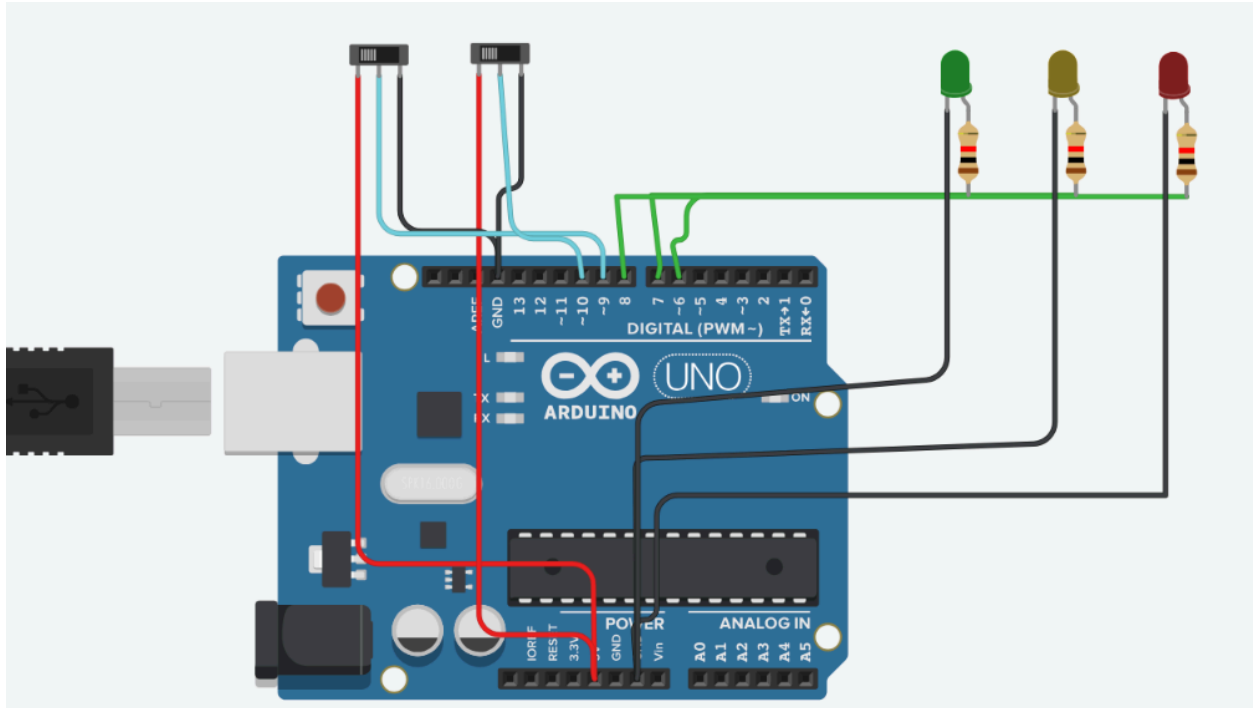

```
// C++ code
//
int green=6;
int yellow=7;
int red=8;
int s1=9;
int s2=10;
void setup()
{
  pinMode(green, OUTPUT);
  pinMode(yellow, OUTPUT);
  pinMode(red, OUTPUT);
  pinMode(green, OUTPUT);
  pinMode(s1,INPUT_PULLUP);
  pinMode(s2, INPUT_PULLUP);
}

void loop()
{
  if(digitalRead(s1)== LOW&&digitalRead(s2)==LOW)
  {
    digitalWrite(green,HIGH);
    digitalWrite(yellow,LOW);
```

```
digitalWrite(red,LOW);

}
else if(digitalRead(s1)== HIGH&&digitalRead(s2)==LOW)
{
digitalWrite(green,LOW);
digitalWrite(yellow,LOW);
digitalWrite(red,HIGH);
}
else if(digitalRead(s1)== HIGH&&digitalRead(s2)==HIGH||digitalRead(s1)==
LOW&&digitalRead(s2)==HIGH)
{
digitalWrite(green,LOW);
digitalWrite(yellow,HIGH);
digitalWrite(red,LOW);
}
}
```