


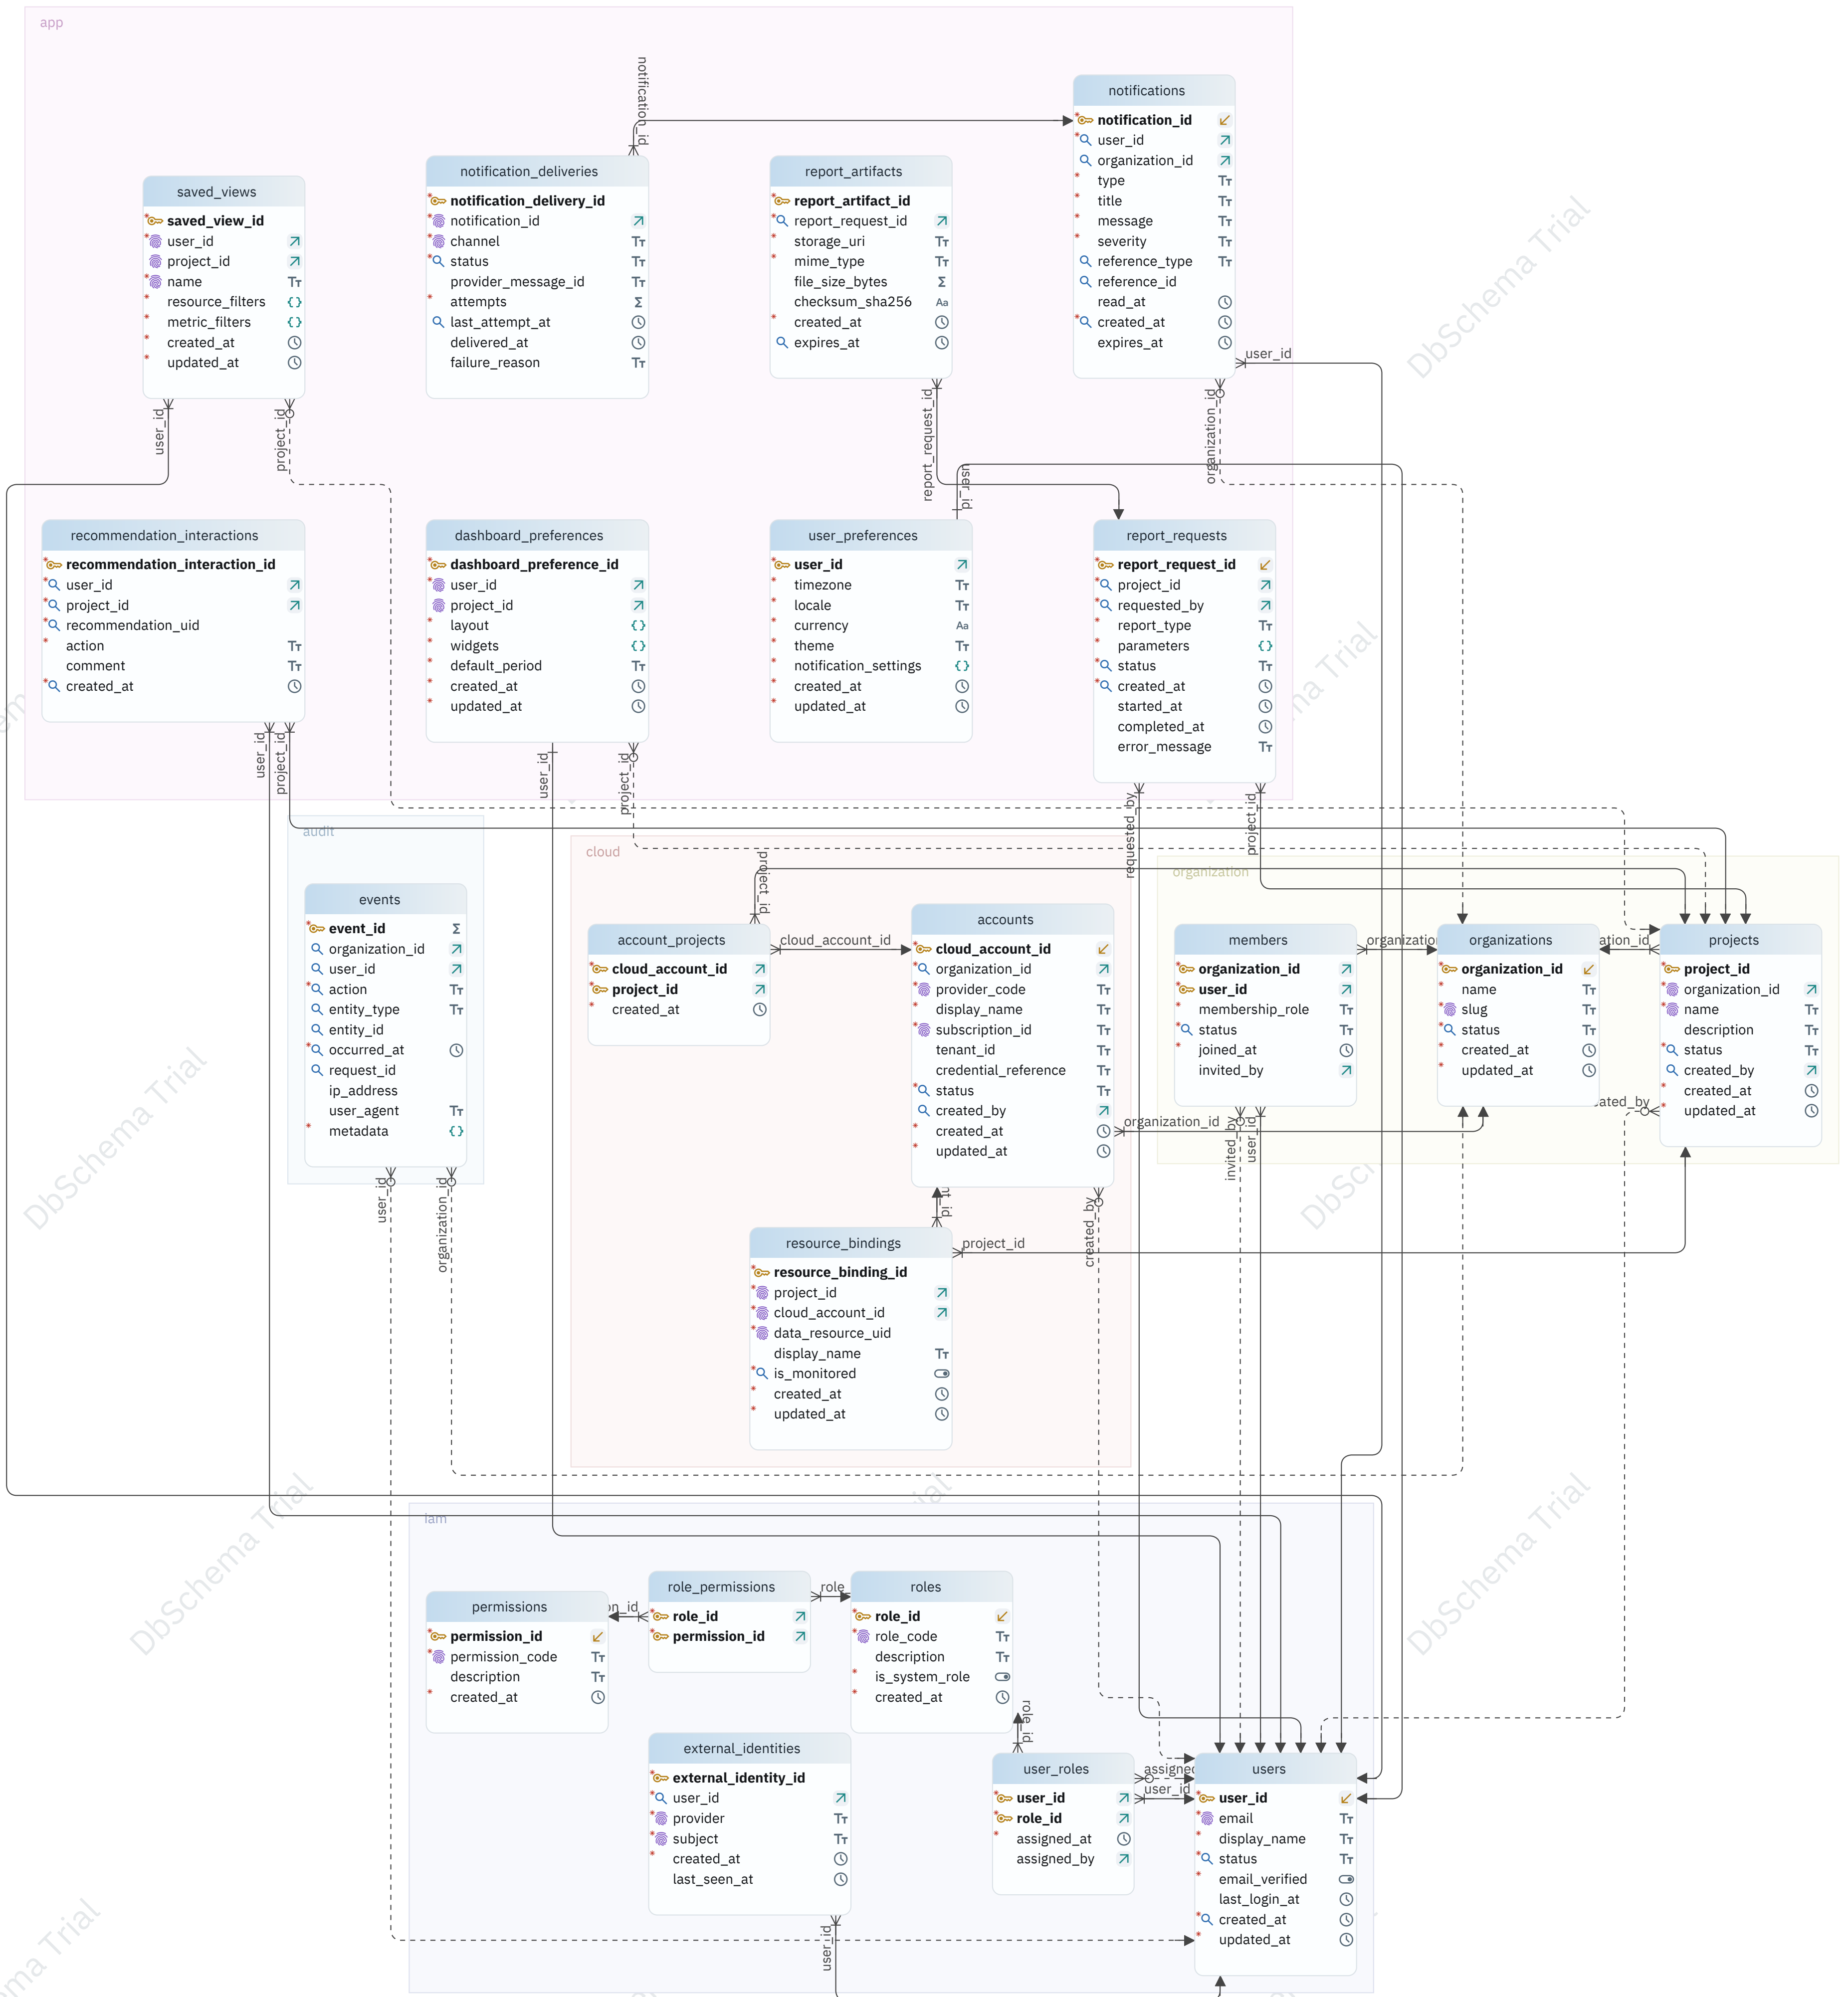

Diagрма_cco_app

Table account_projects

Idx	Name	Data Type
* 	cloud_account_id	uuid
* 	project_id	uuid
*	created_at	timestampz DEFAULT now()
Indexes		
Type	Name	On
Pk	account_projects_pkey	cloud_account_id, project_id
	ix_account_projects_project	project_id
Foreign Keys		
Type	Name	On
	account_projects_project_id_fkey (project_id) ref projects (project_id)	
	account_projects_cloud_account_id_fkey (cloud_account_id) ref accounts (cloud_account_id)	

Table accounts

Idx	Name	Data Type
* 	cloud_account_id	uuid DEFAULT gen_random_uuid()
* 	organization_id	uuid
* 	provider_code	varchar(30)
*	display_name	varchar(160)
* 	subscription_id	varchar(128)
	tenant_id	varchar(128)
	credential_reference	varchar(512)
* 	status	varchar(20) DEFAULT 'pending'::character varying
	created_by	uuid
*	created_at	timestampz DEFAULT now()
*	updated_at	timestampz DEFAULT now()
Indexes		
Type	Name	On
Pk	accounts_pkey	cloud_account_id
Unq	uq_cloud_account_subscription	provider_code, subscription_id
	ix_cloud_accounts_org_status	organization_id, status
	ix_cloud_accounts_created_by	created_by
Foreign Keys		
Type	Name	On
	accounts_created_by_fkey (created_by) ref users (user_id)	
	accounts_organization_id_fkey (organization_id) ref organizations (organization_id)	
Constraints		
	Name	Definition
	ck_cloud_accounts_display_name	length(btrim((display_name)::text)) >= 1) AND (length(btrim((display_name)::text)) <= 160
	ck_cloud_accounts_provider	provider_code)::text = ANY ((ARRAY['azure'::character varying, 'aws'::character varying, 'gcp'::character varying])::text[]
	ck_cloud_accounts_status	status)::text = ANY ((ARRAY['pending'::character varying, 'active'::character varying, 'error'::character varying, 'disabled'::character varying, 'deleted'::character varying])::text[]
Triggers		
	Name	Definition

Table accounts

trg_cloud_accounts_updated_at

Table dashboard_preferences

Idx	Name	Data Type
* 	dashboard_preference_id	uuid DEFAULT gen_random_uuid()
* 	user_id	uuid
	project_id	uuid
* 	layout	jsonb DEFAULT '{}':jsonb
* 	widgets	jsonb DEFAULT '[]':jsonb
* 	default_period	varchar(20) DEFAULT '30d':character varying
* 	created_at	timestampz DEFAULT now()
* 	updated_at	timestampz DEFAULT now()

Indexes

Type	Name	On
Pk	dashboard_preferences_pkey	dashboard_preference_id
Unq	uq_dashboard_preferences_global_user	user_id
Unq	uq_dashboard_preferences_project_user	user_id, project_id
	ix_dashboard_preferences_user	user_id
	ix_dashboard_preferences_project	project_id

Foreign Keys

Type	Name	On
	dashboard_preferences_project_id_fkey (project_id) ref projects (project_id)	
	dashboard_preferences_user_id_fkey (user_id) ref users (user_id)	

Constraints

Name	Definition
ck_dashboard_period	default_period)::text = ANY ((ARRAY['24h':character varying, '7d':character varying, '30d':character varying, '90d':character varying, '1y':character varying]::text[]
ck_dashboard_layout_object	jsonb_typeof(layout) = 'object':text
ck_dashboard_widgets_array	jsonb_typeof(widgets) = 'array':text

Triggers

Name	Definition
trg_dashboard_preferences_updated_at	

Table events

Idx	Name	Data Type
* 	event_id	bigint GENERATED ALWAYS AS IDENTITY
	organization_id	uuid
	user_id	uuid
* 	action	varchar(80)
	entity_type	varchar(80)
	entity_id	uuid
* 	occurred_at	timestampz DEFAULT now()
	request_id	uuid
	ip_address	inet
	user_agent	text
* 	metadata	jsonb DEFAULT '{}':jsonb

Indexes

Table events

Type	Name	On
Pk	events_pkey	event_id
	ix_audit_org_time	organization_id, occurred_at
	ix_audit_user_time	user_id, occurred_at
	ix_audit_entity_time	entity_type, entity_id, occurred_at
	ix_audit_action_time	action, occurred_at
	ix_audit_request_id	request_id

Foreign Keys

Type	Name	On
	events_organization_id_fkey (organization_id)	ref organizations (organization_id)
	events_user_id_fkey (user_id)	ref users (user_id)

Constraints

Name	Definition
ck_audit_metadata_object	jsonb_typeof(metadata) = 'object'::text

Table external_identities

Idx	Name	Data Type
* 	external_identity_id	uuid DEFAULT gen_random_uuid()
* 	user_id	uuid
* 	provider	varchar(50)
* 	subject	varchar(255)
* 	created_at	timestampz DEFAULT now()
	last_seen_at	timestampz

Indexes

Type	Name	On
Pk	external_identities_pkey	external_identity_id
Unq	uq_external_identity	provider, subject
	ix_external_identities_user	user_id

Foreign Keys

Type	Name	On
	external_identities_user_id_fkey (user_id)	ref users (user_id)

Table members

Idx	Name	Data Type
* 	organization_id	uuid
* 	user_id	uuid
* 	membership_role	varchar(30) DEFAULT 'member'::character varying
* 	status	varchar(20) DEFAULT 'active'::character varying
* 	joined_at	timestampz DEFAULT now()
	invited_by	uuid

Indexes

Type	Name	On
Pk	members_pkey	organization_id, user_id
	ix_members_user_status	user_id, status
	ix_members_org_status	organization_id, status

Foreign Keys

Type	Name	On
------	------	----

Table members

members_invited_by_fkey (invited_by) ref users (user_id)

members_user_id_fkey (user_id) ref users (user_id)

members_organization_id_fkey (organization_id) ref organizations (organization_id)

Constraints

Name	Definition
ck_members_role	membership_role::text = ANY ((ARRAY['owner'::character varying, 'admin'::character varying, 'member'::character varying, 'viewer'::character varying])::text[]
ck_members_status	status::text = ANY ((ARRAY['invited'::character varying, 'active'::character varying, 'suspended'::character varying, 'removed'::character varying])::text[]

Table notification_deliveries

Idx	Name	Data Type
* 	notification_delivery_id	uuid DEFAULT gen_random_uuid()
* 	notification_id	uuid
* 	channel	varchar(20)
* 	status	varchar(20) DEFAULT 'pending'::character varying
	provider_message_id	varchar(255)
* 	attempts	smallint DEFAULT 0
	last_attempt_at	timestampztz
	delivered_at	timestampztz
	failure_reason	text

Indexes

Type	Name	On
Pk	notification_deliveries_pkey	notification_delivery_id
Unq	uq_notification_channel	notification_id, channel
	ix_notification_deliveries_pending	status, last_attempt_at

Foreign Keys

Type	Name	On
	notification_deliveries_notification_id_fkey (notification_id)	ref notifications (notification_id)

Constraints

Name	Definition
ck_delivery_attempts	attempts >= 0
ck_delivery_channel	channel::text = ANY ((ARRAY['in_app'::character varying, 'email'::character varying, 'webhook'::character varying])::text[]
ck_delivery_status	status::text = ANY ((ARRAY['pending'::character varying, 'sent'::character varying, 'delivered'::character varying, 'failed'::character varying, 'cancelled'::character varying])::text[]

Table notifications

Idx	Name	Data Type
* 	notification_id	uuid DEFAULT gen_random_uuid()
* 	user_id	uuid
	organization_id	uuid
* 	type	varchar(60)
* 	title	varchar(200)
* 	message	text
* 	severity	varchar(20) DEFAULT 'info'::character varying
	reference_type	varchar(50)

Table notifications

	reference_id	uuid
	read_at	timestampz
	created_at	timestampz DEFAULT now()
	expires_at	timestampz

Indexes

Type	Name	On
Pk	notifications_pkey	notification_id
	ix_notifications_user_unread	user_id, created_at
	ix_notifications_org_created	organization_id, created_at
	ix_notifications_reference	reference_type, reference_id

Foreign Keys

Type	Name	On
	notifications_organization_id_fkey (organization_id)	ref organizations (organization_id)
	notifications_user_id_fkey (user_id)	ref users (user_id)

Constraints

Name	Definition
ck_notifications_severity	severity)::text = ANY ((ARRAY['info'::character varying, 'success'::character varying, 'warning'::character varying, 'critical'::character varying])::text[])

Table organizations

Idx	Name	Data Type
	organization_id	uuid DEFAULT gen_random_uuid()
	name	varchar(160)
	slug	varchar(80)
	status	varchar(20) DEFAULT 'active'::character varying
	created_at	timestampz DEFAULT now()
	updated_at	timestampz DEFAULT now()

Indexes

Type	Name	On
Pk	organizations_pkey	organization_id
Unq	uq_organizations_slug	slug
	ix_organizations_status	status

Constraints

Name	Definition
ck_organizations_slug	(slug)::text ~ '^[a-z0-9]+(?:-[a-z0-9]+)*\$':text
ck_organizations_status	status)::text = ANY ((ARRAY['active'::character varying, 'suspended'::character varying, 'deleted'::character varying])::text[])
ck_organizations_name	length(btrim((name)::text)) >= 1) AND (length(btrim((name)::text)) <= 160

Triggers

Name	Definition
trg_organizations_updated_at	

Table permissions

Idx	Name	Data Type
	permission_id	smallint DEFAULT nextval('iam.permissions_permission_id_seq'::regclass)
	permission_code	varchar(100)

Table permissions

	description	varchar(255)
*	created_at	timestampz DEFAULT now()

Indexes

Type	Name	On
Pk	permissions_pkey	permission_id
Unq	permissions_permission_code_key	permission_code

Table projects

Idx	Name	Data Type
* 	project_id	uuid DEFAULT gen_random_uuid()
* 	organization_id	uuid
* 	name	varchar(160)
	description	text
* 	status	varchar(20) DEFAULT 'active'::character varying
	created_by	uuid
*	created_at	timestampz DEFAULT now()
*	updated_at	timestampz DEFAULT now()

Indexes

Type	Name	On
Pk	projects_pkey	project_id
Unq	uq_projects_org_name	organization_id, name
	ix_projects_org_status	organization_id, status
	ix_projects_created_by	created_by

Foreign Keys

Type	Name	On
	projects_created_by_fkey (created_by) ref users (user_id)	
	projects_organization_id_fkey (organization_id) ref organizations (organization_id)	

Constraints

Name	Definition
ck_projects_status	status::text = ANY ((ARRAY['active'::character varying, 'archived'::character varying, 'deleted'::character varying])::text[])
ck_projects_name	length(btrim((name)::text)) >= 1) AND (length(btrim((name)::text)) <= 160

Triggers

Name	Definition
trg_projects_updated_at	

Table recommendation_interactions

Idx	Name	Data Type
* 	recommendation_interaction_id	uuid DEFAULT gen_random_uuid()
* 	user_id	uuid
* 	project_id	uuid
* 	recommendation_uid	uuid
*	action	varchar(30)
	comment	text
* 	created_at	timestampz DEFAULT now()

Indexes

Table recommendation_interactions

Type	Name	On
Pk	recommendation_interactions_pkey	recommendation_interaction_id
	ix_recommendation_interactions_user_created	user_id, created_at
	ix_recommendation_interactions_project_created	project_id, created_at
	ix_recommendation_interactions_recommendation	recommendation_uid, created_at

Foreign Keys

Type	Name	On
	recommendation_interactions_project_id_fkey (project_id)	ref projects (project_id)
	recommendation_interactions_user_id_fkey (user_id)	ref users (user_id)

Constraints

Name	Definition
ck_recommendation_action	action)::text = ANY ((ARRAY['viewed'::character varying, 'accepted'::character varying, 'rejected'::character varying, 'deferred'::character varying, 'dismissed'::character varying, 'restored'::character varying]))::text[]

Table report_artifacts

Idx	Name	Data Type
* 	report_artifact_id	uuid DEFAULT gen_random_uuid()
* 	report_request_id	uuid
*	storage_uri	text
*	mime_type	varchar(100)
	file_size_bytes	bigint
	checksum_sha256	char(64)
*	created_at	timestamptz DEFAULT now()
	expires_at	timestamptz

Indexes

Type	Name	On
Pk	report_artifacts_pkey	report_artifact_id
	ix_report_artifacts_request	report_request_id
	ix_report_artifacts_expiry	expires_at

Foreign Keys

Type	Name	On
	report_artifacts_report_request_id_fkey (report_request_id)	ref report_requests (report_request_id)

Constraints

Name	Definition
ck_artifact_checksum	checksum_sha256 IS NULL) OR (checksum_sha256 ~ '^[0-9a-fA-F]{64}\$'::text
ck_artifact_size	file_size_bytes IS NULL) OR (file_size_bytes >= 0

Table report_requests

Idx	Name	Data Type
* 	report_request_id	uuid DEFAULT gen_random_uuid()
* 	project_id	uuid
* 	requested_by	uuid
*	report_type	varchar(50)
*	parameters	jsonb DEFAULT '{}'::jsonb
* 	status	varchar(20) DEFAULT 'queued'::character varying

Table report_requests

* 🔍	created_at	timestamptz DEFAULT now()
	started_at	timestamptz
	completed_at	timestamptz
	error_message	text

Indexes

Type	Name	On
Pk	report_requests_pkey	report_request_id
	ix_report_requests_project_created	project_id, created_at
	ix_report_requests_user_created	requested_by, created_at
	ix_report_requests_queue	status, created_at

Foreign Keys

Type	Name	On
	report_requests_requested_by_fkey (requested_by) ref users (user_id)	
	report_requests_project_id_fkey (project_id) ref projects (project_id)	

Constraints

Name	Definition
ck_report_parameters_object	jsonb_typeof(parameters) = 'object'::text
ck_report_status	status::text = ANY ((ARRAY['queued'::character varying, 'running'::character varying, 'completed'::character varying, 'failed'::character varying, 'cancelled'::character varying])::text[])

Table resource_bindings

Idx	Name	Data Type
* 🔗	resource_binding_id	uuid DEFAULT gen_random_uuid()
* 🌀	project_id	uuid
* 🌀	cloud_account_id	uuid
* 🌀	data_resource_uid	uuid
	display_name	varchar(160)
* 🔍	is_monitored	boolean DEFAULT true
*	created_at	timestamptz DEFAULT now()
*	updated_at	timestamptz DEFAULT now()

Indexes

Type	Name	On
Pk	resource_bindings_pkey	resource_binding_id
Unq	uq_resource_binding_account	cloud_account_id, data_resource_uid
Unq	uq_resource_binding	project_id, data_resource_uid
	ix_resource_bindings_project_monitored	project_id, is_monitored
	ix_resource_bindings_data_uid	data_resource_uid

Foreign Keys

Type	Name	On
	resource_bindings_cloud_account_id_fkey (cloud_account_id) ref accounts (cloud_account_id)	
	resource_bindings_project_id_fkey (project_id) ref projects (project_id)	

Triggers

Name	Definition
trg_resource_bindings_updated_at	

Table role_permissions

Idx	Name	Data Type
-----	------	-----------

Table role_permissions

 	role_id	smallint
 	permission_id	smallint

Indexes

Type	Name	On
Pk	role_permissions_pkey	role_id, permission_id
	ix_role_permissions_permission	permission_id

Foreign Keys

Type	Name	On
	role_permissions_permission_id_fkey (permission_id)	ref permissions (permission_id)
	role_permissions_role_id_fkey (role_id)	ref roles (role_id)

Table roles

Idx	Name	Data Type
 	role_id	smallint DEFAULT nextval('iam.roles_role_id_seq'::regclass)
 	role_code	varchar(50)
	description	varchar(255)
	is_system_role	boolean DEFAULT true
	created_at	timestampz DEFAULT now()

Indexes

Type	Name	On
Pk	roles_pkey	role_id
Unq	roles_role_code_key	role_code

Table saved_views

Idx	Name	Data Type
 	saved_view_id	uuid DEFAULT gen_random_uuid()
 	user_id	uuid
	project_id	uuid
 	name	varchar(120)
	resource_filters	jsonb DEFAULT '{}':jsonb
	metric_filters	jsonb DEFAULT '{}':jsonb
	created_at	timestampz DEFAULT now()
	updated_at	timestampz DEFAULT now()

Indexes

Type	Name	On
Pk	saved_views_pkey	saved_view_id
	ix_saved_views_user_project	user_id, project_id
Unq	uq_saved_views_user_project_name	user_id, project_id, name
Unq	uq_saved_views_user_global_name	user_id, name

Foreign Keys

Type	Name	On
	saved_views_project_id_fkey (project_id)	ref projects (project_id)
	saved_views_user_id_fkey (user_id)	ref users (user_id)

Constraints

Name	Definition
ck_saved_view_filters_object	jsonb_typeof(resource_filters) = 'object'::text) AND (jsonb_typeof(metric_filters) = 'object'::text)

Table saved_views

Triggers

Name	Definition
trg_saved_views_updated_at	

Table user_preferences

Idx	Name	Data Type
* 	user_id	uuid
*	timezone	varchar(64) DEFAULT 'UTC'::character varying
*	locale	varchar(20) DEFAULT 'es-CO'::character varying
*	currency	char(3) DEFAULT 'USD'::bpchar
*	theme	varchar(20) DEFAULT 'system'::character varying
*	notification_settings	jsonb DEFAULT '{}'::jsonb
*	created_at	timestampz DEFAULT now()
*	updated_at	timestampz DEFAULT now()

Indexes

Type	Name	On
Pk	user_preferences_pkey	user_id

Foreign Keys

Type	Name	On
	user_preferences_user_id_fkey (user_id) ref users (user_id)	

Constraints

Name	Definition
ck_user_preferences_theme	theme)::text = ANY ((ARRAY['system'::character varying, 'light'::character varying, 'dark'::character varying])::text[]
ck_user_preferences_notification_object	jsonb_typeof(notification_settings) = 'object'::text
ck_user_preferences_currency	currency ~ '^[A-Z]{3}\$'::text

Triggers

Name	Definition
trg_user_preferences_updated_at	

Table user_roles

Idx	Name	Data Type
* 	user_id	uuid
* 	role_id	smallint
*	assigned_at	timestampz DEFAULT now()
	assigned_by	uuid

Indexes

Type	Name	On
Pk	user_roles_pkey	user_id, role_id
	ix_user_roles_role	role_id

Foreign Keys

Type	Name	On
	user_roles_assigned_by_fkey (assigned_by) ref users (user_id)	
	user_roles_role_id_fkey (role_id) ref roles (role_id)	
	user_roles_user_id_fkey (user_id) ref users (user_id)	

Table users

Idx	Name	Data Type
-----	------	-----------

Table users

* 🔑	user_id	uuid DEFAULT gen_random_uuid()
* 🌀	email	citext
*	display_name	varchar(160)
* 🔍	status	varchar(20) DEFAULT 'active'::character varying
*	email_verified	boolean DEFAULT false
	last_login_at	timestampz
* 🔍	created_at	timestampz DEFAULT now()
*	updated_at	timestampz DEFAULT now()

Indexes

Type	Name	On
Pk	users_pkey	user_id
Unq	uq_users_email	email
	ix_users_status_created	status, created_at

Constraints

Name	Definition
ck_users_display_name	length(btrim((display_name)::text)) >= 1) AND (length(btrim((display_name)::text)) <= 160
ck_users_status	status)::text = ANY ((ARRAY['pending'::character varying, 'active'::character varying, 'suspended'::character varying, 'deleted'::character varying])::text[]

Triggers

Name	Definition
trg_users_updated_at	