




Configure Burpsuite with 203.0.113.66:8080 proxy listener, turn off intercept traffic

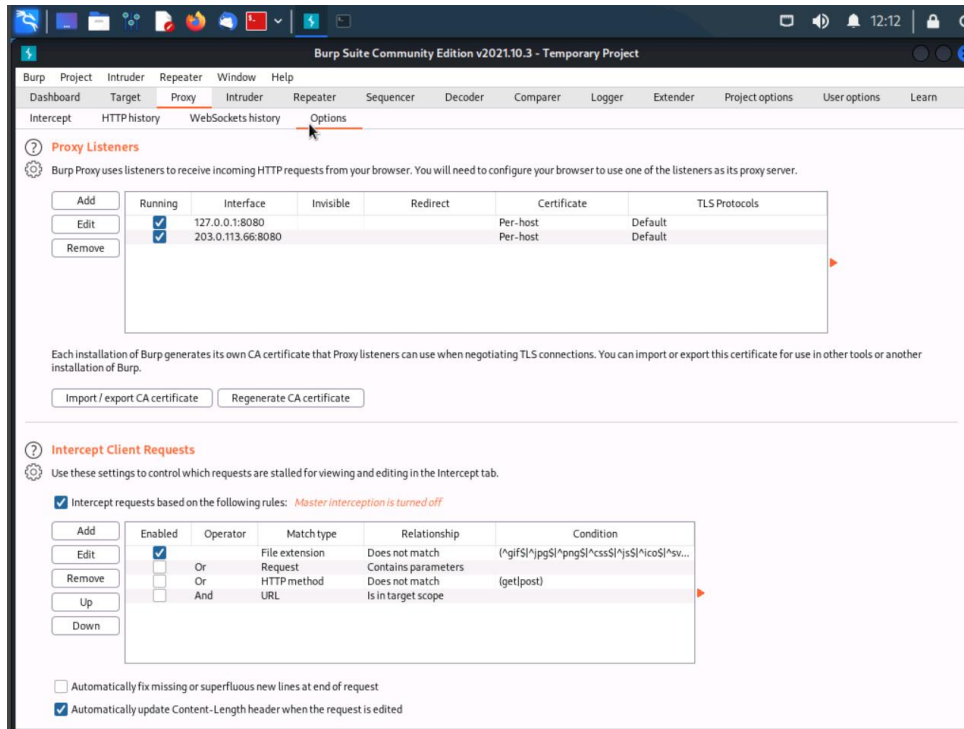


Create bash script that will set the proxy settings on a Windows machine to route traffic through a specified proxy server (IP: 203.0.113.66, Port: 8080).

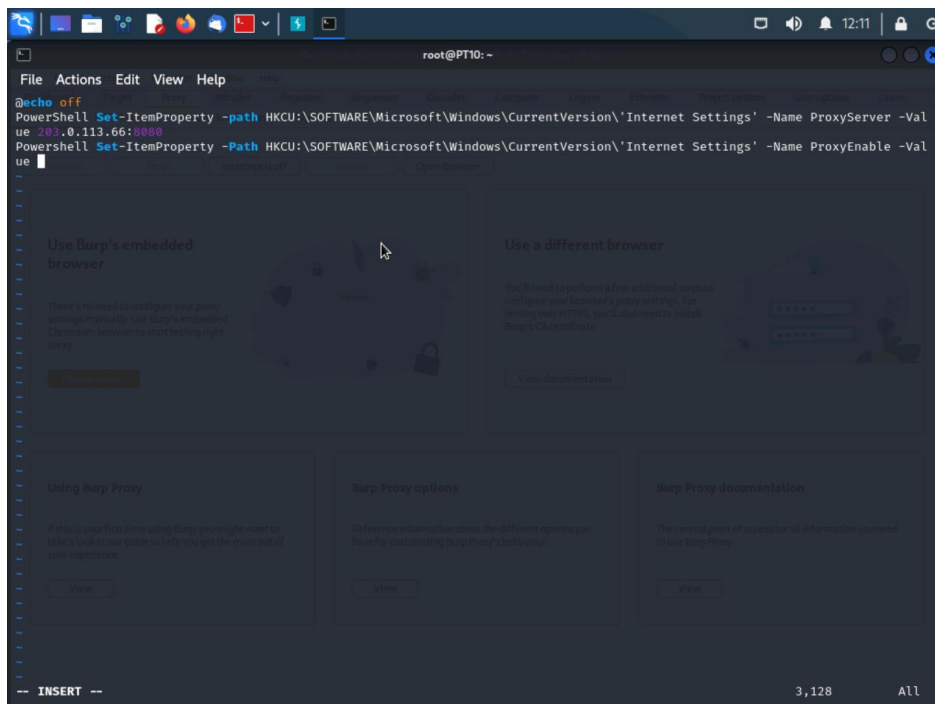

Victim is sent a phishing email, which they click on and run the bat file.

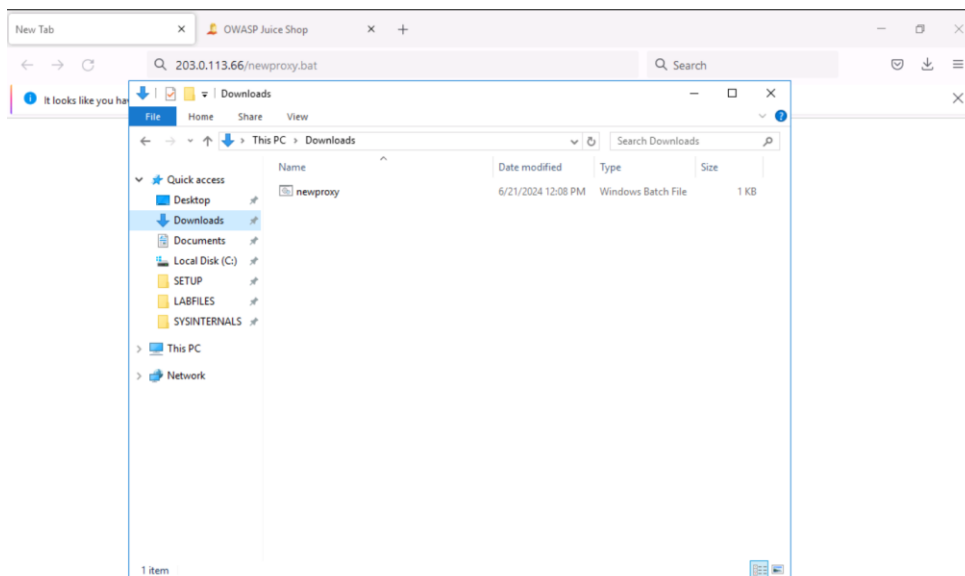

Victim's traffic is captured on burpsuite

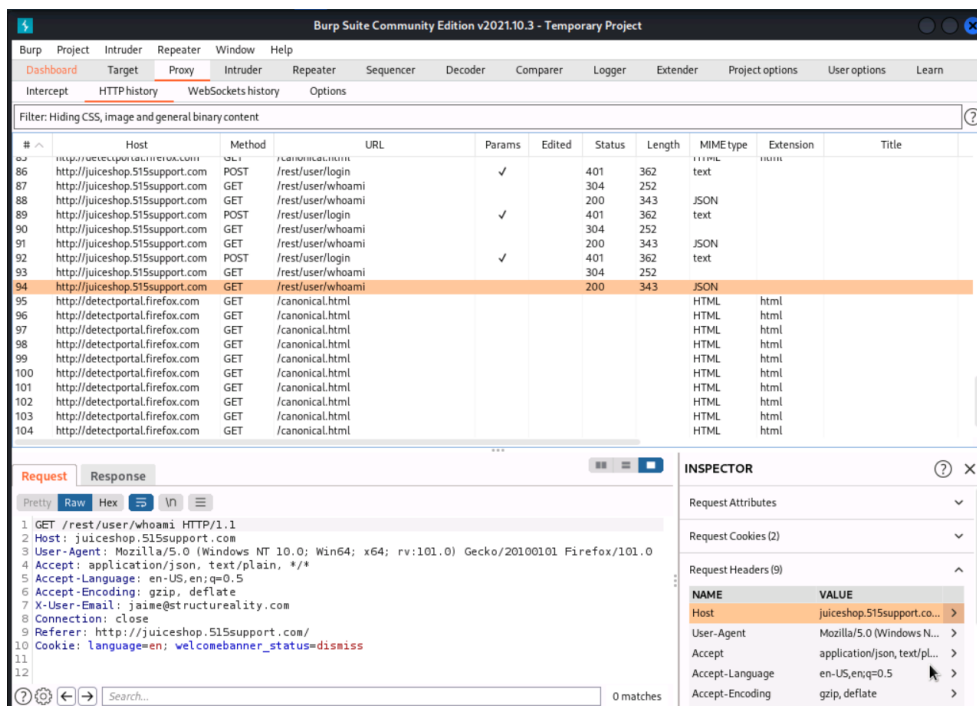

Target Information will be contained in MIME Type: Post.

