Vector Matrix Multiplication & Optimizations Assignment #3, CSC 746, Fall 2026

Jacob Cordano
Computer Science Department
San Francisco State University
San Francisco, CA, USA
Email: jcordano1@sfsu.edu

***Abstract*—**

I. Introduction

II. Implementation

Here, we describe the implementation of the vector matrix multiplication algorithms (VMM) that we have developed and evaluated in this study. We first implement a basic matrix multiplication algorithm that has been parallelized using OpenMP. We then implement a blocked matrix multiplication algorithm that has also been parallelized using OpenMP.

A. DGEMM Basic Open MP Implementation

The basic DGEMM implementation performs square matrix–matrix multiplication, computing $C = C + AB$. The matrices are stored in row-major order. OpenMP parallelizes the outer loop over the rows of A, allowing different threads to update distinct rows of C concurrently. For each output element C_{ij}, the innermost loop computes the dot product of row i of A and column j of B, adding the result to the existing value of C_{ij}. Because each OpenMP iteration updates a distinct row of C, no synchronization is required for the matrix updates. The LIKWID markers enclose the parallel computation for performance measurement.

```
void square_dgemm(int n, double *A, double *B, double *C){
    #pragma omp parallel
    {
        LIKWID_MARKER_START(MY_MARKER_REGION_NAME);

#pragma omp for
        for (int i = 0; i < n; i++)
        {
            for (int j = 0; j < n; j++)
            {
                double sum = C[i * n + j];
                for (int k = 0; k < n; k++)
                {
                    sum += A[i * n + k] * B[k * n + j];
                }
                C[i * n + j] = sum;
            }
        }

        LIKWID_MARKER_STOP(MY_MARKER_REGION_NAME);
    }
}
```

Listing 1. Basic DGEMV OMP implementation

B. DGEMM Blocked Open MP Implementation

The blocked DGEMM computes $C = C + AB$ for $n \times n$ matrices A, B, and C, all stored in row-major order. The matrices are divided into square tiles with dimensions `block_size` by `block_size`. Each tile of C is copied into a thread-local buffer and updated using the corresponding tiles of A and B, which are also copied into thread-local buffers. This copy optimization improves spatial and temporal locality by allowing the block multiplication to operate on contiguous data that can be reused from the cache. OpenMP parallelizes the outer loop over block rows, allowing threads to update distinct regions of C concurrently without requiring synchronization. After all contributing block products have been accumulated, the updated tile is copied back into C. The LIKWID markers enclose the parallel computation for performance measurement.

```
PROCEDURE Blocked_DGEMM(n, size, A, B, C)
    blocks = n / size

    PARALLEL FOR each block (i, j)
        Copy C(i,j) to local C_block

        FOR k = 0 TO blocks - 1
            Copy A(i,k) to local A_block
            Copy B(k,j) to local B_block
            C_block = C_block + A_block * B_block
```

```
11          END FOR

13          Copy C_block back to C(i,j)
14      END PARALLEL FOR
15  END PROCEDURE
```

Listing 2. Blocked DGEMV OMP pseudocode implementation

III. Results

A. Computational platform and Software Environment

This evaluation was performed on the NERSC Perlmutter supercomputer using two AMD EPYC 7763 processors with a base clock speed of 2.45 GHz. The system was configured with 512 GB of DDR4 memory per node, a 32 KB L1 cache, a 512 KB L2 cache, and a 32 MB L3 cache, providing ample resources for large matrix multiplications. The operating system is SUSE Linux Enterprise Server 15 SP6 with kernel version `6.4.0-150600.23.125_15.0.29-cray_shasta_c`. GCC 14.3.0 and CMake 3.28.3 were used for compilation and build configuration, respectively. [4]

B. Methodology

While conducting this evaluation, we focused on measuring the performance of our matrix multiplication implementations under various configurations. We utilized OpenMP for parallelization and compared the performance of our Basic Matrix Multiplication, Blocked Matrix Multiplication, and the CBLAS library. The evaluation was conducted across different problem sizes, specifically 128, 512, and 2048, to assess scalability and efficiency. We collected data on execution time, speedup, and cache access patterns to provide a comprehensive understanding of the performance characteristics of each implementation.

All metrics were collected using the job files which leveraged the LIKWID performance monitoring tool, allowing us to capture detailed information about speedup using the Runtime (RDTSC) values as well as cache access patterns using the L2 and L3 cache access counters. The collected data was then analyzed to identify trends, bottlenecks, and areas for optimization.

C. Scaling Study for Basic MM with OpenMP parallelization

The scaling study for basic matrix multiplication with OpenMP parallelization was conducted to evaluate the performance improvements achieved through parallel execution. The study involved running the Basic MM implementation across different problem sizes and measuring the speedup achieved by utilizing multiple threads.

To collect this data, we executed the included job-basic-omp file, which was designed to run the Basic MM implementation with OpenMP parallelization. The job file was configured to utilize multiple threads, allowing us to observe the performance gains achieved through parallel execution.

The problem sizes tested were 128, 512, and 2048, and the speedup was calculated by comparing the execution time of the parallel implementation against the serial version. The results of this scaling study are presented in Figure 1, which illustrates the speedup achieved for each problem size.

Speedup was calculated using the formula:

$$\text{Speedup} = \frac{\text{Execution Time (Serial)}}{\text{Execution Time (Parallel)}} \tag{1}$$

The execution time for the parallel implementation was measured using the maximum runtime recorded across all threads, while the serial execution time was obtained from the single-threaded execution of the Basic MM implementation. The reason for using the maximum runtime across threads is to account for the fact that the overall execution time is determined by the slowest thread, which can be influenced by factors such as load imbalance and thread synchronization overhead.

Figure 1 shows the speedup by problem size for the basic matrix multiplication implementation parallelized with OpenMP.

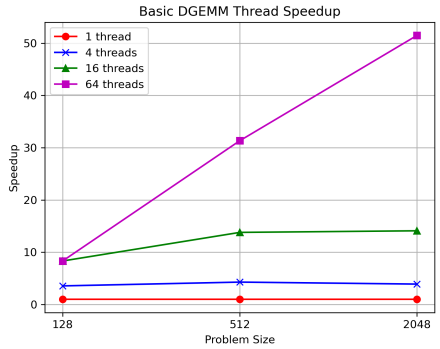


Fig. 1. Speedup of Basic Matrix Multiplication with OpenMP parallelization

We observed that the speedup achieved by the Basic implementation was significant as concurrency increased, with the highest speedup observed for the largest problem size of 2048 and a concurrency of 64 threads. We also observed that speedup was not linear as well and

see that problem size seems to have the most significant increases on the 64-thread speedup. This is likely due to the greater ability to utilize the available threads for larger problem sizes.

D. Evaluation of BMMCO with OpenMP parallelization

For the blocked matrix multiplication implementation with OpenMP parallelization, we conducted a similar scaling study to evaluate its performance improvements. The study involved running the blocked implementation across different problem sizes and measuring the speedup achieved by utilizing multiple threads.

To collect this data, we executed the included job-blocked-omp file, which was designed to run the blocked implementation with OpenMP parallelization. The job file was configured to utilize multiple threads, allowing us to observe the performance gains achieved through parallel execution.

To calculate speedup, we used the same formula as in the previous section, comparing the execution time of the parallel implementation against the serial version. The execution time for the parallel implementation was measured using the maximum runtime recorded across all threads, while the serial execution time was obtained from the single-threaded execution of the blocked implementation.

Figure 2 shows the speedup by problem size for the blocked implementation parallelized with OpenMP.

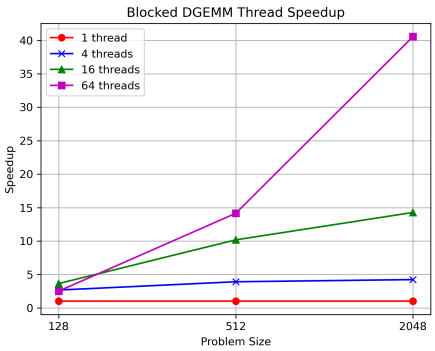


Fig. 2. Speedup of Blocked Matrix Multiplication with OpenMP parallelization

In this observation, we found that speedup was less significant for the blocked implementation compared to the basic implementation. The highest speedup was observed for the largest problem size of 2048 and a concurrency of 64 threads, but the overall speedup was lower than that of the basic implementation. Additionally, we observed that the different problem sizes had generated elevated speedup for the threads less than 64 when compared tot the basic implementation.

The lower overall speedup for the blocked implementation can be attributed to the increased complexity of the algorithm compared to the basic implementation, which may introduce additional computational overhead.

E. Comparison of CBLAS, BasicMM-omp, and BMMCO-omp

TABLE I
NORMALIZED L2 CACHE ACCESSES. EACH VALUE IS DIVIDED BY THE CORRESPONDING CBLAS L2 ACCESS COUNT FOR THE SAME PROBLEM SIZE.

Problem size	CBLAS	Basic	Blocked B4	Blocked B16
128	1.000	44.987	4.574	1.335
512	1.000	45.813	4.449	1.977
2048	1.000	120.906	7.807	2.013

TABLE II
NORMALIZED L3 CACHE ACCESSES. EACH VALUE IS DIVIDED BY THE CORRESPONDING CBLAS `L3_ACCESS_ALL_TYPES` COUNT FOR THE SAME PROBLEM SIZE.

Problem size	CBLAS	Basic	Blocked B4	Blocked B16
128	1.000	0.044	0.035	0.053
512	1.000	273.351	13.936	3.043
2048	1.000	604.116	20.994	4.508

F. Overall findings and discussion

IV. AI USAGE

In order to complete this assignment AI was used in the following ways:

- To configure the included Dockerfile so that I may easily run the homework file without installing various packages locally to my machine.
- After running the benchmarks, I would ask an LLM to combine data into one CSV for plotting.
- For LaTeX debugging, formatting, and learning how to use citations.
- To create my speedup LaTeXtable.
- To better understand the lecture materials provided for the course.

REFERENCES

[1] Bethel, E. Wes. Csc 746 f26 lecture 08 – vectorization and ilp, Sep 2026.
[2] Bethel, E. Wes. Csc 746 f26 lecture 10 – parallel perf measures, smp programming, Sep 2026.

[3] Lindevs, May 2025.
[4] Nersc. Perlmutter architecture.
[5] OpenBLAS Developers. Openblas faq, Jul 2026.