

# An R Implementation for Correlated Pseudo Marginal Monte Carlo Methods

James Thornton      Yuxi Jiang

October 17, 2018

## Abstract

This document briefly summarises the statistical methodology underlying the `cpmmc` package, located at <https://github.com/JTT94/cpmmc>. In particular, this paper looks at the Correlated Pseudo Marginal Markov Chain theory introduced by Deligiannidis et al. (2015) and application to the random effects model.

## 1 Background

The Metropolis-Hastings (MH) algorithm, detailed fully by Roberts and Rosenthal (2004), is a particular Markov Chain Monte Carlo (MCMC) procedure used to sample asymptotically from a target distribution,  $\pi$ , in order to compute expectations with respect to the target distribution. This and similar MCMC procedures are often employed when it is difficult to sample from  $\pi$  directly. The outline of MH is that one builds a markov chain with states  $(\theta_t; t \in \mathbb{N})$ , and stationary distribution  $\pi$ , coinciding with the desired target distribution. At each time  $t$ , the state is updated stochastically via an acceptance/rejection probability on a proposal state,  $\theta'$ , generated from some transition kernel,  $K$  with density  $q$ . The acceptance probability is defined as  $\alpha_E(\theta_{t-1}, \theta') = \min \left\{ 1, \frac{\pi(\theta')q(\theta', \theta_{t-1})}{\pi(\theta_{t-1})q(\theta_{t-1}, \theta')} \right\}$ . Provided certain ergodic conditions given by Roberts and Rosenthal (2004) hold, the arithmetic average of accepted states in the generated Markov Chain will approach the desired expectation with respect to  $\pi$ .

In a Bayesian context, MH is often used to sample from a posterior distribution of some parameter of interest,  $\theta$ . Given observations  $y_{1:T}$ , and parameter of interest with prior distribution  $p$ , the target distribution will be of the form  $\pi(\theta) = p(\theta|y_{1:T}) \propto p(y|\theta)p(\theta)$ .

To implement MH for Bayesian inference, one would need to be able to evaluate  $p(y|\theta)p(\theta)$  in order to perform the acceptance/rejection step in building the Markov chain. For many applications, such as with latent variable models, the

likelihood,  $p(y|\theta)$ , is often intractable thus making MH difficult to implement.

The pseudo-marginal (PM) algorithm follows the same procedure as the idealised MH, however, it introduces an estimator for the intractable likelihood to replace the true likelihood ratio required for the acceptance probability. This reduces the requirement of being able to compute likelihood  $p(y|\theta)$ , to only being required to be able to compute a non-negative, unbiased, unnormalised Monte Carlo estimate of this likelihood.

The correlated pseudo-marginal (CPM) algorithm is a development of the PM algorithm and shall be the focus of this document. The CPM correlates the estimators for the likelihood to reduce the variance of the resulting likelihood ratio, in order to improve efficiency in implementing the scheme. In Deligiannidis et al. (2015), correlated auxiliary variables are introduced in the calculation of the likelihood estimate to encourage correlation in the estimates.

The main contributions of Deligiannidis et al. (2015), in addition to introducing this correlation approach, are: providing theoretical results on the benefits, guidance on tuning parameters and demonstrated applications in state space and random effect models. This document shall focus on the high-level CPM theory, random effect model and a simulation study to demonstrate some properties empirically.

## 2 Methodology

Let  $p(y_{1:T}|\theta)$  denote the likelihood for the  $T$  observations  $y_{1:T}$ , and let  $p(\theta)$  be the prior density for the parameter  $\theta \in \Theta \subseteq \mathbb{R}^d$ . The Bayesian posterior density of interest can be written as  $\pi(\theta) \propto p(y_{1:T}|\theta)p(\theta)$ . To further abuse notation, let  $x \sim p$  denote sampling realisation  $x$  from the distribution with density  $p$ .

### 2.1 Metropolis-Hastings

In a Bayesian setting, the MH algorithm is as detailed below, the acceptance probability have been rewritten from  $\alpha_E(\theta_{t-1}, \theta') = \min \left\{ 1, \frac{\pi(\theta')q(\theta', \theta_{t-1})}{\pi(\theta_{t-1})q(\theta_{t-1}, \theta')} \right\}$  to  $\alpha_E(\theta_{t-1}, \theta') = \min \left\{ 1, \frac{p(y_{1:T}|\theta')q(\theta', \theta_{t-1})p(\theta')}{p(y_{1:T}|\theta_{t-1})q(\theta_{t-1}, \theta')p(\theta_{t-1})} \right\}$  to emphasis the need to compute the exact likelihood.

---

**Algorithm 1** Idealised Metropolis Hastings

---

- 1: Initialise  $\theta_0$  :  
    Sample from prior  $\theta_0 \sim p$
  - 2: At each iteration  $t > 0$  :
  - 3:   Sample proposal:  $\theta' \sim q(\theta_{t-1}, \cdot)$
  - 4:   Calculate acceptance probability  $\alpha_E(\theta_{t-1}, \theta')$  :  
    
$$\alpha_E(\theta_{t-1}, \theta') = \min \left\{ 1, \frac{p(y_{1:T}|\theta')q(\theta', \theta_{t-1})p(\theta')}{p(y_{1:T}|\theta_{t-1})q(\theta_{t-1}, \theta')p(\theta_{t-1})} \right\}$$
  - 5:   With probability:  $\alpha_E(\theta_{t-1}, \theta')$   
    Set  $\theta_t \leftarrow \theta'$  else  $\theta_t \leftarrow \theta_{t-1}$
- 

## 2.2 Correlated Pseudo-Marginal Algorithm

To target  $\pi$ , the CPM first augments the state from  $\theta$  to  $(\theta, U)$ , with joint density  $\bar{\pi}$  given as

$$\bar{\pi}(\theta, u) = \pi(\theta)m(u)\frac{\hat{p}(y_{1:T}|\theta, u)}{p(y_{1:T}|\theta)}$$

By simulating a Markov chain to target  $\bar{\pi}$ , one can record only the  $\theta$  values in order to target  $\pi$ . Given that  $\hat{p}(y_{1:T}|\theta, U)$  is unbiased, we have that  $\pi(\theta)$  is a marginal density of  $\bar{\pi}(\theta, u)$ , as  $\int \bar{\pi}(\theta, u)du = \pi(\theta)$ .

The Correlated Pseudo Marginal algorithm uses the following assumptions, as well as the Metropolis Hastings algorithm to target  $\bar{\pi}$  with a choice of transition kernel  $K$  to induce correlated  $U$  proposals.

- $\hat{p}(y_{1:T}|\theta, U)$  is a non-negative, unbiased estimator of likelihood  $p(y_{1:T}|\theta)$
- $U \sim m$
- $K$  is a transition kernel admitting an m-reversible Markov chain

$$m(u)K(u, u') = m(u')K(u', u)$$

This framework allows for running MH without having to compute  $p(y_{1:T}|\theta)$ . The primary difference to the idealised MH algorithm is swapping the likelihood ratio,  $\frac{p(y_{1:T}|\theta, U')}{p(y_{1:T}|\theta, U)}$ , with its estimator  $\frac{\hat{p}(y_{1:T}|\theta, U')}{\hat{p}(y_{1:T}|\theta, U)}$  in the acceptance probability at each iteration.

Informally, the intuition behind the CPM, and in particular the correlation aspect, is as follows. Providing  $\hat{p}(y_{1:T}|\cdot, \cdot)$  as a function of  $(\theta, U)$  is sufficiently "nice" and  $\theta$  is close to  $\theta'$ , correlation amongst  $U$  and  $U'$  will induce correlation amongst  $\hat{p}(y_{1:T}|\theta, U)$  and  $\hat{p}(y_{1:T}|\theta', U')$ . This correlation lowers the variance of the ratio seen in the acceptance probability,  $\frac{\hat{p}(y_{1:T}|\theta, U')}{\hat{p}(y_{1:T}|\theta, U)}$ . Hence, the algorithm will be "more similar" to the idealised MH algorithm, and reduce the inefficiency introduced by taking estimates rather than computing the exact values of the likelihood.

---

**Algorithm 2** Correlated Pseudo Marginal Algorithm

---

- 1: Initialise :
 
$$\theta_0 \sim p_\theta$$

$$U_0 \sim p_U$$
  - 2: At each iteration  $t > 0$  :
    - 3: Sample proposal:  $\theta' \sim q(\theta_{t-1}, \cdot)$
    - 4: Sample auxiliary variables:  $\epsilon \sim \mathcal{N}(0_M, I_M)$   
 Set  $U' = \rho U_{t-1} + \sqrt{1 - \rho^2} \epsilon$
    - 5: Compute estimator  $\hat{p}(y_{1:T}|\theta', U')$  of  $p(y_{1:T}|\theta', U')$
    - 6: Calculate acceptance probability:  $\alpha_E(\theta_{t-1}, \theta') :$   

$$\alpha_E\{(\theta_{t-1}, U_{t-1}), (\theta', U')\} = \min \left\{ 1, \frac{\hat{p}(y_{1:T}|\theta', U')q(\theta', \theta_{t-1})p(\theta')}{\hat{p}(y_{1:T}|\theta_{t-1}, U_{t-1})q(\theta_{t-1}, \theta')p(\theta_{t-1})} \right\}$$
    - 7: With probabiliy:  $\alpha_E\{(\theta_{t-1}, U_{t-1}), (\theta', U')\}$   
 Set  $(\theta_t, U_t) \leftarrow (\theta', U')$  else  $(\theta_t, U_t) \leftarrow (\theta_{t-1}, U_{t-1})$
- 

Notice that by setting  $K(u, u') = m(u')$  and let  $\rho = 0$  in the CPM algorithm given above, we will obtain the PM algorithm.

### 2.3 Random Effect Model

Define the model as follows:

$$x \sim f_\theta(\cdot)$$

$$Y_t|X_t \sim g_\theta(\cdot|X_t)$$

where  $t \in \mathbb{N}$  and  $\{X_t; t > 0\}$  are  $\mathbb{R}^k$ -valued latent variables and  $\{Y_t; t > 0\}$  are  $\mathcal{Y}$ -valued observations.

For observed data  $Y_{1:T} = y_{1:T}$ , the likelihood satisfies:

$$p(y_{1:T}) = \prod_{t=1}^T p(y_t|\theta)$$

$$p(y_t|\theta) = \int g_\theta(y_t|x_t, \theta) f_\theta(x_t) dx_t$$

If the integral for  $p(y_t|\theta)$  is intractable, one can use importance sampling to form an unbiased estimator  $\hat{p}(y_t|\theta)$ , where  $N$  is the number of proposal samples. The likelihood estimator and importance sampling weights are given as

$$\hat{p}(y_{1:T}|\theta, U) = \prod_{t=1}^T \hat{p}(y_t|\theta, U_t)$$

$$\hat{p}(y_t|\theta, U_t) = \frac{1}{N} \sum_{i=1}^N w(y_t, U_{t,i}; \theta)$$

$$w(y_t, U_{t,i}) = \frac{g_\theta(y_t|X_{t,i}) f_\theta(X_{t,i})}{q_\theta(X_{t,i}|y_t)}$$

assuming that there exists a deterministic map  $\Xi : \mathbb{R}^p \times \Theta \rightarrow \mathbb{R}^k$  such that  $X_{t,i} = \Xi(U_{t,i}, \theta) \sim q_\theta(\cdot|y_t)$  and  $U_{t,i} \sim \mathcal{N}(0_p, I_p)$ .

## 2.4 Key Results on Parameter Tuning and Optimisation

Other than introducing the approach, the primary theoretic contributions of Deligiannidis et al. (2015) are in specifying the distributions of the loglikelihood error,  $Z_T(\theta)$ , and loglikelihood error ratio,  $R_T(\theta, \theta')$  under correlated  $U$  proposals and under non-correlated for comparison of CPM with the PM algorithm.

$$\begin{aligned} Z_T(\theta) &= \log(\hat{p}(Y_{1:T}|\theta, U)) - \log(p(Y_{1:T}|\theta)) \\ R_T(\theta, \theta') &= \log \frac{\hat{p}(Y_{1:T}|\theta', U')}{\hat{p}(Y_{1:T}|\theta, U)} - \log \frac{p(Y_{1:T}|\theta', )}{p(Y_{1:T}|\theta)} \end{aligned}$$

The significance of these results lies in using them to inform choice of parameters  $\rho$  and  $N$  which controls the correlation and number of Monte Carlo samples in the unbiased estimator respectively.

In the interest of brevity, the theorems of Deligiannidis et al. (2015) which state that  $Z_T(\theta)$  and  $R_T(\theta, \theta')$  are asymptotically normal are not repeated below. However, the key practical implications are that one should find  $\beta > 0, \psi > 0$  and set the CPM parameters such that:

$$\begin{aligned} N_T &= \beta T^{\frac{1}{2}} \\ \rho &= \exp(-\psi \beta T^{-\frac{1}{2}}) = \exp(-\psi \frac{N_T}{T}) \end{aligned}$$

Deligiannidis et al. (2015) then provides a heuristic to find these parameters by minimizing the objective function:

$$CT(h, Q_T) = N_T \times IF(h, Q_T)$$

where  $h$  is a real-valued measurable function, and  $IF(h, Q_T)$  is a measure of the integrated autocorrelation time of  $\{h(\theta_t); t \in \mathbb{N}\}$ , where  $\{\theta_t\}_{t \in \mathbb{N}}$  are generated under Markov kernel  $Q_T$ , given by:

$$IF(h, Q_T) = 1 + 2 \sum_{n=1}^{\infty} \phi_n(h, Q_T)$$

For  $n > 0$ ,  $\phi_n$  denotes the autocorrelation at lag  $n$ . Thus,  $IF(h, Q_T)$  provides a measure for inefficiency, and can be used to compare results and performances between different Markov Chain Monte Carlo schemes by looking at the autocorrelation within the sampled chains.

Due to the involved nature, the detailed analysis of the heuristic has been excluded from this document.

### 3 Application

#### 3.1 Simulation Study

In order to compare the performance of CPM algorithm with PM and MH algorithms, we first need to introduce the following Gaussian random effects model.

$$\begin{aligned} X_t &\stackrel{\text{i.i.d.}}{\sim} N(\theta, 1) \\ Y_t|X_t &\sim N(X_t, 1) \end{aligned}$$

We also choose prior  $\theta \sim \mathcal{N}(0, 1)$ . Under this particular construction, we can obtain the true likelihood  $Y_t \sim N(\theta, 2)$ , which not only can be used to directly implement the MH algorithm for benchmarking purposes, but also enables the computation of loglikelihood error and loglikelihood error ratio.

All of the three algorithms use the same random walk proposal distribution,  $\theta' \sim \mathcal{N}(\theta, 0.02^2)$ . In addition, we use importance sampling to obtain a non-negative, unbiased estimator for the likelihood, given below, to compute the acceptance probabilities for the PM and CPM schemes.

The true value for the 'unknown' parameter of interest,  $\theta$ , is set to be 0.5 when generating observations  $y_{1:T}$ .

$$\begin{aligned} \hat{p}(y_{1:T}|\theta, U) &= \prod_{t=1}^T \hat{p}(y_t|\theta, U_t) \\ \hat{p}(y_t|\theta, U_t) &= \frac{1}{N} \sum_{i=1}^N \psi(y_t; \theta + U_{t,i}, 1) \end{aligned}$$

where  $\psi(\cdot; \mu, \sigma^2)$  denotes the density for the Gaussian distribution with mean  $\mu$  and variance  $\sigma^2$ , and the auxiliary variables  $U_{t,i}$  are realisations from independent standard Gaussian distributions.

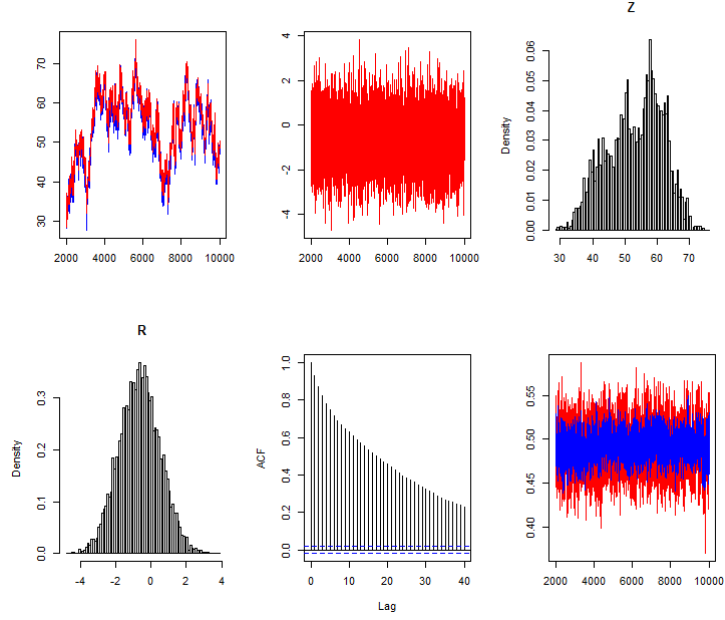


Figure 1: test

### 3.2 Benchmarking: MH, CPM, PM

– compare  $\theta$  estimated by the three algorithms with true value – plots of accepted chains, correlogram – calculate acceptance probability for three algorithms – time used to run the three algorithms – efficiency, mixing, burnin time? sticky chains? – the loglikelihood error and loglikelihood error ratios  $Z$ ,  $R$  and  $W = Z + R$  for PM and CPM

$T$	$N_T$	$\rho$	Average Acceptance			Inefficiency Score, $h$		
			$\varrho_{MH}$	$\varrho_{CPM}$	$\varrho_{PM}$	$IF_{MH}$	$IF_{CPM}$	$IF_{PM}$
1024	19	0.9894	0.85	0.45	0.0052	18.78	27.04	78.95
2048	28	0.9925	0.78	0.47	0.0044	11.96	21.65	76.56
4096	39	0.9947	11.91	0.44	0.0040	11.91	20.54	53.66
8192	80	0.9963	0.65	0.44	0.0031	19.92	24.34	64.29

$T$	$N_T$	$\rho$	Relative Inefficiency, to $MH$	
			$RIF_{CPM}$	$RIF_{PM}$
1024	19	0.9894	1.44	4.2
2048	28	0.9925	1.81	6.4
4096	39	0.9947	1.7	4.5
8192	80	0.9963	1.2	3.2

## 4 Discussion

As mentioned in Section 2.2, in order for there to be small relative variance for the likelihood ratio estimator  $\frac{\hat{p}(y|\theta_t, U_t)}{\hat{p}(y|\theta, U)}$ , the CPM algorithm requires  $(\theta, U)$  to be "close" enough to  $(\theta_t, U_t)$ , and that  $\hat{p}(y|\cdot, \cdot)$  is a regular enough function. However, it may not always be possible to fulfil the requirements, and Deligiannidis et al. (2015) had used the state-space model as an example, where the likelihood ratio estimator does not behave as required even for "close" enough  $(\theta, U)$  and  $(\theta_t, U_t)$ . In this case, Deligiannidis et al. (2015) introduced a resampling scheme procedure based on the Hilbert space-filling curve and the "Particle filter using Hilbert sort" algorithm in order to sample from the state-space model.

The CPM algorithm can be computationally complex during implementations. In the case of the random effects model, the CPM scheme have to simulated  $N$  samples to compute the likelihood estimation using importance sampling estimator for each observed data points, and this has to be repeated  $T$  times to compute the acceptance probability for a single iteration. If the parameter of interest is of dimension  $p$ , then the CPM algorithm has to simulate  $NTp$  random variables per iteration to get one sample, which can be inefficient if the size of the sample required is large.

In addition, the heuristic provided by Deligiannidis et al. (2015) to select parameters for CPM in order to optimise the performance of the algorithm is expensive to compute. In practice, the suggested procedure is to evaluate  $CT(h, Q_T)$  only on a subset of data, then the parameters can be estimated through regression.

## 5 Conclusion

## References

- George Deligiannidis, Arnaud Doucet, and Michael K Pitt. The correlated pseudo-marginal method. *arXiv preprint arXiv:1511.04992*, 2015.
- Gareth O. Roberts and Jeffrey S. Rosenthal. General state space markov chains and mcmc algorithms. *Probab. Surveys*, 1:20–71, 2004. doi: 10.1214/1549578041000000024. URL <https://doi.org/10.1214/1549578041000000024>.