– SAFAPS SIM –API SPECIFICATION

Jeremy Harrault

SWORDFISH

– SAFAPS SIM –	Publication date	28/01/2016	- SPARCS -
Stress and Fatigue			0.7
Audit and Prediction	Project name	SAFAPS SIM	Software Product Architecture Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Objectives of this document	

Objectives of this document

The purpose of this document is to specify the interface of the SAFAPS SIM API. This is the interface between SAFAPS web service and external systems requesting SAFAPS. This document define the functions offered by the API both from static view and dynamic view. The static view of each function is defined by their inputs and outputs whereas the dynamic view is defined using the sequential view showing the action which need to be performed for each function.

SAFAPS SIM –
Stress and Fatigue
Audit and Prediction
Service Simulator

Publication date	28/01/2016
Project name	SAFAPS SIM
Subject	API Specification
Chapter name	Objectives of this document

– SPARCS –Software Product ArchitectureResources Control System

Glossary and Terminology

-A-

API: Application Programming Interface

-R-

REST: Representational State Transfer.

-S-

S&F: Stress and Fatigue

SAFAPS: Stress and Fatigue Audit and Prediction Service

– SAFAPS SIM –Stress and Fatigue	Publication date	28/01/2016	– SPARCS –
Audit and Prediction	Project name	SAFAPS SIM	Software Product Architecture
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Document Description	

Document Description

Title	SAFAPS SIM : API Specification	1
Creation date	26/01/2016	
Publication date	28/01/2016	
Product Owner	Augustin Tataru	taau15md@student.ju.se
Authors	Jeremy Harrault	hajr15bp@ju.se
Subject	API Specification	
Model version	1.0	
Document version	1.4	

Revisions table

Date	Rev.	Author	Modified Section(s)	Comments	
26/01/16	1.0	Jeremy Harrault	All	Define API architecture, function and the static view for each of them.	
27/01/16	1.1	Jeremy Harrault	3.	Add dynamic view for all functions	
28/01/16	1.1.1	Jeremy Harrault	3.	<pre>Correct typo in evaluation request: "EndlTime" => "EndTime" and "Equipment" => "Equipment"</pre>	
01/02/16	1.2	Jeremy Harrault	3.	Remove "Schedule" tag and bring elements inside at a previous level. Put "Timezone" in the "Event"'s tag.	
04/02/16	1.3	Jeremy Harrault	3.	Remove "Timezone" error from evaluation request. Add generic errors section	
12/02/16	1.4	Jeremy Harrault	3.	For GET invoices, change status code 204 => 200	

SAFAPS SIM –
 Stress and Fatigue
 Audit and Prediction
 Service Simulator

Publication date	28/01/2016
Project name	SAFAPS SIM
Subject	API Specification
Chapter name	Table of Contents

SPARCS –Software Product Architecture Resources Control System

Table of Contents

1.	Des	cription of the API	1
1	l. 1 .	REST architecture	1
1	L. 2 .	API keys	2
	1.2.1	•	
	1.2.2	,	
	1.2.3		
2.	Resc	ource View	1
3.	Imp	lementation	2
3	3.1.	Evaluations	2
	3.1.1	. Description	2
	3.1.2	·	
	3.1.3	. Dynamic view	2
3	3.2.	Manager management	3
	3.2.1	. Description	3
	3.2.2	. Interface	3
	3.2.3	Dynamic view	5
3	3.3.	Invoices	6
	3.3.1	. Description	6
	3.3.2	. Interface	6
	3.3.3	Dynamic view	8
Lic	st of	Tables	
		xplanation on request and response attributes	1
		lesource view for SAFAPS SIM API	
		nterface for S&F evaluation	
		lequest for S&F results	
		nterface for manager management	
Tak	ole 6: I	nterface for invoices	7
Lis	st of	Figures	
Fig	ure 1:	Composition of HTTP request and response	1
_		Stress and Fatigue indicators meaning	
_		Dynamic view for S&F evaluation	
_		Dynamic view for manager creation	
_		Dynamic view for invoice generation	0

– SAFAPS SIM –	Publication date	28/01/2016	– SPARCS –
Stress and Fatigue			Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Description of the API	

1. Description of the API

1.1. REST architecture

The SAFAPS SIM API fulfil a RESTful architecture. It is reachable using the HTTP protocol. It means that each function offered by the API can be executed by sending an HTTP request and return an HTTP response.

Below is the basic composition of any HTTP response and request.

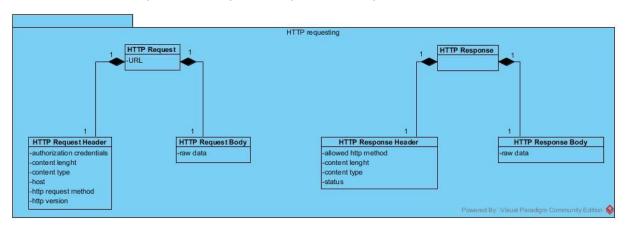


Figure 1: Composition of HTTP request and response

Request	Route	This identify the resource on the server to perform an action on	
	Authorization credentials	This field will be used to store the encrypted key allowing the	
		API to authenticate a manager or organization within the	
		system. (cf. 1.2. API keys).	
	Content length	This field contains the number of characters contained in the	
		request body.	
	Content type	This field contains the format of the data sent in the request	
		body.	
	Host	This field contains the host of the requested server	
	HTTP request method	This field specify the action to perform on the route.	
		(GET/POST/PUT/DELETE/etc.)	
	HTTP version	The version the HTTP protocol to be used for the request	
	Raw data	The situational data to send with the request.	
Response	Allowing HTTP method	The authorized action to perform on the requested resource	
	Content length	This field contains the number of characters contained in the	
		response body.	
	Content type	This field contains the format of the data sent in the response	
		body.	
	Status	This field contains an integer identifying the type of response	
		(OK, redirection, client error, server error).	
	Raw data	The situational data to send back to the caller	

Table 1: Explanation on request and response attributes

For the SAFAPS SIM API, the input and output data in the request and response bodies are formatted in **JSON**.

– SAFAPS SIM –	Publication date	28/01/2016	– SPARCS –
Stress and Fatigue			Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Description of the API	

1.2. API keys

1.2.1. Managers' API secret keys

SAFAPS SIM needs to identify the manager who made request to add it to the invoice of his/her organization. To do so, each manager has its own SAFAPS secret key allowing him to be authenticated when he sends a request. Such managers' API keys are created at the insertion of the managers inside SAFAPS SIM.

1.2.2. Organizations' API keys

Some request offered by SAFAPS SIM's API cannot be perform by managers but by the organizations themselves. To do so, each organization has a secret key allowing it to be authenticated when sending a request.

1.2.3. Sending API keys in a request

The API keys need to be sent in the request header of the requests, in the "Authorization" field. The value of this field is "Basic base64 (apiKey)"

– SAFAPS SIM –	Publication date	28/01/2016	– SPARCS –
Stress and Fatigue			Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Resource View	

2. Resource View

Resource	HTTP Method	API Key	Description	
/evaluations	POST	Manager	Perform a SAFAPS request to run the S&F algorithm	
/organizations/managers	POST	Organization	Add a new manager for the organization	
/organizations/managers/[manid]	DELETE	Organization	Close a manager account for the organization	
/organizations/invoices	GET	Organization	Retrieve the list of invoices for an organization	
/organizations/[orgaid]/invoices	POST	NA	Create an invoice for an organization from the performed request	

Table 2: Resource view for SAFAPS SIM API

– SAFAPS SIM –Stress and Fatigue	Publication date	28/01/2016	– SPARCS – Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

3. Implementation

3.1. Evaluations

3.1.1. Description

The managers can send request to SAFAPS to perform Audit and Prediction on the Stress and Fatigue level of the people they are in charge of. The request needs the API key of the manager sending the request. Once the manager authenticated and the check if the request body is properly set, a response is sent back to the caller to notify whether his request has been accepted. If it has been, the request is treated using the S&F algorithm. Once the results have been generated, they are sent back to the caller of the evaluation caller via a new HTTP request sent to the response URL previously sent by the caller.

3.1.2. Interface

	Request		Response	
Resource	HTTP Method	Body	HTTP Status	Body
/evaluations	POST	<pre>{ ResponseURL: "[string]", Events: [</pre>	400 400	<pre>{ RequestId: [integer], ResponseURL: "[string]" } *The ResponseURL has the same value as sent in the request. { "Error": "The response URL is not properly set" } { "Error": "One or several event attributes are missing in the event [event_nbr]: "[ev_missing_attr1]", "[ev_missing_attr2]", } *The [event_nbr] refers to the index (starting at 0) of the uncomplete event within the JSON array contained in the request body. **The [ev_missing_attrn] refers to the name of the missing attribute. {</pre>

– SAFAPS SIM –	Publication date	28/01/2016	– SPARCS –
Stress and Fatigue			Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

		<pre>"Error": "The authorization field is not specified or the API key is not valid" }</pre>
	415	{ "Error": "The data is not in JSON format" }

Table 3: Interface for S&F evaluation

3.1.2.1. Response URL

The results containing the S&F level are to be sent by SAFAPS SIM using an HTTP request. The response of this request is ignored by SAFAPS SIM. Below is the schema this request:

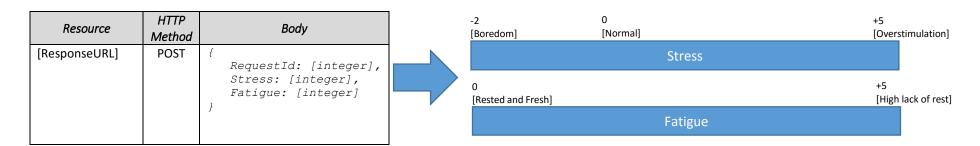


Table 4: Request for S&F results

Figure 2: Stress and Fatigue indicators meaning

– SAFAPS SIM –	Publication date	28/01/2016	CDARCC
Stress and Fatigue			– SPARCS – Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

3.1.2.2. Format and possible values

- TimeZone
 - o "Continent/City"
- StartTime
 - o "YYYY-MM-dd hh:mm:ss"
- EndTime
 - o "YYYY-MM-dd hh:mm:ss"
- ASMEnvironment:
 - o "E" for Enroute
 - o "T" for Terminal
 - "LM" for Local Moves
 - o "D" for Departures
 - o "A" for Arrivals
 - o "GM" for Ground Moves
 - "T" for Tower
- ControlTechnology:
 - o "R" for Radar
 - o "PS" for Procedural Supported
 - o "PM" for Procedural Manual
- ControllerStatus:
 - o "SC" for Solo controller
 - o "MCU" for Multi controller Unsupported
 - o "MCS" for Multi controller Supported
 - o "MCM" for Multi controller Mentoring
 - o "MCT" for Multi controller Trainee
 - "MCI" for Multi controller instructor

- Traffic:
 - o "VH" for Very Heavy
 - o "H" for Heavy
 - o "B" for Busy
 - o "NB" for Not busy
 - o "L" for Light
 - o "VL" for Very Light
- Equipment:
 - o "SD" for Severely Degraded
 - o "BD" for Badly Degraded
 - o "D" for Degraded
 - o "O" for Operational
- Weather:
 - o "HD" for Highly disruptive
 - o "D" for Disruptive
 - o "MD" for Mildly Disruptive
 - o "ND" for No Disruption

– SAFAPS SIM –	Publication date	28/01/2016	– SPARCS –
Stress and Fatigue			Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

3.1.3. Dynamic view

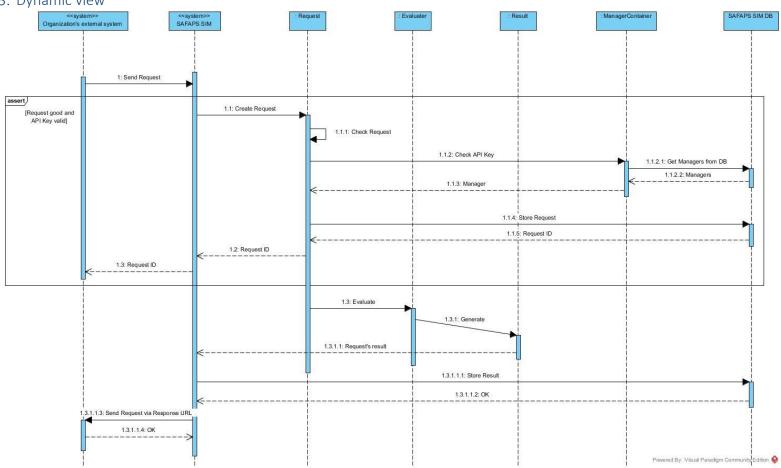


Figure 3: Dynamic view for S&F evaluation

– SAFAPS SIM –	Publication date	28/01/2016	– SPARCS –
Stress and Fatigue			Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

3.2. Manager management

3.2.1. Description

Organization might add and remove managers able to use SAFAPS SIM. At the creation of a manager, a new API key is created to be used as authentication token for this manager when he attempts to send an S&F evaluation request. When the manager is remove, it is not delete from the database but marked as "CLOSE" disable the use of his/her API key.

3.2.2. Interface

Request			Response	
Resource	HTTP	Body	HTTP	Body
	Method		Status	
/organizations/managers	POST	<pre>{ Name: "[string]" }</pre>	200	<pre>{ ManagerId: [integer] Name: "[string]" ApiKey: "[string]" } *The API key is the one to use to authenticate the newly created manager on SAFAPS SIM.</pre>
			400	{ "Error": "The name is not properly set" }
			401	{ "Error": "The authorization field is not specified or the API key is not valid" }
			415	{ "Error": "The data is not in JSON format" }
/organizations/managers/[manid]	DELETE	EMPTY	204	EMPTY
		*Note that the managers are not removed from the database but are marked as CLOSED.	400	{ "Error": "The manager id is not valid" }
			401	{

– SAFAPS SIM –	Publication date	28/01/2016	– SPARCS –
Stress and Fatigue			Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources control system
	Chapter name	Implementation	

	"Error": "The authorization field is not specified or the API key is not valid"
	 }

Table 5: Interface for manager management

– SAFAPS SIM –	Publication date	28/01/2016	CDARCS
Stress and Fatigue			– SPARCS – Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

3.2.3. Dynamic view

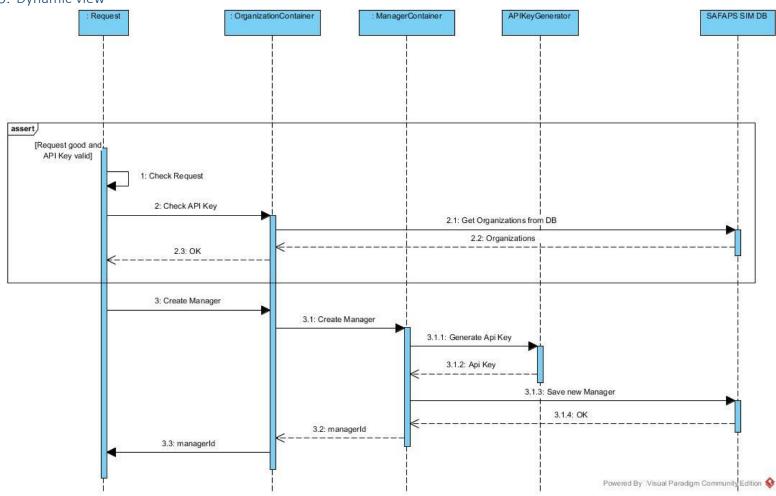


Figure 4: Dynamic view for manager creation

– SAFAPS SIM –	Publication date	28/01/2016	– SPARCS –
Stress and Fatigue			Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

3.3. Invoices

3.3.1. Description

Periodically, invoices are created for every organization using SAFAPS SIM. To calculate the amount of an invoice, the total number of request sent by the managers of the organizations during the period to invoice, is retrieve and is submitted to a conversion rate. Once the amount calculated, the invoice is sent by mail by SAFAPS SIM. An API route allow the organizations' financials to get the list of invoices from his/her organization.

3.3.2. Interface

Request		Response		
Resource	HTTP	Body	HTTP	Body
	Method		Status	
/organizations/[orgald]/invoices	POST	EMPTY	200	<pre>{ OrganizationName:"[string]", Invoice: { Date: "[datetime]", PeriodStart: "[datetime]", PeriodEnd: "[datetime]", Amount: [float], Currency: "[string]" } }</pre>
				*PeriodStart and PeriodEnd refers to the time frame to consider as invoiced.
			400	<pre>**Date is the date the invoice is instantiated. { "Error": "The organization id is not valid" }</pre>
/organizations/invoices	GET	ЕМРТУ	200	<pre>{ OrganizationName: "[string]", Invoices: [</pre>

– SAFAPS SIM –	Publication date	28/01/2016	SDARCS
Stress and Fatigue			– SPARCS – Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

Request		Response	
			<pre>PeriodEnd: "[datetime]", Amount: [float], Currency: "[string]" },]</pre>
		401	<pre>{ "Error": "The authorization field is not specified or the API key is not valid" }</pre>

Table 6: Interface for invoices

– SAFAPS SIM –	Publication date	28/01/2016	CDARCC
Stress and Fatigue			– SPARCS – Software Product Architecture
Audit and Prediction	Project name	SAFAPS SIM	Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

3.3.3. Dynamic view

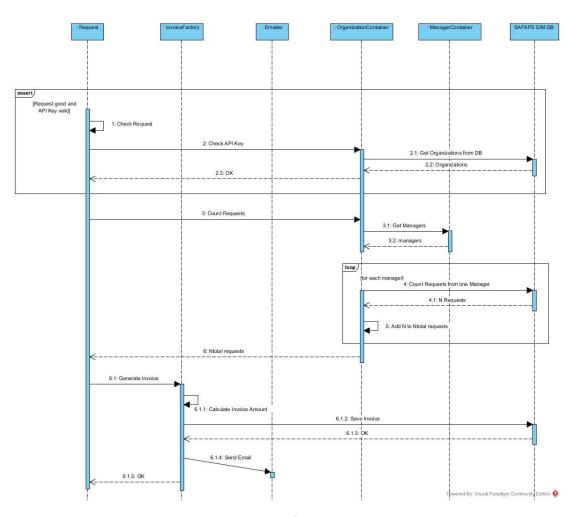


Figure 5: Dynamic view for invoice generation

– SAFAPS SIM –Stress and Fatigue	Publication date	28/01/2016	- SPARCS -
Audit and Prediction	Project name	SAFAPS SIM	Software Product Architecture Resources Control System
Service Simulator	Subject	API Specification	Resources Control System
	Chapter name	Implementation	

3.4. Generic errors

Some generic errors can be raised from the server. These errors are not related to any specific route but to the request received but the server.

HTTP status	Response body	Explanation
404	{ "Error": "The requested resource cannot be found" }	The resource pointed by the request does not exist.
405	{ "Error": "This action cannot be performed on this resource" }	The HTTP method used in the request cannot be performed on the resource pointed by the request.