Decoding pipeline (fb_ts_lr)

Each stage follows from a property of the recording, not from a benchmark score. Data shape in monospace; justification below.

fitted inside the training fold only — band weighting, covariance shrinkage, tangent-space reference, scaler and classifier all refit per fold

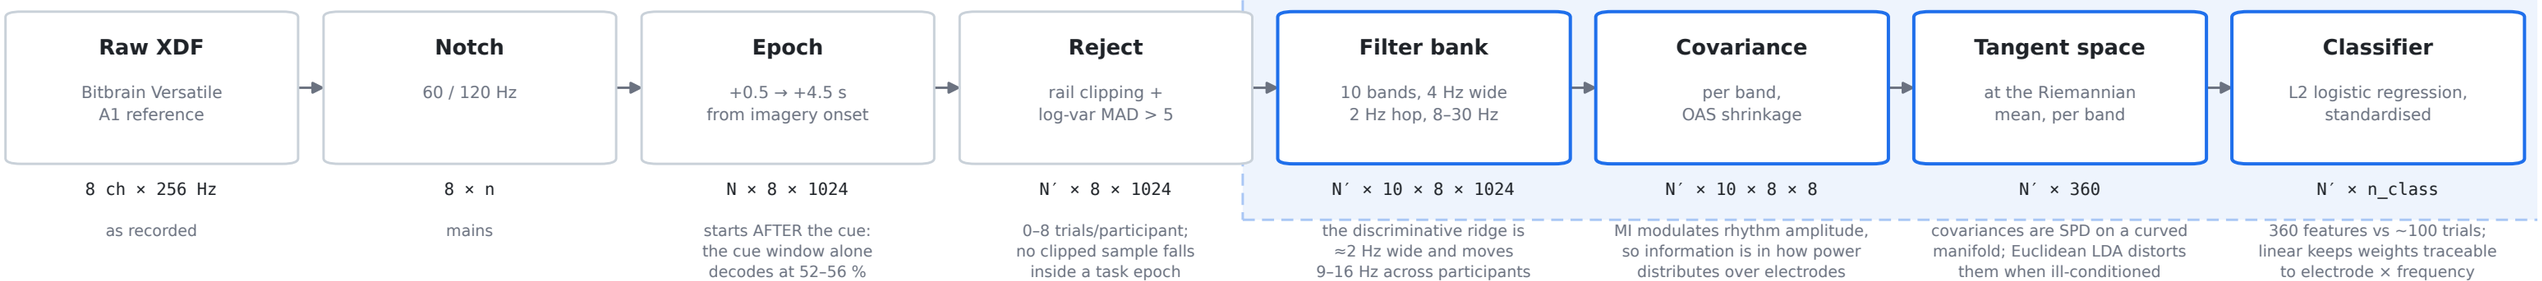

Evaluation: repeated stratified 5-fold CV, plus NESTED accuracy (inner 4-fold selects the pipeline within each outer training fold), plus a chronological 60/40 split. Per-participant significance from 1000-permutation label nulls, Holm-corrected across participants.