

Help

GETTING STARTED

- Get Started with Access Tokens
- Build a sample map
- Add your data
- [Configure interactions](#)
- Post-launch checklist

Docs

Navigation

Search

Data

Q

Search...

⌘K

🌐

English

▼

DIVE DEEPER

TUTORIALS

HOW-TO VIDEOS

TROUBLESHOOTING

FAQS

GLOSSARY




Configure interactions

Turn your maps into powerful interactive experiences.

Get started



Add map



Add data



Configure interactions



Deploy

Make your map interactive

Mapbox has many options available to turn your maps into powerful interactive experiences across all platforms. Here are some of the most popular ways to add interactivity to maps with Mapbox.

Add search

Need to interactively search for locations in your product? Or convert addresses into geographic coordinates? Try adding search or geocoding into your app.

To add search follow along with [GL JS](#), or get started with [iOS](#) and [Android](#).


[Web](#)[iOS](#)[Android](#)

```
// Example from: https://docs.mapbox.com/mapbox-gl-js/example/mapbox-gl-geocoder/  
map.addControl(  
  new MapboxGeocoder({  
    accessToken: mapboxgl.accessToken,  
    mapboxgl: mapboxgl  
  })  
);
```

Learn more about our [Search](#) products including the Search Box API and the Geocoding API.



Test the Search Box API, experiment with query parameters, and view the results.

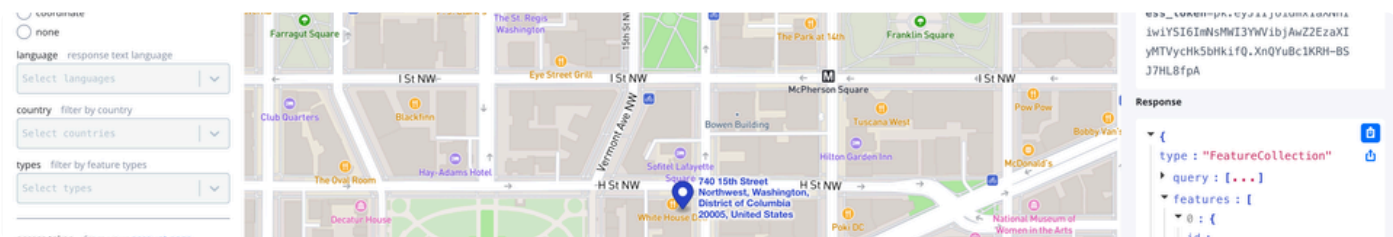

Use this Developer API Sandbox to test forward and reverse geocoding queries, experiment with query parameters, and view the results.

Create markers and popups

Markers and annotations

[Markers](#) are one of the most popular ways to highlight and visualize locations or data on a map on web.

Mobile devices do *not* contain markers. You can mimic the same functionality on [iOS](#) and [Android](#) in two different ways, either with a symbol layer if you want to mimic a default marker or a point annotation if you want to use more complex features.

If you want to learn more, start by exploring one of these tutorials.

Mapbox GL JS	iOS	Android
Add custom markers in Mapbox GL JS Add custom icons with Markers	Add a marker in iOS Add dynamic view annotations in iOS Add custom point annotation in iOS	Add a marker in Android Add dynamic view annotations in Android Add custom point annotations in Android

Show information dynamically with popups

Once you have data showing up on your map, you can use a [Popup](#) to show relevant and contextual information when needed.

Popups in GL JS

On web you can explore different types of interactions, maybe you want a popup on hover or on click.

TUTORIAL **Display a popup on hover →**

When a user hovers over a custom marker, show a Popup containing more information.

TUTORIAL **Display a popup on click** →

When a user clicks a circle, show a Popup containing more information.

User Interaction Guides for Mobile

For mobile, it's important to pair the different types of content with the right gestures - we've put together guides on user interaction for both Android and iOS:

GUIDE **Android User Interaction Guide** →

Learn how user interaction works in the Mapbox Maps SDK for Android.

GUIDE **iOS User Interaction Guide** →

Learn how user interaction works in the Mapbox Maps SDK for iOS.

UI Controls in GL JS

It's important to consider how your users will interact with your map. Mapbox provides some commonly used map [UI controls](#) right out of the box including a scale element and on-screen zoom and tilt controls.

TUTORIAL **Display zoom and rotation controls** →

Add zoom and rotation controls to the map.

TUTORIAL **Display map scale** →

Add a scale to the map.

Use camera movement and animations



Create stunning cinematic effects or smoothly transition map viewers from one place to another using the map camera. Start with GL JS by following one of these tutorials:

[Animate the camera around a point with 3D terrain](#)

[Fly to a location after search: Use a custom camera animation with a geocoder](#)

Mapbox's mobile SDKs also give you the ability to display the user's location:

[Android: Display the user's location](#)

[iOS: Display the user's location](#)

Dynamically cluster data

Are you working with [GeoJSON point](#) data? Sometimes there is too much data to show cleanly when zoomed out of the map, this is where clustering comes in. Clustering can intelligently group data points so that they are revealed intentionally as a user zooms into and out of the map.

Example: Create and style clusters

Use Mapbox GL JS' built-in functions to visualize points as clusters.

Example: Display HTML clusters with custom properties

An example of a circle layer combined with HTML markers.

Additional Developer Resources

 [Mapbox Developer Discord](#)

 [Developer Cheatsheet](#)

 [Mapbox Support](#)

 [Ask AI](#)

Was this page helpful?

Yes

No

© Mapbox All Rights Reserved [Terms](#) [Privacy](#) [Security](#) [Your California Privacy Choices](#)

