

ONLINE VOTEING USING BLOCK CHAIN

PROJECT REPORT 2019 – 2020

Submitted in partial fulfillment of requirement for the award of Diploma

in

COMPUTER ENGINEERING

of the State Board of Technical Education, Tamilnadu

PROJECT WORK DONE BY

PROJECT MEMBERS	REG NO
A.MOHAMED IRSHAK	18581807
J.JEBIN ROSE REYON BELL	18506853
B.SACHIN	18581808
P.NADAR KAMALAKANNAN PERUMAL	18506860
J.KHAJA PEER MOHIDEEN	18506856
S.KANNAN	18581805

Under the Guidance of

Miss.J.JESSI KOHILA, M.E.,



DEPARTMENT OF COMPUTER ENGINEERING

772, PET POLYTECHNIC COLLEGE

VALLIOOR – 627117.

ACKNOWLEDGEMENT

First of all we think the almighty God for giving us the opportunity to complete our project successfully.

We wish to thank our Secretary **Mr. S.KHAJA MOHIDEEN, B.A.,**

We heartily our sincere and special thanks to our Principal **Mr.R.KAMARAJ, M.E.,** who gave us a full support and encouragement to complete to our project.

We also convey our graceful thanks to our Head of the Department **Mrs.M.UMA MAHESWARI, B.E.,** and other staff members for their valuable suggestion and support.

We would particular like to thank our guide **Miss.J.JESSI KOHILA, M.E.,** of Computer Engineering Department for his complete dedication, support advice and encouragement in the completion of this project.

We also express our deep sense of gratitude and profound thank to all our beloved Lectures for the constant encouragement to completion this project work successfully.

CONTENTS

CHAPTER	TITLE	PAGE NO
1	Synopsis	1
2	Project description	3
3	System analysis	7
	3.1 Existing system	
	3.2 Proposed system	
4	System environment	15
	4.1 Hardware specification	
	4.2 Software specification	
	4.3 Software description	
5	System design	20
	5.1 Input design	
	5.2 Database design	
	5.3 Output design	
6	Testing	25
7	Implementation	28
8	Conclusion	30
9	Future enhancement	32
10	Bibliography	34
11	Annexure	36
	11.1 Screenshot	
	11.2 Source code	

SYNOPSIS

Introduction CHAPTER 1

In today's world, although several countries already use means of e-voting due to many social and economic reasons, which we further investigated. Nevertheless, the number of countries offering various e-government solutions, apart from e-voting, is significantly high. E-voting systems, naturally, require much more attention and assurance regarding potential security and anonymity issues, since voting is one of the few extremely critical governmental processes. Block chain technology is claimed to be able to address some, obviously not all, important security concerns, including anonymity, confidentiality, integrity, and non-repudiation Technology has positive impacts on many aspects of our social life. Furthermore, technology like the Internet has been a fertile ground for innovation and creativity. One such disruptive innovation is block chain – a keystone of crypto currencies. The block chain technology is presented as a game changer for many of the existing and emerging technologies/services. We lastly conclude this paper by laying out possible future developments of block chain technology. The analysis results presented in this article mostly confirm these claims.

CHAPTER 2

PROJECT DESCRIPTION

In this work, we consider existing electronic voting systems, block chain-based and non-block chain-based, and evaluate their respective feasibility for implementing a national e-voting system. Based on this, we devised a block chain-based electronic voting system, optimizing for the requirements and considerations identified. In the following subsection, we start by identifying the roles and component for implementing an e-voting smart contract then, we evaluate different block chain frameworks that can be used to realize and deploy the election smart contracts. In the last subsection, we will discuss the design and architecture of the proposed system.

MODULES DESCRIPTION

Election as a Smart Contract

Defining a smart contract includes identifying the roles that are involved in the agreement (the election agreement in our case) and the different components and transactions in the agreement process. We start by explaining the election roles followed by the election process.

Election Roles: Elections in our proposal enable participation of individuals or institutions in the following roles. Where multiple institutions and individuals can be enrolled to the same role.

- **Election administrators:** Manage the lifecycle of an election. Multiple trusted institutions and companies are enrolled with this role. The election administrators specify the election type and create aforementioned election, configuration ballots, register voters, decide the lifetime of the election and assign permissioned nodes.
- **Voters:** For elections to which they are eligible for, voters can authenticate themselves, load election ballots, cast their vote and verify their vote after an election is over. Voters can be rewarded for voting with tokens when they cast their vote in an election in the near future, which could be integrated with a smart city project.
- **District nodes:** When the election administrators create an election, each ballot smart contracts, representing each voting district, are deployed onto the block chain.

When the ballot smart contracts are created, each of the corresponding district nodes are given permission to interact with their corresponding ballot smart contract. When an individual voter casts his vote from his corresponding smart contract, the vote data is verified by all of the corresponding district nodes and every vote they agree on are appended onto the block chain when block time has been reached.

- **Boot nodes:** Each institution, with permission access to the network, hosts a boot node. A boot node helps the district nodes to discover each other and communicate. The boot nodes do not keep any state of the block chain and is ran on a static IP so that district nodes find its peers faster.

Election Process: In our work, each election process is represented by a set of smart contracts, which are instantiated on the block chain by the election administrators. A smart contract is defined for each of the voting districts of the election so multiple smart contracts are involved in an election. For each voter with its corresponding voting district location, defined in the voters registration phase, the smart contract with the corresponding location will be prompted to the voter after the user authenticates himself when voting.

The following are the main activities in the election process:

- **Election creation:** Election administrators create election ballots using a decentralized app (dApp). This decentralized app interacts with an election creation smart contract, in which the administrator defines a list of candidates and voting districts. This smart contract creates a set of ballot smart contracts and deploys them onto the block chain, with a list of the candidates, for each voting district, where each voting district is a parameter in each ballot smart contract. When the election is created, each corresponding district node is given permission to interact with his corresponding ballot smart contract
- **Voter registration:** The registration of voter phase is conducted by the election administrators. When an election is created the election administrators must define a deterministic list of eligible voters. This requires a component for a government identity verification service to securely authenticate and authorize eligible individuals. Using such verification services, each of the eligible voter should have an electronic ID and PIN number and information on what voting district the voter is located in. For each eligible voter, a corresponding wallet would be generated for the voter. The wallet generated for each individual voter should be unique for each election the voter is eligible for and a

NIZKP could be integrated to generate such wallet so that the system itself does not know which wallet matches an individual voter.

- **Vote transaction:** When an individual votes at a voting district, the voter interacts with a ballot smart contract with the same voting district as is defined for any individual voter. This smart contract interacts with the block chain via the corresponding district node, which appends the vote to the block chain if consensus is reached between the majorities of the corresponding district nodes. Each vote is stored as a transaction on the block chain whereas each individual voter receives the transaction ID for their vote for verifying purposes. Each transaction on the block chain holds information about who was voted for, and the location of aforementioned vote. Each vote is appended onto the block chain by its corresponding ballot smart contract, if and only if all corresponding district nodes agree on the verification of the vote data. When a voter casts his vote, the weight of their wallet is decreased by 1, therefore not enabling them to vote more than once per election. Finally the value of the transaction is the data which was selected to cast, D therefore indicates that the vote casted in this transaction was the party D.
- **Tallying results:** The tallying of the election is done on the fly in the smart contracts. Each ballot smart contract does their own tally for their corresponding location in its own storage. When an election is over, the final result for each smart contract is published.
- **Verifying vote:** As was mentioned earlier, each individual voter receives the transaction ID of his vote. Each individual voter can go to his government official and present their transaction ID after authenticating himself using his electronic ID and its corresponding PIN. The government official, utilizing district node access to the block chain, uses the block chain explorer to locate the transaction with the corresponding transaction ID on the block chain. The voter can therefore see his vote on the block chain, verifying that it was counted correctly.

CHAPTER 3

SYSTEM ANALYSIS

3.1 Existing System

Electronic voting (also known as e-voting)

Electronic voting is voting that uses electronic means to either aid or take care of casting and counting votes. Depending on the particular implementation, e-voting may use standalone electronic voting machines (also called EVM) or computers connected to the Internet. The newer optical scan voting systems allow a computer to count a voter's mark on a ballot. DRE voting machines which collect and tabulate votes in a single machine, are used by all voters in all elections in Brazil and India,

- Paper-based electronic voting system

Sometimes called a "document ballot voting system", paper-based voting systems originated as a system where votes are cast and counted by hand, using paper ballots. With the advent of electronic tabulation came systems where paper cards or sheets could be marked by hand, but counted electronically. These systems included punched card voting, mark sense and later digital pen voting systems

- Direct-recording electronic (DRE) voting system

A direct-recording electronic (DRE) voting machine records votes by means of a ballot display provided with mechanical or electro-optical components that can be activated by the voter (typically buttons or a touchscreen); that processes data with computer software; and that records voting data and ballot images in memory components

- Public network DRE voting system

A public network DRE voting system is an election system that uses electronic ballots and transmits vote data from the polling place to another location over a public network. Vote data may be transmitted as individual ballots as they are cast, periodically as batches of ballots throughout the Election Day, or as one batch at the close of voting. This includes Internet voting as well as telephone voting.

Traditional Voting System

Large professional, social, and special interest organizations tend to hold their elections through mail-in balloting. These systems allow voters to cast their votes from

systems are themselves increasingly connected to the internet and computers to which the receiving server may be connected, such as through a local area network (LAN), may have internet connections. So, using internet would be out of the question in case of Bangladesh where we continuously have history of suspicion over electoral fraud

- Voter verified paper audit trails: All fully-electronic (touch screen, DRE, internet) voting systems are subject to the limitations and risks of computer technology. This includes the inability to detect the presence of hardware and/or software that could be used, deliberately or inadvertently, to alter election outcomes.
- According to Rebecca Mercury, PhD, president, Notable Software, democratic elections require independent verification that all balloting choices have been recorded as intended and vote totals have been reliably and indisputably created from the same material examined by the voters. A Voter Verified Paper Ballot (VVPB) provides an auditable way to assure voters that their ballots will be available to be counted. Without VVPB there is no way to independently audit the election results.
- Susceptibility to fraud: Voting fraud is not either present everywhere or absent everywhere. Especially in our country, there have always been allegations of fraud by all the losing political parties. Fraud comes in degrees and increments. A malicious voting system created and distributed by one vendor to hundreds of thousands of polling booths, can systematically falsify millions of votes. Although some may believe that tampering with an electronic voting machine is extremely hard to do, computer scientists have tampered with machines to prove that it is quite easily done.
- However, if people have access to the machines, and know how to work them, they can take the memory card out of the machine, which stores the votes, and in place they put their own memory card with a virus that can tamper with the votes. It is a fraud on a large scale and wholesale level. Stuffing a ballot box, in contrast, works at a retail level. A tampered, however malicious and skilled, can stuff only as many ballots as might plausibly be cast at the polling place, but a faulty and corrupted voting system (malicious DRE software) could affect far more votes.
- Accuracy in capturing voters' intent: If a touch screen is used in the elections, the sensors in touch screen devices can be knocked out of alignment by shock and vibration that may occur during transport. Unless these sensors are realigned at the polling place prior to the start of voting, touch screen machines can misinterpret a voter's intent. For example, a

voter might touch the part of the screen identified with candidate X, but candidate Y's would light up instead.

- Political ties of manufacturers: The present government's decision not to keep the provision of caretaker government and to hold next general election under a political government and the election commission, has made the attempt of using e-voting system more unreasonable and unfair. Our election commission itself were also subject to considerable amount of criticism because of its controversial comments and actions during the emergency period after January 11 takeover, and also during the last 2008 general elections.
- Considering our political culture, it is undeniably a fact that any manufacturer or company hired for the e-voting system will tailor the e-voting machines according to the 'needs' of the current political party in power. So these machines will be subject to scrutiny, distrust and inquiry from all the other political parties in the country.
- Malicious software programming: Any computer software is basically generated from software programming and coding. And all these software's could be tampered with by a computer programmer who knows the source code. Testing electronic voting systems for security problems, especially if they were intentionally introduced and concealed, is basically impossible. If malicious coding is inserted by programmers into commercial software that are triggered by secure combinations of commands and keystrokes via the computer keyboard, then election results can change completely.
- Physical security of machines: Regarding physical hardware controls, many of the DRE (direct recording electronic voting machine) models under examination contained weaknesses in controls designed to protect the system. According to the USA Government Accountability office, all the locks on a particular DRE model were easily picked, and were all controlled by the same keys.
- Also a particular model of DRE was linked together with others to form a rudimentary network. If one of these machines were accidentally or intentionally unplugged from the others, voting functions on the other machines in the network would be disrupted. In addition, reviewers found that switches used to turn a DRE system on or off, as well as those used to close the polls on a particular DRE terminal, were not protected.
- Secure storage of cast votes: The votes that are cast using the electronic voting machines, are stored in a safe storage or space in the computer machine memory. But, Doug Jones, PhD, Professor of Computer Science at University of Iowa explained in his book, Secure

Electronic Voting, 'For over a decade, all direct recording electronic machines have been required to contain redundant storage, but this redundant storage is not an independent record of the votes, because it is created by the same software that created the original record. As a result, the multiple files are of limited use to check the correctness of the software.

3.2) Proposed System

Neumann proposed electronic voting criteria, that include:

- system integrity
- data integrity and reliability
- voter anonymity and data confidentiality operator authentication As shown,

The generation of addresses does not rely on personally identifiable information (PII), but allows transparent tracking of transactions. These transactions are verifiable, open to the public and are difficult to forge. Block-chains, then, can guarantee data integrity and reliability, voter anonymity, data confidentiality and – at least for the block- chain – system integrity. Operator authentication, however, is still required. User authentication is necessary to ensure that the person voting has a right to vote. Once authenticated, a vote from one user must be tracked to one candidate. In this section we give a block-chain based voting system with government-based authentication systems.

Organization, Trusted third party, Voters, and Block-chain

There are four parts that are involved in this electronic voting model. An authentication organization refers to any institution that holds a voter registration list such as the National Election Committee or private companies. Electronic voting systems may be used for presidential elections, stockholders meetings, and so on. In a presidential election, only the National Election Committee will have the list of voters in their nation. Both Bit coin and the proposed voting system are open to anyone to make any transactions, but the voting system restricts voters to only those who have right to vote in their own organization. As stated, this means authentication for a user is needed. There are three problems with this organization. The first is that an authentication organization should authenticate the voters, but should not be able to find who the voter voted for. The second is that since the authentication organization has the voters list, they can potentially manipulate the number of voters in their nation. The third potential problem is that an authentication organization could potentially

provide the majority of nonce mining. If so, they can potentially forge the block-chain ledger in the way that they want. For this reason, a trusted third party (TTP) is introduced to authenticate voters, similar to a proxy. The TTP checks if the voter is authenticated by reporting declaration of vote to the authentication organization. A message hash is used for voter authentication without exposing identity information.

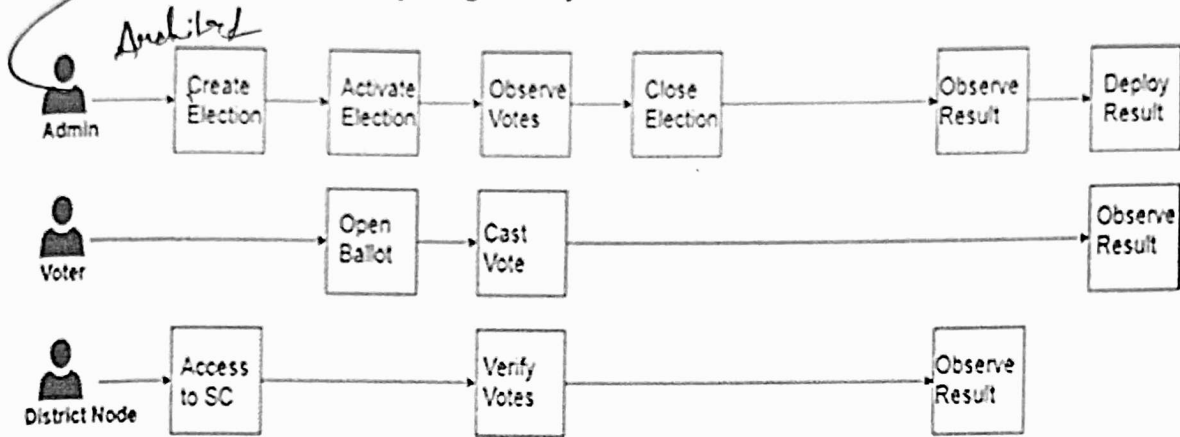


Fig 1. BLOCK CHAIN ENABLED E-VOTING SYSTEM FLOW

A voter sends his or her own secret message hash to the authentication organization. Then the authentication organization, once it authenticates a registered voter, will link the message hash to each voter's identification when he or she is verified. The authentication organization decides whether a voter has the right to vote or not, according to the voters list, through identification information such as Social Security Number (SSN). This not be exposed to the public, especially to the Trusted Third Party; otherwise it could be used to identify a voter.

This means that when an ID is exposed, then the TTP would know exactly who voted for whom. Therefore, a secret message hash is needed to identify and authenticate valid voters between the organization and the TTP without directly providing identifying information. In our proposed model, we keep vote transactions in the block-chain. There are many ways to manage a block-chain, and we introduce two ways that are useful for voting purposes.

ID information should Operating independent block-chain funded by the organization. Block-chain receives all transactions cast by anyone. Our block-chain receives all transactions cast and stamps them all no matter if it is authenticated by the organization and Trusted Third Party. It receives everything, and filters out unauthenticated or invalidated transactions. When voting is finished, the list of validated voters that is kept from the Trusted Third Party is used

to filter out the transactions that are not validated. All transaction fees (block-chain processing charges) will be paid by the organization.

A problem may occur when there are not enough miners providing hash power, in which case the independent block-chain will not be secure. Using current Bit coin block-chain. When a block-chain network is used, the organization does not need worry about having its own miners. There are multiple advantages to using the Bit coin block-chain for voter transaction processing

- A company or government does not need to operate an independent block- chain.
- There is less risk for transactions to be forged.
- Block-chain mining can incur a cost, but voters could receive tax benefits for voting, thus covering the costs of transaction fees while stimulating participation.

SYSTEM

ENVIRONMENT

CHAPTER 4

SYSTEM ENVIRONMENT

4.1) HARDWARE SPECIFICATION

The minimum hardware requirements for implementing the project are

Processor	:	Intel Core i3 2330M
Speed	:	2.33 Ghz
RAM	:	4 GB
Hard Disk Drive	:	500 GB
Compact Disk Drive	:	700 MB
Monitor	:	18.5" Color LED Monitor
Keyboard	:	108 keys

4.2) SOFTWARE SPECIFICATION

Front-End	:	PHP
Back-End	:	MySQL
Operating System	:	Windows 10

4.3) SOFTWARE DESCRIPTION

PHP:

PHP is a scripting language designed specifically for use on the Web. PHP is a server-side scripting language which was developed for dynamic Web sites and applications. It is an embedded scripting language, which means that PHP code is embedded in HTML code. PHP scripts can parse data submitted by HTML forms, communicate with databases, and make complex calculations on the fly.

- PHP stands for **PHP: Hypertext Preprocessor**
- PHP is a widely-used, open source scripting language
- PHP scripts are executed on the server
- PHP is free to download and use

PHP is very fast because the freely available source code is compiled into the Apache Web server. A PHP script is executed as part of the Web server process and requires no forking, often a criticism of Common Gateway Interface (CGI) scripts. PHP interacts with the database by invoking SQL commands, and displays the results in dynamically generated Web pages. PHP provides the application part and MYSQL provides the database part of a Web database application. PHP is used to move data into and out of the MYSQL database. PHP is also suitable for more complicated tasks such as parsing and verifying data that the user has entered into an HTML form. PHP's advantages include the following:

- It's free via the GNU General Public License (GPL).
- It's fast due to the fact that it's embedded into the HTML code.
- It's designed to support databases including functionality designed to interact with specific databases. It negates the need for the user to need to know the technical details required to communicate with a database.
- It's quite easy to use in that it only contains elements of a programming language needed to interact with a database and to generate dynamic web-pages.

Advantages of PHP:

- PHP can generate dynamic page content
- PHP can create, open, read, write, and close files on the server
- PHP can collect form data
- PHP can send and receive cookies
- PHP can add, delete, modify data in your database
- PHP can restrict users to access some pages on your website
- PHP can encrypt data
- PHP runs on different platforms (Windows, Linux, UNIX, Mac OS X, etc.)
- PHP is compatible with almost all servers used today (Apache, IIS, etc.)
- PHP has support for a wide range of databases
- PHP is free. Download it from the official PHP resource: www.php.net
- PHP is easy to learn and runs efficiently on the server side

It is also helpful to think of PHP in terms of what it can do for you. PHP will allow you to:

- Reduce the time to create large websites.

- Create a customized user experience for visitors based on information that you have gathered from them.
- Open up thousands of possibilities for online tools. Check out [PHP - HotScripts](#) for examples of the great things that are possible with PHP.
- Allow creation of shopping carts for e-commerce websites.

Common Uses of PHP:

- PHP performs system functions, i.e. from files on a system it can create, open, read, write, and close them.
- PHP can handle forms, i.e. gather data from files, save data to a file, thru email you can send data, return data to the user.
- You add, delete, and modify elements within your database thru PHP.
- Access cookies variables and set cookies.
- Using PHP, you can restrict users to access some pages of your website.
- It can encrypt data.

Characteristics of PHP:

Five important characteristics make PHP's practical nature possible:

- Simplicity
- Efficiency
- Security
- Flexibility
- Familiarity

MySQL:

Structured Query Language (SQL) is the de-facto standard programming language for creating, updating and retrieving information that is stored in relational database management system. A relational database is a database divided into logical units called tables, where tables are related to one another within the database. A relational database allows large complex data to be broken down into logical, smaller, more manageable units. Tables are related to each other through a common key (data value) in a relational database. SQL is a

formal programming language. Speed was the developer's main focus when SQL was being developed. MySQL is a fast easy to use RDMS. MySQL is easier to install and use than its commercial competitors and the fact that MySQL is open source is strongly in its favour. MySQL is available via the General Public License (GPL). MySQL consists of a MySQL server, several utility programs that assist the administration of the MySQL databases. MySQL's main advantages include the following:

- It is pre-packaged with most Linux distributions.
- It's quite easy to use: you can interact with a MySQL database using a few simple statements from the SQL language.
- It's very fast: MySQL's developers' main goal was speed; consequently the software was designed from the beginning with speed in mind.
- It's free via the GNU General Public License.
- MySQL is a database system used on the web
- MySQL is a database system that runs on a server
- MySQL is ideal for both small and large applications
- MySQL is very fast, reliable, and easy to use
- MySQL supports standard SQL
- MySQL compiles on a number of platforms
- MySQL is free to download and use
- MySQL is developed, distributed, and supported by Oracle Corporation

CHAPTER 5

SYSTEM DESIGN

5.1) INPUT DESIGN

The user interface design is very important for any application. The interface design describes how the software communicated within itself, to system that interpreted with it and with humans who use it. The interface is a packing for computer software if the interface is easy to learn, simple to use. If the interface design is very good, the user will fall into an interactive software application. The input design is the process of converting the user-oriented inputs into the computer-based format. Errors entered by data entry operations can be controlled by input design. The data is fed into the system using simple interactive forms. The forms have been supplied with messages so that user can enter data without facing any difficulty. The data is validated wherever it requires in the project. This ensures that only the correct data have been incorporated into the system. The goal for designing input data is to make data entry as easy, logical and free from errors. The objectives of input design are:

- To produce a cost effective method of input
- To make the input forms understandable to the user
- To ensure the validation of data input
- To achieve the highest position level of accuracy.

The various activities to be performed for the overall input processors are:

- Data recording at its source.
- Data transfer to input form.
- Data conversation to computer acceptable mode.
- Data validation.
- Data flow control.

Data correction if necessary. In the proposed system, the user is provided with respective forms to input the required data. The input screens in this project are:

- Voter Registration form
- Candidate Registration form
- Cast vote form
- Result Announcement form

5.2) DATABASE DESIGN

Tablename: tblvoter

FIELD NAME	DATA TYPE	CONSTRAINT	DESCRIPTION
id	Int(5)	Primary key	Id
votername	Varchar(15)	Not Null	Voter name
aadhaarno	Varchar(12)	Not Null	Aadhaar number
city	Varchar(15)	Not Null	City
verified	Varchar(15)	Not Null	Verified
photo	Varchar(25)	Not Null	Photo
votedstatus	Varchar(10)	Not Null	Voted status

Tablename: tblcandidate

FIELD NAME	DATA TYPE	CONSTRAINT	DESCRIPTION
id	Int(5)	Primary key	Id
name	Varchar(15)	Not Null	Name
aadhaarno	Varchar(12)	Not Null	Aadhaar number
city	Varchar(15)	Not Null	City
partyname	Varchar(25)	Not Null	Party name
partysymbol	Varchar(25)	Not Null	Party symbol

Tablename: tblelectionconfig

FIELD NAME	DATA TYPE	CONSTRAINT	DESCRIPTION
id	Int(5)	Primary key	Id
electiondate	Date	Not Null	Election date
starttime	Varchar(15)	Not Null	Start time
endtime	Varchar(15)	Not Null	End time

Tablename: tblannouncement

FIELD NAME	DATA TYPE	CONSTRAINT	DESCRIPTION
id	Int(5)	Primary key	Id
cdate	date	Not Null	current date
status	Varchar(15)	Not Null	Status

Tablename: tblvote

FIELD NAME	DATA TYPE	CONSTRAINT	DESCRIPTION
id	Int(5)	Primary key	Id
VaadhaarNo	Varchar(15)	Not Null	Voter aadhaar number
CaadhaarNo	Varchar(12)	Not Null	Candidate Aadhaar number
Currentdate	Varchar(15)	Not Null	Current date
Currenttime	Varchar(25)	Not Null	Current time
Hashkey	Varchar(2000)	Not Null	Hash key
Hashcode	text	Not Null	Hash code
Phashkey	Varchar(2000)	Not Null	Previous Hash key
Phashcode	text	Not Null	Previous Hash code

5.3) OUTPUT DESIGN

The system output is the most important and direct source of information to the user. So intelligible output design improves the relationship with the user and helps in decision-making. Outputs from the computer systems are required primarily to communicate the results of processing to users. They are also used to provide a permanent copy of these results for later consultation.

A major form of output is a hard copy obtained from the printer. These printouts are designed to include the exact requirements of the user. The outputs required by the end-user are defined during the logical design stages.

Output specification Output definition takes into account the type of output contents, its frequency and its volume. The appropriate output media is determined for outputs. Once the output media is chosen, the detail specification of output documents are carried out. The nature of output required from the proposed system is determined during the logical design stage itself. Physical design stage takes the outline of the output from the logical design and produces the output as specified during the logical design phase. The necessary reports are generated which provide the complete information required by the user: The objectives of output design are:

- Design output to serve the indented purpose.
- Provide output on time.
- Assume that output is where it is needed.

Design output to fit the user the output screens in this project are:

- View Election Result
- View Voter details
- View Candidates

CHAPTER 6

SYSTEM TESTING

Testing is a process of executing a program with the intent of finding an error. A good test has a high probability of finding an as yet undiscovered error. A successful test is one that uncovers an as yet undiscovered error. The objective is to design tests that systematically uncover different classes of errors and do so with a minimum amount of time and effort. Testing cannot show the absence of defects, it can only show that software defects are present.

System testing of software or hardware is testing conducted on a complete, integrated system to evaluate the system's compliance with its specified requirements. System testing falls within the scope of black box testing, and as such, should require no knowledge of the inner design of the code or logic.

Test Plan

The test-case designer not only has to consider the white and black box test cases, but also the timing of the data and the parallelism of the tasks that handle the data. In many situations, test data provided when a real system is in one state will result in proper processing, while the same data provided when the system is in a different state may lead to error.

The intimate relationship that exists between real-time software and its hardware environment can cause testing problems. Software tests must consider the impact of hardware faults of software processing. Step strategy for real-time systems is proposed. The first step in the testing of real-time software is to test each task independently (i.e.) the white and black box tests are designed and executed for each task. Each task is executed independently during these tests. The task testing uncovers errors in logic and functions, but will not uncover timing or behavioral errors.

Verification

The process of determining whether or not the products of a given phase of the software development cycle meet the implementation steps and can be traced to the incoming objectives established during the previous phase. Verification process helps in detecting defects early, and preventing their leakage downstream. Thus, the higher cost of later

detection and rework is eliminated. The goal of software testing is to assess the requirements of a project; then the tester will determine if these requirements are met. There are many times when low memory usage and speed are more important than making the program pretty or capable of handling errors. While programming skills are useful when testing software, they are not necessarily required; however it can be useful in determining the cause of errors found in a project.

TYPES OF TESTING

There are different types of testing in the development process. They are:

- Unit Testing
- Integration Testing
- Black Box Testing

Unit Testing

All the modules are tested individually using this test. Developers write unit tests to check their own code. Unit testing differs from integration testing, which confirms that components work well together, and acceptance testing, which confirms that an application does what the customer expects it to do. Unit tests are so named because they test a single unit of code. Unit testing focuses verification effort on the smallest unit of software design. Each of the modules in this project was verified individually for errors.

Eg: The Watch Module was tested in this testing.

Integration Testing

Embedding and inverse process are jointly tested. Integration testing is a systematic testing for constructing the program structure while at the same time conducting tests to uncover errors associated within the interface. This testing was done with sample data. The need for integrated test is to find the overall system performances.

Eg; The order processing module was tested in this integration testing.

Black Box Testing

This test is usually done to find incorrect or missing functions, interface errors in external database access, performance and initializations and terminator error. The test was successfully carried out for the project. When an image file is not loaded it causes error.

CHAPTER 7

SYSTEM IMPLEMENTATION

Implementation of a software package refers to the installation of the package in its real environment to the full satisfaction of the users and operating system. In short, implementation constitutes all activities that are required to put an already tested and completed package into operation. The success of any information system lies in its successful implementation.

Functional Documentation

Functional Documentation plays a vital role in describing the various functionalities of the project. Basically, it considers the various forms designed for the project and explains various functions associated with the form. As a matter of fact, each form is an integrated part of the project and has its own, intended functionality. Often, a form may be related to other forms in the project too. In this section, we explain the functional documentation of the project. It considers various blocks of the modules and the associated forms.

- Run the login form. Enter username and password as 'Admin' and 'Admin'. Then go to Admin panel. There are following menus Election Config, Election Details, Announcement, View Block chain and Logout.
- The Election Details deals with Election Date, Start Time and End Time which is given by admin. The Voter Details deals with Voter Name, Aadhar No, City, Verified and Photo. The Admin can add, update and delete the voter.
- The Candidate Details deals with Candidate Name, Aadhar No, City, Party Name and Party Symbol. The Admin can add, update and delete the voter.
- The Admin can publish the election result. Then only the user can view the result. Admin can check the block chain. If any vote is changed by the hackers, the block chain validation is automatically recovered.
- Voter can login using Aadhar no. After checking Aadhar No, the election Date/Time is checked against current Date/Time. Candidate List will be displayed. The voter can select the candidate, then press vote button. Vote is saved to database.
- If the voter trips to vote again, this system replies are already voted. The user can view the candidate election result. The user can check the block chain validation for fraud vote detection.

CHAPTER 8

CONCLUSION

E-voting is a potential solution to the lack of interest in voting amongst the young tech savvy population. For e-voting to become more open, transparent, and independently auditable, a potential solution would be base it on block chain technology. This project explores the potential of the block chain technology and its usefulness in the e-voting scheme and it proposes an e-voting scheme, which is then implemented. The implementation and related performance measurements are given in the project along with the challenges presented by the block chain platform to develop a complex application like e-voting. This work highlights some shortcomings and presents two potential paths forward to improve the underlying platform (block chain technology) to support e-voting and other similar applications. Block chain technology has a lot of promise; however, in its current state it might not reach its full potential. There needs to be concerted effort in the core block chain technology research to improve its features and support for complex applications that can execute within the block chain network.

As fundamental technologies with transformative potentials, block chain and crypto currencies have found a wide spectrum of application scenarios in various types of industries, ranging from the underlying techniques of data storage, encryption, and verification, to the middle level of finance and asset management, and to a variety of high-level business models. In this project, we present the technical details of Bit coin and other crypto currencies, propose a six-layer reference model for the block chain framework, and discuss several potential application scenarios. The main aim of this project is to stimulate more detailed investigation and innovative research in this new direction.

CHAPTER 9

FUTURE ENHANCEMENT

Our system takes advantage of the transparency of smart contract to allow all voters to participate in both the recording and verification of ballots. It enhances the voter's confidence and reduces the waste of election resources. Governments and other stakeholders will need to address several major challenges before block chains see widespread use for e-voting. Although block chains are good at providing security and accuracy, public confidence and trust are necessary ingredients for BEV's success. Block chains complexity might hinder mainstream public acceptability of BEV. There's no doubt that block chain is a hot issue in recent years, although it has some topics we need to notice, some problems have already been improved along with new techniques developing on application side, getting more and more mature and stable. The government has to make corresponding laws for this technology, and enterprise should be ready to embrace block chain technologies, preventing it from bringing too much impact to the current system.

CHAPTER 10

BIBLIOGRAPHY

- Learning PHP 5.0 – O'Reilly
- PHP and MySQL – Luke Welling
- Php and MySQL 5.0 – Jason Gilmore
- PHP and MySQL for Dummies – JanedVallet
- CONCEPTUAL SECURE BLOCKCHAIN-BASED ELECTRONIC VOTING SYSTEM, Ahmed Ben Ayed, Department of Engineering and Computer Science, Colorado Technical University, Colorado Springs, Colorado, USA, 2017
- A Survey of Block chain Security Issues and Challenges, Iuon-Chang Lin¹;2 and Tzu-Chun Liao², 2017
- Block chain-Enabled E-Voting, NirKshetri and Jeffrey Voas, 2018
- Decentralizing Privacy: Using Blockchain to Protect Personal Data, Guy Zyskind
- MIT Media Lab, Cambridge, Massachusetts, Alex 'Sandy' Pentland, 2016

URL Reference

www.w3schools.com

www.php.net

www.tutorialspoint.com

www.homeandlearn.co.uk/php/php.html



www.1keydata.com/php-tutorial


www.tutorialspoint.com

CHAPTER 11

ANNEXURE

11.1) SCREENSHOTS

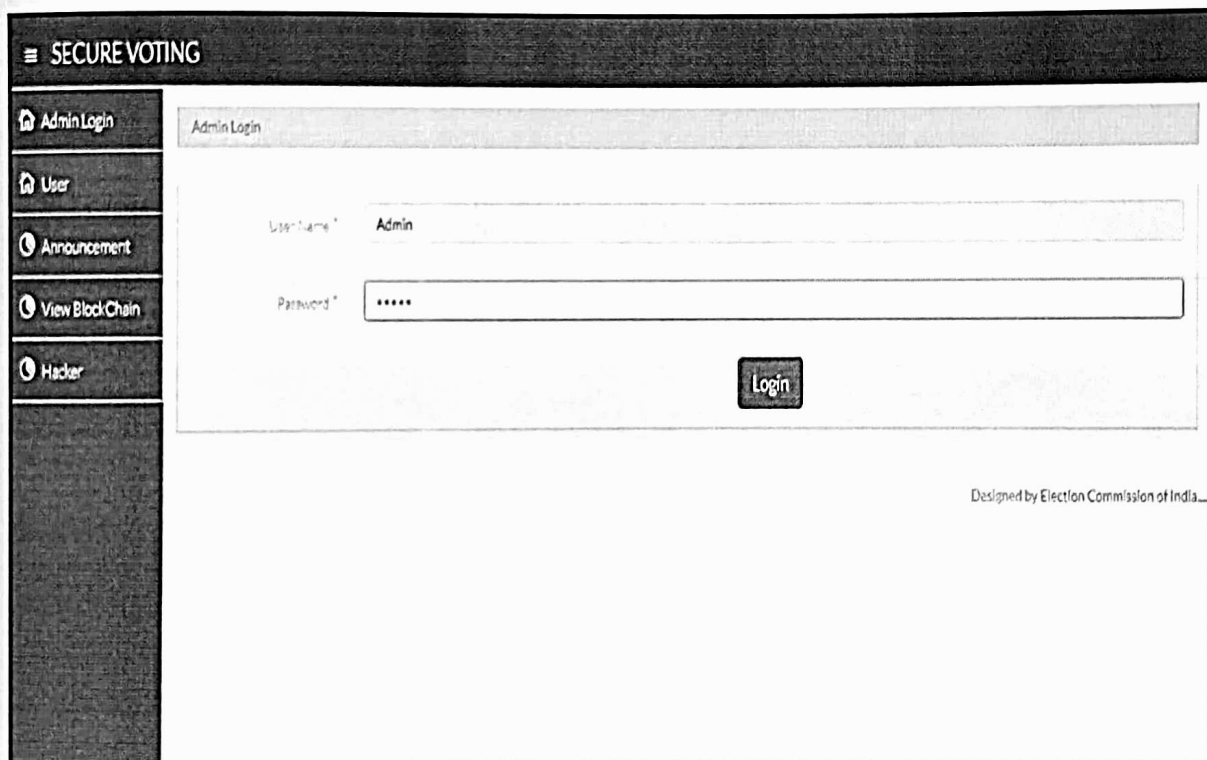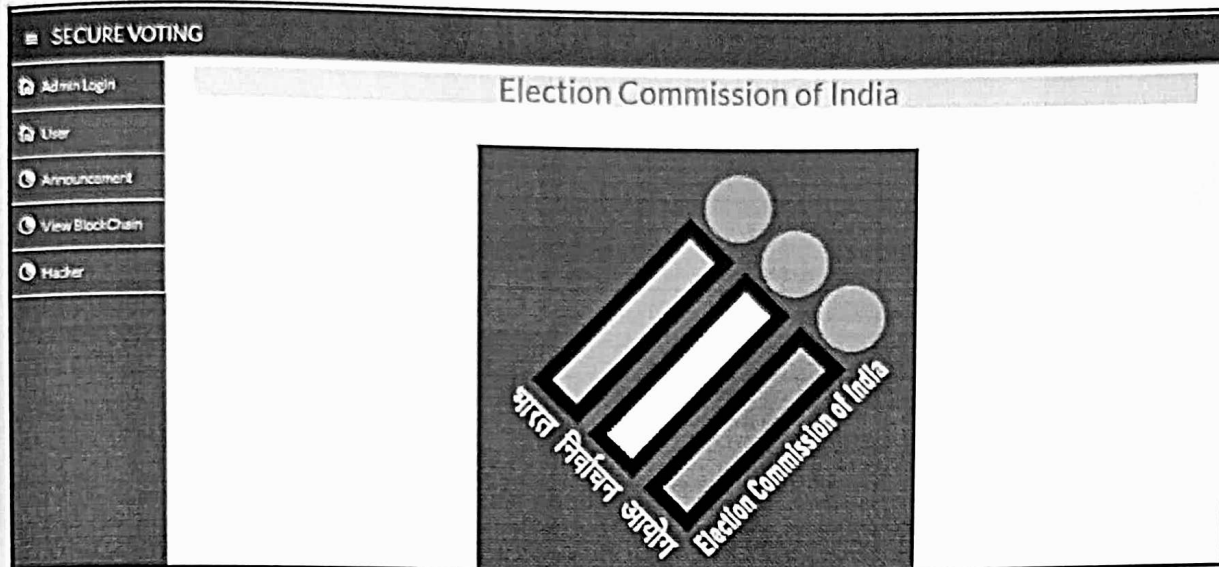

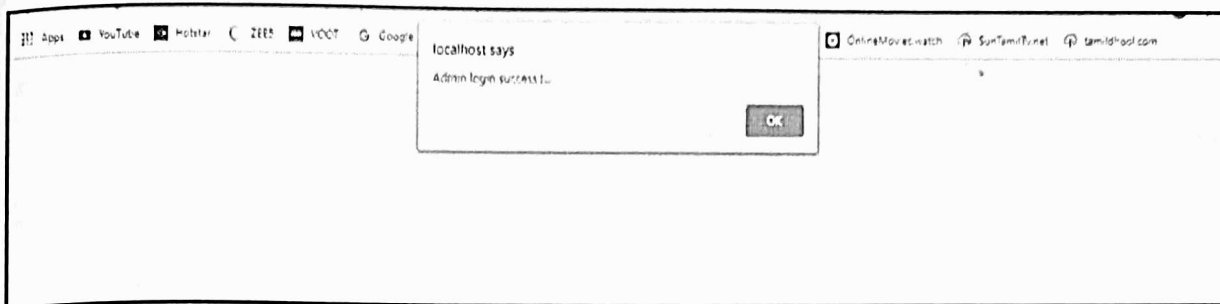

SECURE VOTING

- Home
- Election Config
 - Add Election
 - Voters
 - Candidates
 - Election Details
 - Announcement
 - View BlockChain
- Logout

Election Details

Election Date * 2019-09-09

Start Time * 08:00:00 am

End Time * 06:00:00 pm

Save

Designed by Election Commission of India...

SECURE VOTING

- Home
- Election Config
 - Election Details
 - Announcement
 - View BlockChain
- Logout

Election Configuration

ACTION	Id	ELECTION DATE	START TIME	END TIME
	1	2019-09-09	08:00:00 am	06:00:00 pm

Designed by Election Commission of India...

 Home

Election Config 3

 Election Details

Announcement

View BlockChain

Logout

Add New Voter

Voters					
ACTION	id	VOTER NAME	AADHAR NO	CITY	VERIFIED?
No Voters Records Found!					

Designed by Election Commission of India.

 [Home](#)

Election Config ▶

Election Details

Announcement

View BlockChain

Logout

Voter Name * arizna

अभिज्ञा

Adhaar No* 444455556666

444455556666

Ct: * Trunc: vell

Trunc: vell

Verified?	True
-----------	------

True

Photo[®]

Choose File original.jpg

Save

SECURE VOTING

Home

Election Config >

Election Details

Announcement

View BlockChain

Logout

Add New Voter

Voters						
ACTION	Id	VOTER NAME	AADHAAR NO	CITY	VERIFIED?	PHOTO
 	1	anjana	Tirunelveli	44455556666	True	
 	2	selika	Tirunelveli	123412341234	True	

SECURE VOTING

Home

Election Config >

Election Details

Announcement

View BlockChain

Logout

Add New Candidate

Candidates						
ACTION	Id	CANDIDATE NAME	AADHAAR NO	CITY	PARTY NAME	PARTY SYMBOL
No Candidates Records Found!						

Designed by Election Commission of India...

≡ SECURE VOTING

 Home

Election Config ➤

Election Details

Announcement



Logout

1987-1988 370/371

444455556666

Cu ²⁺	Trivalent
------------------	-----------

Part Number: DMK

Part / Symbol®

Choose File DMK.JPG

Save

≡ SECURE VOTING

 [Home](#)

Election Config >

Election Details


Announcement

 View BlockChain

Logout

Add New Candidate

Candidates

ACTION	id	CANDIDATE NAME	AADHAAR NO	CITY	PARTY NAME	PARTY SYMBOL
	1	anjana	444455556666	Tirunelveli	DMK	
	2	selkra	123412341234	Tirunelveli	ADMK	

III SECURE VOTING

 Admin Login

🏠 User

Announcement

View BlockChain

WELCOME to the voting phase!

“*የግል ልማትና የሥራ ልማት*”

444455556666

Login

Designed by Election Commission of India.

≡ SECURE VOTING

Logout

La Paz, No.

444455556666

Veter Name:

ឧបសគ្គ

City^a

Tirunelveli

List of Candidates

☒ Candidate Name: anjana
 Party Name: DMK

Party Name: DMK

Party Symbol:



● Candidate Name: sellika
Party Name: ADMK

Party Name: ADMK

SECURE VOTING

Logout

Election Commission of India !!!

THANK YOU,WE GOT YOUR VOTE !.



SECURE VOTING

Home

Election Config


Election Details

Announcement

View BlockChain

Logout

Result Announcement

PARTY NAME	PARTY SYMBOL	NO. OF VOTES
DMK		2
ADMK		1

SECURE VOTING

Home

Election Config

Election Details

Announcement

View BlockChain

Logout

BlockChain Validation

Block Chain

ID	HASH KEY	PREVIOUS HASH KEY
1	9aa4d05b3cd84cd51c56465a1fde2a8b7c5d981de282dabeb149684b8295e2681	0
2	52c8829606b536117a3a66f37551b1364802101ef771e48a345d172db7eff4d9	9aa4d05b3cd84cd51c56465a1fde2a8b7c5d981de282dabeb149684b8295e2681
3	0c332d1b7b17393617920a28896cb66bb1cd119d9a62810ac64f3721886dd36f	52c8829606b536117a3a66f37551b1364802101ef771e48a345d172db7eff4d9

Designed by Election Commission of India...

SECURE VOTING

Admin Login

User

Announcement

View BlockChain

Hacker

WELCOME to the voting phase !

Your Aadhaar Number*

112211221122

Login

Designed by Election Commission of India...


Logout

Adhaar No*

112211221122

List of Candidates

☐ Candidate Name: anjana
Party Name: DMK
Party Symbol:




☒ Candidate Name: selika
Party Name: ADMK
Party Symbol:



Logout

Election Commission of India !!!

THANK YOU, WE GOT YOUR VOTE !.

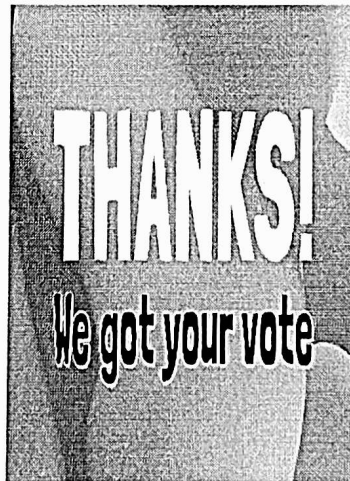

SECURE VOTING

Admin Login


User

Announcement

View BlockChain

Hacker

Result Announcement

PARTY NAME	PARTY SYMBOL	NO. OF VOTES
ADMK		2
DMK		1

SECURE VOTING

Admin Login

User

Announcement

View BlockChain

Hacker

BlockChain Validation

Block Chain

ID	HASH KEY	PREVIOUS HASH KEY
1	6f5b747215d521a7ad6494c4a254cf33eee155c8449c0809b4114e790f8b9236	0
2	52c8829606b596117a3a66f37551b1864802101ef7f1e49a345d172cb7eff4d9	9aa4d05b3d84cd51c56465a1fdc2a8b7c5d981de282dabeb149684b8295e2681
3	7ba007019268a07dc8a4c8c1b483318d5f42d31339b440453c69c10d003035dd	52c8829606b596117a3a66f37551b1864802101ef7f1e49a345d172cb7eff4d9

Designed by Election Commission of India

SECURE VOTING

Admin Login

User

Announcement

View BlockChain

Hacker

Blockchain Recovery

Block Chain

ID	HASH KEY
1	Blockchain is INVALID. UPDATION is FOUND.! 6f8b747215d521afad6494c4a264cf33ee155c8468c0809b4114e790f8b9236
2	Blockchain is INVALID. UPDATION is FOUND.! 9aa4d05b3d84cd51c56465a1fd2a8b7c5f981de202abeb149684b9295e2681

Designed by Election Commission of India...

SECURE VOTING

Admin Login

User

Announcement

View BlockChain

Hacker

Block Chain Recovery

Blockchain is INVALID. UPDATION is FOUND.!

ID	HASH KEY	HASH CODE	PREVIOUS HASH KEY
2	52c8029605b586117a3a6f37551b1864002101ef7f1e43a845d172db7ef4d7	MTLzNDEyMzQxMjM0LDQ6NDQ1NTU1NjY2Ng==	9aa4d05b3d84cd51c56465a1fd2a8b7c5f981de202abeb149684b9295e2681
1	6f8b747215d521afad6494c4a264cf33ee155c8468c0809b4114e790f8b9236	MTLzNDEyMzQxMjM0LDQ6NDQ1NTU1NjY2Ng==	0

Designed by Election Commission of India...

SECURE VOTING

Admin Login

User

Announcement

View BlockChain

Hacker

BlockChain Validation

Block Chain

ID	HASH KEY	PREVIOUS HASH KEY
1	9aa4d05b3d84cd51c56465a1fd02a8b7c5d981de282dabeb149684b8295e2681	0
2	52c8829606b586117a3a66f37551b1864802101ef7f1e48a845d172cb7eff4d9	9aa4d05b3d84cd51c56465a1fd02a8b7c5d981de282dabeb149684b8295e2681
3	7ba007019268a07dc8a4c9c1b688318d5f42d31339b440463c69c108003085dd	52c8829606b586117a3a66f37551b1864802101ef7f1e48a845d172cb7eff4d9

Designed by Election Commission of India...

SECURE VOTING

Home

Election Config


Election Details

Announcement

View BlockChain

Logout

Result Announcement

PARTY NAME	PARTY SYMBOL	NO. OF VOTES
DMK		2
ADMK		1

11.2) SOURCE CODES

Frmvoter.php

```
<?php
include_once("header.php");
include_once("class/voterclass.php");
$obj=new voterclass();
if (($_REQUEST['mode']=='Update' || $_REQUEST['mode']=='Delete') &&
$_REQUEST['id']!='')
{
$result=$obj->getvoterbyid($_REQUEST['id']);
$row=mysql_fetch_assoc($result);
}
if(isset($_REQUEST['btnadd']))
{
    $obj->name=$_REQUEST['txtname'];
    $obj->ano=$_REQUEST['txtano'];
    $obj->city=$_REQUEST['ddlcity'];
    $obj->verified=$_REQUEST['ddlverified'];
    $obj->photo=$_FILES["filefield"]["name"];
    move_uploaded_file($_FILES["filefield"]["tmp_name"],
        "images/".$_FILES["filefield"]["name"]);
    if (isset($_FILES["filefield"]["name"]) && $_FILES["filefield"]["name"]=="")
        $obj -> photo=isset($_REQUEST["hiddenField"]) ?
        $_REQUEST["hiddenField"] : "";
    else
        $obj -> photo=isset($_FILES["filefield"]["name"]) ?
        $_FILES["filefield"]["name"] : "";
    //echo $con -> photo;
```

```

        move_uploaded_file($_FILES["filefield"]["tmp_name"],"images/".
$obj->photo);
if($_REQUEST['mode']=="Update" && $_REQUEST['id']!="")
{
    $obj->id=$_REQUEST['id'];
    $result=$obj->Update($_REQUEST['id']);
}
elseif($_REQUEST['mode']=="Delete" && $_REQUEST['id']!="")
{
    $obj->id=$_REQUEST['id'];
    $result=$obj->Delete($_REQUEST['id']);
}
else
    $result=$obj->AddVoter();
if ($result>0)
{
    echo '<script type="text/javascript">'. "\n";
    echo 'alert("Success !..."). "\n";
    echo 'window.location = "frmviewvoters1.php";';
    echo '</script>';
}
else
{
    echo '<script type="text/javascript">'. "\n";
    echo 'alert("Fails !");';
    echo '</script>';
}
}
}
?>

```

```

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
<title>-- Secure Voting System --</title>
<script language="javascript">
functionreadURL(input)
{
if (input.files&&input.files[0]) {
var reader=new FileReader();
    reader.onload=function(e) {
        $('#imgg')
            .attr('src',e.target.result)
            .width(150)
            .height(200);
    };
    reader.readAsDataURL(input.files[0]);
}
}
</script>
</head>
<body>
<!--main content start-->
<section id="main-content">
<section class="wrapper">
<!-- Form -->
<div class="row">
<div class="col-lg-12">

```

```

<section class="panel">
<div class="panel panel-warning">
<div class="panel-heading">Voter Details</div>
</div>
<div class="panel-body">
<div class="form">
<form id="form1" name="form1" method="post" action="" align="center"
class="form-validate form-horizontal" enctype="multipart/form-data"
onsubmit="return validate(this)">
<div class="form-group ">
<label for="cname" class="control-label col-lg-2">Voter Name <span
class="required">*</span></label>
<div class="col-lg-10">
<input class="form-control" id="txtname" name="txtname" type="text"
required value="<?php if(isset($row['votername'])) echo $row['votername']; ?>"
onkeypress="return alphacheck(this)" />
</div>
</div>
<div class="form-group ">
<label for="cname" class="control-label col-lg-2">Aadhaar No <span
class="required">*</span></label>
<div class="col-lg-10">
<input class="form-control" id="txtano" name="txtano" minlength="12"
maxlength="12" type="text" required value="<?php if(isset($row['aadhaarno']))
echo $row['aadhaarno']; ?>" onkeypress="return nocheck(this)" />
</div>
</div>
<div class="form-group ">
<label for="cname" class="control-label col-lg-2">City <span
class="required">*</span></label>
<div class="col-lg-10">
<select name="ddlcity" id="ddlcity" class="form-control">

```

```

<option value="Select"> --SELECT YOUR CITY-- </option>
<option <?php if(isset($row['city']) && $row['city']=="Tiruchirapalli"){echo
"selected";}?>>Tiruchirapalli</option>
<option <?php if(isset($row['city']) && $row['city']=="Tirunelveli"){echo
"selected";}?>>Tirunelveli</option>
<option <?php if(isset($row['city']) && $row['city']=="Dindigul"){echo
"selected";}?>>Dindigul</option>
<option <?php if(isset($row['city']) && $row['city']=="Thanjavur"){echo
"selected";}?>>Thanjavur</option>
<option <?php if(isset($row['city']) && $row['city']=="Tirupur"){echo
"selected";}?>>Tirupur</option>
<option <?php if(isset($row['city']) && $row['city']=="Salem"){echo
"selected";}?>>Salem </option>
<option <?php if(isset($row['city']) && $row['city']=="Vellore"){echo
"selected";}?>>Vellore </option>
<option <?php if(isset($row['city']) && $row['city']=="Coimbatore"){echo
"selected";}?>>Coimbatore </option>
<option <?php if(isset($row['city']) && $row['city']=="Madurai"){echo
"selected";}?>>Madurai </option>
<option <?php if(isset($row['city']) && $row['city']=="Erode"){echo
"selected";}?>>Erode </option>
<option <?php if(isset($row['city']) && $row['city']=="Thoothukudi"){echo
"selected";}?>>Thoothukudi</option>
<option <?php if(isset($row['city']) && $row['city']=="Chennai"){echo
"selected";}?>>Chennai </option>
</select>
</div>
</div>
<div class="form-group ">
<label for="cname" class="control-label col-lg-2">Verified ?<span
class="required">*</span></label>
<div class="col-lg-10">
<select name="ddlverified" id="ddlverified" class="form-control">

```

```

<option value="Select"> --Select Whether Verified? -- </option>
<option <?php if(isset($row['verified']) && $row['verified']=="True"){echo
"selected";}?>>True </option>
<option <?php if(isset($row['verified']) && $row['verified']=="False"){echo
"selected";}?>>False </option>
</select>
</div>
</div>
<div class="form-group ">
<label for="cname" class="control-label col-lg-2">Photo<span
class="required">*</span></label>
<div class="col-lg-10"><imgsrc="images/<?php if(isset($row['photo'])) echo
$row['photo']; ?>" height="150px" width="250px" name="imgg" id="imgg" />
<input type="hidden" name="hiddenField" id="hiddenField" value="<?php
if(isset($row['photo'])) echo $row['photo']; ?>" />
<input type="file" name="filefield" id="filefield" onChange="readURL(this);"
value="<?php if(isset($row['photo'])) echo $row['photo']; else echo 0;?>" />
</div>
</div>
<div class="form-group">
<div class="col-lg-offset-2 col-lg-10">
<input type="submit" class="btn btn-primary btn-lg" value="<?php echo
$_REQUEST['mode']; ?>" name="btnadd" id="btnadd"/>
</div>
</div>
</form>
</div>
</div>
</section>
</div>
</div>

```

</section>

</section>

<!--main content end-->

</body>

</html>

<?php

include_once("footer.php");

?>

Frmcandidate.php

<?php

include_once("header.php");

include_once("class/candidateclass.php");

\$obj=new candidateclass();

if ((\$_REQUEST['mode']=='Update' || \$_REQUEST['mode']=='Delete') &&
\$_REQUEST['id']!='')

{

\$result=\$obj->getcandidatebyid(\$_REQUEST['id']);

\$row=mysql_fetch_assoc(\$result);

}

if(isset(\$_REQUEST['btnadd']))

{

\$obj->name=\$_REQUEST['txtname'];

\$obj->ano=\$_REQUEST['txtano'];

\$obj->city=\$_REQUEST['ddlcity'];

\$obj->pname=\$_REQUEST['txtpname'];

\$obj->photo=\$_FILES["filefield"]["name"];

move_uploaded_file(\$_FILES["filefield"]["tmp_name"],
"images/" . \$_FILES["filefield"]["name"]);

if (isset(\$_FILES["filefield"]["name"]) && \$_FILES["filefield"]["name"]=="")

```

        $obj -> photo=isset($_REQUEST["hiddenField"]) ?
$_REQUEST["hiddenField"] : "";
    else
        $obj -> photo=isset($_FILES["filefield"]["name"]) ?
$_FILES["filefield"]["name"] : "";
        //echo $con -> photo;
        move_uploaded_file($_FILES["filefield"]["tmp_name"],"images/".
$obj -> photo);
if($_REQUEST['mode']=="Update" && $_REQUEST['id']!="")
{
    $obj->id=$_REQUEST['id'];
    $result=$obj->Update($_REQUEST['id']);
}
elseif($_REQUEST['mode']=="Delete" && $_REQUEST['id']!="")
{
    $obj->id=$_REQUEST['id'];
    $result=$obj->Delete($_REQUEST['id']);
}
else
    $result=$obj->AddCandidate();
if ($result>0)
{
    echo '<script type="text/javascript">'. "\n";
    echo 'alert("Success !...")'. "\n";
    echo 'window.location = "frmviewcandidates1.php";';
    echo '</script>';
}
else
{
    echo '<script type="text/javascript">'. "\n";

```

```

echo 'alert("Unable to process !");
echo '</script>';
}
}
?>
<head>
<script language="javascript">
function readURL(input)
{
if (input.files && input.files[0]) {
var reader = new FileReader();
    reader.onload = function(e) {
        $('#imgg')
            .attr('src', e.target.result)
            .width(150)
            .height(200);
    };
    reader.readAsDataURL(input.files[0]);
}
}
</script>
</head>
<body>
<!-- main content start -->
<section id="main-content">
<section class="wrapper">
<!-- Form -->
<div class="row">
<div class="col-lg-12">

```

```

<section class="panel">
<div class="panel panel-warning">
<div class="panel-heading">Candidate Details</div>
</div>
<div class="panel-body">
<div class="form">
<form id="form1" name="form1" method="post" action="" align="center"
enctype="multipart/form-data" class="form-validate form-horizontal"
onSubmit="return validate(this)">
<div class="form-group ">
<label for="cname" class="control-label col-lg-2">Name <span
class="required">*</span></label>
<div class="col-lg-10">
<input class="form-control" id="txtname" name="txtname" type="text"
required value="<?php if(isset($row['candidatename'])) echo
$row['candidatename']; ?>" onKeyPress="return alphacheck(this)"/>
</div>
</div>
<div class="form-group ">
<label for="cname" class="control-label col-lg-2">Aadhaar Number <span
class="required">*</span></label>
<div class="col-lg-10">
<input class="form-control" id="txtano" name="txtano" type="text" required
value="<?php if(isset($row['aadhaarno'])) echo $row['aadhaarno'];
?>" onkeypress="return alphacheck(this)"/>
</div>
</div>
<div class="form-group ">
<label for="cname" class="control-label col-lg-2">City <span
class="required">*</span></label>
<div class="col-lg-10">
<select name="ddlcity" id="ddlcity" class="form-control">

```

```

<option value="Select"> --SELECT YOUR CITY-- </option>
<option <?php if(isset($row['city']) && $row['city']=="Tiruchirapalli"){echo
"selected";}?>>Tiruchirapalli</option>
<option <?php if(isset($row['city']) && $row['city']=="Tirunelveli"){echo
"selected";}?>>Tirunelveli</option>
<option <?php if(isset($row['city']) && $row['city']=="Dindigul"){echo
"selected";}?>>Dindigul</option>
<option <?php if(isset($row['city']) && $row['city']=="Thanjavur"){echo
"selected";}?>>Thanjavur</option>
<option <?php if(isset($row['city']) && $row['city']=="Tirupur"){echo
"selected";}?>>Tirupur</option>
<option <?php if(isset($row['city']) && $row['city']=="Salem"){echo
"selected";}?>>Salem </option>
<option <?php if(isset($row['city']) && $row['city']=="Vellore"){echo
"selected";}?>>Vellore </option>
<option <?php if(isset($row['city']) && $row['city']=="Coimbatore"){echo
"selected";}?>>Coimbatore </option>
<option <?php if(isset($row['city']) && $row['city']=="Madurai"){echo
"selected";}?>>Madurai </option>
<option <?php if(isset($row['city']) && $row['city']=="Erode"){echo
"selected";}?>>Erode </option>
<option <?php if(isset($row['city']) && $row['city']=="Thoothukudi"){echo
"selected";}?>>Thoothukudi</option>
<option <?php if(isset($row['city']) && $row['city']=="Chennai"){echo
"selected";}?>>Chennai </option>
</select>
</div>
</div>
<div class="form-group ">
<label for="cname" class="control-label col-lg-2">Party Name <span
class="required">*</span></label>
<div class="col-lg-10">

```

```
<input class="form-control" id="txtpname" name="txtpname" type="text"
required value="<?php if(isset($row['partypname'])) echo $row['partypname']; ?>"
onKeyPress="return alphacheck(this)"/>
```

```
</div>
```

```
</div>
```

```
<div class="form-group">
```

```
<label for="cname" class="control-label col-lg-2">Party Symbol<span
class="required">*</span></label>
```

```
<div class="col-lg-10">
```

```
<imgsrc="images/<?php if(isset($row['partysymbol'])) echo
$row['partysymbol']; ?>" height="150px" width="250px" name="imgg"
id="imgg" />
```

```
<input type="hidden" name="hiddenField" id="hiddenField" value="<?php
if(isset($row['partysymbol'])) echo $row['partysymbol']; ?>"/>
```

```
<input type="file" name="filefield" id="filefield" onChange="readURL(this);"
value="<?php if(isset($row['partysymbol'])) echo $row['partysymbol']; else
echo 0;?>" />
```

```
</div>
```

```
</div>
```

```
<div class="form-group">
```

```
<div class="col-lg-offset-2 col-lg-10">
```

```
<input type="submit" class="btn btn-primary btn-lg" value="<?php echo
$_REQUEST['mode']; ?>" name="btnadd" id="btnadd"/>
```

```
</div>
```

```
</div>
```

```
</form>
```

```
</div>
```

```
</div>
```

```
</section>
```

```
</div>
```

```
</div>
```

```
</section>
```

```
</section>
```

```
<!--main content end-->
```

```
</body>
```

```
<?php
```

```
    include_once("footer.php");
```

```
?>
```