



Software Diversification for WebAssembly

JAVIER CABRERA-ARTEAGA

Doctoral Thesis in Computer Science
Supervised by
Benoit Baudry and Martin Monperrus
Stockholm, Sweden, 2023

KTH Royal Institute of Technology
School of Electrical Engineering and Computer Science
Division of Software and Computer Systems
SE-10044 Stockholm
Sweden

TRITA-EECS-AVL-2020:4
ISBN 100-

Akademisk avhandling som med tillstånd av Kungl Tekniska högskolan framlägges
till offentlig granskning för avläggande av Teknologie doktorexamen i elektroteknik
i .

© Javier Cabrera-Arteaga , date

Tryck: Universitetsservice US AB

Abstract

Keywords: Lorem, Ipsum, Dolor, Sit, Amet

Sammanfattning

LIST OF PAPERS

1. ***WebAssembly Diversification for Malware Evasion***
Javier Cabrera-Arteaga, Tim Toady, Martin Monperrus, Benoit Baudry
Computers & Security, Volume 131, 2023, 17 pages
<https://www.sciencedirect.com/science/article/pii/S0167404823002067>
2. ***Wasm-mutate: Fast and Effective Binary Diversification for WebAssembly***
Javier Cabrera-Arteaga, Nicholas Fitzgerald, Martin Monperrus, Benoit Baudry
Under review, 17 pages
<https://arxiv.org/pdf/2309.07638.pdf>
3. ***Multi-Variant Execution at the Edge***
Javier Cabrera-Arteaga, Pierre Laperdrix, Martin Monperrus, Benoit Baudry
Moving Target Defense (MTD 2022), 12 pages
<https://dl.acm.org/doi/abs/10.1145/3560828.3564007>
4. ***CROW: Code Diversification for WebAssembly***
Javier Cabrera-Arteaga, Orestis Floros, Oscar Vera-Pérez, Benoit Baudry, Martin Monperrus
Measurements, Attacks, and Defenses for the Web (MADWeb 2021), 12 pages
<https://doi.org/10.14722/madweb.2021.23004>
5. ***Superoptimization of WebAssembly Bytecode***
Javier Cabrera-Arteaga, Shrinish Donde, Jian Gu, Orestis Floros, Lucas Satabin, Benoit Baudry, Martin Monperrus
Conference Companion of the 4th International Conference on Art, Science, and Engineering of Programming (Programming 2021), MoreVMs, 4 pages
<https://doi.org/10.1145/3397537.3397567>
6. ***Scalable Comparison of JavaScript V8 Bytecode Traces***
Javier Cabrera-Arteaga, Martin Monperrus, Benoit Baudry
11th ACM SIGPLAN International Workshop on Virtual Machines and Intermediate Languages (SPLASH 2019), 10 pages
<https://doi.org/10.1145/3358504.3361228>

ACKNOWLEDGEMENT

Contents

| | |
|--|------------|
| List of Papers | iii |
| Acknowledgement | v |
| Contents | 1 |
| | |
| I Thesis | 3 |
| | |
| 1 Introduction | 5 |
| 1.1 Software Monoculture | 6 |
| 1.2 Software Diversification | 7 |
| 1.3 Background | 8 |
| 1.4 Problem statement | 8 |
| 1.5 Automatic Software diversification requirements | 8 |
| 1.6 List of contributions | 8 |
| 1.7 Summary of research papers | 9 |
| | |
| 2 Background and state of the art | 13 |
| 2.1 WebAssembly | 13 |
| 2.2 Software diversification | 23 |
| | |
| 3 Automatic Software Diversification for WebAssembly | 31 |
| 3.1 CROW: Code Randomization of WebAssembly. | 32 |
| 3.2 MEWE: Multi-variant Execution for WebAssembly | 37 |
| 3.3 WASM-MUTATE: Fast and Effective Binary for WebAssembly | 41 |
| 3.4 Comparing CROW, MEWE, and WASM-MUTATE | 46 |
| | |
| 4 Exploiting Software Diversification for WebAssembly | 51 |

| | | |
|-----------|--|-----------|
| 4.1 | Offensive Diversification: Malware evasion | 51 |
| 4.2 | Defensive Diversification: Speculative Side-channel protection | 59 |
| 4.3 | Intrinsic properties of diversification. | 65 |
| 5 | Conclusions and Future Work | 69 |
| 5.1 | Summary of technical contributions | 69 |
| 5.2 | Summary of empirical findings. | 69 |
| 5.3 | Future Work | 70 |
| II | Included papers | 73 |
| | Superoptimization of WebAssembly Bytecode | 77 |
| | CROW: Code Diversification for WebAssembly | 79 |
| | Multi-Variant Execution at the Edge | 81 |
| | WebAssembly Diversification for Malware Evasion | 83 |
| | Wasm-mutate: Fast and Effective Binary Diversification for WebAssembly | 85 |
| | Scalable Comparison of JavaScript V8 Bytecode Traces | 87 |

Part I

Thesis

1

INTRODUCTION

Jealous stepmother and sisters; magical aid by a beast; a marriage won by gifts magically provided; a bird revealing a secret; a recognition by aid of a ring; or show; or what not; a dénouement of punishment; a happy marriage - all those things, which in sequence, make up Cinderella, may and do occur in an incalculable number of other combinations.

— MR. Cox **1893**, *Cinderella: Three hundred and forty-five variants* [?]]

This dissertation presents toolsets, approaches and methodologies designed to enhance WebAssembly security proactively through Software Diversification. First, Software Diversification could expand the capabilities of the mentioned tools by incorporating diversified program variants, making it more challenging for attackers to exploit any missed vulnerabilities. Generated as proactive security, these diversified variants can simulate a broader set of real-world conditions, thereby making WebAssembly analysis tools more accurate. Second, we noted that current solutions to mitigate side-channel attacks on WebAssembly binaries are either specific to certain attacks or need the modification of runtimes, e.g., Swivel as a cloud-deployed compiler. Software Diversification could mitigate yet-unknown vulnerabilities on WebAssembly binaries by generating diversified variants in a platform-agnostic manner.

Our work focuses on artificial diversification techniques, particularly for WebAssembly, drawing insights from significant works by Baudry et al. [?]] and Jackson et al. [?]].

TODO From the LIC

The first web browser, Nexus [?]], appeared in 1990. At that moment, web browsing was only about retrieving and showing small and static HTML web pages. In other words, users read the content of pages without interactions. The growing computing power of devices, the spread of the internet, and the need for more interaction and experiences for users encouraged the idea of executing code along with web pages. The Netscape browser made possible the execution of code on the client-side with the introduction of the JavaScript [?]] language in 1995. Remarkably, all browsers have supported JavaScript since Netscape. Nowadays,

⁰Compilation probe time 2023/10/24 14:23:31

most web pages include not only HTML, but also include JavaScript code that is executed in client computers. During the past decades, web browsers have become JavaScript language virtual machines. They evolved to complex systems that can run full-fledged applications, like video and audio players, animation creators, and PDF document renderers such as the one showing this document.

JavaScript is currently the most used scripting language in all modern web browsers [?]. However, JavaScript faces several limitations related to the characteristics of the language. For example, any JavaScript engine requires the parsing and recompiling the JavaScript code, which implies a significant overhead. Moreover, JavaScript faces security issues [?]. For example, JavaScript lacks of memory isolation, making possible to extract pieces of information from others processes [?]. Because of these problems, the Web Consortium (W3C) standardized in 2017 a bytecode for the web environment, the Wasm (Wasm) language.

Wasm is designed to be fast, portable, self-contained, and secure [?]. All Wasm programs are compiled ahead-of-time from source languages such as C/C++ and Rust. Wasm is created by third-party compilers that might include optimizations like in the case of LLVM. The Wasm language defines its Instruction Set Architecture [?] as an abstraction close to machine code instructions but agnostic to CPU architectures. Thus, web browsers can use it to rapidly compile to the target architectures in a one-to-one translation process.

WebAssembly evolved outside web browsers. Some works demonstrated that using WebAssembly as an intermediate layer is better in terms of startup and memory usage than containerization and virtualization [? ?]. Consequently, in 2019, the Bytecode Alliance [?] proposed WebAssembly System Interface (WASI) [?]. WASI pioneered the execution of Wasm with a POSIX system interface protocol, making possible to execute Wasm directly in the operating system. Therefore, it standardizes the adoption of Wasm in heterogeneous platforms [?], making it suitable for edge-cloud computing platforms [? ?].

1.1 Software Monoculture

Web browsers and JavaScript have nearly three decades of development. Since then, web browsers have grown, reaching several implementations [? ?]. Nevertheless, only Firefox, Chrome, Safari, and Edge dominate on user computers. This means that, for 5 arbitrary devices (computers, tablets, smartphones) in a world of millions, at least two of them use the same web browser. This highlights a software monoculture problem [?], as an ecosystem of machines running the exact same software. The monoculture concept is an analogy from biology [?]. It describes an ecosystem that faces extinction due the lack of diversity as all individuals share the exact same vulnerabilities. In other words, many applications can crash due to a single shared vulnerability.

Nowadays, the serving of web pages, including WebAssembly code, is centralized and provided through main servers [?]. Thus, a similar argument for software monoculture can be used for the Wasm code that is served to web browsers. Despite being designed for sandboxing and secure execution, Wasm is not exempt from vulnerabilities [?]. For example, Wasm engines are vulnerable to speculative execution [?], and C/C++ source code vulnerabilities might be ported to Wasm binaries [?]. Therefore, the sharing of the Wasm code through web browsers, also includes Wasm vulnerabilities.

The software monoculture problem escalates if we consider the edge-cloud computing platforms and how they are adopting Wasm to provide services, as we previously mentioned. Concretely, along with browser clients, thousands of edge devices running Wasm as backend services might be affected due to vulnerabilities sharing. This means that if one node in an edge network is vulnerable, all the others are vulnerable in the exact same manner as the same binary is replicated on each node. In other words, the same attacker payload would break all edge nodes at once. This illustrates how Wasm execution is fragile with respect to systemic vulnerabilities for the whole internet. Let us take the example of what happened on June 8, 2021, with Fastly [?]. That day, the whole internet suffered a 45 minutes disruption because of a failure when one Wasm binary was deployed at Fastly. The complete Fastly platform crashed. The bug, combined with most web pages being CDN-dependant, created a catastrophe. Therefore, a single distributed Wasm binary could unleash the same incident [?].

One might think that the solution is to adopt more web browser and interpreters implementations. However, this is virtually impossible as 4 web browsers dominate the market and edge-cloud computing platforms are transparently executed in the backend. Thus, a solution in this direction is doomed to fail. Another solution is to provide different WebAssembly codes. For example, a different source code, yet equivalent, can be provided when a web page requests it [?]. Consequently, millions of computers would execute different codes even though they use the same web browser. This strategy is called Software Diversification.

1.2 Software Diversification

Software Diversification is the process of finding, creating, and deploying program variants of a given original program [?] for the sake of security. Cohen et al. [?] and Forrest et al. [?] pioneered this field by proposing software diversification through code transformations. They proposed to produce variants of programs while preserving their functionalities, aiming to mitigate vulnerabilities. Since then, transformations aiming at reducing the predictability of observable behavior of programs have been proposed. For example, works on this direction proposed to diversify programs control flow [?], instruction set [?], or the system calls

they use [?]. Several of these transformations can be combined to produce less predictable variants.

While previous works on software diversification demonstrated the removal of vulnerabilities, in all cases, it can be used as a preemptive solution. For example, if a vulnerability is present in one program variant, discovering and disseminating it will not affect other variants. Software diversification has been widely researched, yet, the field does not study its application to Wasm. Only Romano et al. [?] proposed the intermixing JavaScript and Wasm function calls to provide obfuscation against code analysis. For Wasm, no software diversification solution has been proposed, primarily due to its novelty.

TODO Recent papers first. Mention Workshops instead in conference. "Proceedings of XXXX". Add the pages in the papers list.

1.3 Background

TODO Motivate with the open challenges.

1.4 Problem statement

TODO Problem statement **TODO** Set the requirements as R1, R2, then map each contribution to them.

1.5 Automatic Software diversification requirements

1. 1: **TODO** Requirement 1

1.6 List of contributions

TODO Describe each one

C1 Experimental contribution: We propose reproducible methodology for generating software diversification for WebAssembly, the assessment of the generated diversity and the exploitation of the generated variants.

C2 Theoretical contribution: We propose a theoretical foundation in order to improve Software Diversification for WebAssembly.

C3 Diversity generation: We generate WebAssembly program variants.

| Contribution | Research papers | | | |
|------------------------------|-----------------|----|----|----|
| | P1 | P2 | P3 | P4 |
| C1 Experimental contribution | ✓ | ✓ | ✓ | ✓ |
| C2 Theoretical contribution | ✓ | | ✓ | |
| C3 Diversity generation | ✓ | ✓ | ✓ | ✓ |
| C4 Defensive diversification | ✓ | ✓ | ✓ | |
| C5 Offensive diversification | | | | ✓ |

Table 1.1

C4 Defensive Diversification: We assess how generated WebAssembly program variants could be used for defensive purposes.

C5 Offensive Diversification: We assess how generated WebAssembly program variants could be used for offensive purposes, yet improving security systems.

1.7 Summary of research papers

This compilation thesis comprises the following research papers.

P1: CROW: Code randomization for WebAssembly bytecode.

Summary: Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut

purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

P2: Multivariant execution at the Edge.

Summary: Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut

purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi

tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

P3: Wasm-mutate: Fast and efficient software diversification for WebAssembly.

Summary: Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut

purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

P4: WebAssembly Diversification for Malware evasion.

Summary: Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut

purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

■ Thesis layout

This dissertation comprises two parts as a compilation thesis. Part one summarises the research papers included within, which is partially rooted in the

author's licentiate thesis [?]. Chapter 2 offers a background on WebAssembly and the latest advancements in Software Diversification. Chapter 3 delves into our technical contributions. Chapter 4 exhibits two use cases applying our technical contributions. Chapter 5 concludes the thesis and outlines future research directions. The second part of this thesis incorporates all the papers discussed in part one.

2

BACKGROUND AND STATE OF THE ART

You must have a map, no matter how rough. Otherwise you wander all over the place.

— J.R.R. Tolkien

THIS chapter discusses the state-of-the-art in the areas of WebAssembly and Software Diversification. In Section 2.1 we discuss WebAssembly, focusing on its design and security model. Besides, we discuss the current state-of-the-art in the area of WebAssembly program analysis. In Section 2.2 we discuss related works in the area of Software Diversification. Moreover, we delve into the open challenges regarding the diversification of WebAssembly programs.

2.1 WebAssembly

The W3C publicly announced the WebAssembly (Wasm) language in 2017 as the fourth scripting language supported in all major web browser vendors. WebAssembly is a binary instruction format for a stack-based virtual machine and was officially consolidated by the work of Haas et al. [?] in 2017 and extended by Rossberg et al. in 2018 [?]. It is designed to be fast, portable, self-contained, and secure.

Moreover, WebAssembly has been evolving outside web browsers since its first announcement. Some works demonstrated that using WebAssembly as an intermediate layer is better in terms of startup time and memory usage than containerization and virtualization [? ?]. Consequently, in 2019, the Bytecode Alliance proposed WebAssembly System Interface (WASI) [?]. WASI pioneered the execution of WebAssembly with a POSIX system interface protocol, making it possible to execute Wasm closer to the underlying operating system. Therefore, it standardizes the adoption of WebAssembly in heterogeneous platforms [?], i.e., IoT and Edge computing [? ?].

⁰Compilation probe time 2023/10/24 14:23:31

Currently, WebAssembly serves a variety of functions in browsers, ranging from gaming to cryptomining [?]. Other applications include text processing, visualization, media processing, programming language testing, online gambling, bar code and QR code fast reading, hashing, and PDF viewing. On the backend, WebAssembly notably excels in short-running tasks. As such, it is particularly suitable for Function as a Service (FaaS) platforms like Cloudflare and Fastly. The subsequent text in this chapter focuses specifically on WebAssembly version 1.0. However, the tools, techniques, and methodologies discussed are applicable to future WebAssembly versions.

2.1.1 From source code to WebAssembly

WebAssembly programs are compiled from source languages like C/C++, Rust, or Go, which means that it can benefit from the optimizations of the source language compiler. The resulting WebAssembly program is like a traditional shared library, containing instruction codes, symbols, and exported functions. A host environment is in charge of complementing the Wasm program, such as providing external functions required for execution within the host engine. For instance, functions for interacting with an HTML page’s DOM are imported into the Wasm binary when invoked from JavaScript code in the browser.

```

1 // Static raw data
2 const int A[250];
3
4 // External function usage
5 int ftoi(float a);
6
7 int main() {
8     for(int i = 0; i < 250; i++) {
9         if (A[i] > 100)
10             return A[i] + ftoi(12.54);
11     }
12
13     return A[0];
14 }
```

Listing 2.1: *Example C program which includes heap allocation, external function usage, and a function definition featuring a loop, conditional branching, function calls, and memory accesses.*

In Listing 2.1 and Listing 2.2, we present a C program alongside its corresponding WebAssembly binary. The C function encompasses various elements such as static allocation, external function usage, and a function definition that includes a loop, conditional branching, function calls, and memory accesses. The Wasm code shown in Listing 2.2 is displayed in its textual format, known as WAT¹. The static memory declared in line 2 of Listing 2.1 is allocated within the Wasm binary’s linear memory, as illustrated in line 47 of Listing 2.2.

¹The WAT text format is primarily designed for human readability and for low-level manual editing.

The function prototype in line 5 of Listing 2.1 is converted into an imported function, as seen in line 8 of Listing 2.2. The main function, spanning lines 7 to 14 in Listing 2.1, is transcribed into a Wasm function covering lines 12 to 38 in Listing 2.2. Within this function, the translation of various C language constructs into Wasm can be observed. For instance, the `for` loop found in line 8 of Listing 2.1 is mapped to a block structure in lines 17 to 31 of Listing 2.2. The loop's breaking condition is converted into a conditional branch, as shown in line 25 of Listing 2.2.

There exist several compilers that turn source code into WebAssembly binaries. For example, LLVM compiles to WebAssembly as a backend option since its 7.1.0 release in early 2019², supporting a diverse set of frontend languages like C/C++, Rust, Go, and AssemblyScript³. Significantly, a study by Hilbig [?] reveals that 70% of WebAssembly binaries are generated using LLVM-based compilers. The main advantage of using LLVM is that it provides a modular and state-of-the-art optimization infrastructure for WebAssembly binaries. Recently, the Kotlin Multiplatform framework⁴ has incorporated WebAssembly as a compilation target, enabling the compilation of Kotlin code to WebAssembly.

A recent trend in the WebAssembly ecosystem involves porting various programming languages by converting both the language's engine or interpreter and the source code into a WebAssembly program. For example, Javy⁵ encapsulates JavaScript code within the QuickJS interpreter, demonstrating that direct source code conversion to WebAssembly isn't always required. If an interpreter for a specific language can be compiled to WebAssembly, it allows for the bundling of both the interpreter and the language into a single, isolated WebAssembly binary. Similarly, Blazor⁶ facilitates the execution of .NET Common Intermediate Language (CIL) in WebAssembly binaries for browser-based applications. However, packaging the interpreter and the code in one single standalone WebAssembly binary is still immature and faces challenges. For example, the absence of JIT compilation for the "interpreted" code makes it less suitable for long-running tasks [?]. On the other hand, it proves effective for short-running tasks, particularly those executed in Edge-Cloud computing platforms.

²<https://github.com/llvm/llvm-project/releases/tag/llvmorg-7.1.0>

³A subset of the TypeScript language

⁴<https://kotlinlang.org/docs/wasm-overview.html>

⁵<https://github.com/bytedcodealliance/javy>

⁶<https://dotnet.microsoft.com/en-us/apps/aspnet/web-apps/blazor>

```

1 ; WebAssembly magic bytes(\0asm) and version (1.0) ;
2 (module
3 ; Type section: 0x01 0x00 0x00 0x00 0x13 ... ;
4 (type (;0;) (func (param f32) (result i32)))
5 (type (;1;) (func))
6 (type (;2;) (func (result i32)))
7 ; Import section: 0x02 0x00 0x00 0x00 0x57 ... ;
8 (import "env" "ftoi" (func $ftoi (type 0)))
9 ; Custom section: 0x00 0x00 0x00 0x00 0x7E ;
10 (@custom "name" "...")
11 ; Code section: 0x03 0x00 0x00 0x00 0x5B... ;
12 (func $main (type 2) (result i32)
13 (local i32 i32)
14 i32.const -1000
15 local.set 0
16 block ;label = @1;
17 loop ;label = @2;
18 i32.const 0
19 local.get 0
20 i32.add
21 i32.load
22 local.tee 1
23 i32.const 101
24 i32.ge_s
25 br_if 1 ;@1;
26 local.get 0
27 i32.const 4
28 i32.add
29 local.tee 0
30 br_if 0 ;@2;
31 end
32 i32.const 0
33 return
34 end
35 f32.const 0x1.9147aep+3
36 call $ftoi
37 local.get 1
38 i32.add)
39 ; Memory section: 0x05 0x00 0x00 0x00 0x03 ... ;
40 (memory (;0;) 1)
41 ; Global section: 0x06 0x00 0x00 0x00 0x11... ;
42 (global (;4;) i32 (i32.const 1000))
43 ; Export section: 0x07 0x00 0x00 0x00 0x72 ... ;
44 (export "memory" (memory 0))
45 (export "A" (global 2))
46 ; Data section: 0x0d 0x00 0x00 0x03 0xEF ... ;
47 (data $data (0) "\00\00\00\00...")
48 ; Custom section: 0x00 0x00 0x00 0x00 0x2F ;
49 (@custom "producers" "...")
50 )

```

Listing 2.2: Wasm code for Listing 2.1. The example Wasm code illustrates the translation from C to Wasm in which several high-level language features are translated into multiple Wasm instructions.

2.1.2 Extending WebAssembly

The broad spectrum of applicability and the rapid adoption of WebAssembly has resulted in demands for additional features. However, not all of these demands align with its original specifications. Thus, since the introduction of

WebAssembly, various extensions have been proposed for standardization. For instance, the SIMD proposal enables the execution of vectorized instructions in WebAssembly. To become a standard, a proposal must fulfill certain criteria, including having a formal specification and at least two independent implementations, e.g., two different engines. Notably, even after adoption, new extensions are optional, e.g., the core WebAssembly remains untouched and continues to be referred to as version 1.0.

2.1.3 WebAssembly's binary format

The Wasm binary format is close to machine code and already optimized, being a consecutive collection of sections. In Figure 2.1 we show the binary format of a Wasm section. A Wasm section starts with a 1-byte section ID, followed by a 4-byte section size, and concludes with the section content, which precisely matches the size indicated earlier. A WebAssembly binary contains sections of 13 types, each with a specific semantic role and placement within the module. For instance, the *Custom Section* stores metadata like the compiler used to generate the binary, while the *Type Section* contains function signatures that serve to validate the *Function Section*. The *Import Section* lists elements imported from the host, and the *Function Section* details the functions defined within the binary. Other sections like *Table*, *Memory*, and *Global Sections* specify the structure for indirect calls, unmanaged linear memories, and global variables, respectively. *Export*, *Start*, *Element*, *Code*, *Data*, and *Data Count Sections* handle aspects ranging from declaring elements for host engine access to initializing program state, declaring bytecode instructions per function, and initializing linear memory. Each of these sections must occur only once in a binary and can be empty. For clarity, we also annotate sections as comments in the Wasm code in Listing 2.2.



Figure 2.1: Memory byte representation of a WebAssembly binary section, starting with a 1-byte section ID, followed by an 8-byte section size, and finally the section content.

A WebAssembly binary can be processed efficiently due to its organization into a contiguous array of sections. For instance, this structure permits compilers to expedite the compilation process either through parallel parsing or by disregarding *Custom Sections*. Moreover, the *Code Section*'s instructions are further compacted through the use of the LEB128⁷ encoding. Consequently, Wasm binaries are not only fast to validate and compile, but also swift to transmit over a network.

⁷<https://en.wikipedia.org/wiki/LEB128>

2.1.4 WebAssembly's runtime

The WebAssembly's runtime characterizes the behavior of WebAssembly programs during execution. This section describes the main components of the WebAssembly runtime, namely the execution stack, functions, memory model, and execution process. These components are crucial for understanding both the WebAssembly's control-flow and the analysis of WebAssembly binaries.

Execution Stack: At runtime, WebAssembly engines instantiate a WebAssembly module. This module is a runtime representation of a loaded and initialized WebAssembly binary described in Section 2.1.3. The primary component of a module instance is its Execution Stack. The Execution Stack stores typed values, labels, and control frames. Labels manage block instruction starts and loop starts. Control frames manage function calls and function returns. Values within the stack can only be static types. These types include `i32` for 32-bit signed integers, `i64` for 64-bit signed integers, `f32` for 32-bit floats, and `f64` for 64-bit floats. Abstract types such as classes, objects, and arrays are not supported natively. Instead, these types are abstracted into primitive types during compilation and stored in linear memory.

Functions: At runtime, WebAssembly functions are closures over the module instance, grouping locals and function bodies. Locals are typed variables that are local to a specific function invocation. A function body is a sequence of instructions that are executed when the function is called. Each instruction either reads from the execution stack, writes to the execution stack, or modifies the control-flow of the function. Recalling the example WebAssembly binary previously showed, the local variable declarations and typed instructions that are evaluated using the stack can be appreciated between Line 12 and Line 38 in Listing 2.2. Each instruction reads its operands from the stack and pushes back the result. Notice that, numeric instructions are annotated with its corresponding type. In the case of Listing 2.2, the result value of the main function is the calculation of the last instruction, `i32.add` in line 38. As the listing also shows, instructions are annotated with a numeric type.

Memory model: A WebAssembly module instance incorporates three key types of memory-related components: linear memory, local variables and global variables. These components can either be managed solely by the host engine or shared with the WebAssembly binary itself. This division of responsibility is often categorized as *managed* and *unmanaged* memory [?]. Managed refers to components that are exclusively modified by the host engine at the lowest level, e.g. when the WebAssembly binary is JITed, while unmanaged components can also be altered through WebAssembly opcodes. First, modules may include multiple linear memory instances, which are contiguous arrays of bytes. These are accessed using 32-bit integers (`i32`) and are shareable only between the initiating engine and the WebAssembly binary. Generally, these linear memories

are considered to be unmanaged, e.g., line 21 of Listing 2.2 shows an explicit memory access opcode. Second, there are global instances, which are variables accompanied by values and mutability flags (see example in line 42 of Listing 2.2). These globals are managed by the host engine, which controls their allocation and memory placement completely oblivious to the WebAssembly binary scope. They can only be accessed via their declaration index, prohibiting dynamic addressing. Third, local variables are mutable and specific to a given function instance. They are accessible only through their index relative to the executing function and are part of the data managed by the host engine.

WebAssembly module execution: While a WebAssembly binary could be interpreted, the most practical approach is to JIT compile it into machine code. The main reason is that WebAssembly is optimized and closely aligned with machine code, leading to swift JIT compilation for execution. Browser engines such as V8⁸ and SpiderMonkey⁹ utilize this strategy when executing WebAssembly binaries in browser clients. Once JITed, the WebAssembly binary operates within a sandboxed environment, accessing the host environment exclusively through imported functions. The communication between the host and the WebAssembly module execution is typically facilitated by trampolines in the JITed machine code.

WebAssembly standalone engines: While initially intended for browsers, WebAssembly has undergone significant evolution, primarily due to WASI[?]. WASI establishes a standardized POSIX-like interface for interactions between WebAssembly modules and host environments. Compilers can generate WebAssembly binaries that implement WASI, which allows execution in standalone engines. These binaries can then be executed by standalone engines across a variety of environments, including the cloud, servers, and IoT devices [?]. Similarly to browsers, these engines often translate WebAssembly into machine code via JIT compilation, ensuring a sandboxed execution process. Standalone engines such as WASM3¹⁰, Wasmer¹¹, Wasmtime¹², WAVM¹³, and Sledge[?] have been developed to support both WebAssembly and WASI. In a related development, Singh et al.[?] have created a WebAssembly virtual machine specifically designed for Arduino-based devices.

⁸<https://chromium.googlesource.com/v8/v8.git>

⁹<https://spidermonkey.dev/>

¹⁰<https://github.com/wasm3/wasm3>

¹¹<https://wasmer.io/>

¹²<https://github.com/bytecodealliance/wasmtime>

¹³<https://github.com/WAVM/WAVM>

2.1.5 WebAssembly’s control-flow

A WebAssembly function groups instructions into blocks, with the function’s entrypoint acting as the root block. In contrast to conventional assembly code, control-flow structures in Wasm leap between block boundaries rather than arbitrary positions within the code, effectively prohibiting `gotos` to random code positions. Each block may specify the needed execution stack state before execution as well as the resultant execution stack state once its instructions have been executed. Typically, the execution stack state is simply the quantity and numeric type of values on the stack. This stack state is used to validate the binary during compilation and to ensure that the stack is in a valid state before the execution of the block’s instructions. Blocks in Wasm are explicit (see instructions `block` and `end` in lines 16 and 34 of Listing 2.2), delineating where they commence and conclude. By design, a block cannot reference or execute code from external blocks.

During runtime, WebAssembly break instructions can only jump to one of its enclosing blocks. Breaks, except for those within loop constructions, jump to the block’s end and continue to the next immediate instruction. For instance, after line 34 of Listing 2.2, the execution would proceed to line 35. Within a loop, the end of a block results in a jump to the block’s beginning, thus restarting the loop. For example, if line 30 of Listing 2.2 evaluates as false, the next instruction to be executed in the loop would be line 18. Listing 2.3 provides an example for better understanding, comparing a standard block and a loop block in a Wasm function.



Listing 2.3: Example of breaking a block and a loop in WebAssembly.

Each break instruction includes the depth of the enclosing block as an operand. This depth is used to identify the target block for the break instruction. For example, in the left-most part of the previously discussed listing, a break instruction with a depth of 1 would jump past two enclosing blocks. This design hardens the rewriting of WebAssembly binaries. For instance, if an outer block is removed, the depth of the break instructions within nested blocks must be updated to reflect the new enclosing block depth. This is a significant challenge for rewriting tools, as it requires the analysis of the control-flow graph to determine the enclosing block depth for each break instruction.

2.1.6 Security and Reliability for WebAssembly

The WebAssembly ecosystem’s expansion needs robust tools to ensure its security and reliability. Numerous tools, employing various strategies to detect vulnerabilities in WebAssembly programs, have been created to meet this need. This paper presents a review of the most relevant tools in this field, focusing on those capable of providing security guarantees for WebAssembly binaries.

Static analysis: SecWasm[?] uses information control-flow strategies to identify vulnerabilities in WebAssembly binaries. Conversely, Wasmati[?] employs code property graphs for this purpose. Wasp[?] leverages concolic execution to identify potential vulnerabilities in WebAssembly binaries. VeriWasm[?], an offline verifier designed specifically for native x86-64 binaries JITed from WebAssembly, adopts a unique approach. While these tools emphasize specific strategies, others adopt a more holistic approach. CT-Wasm[?], verifies the implementation of cryptographic algorithms in WebAssembly. Similarly, Vivienne applies relational Symbolic Execution (SE) to WebAssembly binaries in order to reveal vulnerabilities in cryptographic implementations[?]. For example, both Wassail[?] and WasmA[?] provide a comprehensive static analysis framework for WebAssembly binaries. However, static analysis tools may have limitations. For instance, a newly, semantically equivalent WebAssembly binary may be generated from the same source code bypassing or breaking the static analysis [?]. If the WebAssembly input differs from the input used during sound analysis [?], the vulnerability may go unnoticed. Thus, there may be a lack of subjects to evaluate the effectiveness of these tools.

Dynamic analysis: Dynamic analysis involves tools such as TaintAssembly[?], which conducts taint analysis on WebAssembly binaries. Fuzzm[?] identifies vulnerabilities in host engines by conducting property fuzzing through WebAssembly binary execution. Furthermore, Stiévenart and colleagues have developed a dynamic approach to slicing WebAssembly programs based on Observational-Based Slicing (ORBS)[? ?]. This technique aids in debugging, understanding programs, and conducting security analysis. However, Wasabi[?] remains the only general-purpose dynamic analysis tool for WebAssembly binaries, primarily used for profiling, instrumenting, and debugging WebAssembly code. Similar to static analysis, these tools typically analyze software behavior during execution, making them inherently reactive. In other words, they can only identify vulnerabilities or performance issues while pseudo-executing input WebAssembly programs. Thus, facing an important limitation on overhead for real-world scenarios.

Protecting WebAssembly binaries and runtimes: The techniques discussed previously are primarily focused on reactive analysis of WebAssembly binaries. However, there exist approaches to harden WebAssembly binaries, enhancing their secure execution, and fortifying the security of the entire

execution runtimes ecosystem. For instance, Swivel[?] proposes a compiler-based strategy designed to eliminate speculative attacks on WebAssembly binaries, particularly in Function-as-a-Service (FaaS) platforms such as Fastly. Similarly, Kolosick and colleagues [?] modify the Lucet compiler to use zero-cost transitions, eliminating the performance overhead of SFI guarantees implementation. Conversely, WaVe[?] introduces a mechanized engine for WebAssembly that facilitates differential testing. WaVe can be employed to detect anomalies in engines running Wasm-WASI programs. Much like static and dynamic analysis tools, these tools may suffer from a lack of WebAssembly inputs, which could affect the measurement of their effectiveness.

WebAssembly malware: Since the introduction of WebAssembly, the Web has consistently experienced an increase in cryptomalware. This rise primarily stems from the shift of mining algorithms from CPUs to WebAssembly, a transition driven by notable performance benefits [?]. Tools such as MineSweeper[?], MinerRay[?], and MINOS[?] employ static analysis with machine learning techniques to detect browser-based cryptomalwares. Conversely, SEISMIC[?], RAPID[?], and OUTGuard[?] leverage dynamic analysis techniques to achieve a similar objective. VirusTotal¹⁴, a tool incorporating over 60 commercial antivirus systems as black-boxes, is capable of detecting cryptomalware in WebAssembly binaries. However, obfuscation studies have exposed their shortcomings, revealing an almost unexplored area for WebAssembly that threatens malware detection accuracy. In concrete, Bahnsali et al. seminal work[?] demonstrate that cryptomining algorithm’s source code can evade previous techniques through the use of obfuscation techniques.

2.1.7 Open challenges

Despite progress in WebAssembly analysis, numerous challenges remain. WebAssembly, though deterministic and well-typed by design, is susceptible to a variety of security threats. First, most existing WebAssembly research is reactive, focusing on detecting and fixing vulnerabilities already reported. This approach leaves WebAssembly binaries and runtime implementations potentially open to unidentified attacks. Second, side-channel attacks present a significant risk. Genkin et al., for example, illustrated how WebAssembly could be manipulated to extract data via cache timing-side channels [?]. Furthermore, research conducted by Maisuradze and Rossow demonstrated the potential for speculative execution attacks on WebAssembly binaries [?]. Rokicki et al. disclosed the possibility for port contention side-channel attacks on WebAssembly binaries in browsers [?]. Finally, the binaries themselves may be inherently vulnerable. For example, studies by Lehmann et al. and Stiévenart et al. suggested that flaws in C/C++ source code could infiltrate WebAssembly binaries [? ?].

¹⁴<https://www.virustotal.com>

2.2 Software diversification

Software diversification involves the synthesis, reuse, distribution, and execution of different, functionally equivalent programs. As outlined in Baudry et al.’s survey [?], software diversification falls into five usage categories: reusability [?], software testing [?], performance [?], fault tolerance [?], and security [?]. Our work specifically contributes to the last two categories. This section presents core concepts and related works, emphasizing how they generate diversification and apply it to WebAssembly.

2.2.1 Generation of Software Variants

Software variants are functionally equivalent versions of an original program, created through software diversification at different stages of the software lifecycle, such as the source code or machine code levels. The diversification can be either natural [?] or artificial [?].

Natural Diversity: Natural diversity denotes the innate process wherein humans create software variants using various programming languages, compilers, and operating systems [?], all adhering to the same initial functional requirements. As an example, varying versions of the Linux kernel exemplify natural diversity, given their practical differences. Natural diversity plays a crucial role in securing systems, as different variants are not susceptible to identical vulnerabilities. However, it is an unviable solution for software security, as ensuring functional equivalence among different versions of the program is impossible. Creating natural software variants demands a significant amount of human effort and time. This makes it impractical for new ecosystems such as WebAssembly.

Artificial Software Diversification: The concept of artificial software variants starts with Randell’s 1975 work [?], which put forth the notion of artificial fault-tolerant instruction blocks. Artificial software diversification, as proposed by Cohen and Forrest in the 1990s [? ?], gets its development through rewriting strategies. These strategies consist of rule sets for modifying software components to create functionally equivalent, yet distinct, programs. Rewriting strategies typically take the form of tuples: `instr1 => (instr2, instr3, ...)`, where `instr` represents the original code and `(instr2, instr3, ...)` denotes the functionally equivalent code. This dissertation focuses on artificial software diversification, as it is more practical and scalable than natural diversity.

Rewriting strategies: The starting point of creating artificial software diversification is through rewriting rules. A rewriting rule is a pairing of a code segment and its functionally equivalent substitution, which is written manually. Consider, for instance, Cleemput et al. [?] and Homescu et al. [?], who inject

NOP instructions to yield statically varied versions. Here, the rewriting rule is expressed as `instr => (nop instr)`, indicating a `nop` operation preceding the instruction.

Instruction Reordering: This strategy reorders instructions in a program. For example, variable declarations may change if compilers reorder them in the symbol tables. This prevents static examination and analysis of parameters and alters memory locations. In this area, Bhatkar et al. [?] proposed the random permutation of variable and routine order for ELF binaries. Such strategies are not implemented for WebAssembly to the best of our knowledge.

Adding, Changing, Removing Jumps and Calls: This strategy generates program variants by adding, changing, or removing jumps and calls in the original program. Cohen [?] primarily illustrated this concept by inserting random jumps in programs. Pettis and Hansen [?] suggested splitting basic blocks and functions for the PA-RISC architecture, inserting jumps between splits. Similarly, Crane et al. [?] de-inlined basic blocks of code as an LLVM pass. In their approach, each de-inlined code transforms into semantically equivalent functions that are randomly selected at runtime to replace the original code calculation. On the same topic, Bhatkar et al. [?] extended their previous approach [?], replacing function calls with indirect pointer calls in C source code, allowing post-binary reordering of function calls. Recently, Romano et al. [?] proposed an obfuscation technique for JavaScript in which part of the code is replaced by calls to complementary Wasm functions. As previously discussed in Section 2.1.5, the control flow of WebAssembly is restricted, making them impractical to directly port these strategies to WebAssembly.

Program Memory and Stack Randomization: This strategy alters the layout of programs in the host memory. Additionally, it can randomize how a program variant operates its memory. The work of Bhatkar et al. [?] proposes to randomize the base addresses of applications and library memory regions in ELF binaries. Tadesse Aga and Autin [?], and Lee et al. [?] propose a technique to randomize the local stack organization for function calls using a custom LLVM compiler. Younan et al. [?] suggest separating a conventional stack into multiple stacks where each stack contains a particular class of data. On the same topic, Xu et al. [?] transforms programs to reduce memory exposure time, improving the time needed for frequent memory address randomization. This makes it very challenging for an attacker to ignore the key to inject executable code. This strategy disrupts the predictability of program execution and mitigates certain exploits such as speculative execution. No work has been found that explicitly applies this strategy to WebAssembly. However, the transformation of WebAssembly binaries inherently randomizes the memory layout. Consequently, memory access is randomized as these binaries are further JITed to machine code in the majority of cases.

ISA Randomization and Simulation This strategy involves using a key to cypher the original program binary into another encoded binary. Once encoded, the program can only be decoded at the target client, or it can be interpreted in the encoded form using a custom virtual machine implementation. This technique is strong against attacks involving code inspection. Kc et al. [?], and Barrantes et al. [?] proposed seminal works on instruction-set randomization to create a unique mapping between artificial CPU instructions and real ones. On the same topic, Chew and Song [?] target operating system randomization. They randomize the interface between the operating system and the user applications. Couroussé et al. [?] implement an assembly-like DSL to generate equivalent code at runtime in order to increase protection against side-channel attacks. Their technique generates a different program during execution using an interpreter for their DSL. Code obfuscation [?] can be seen as a simplification of *ISA randomization*. The main difference between encoding and obfuscating code is that the former requires the final target to know the encoding key while the latter executes as is in any client. Yet, both strategies aim to tackle program analysis from potential attackers. Moreover, this strategy faces a performance penalty, specially for WebAssembly, due to the decoding process as shown in WASMixer evaluation [?].

Enumerative synthesis: Enumerative synthesis is a fully automated approach to generate program variants. It examines all possible programs specific to a given language. The process of enumerative synthesis commences with a piece of input program, typically a basic block. Incrementally, using a defined grammar, it generates all programs of size n . A generated program is then checked for equivalence to the original program, either by using a test suite or a theorem solver. If the generated variant is proved, it is added to the variants collection. The procedure continues until all potential programs have been explored. This approach proves especially effective when the solution space is relatively small or can be navigated efficiently. Jacob and colleagues [?] implemented this strategy for x86 programs. They named this technique superdiversification, drawing parallels to superoptimization [?]. Since this strategy fully explores a program’s solution space, it contains the aforementioned strategies as special cases.

2.2.2 Equivalence Checking

Equivalence checking between program variants is a vital component for any program transformation task, ranging from checking compiler optimizations [?] to the artificial synthesis of programs discussed in this chapter. It proves that two pieces of code or programs are functionally equivalent [?]. Cohen [?] simplifies the checking process with the following property: two programs are equivalent if, given identical inputs, they produce identical outputs. We adopt this definition of *functional equivalence* throughout this dissertation. In Software

Diversification, equivalence checking seeks to preserve the original functionality of programs while varying observable behaviors. Two programs, for instance, can differ statically and still compute the same result. We outline two methods to check variant equivalence: by construction and automated equivalence checking. In Chapter 3, we discuss the primary advantages and limitations in practice for both approaches within the scope of our contributions.

Equivalence checking by construction: The equivalence property is often guaranteed by construction. Cleemput et al. [?] and Homescu et al. [?], for example, design their transformation strategies to generate semantically equivalent program variants. However, developer errors can occur in this process, necessitating further validation. The test suite of the original program can serve as a check for the variant. If the program variant passes the test suite [?], it can be considered equivalent to the original. However, this technique is limited by the need for a preexisting test suite and does not give guarantees. Should the test suite not exist, an alternative technique is required for equivalence checking. An alternative method for checking program equivalence involves the use of fuzzers [?]. Fuzzers randomly generate inputs that yield different observable behaviors. If two inputs produce a different output in the variant, the variant and the original program are not equivalent. The primary limitation for fuzzers is that the process is notably time-consuming and necessitates manual introduction of oracles.

Automated equivalence checking: In the absence of a test suite or a technique that inherently implements the equivalence property, the works mentioned earlier use theorem solvers (SMT solvers) [?] to prove equivalence. The central idea for SMT solvers is to convert the two code variants into mathematical formulas. The SMT solver then checks for counter-examples. When it finds a counter-example, there is an input for which the two mathematical formulas yield different outputs. The primary limitation of this technique is that not all algorithms can be translated into a mathematical formula, such as loops. Nevertheless, this technique is frequently used for checking no-branching-programs like basic block and peephole replacements [?].

2.2.3 Variants deployment

Program variants, once generated and verified, may be utilized in two primary scenarios: Randomization or Multivariant Execution (MVE) [?]. Additionally, these variants serve both defensive and offensive purposes [?].

Randomization: In the context of our work, the term *Randomization* denotes a program’s ability to present different variants to different clients. In this setup, a program, chosen from a collection of variants (referred to as the program’s variant pool), is assigned to a random client during each deployment. Jackson et al. [?] define the variant pool in Randomization as herd immunity, as vulnerable binaries

can only affect a segment of the client community. El-Khalil and colleagues [?] suggest employing a custom compiler to generate varying binaries from the compilation process. They adapt a version of GCC 4.1 to partition a conventional stack into several component parts, termed multistacks. Similarly, Singhal and colleagues, propose Cornucopia [?]. Cornucopia generates multiple variants of a program by using different compiler flag combinations. Aga and colleagues [?], contributing to this discussion, propose the generation of program variants through the randomization of its data layout in memory. This method allows each variant to operate on the same data in memory but at different memory offsets. Randomization can also be applied to virtual machines and operating systems. On this note, Kc et al. [?] establish a unique mapping between artificial CPU instructions and actual ones, enabling the assignment of various variants to specific target clients. In a similar vein, Xu et al. [?] recompile the Linux Kernel to minimize the exposure time of persistent memory objects, thereby increasing the frequency of address randomization.

Multivariant Execution (MVE): Multiple program variants are composed into a single binary, known as a multivariant binary [?]. Each multivariant binary is randomly deployed to a client. Then, the multivariant binary executes its embedded program variants at runtime. These embedded variants can either execute in parallel to check for inconsistencies, or as a single program to randomize execution paths [?]. Bruschi and colleagues extend the concept of executing two variants in parallel, introducing non-overlapping and randomized memory layouts [?]. At the same time, Salamat et al. modifies a standard library to generate 32-bit Intel variants. These variants have a stack that grows in the opposite direction, allowing for the detection of memory inconsistencies [?]. Davi and colleagues propose Isomeron, an approach for execution-path randomization [?]. Isomeron operates by simultaneously loading the original program and a variant. It then uses a coin flip to determine which copy of the program to execute next at the function call level. Previous works have highlighted the benefits of limiting execution to only two variants in a multivariant environment. Agosta and colleagues, as well as Crane and colleagues, used more than two generated programs in the multivariant composition, thereby randomizing software control flow at runtime [? ?]. Both strategies have proven effective in enhancing security by addressing known vulnerabilities, such as Just-In-Time Return-Oriented Programming (JIT-ROP) attacks [?] and power side-channel attacks [?]. Lastly, only Voulimeneas et al. [?] have recently proposed a multivariant execution system that enhances security by parallelizing the execution of variants across different machines.

Defensive Diversification: Lundquist and colleagues [?] separate the usages of Software diversification into two categories: Defensive Software Diversification and Offensive Software Diversification. Defensive Software Diversification is the traditional application of previously discussed techniques aimed at enhancing

the security and reliability of software systems. The core idea is to make it more difficult for attackers to predict the system’s behavior and exploit program vulnerabilities. By doing so, even if an attacker manages to compromise one variant, the others may remain secure, thereby limiting the potential impact of the attack. Defensive diversification is often complementary with other security measures, such as encryption and intrusion detection systems, to create a multi-layered defense strategy [?].

Offensive Diversification: Offensive Software Diversification uses the principles of software diversification. Yet, in the offensive context, diversification techniques may be applied to malware or other malicious code to evade detection by security software [?]. For example, in the context of Wasm, the seminal work of Romano et al. [?] proposed to intermix JavaScript and Wasm code to obfuscate JavaScript malware and make it more difficult to analyze for malware detectors. The obfuscated version of the code is functionally equivalent to the original, being, in practice, Offensive Software Diversification. Notice that, this method also measures the resilience and accuracy of security systems. However, obfuscation studies have exposed their shortcomings, revealing an almost unexplored area for WebAssembly that threatens malware detection accuracy. In concrete, Bahnsali et al. seminal work[?] demonstrate that cryptominig algorithm’s source code can evade previous techniques through the use of obfuscation techniques.

2.2.4 Open challenges

As outlined in Section 2.1.7, our primary motivation for the contributions of this thesis is the open issues within the WebAssembly ecosystem. We see potential in employing Software Diversification to address them. Based on our previous discussion, we highlight several open challenges in the realm of Software Diversification for WebAssembly. First, Wasm being an emerging technology, is still in the process of implementing defensive measures [?]. The process of officially adopting a new defensive measure is inherently slow, making software diversification a potentially valuable preemptive strategy. Second, despite the abundance of related work on software diversity, its exploration in the context of Wasm remains limited. Third, both defensive and offensive software diversification have been largely unexplored. Notably, the works on malware detection discussed in Section 2.1.6 suggest that offensive diversification could be useful in measuring the resilience and accuracy of security systems for WebAssembly.

■ Conclusions

In this chapter, we presented an overview of the Wasm language. This included its binary format, runtime execution concepts, and security issues. Related work was also discussed. The goal of this chapter is to establish a foundation for studying automatic diversification in Wasm. We emphasized the fact that Wasm has not been extensively researched in the field of Artificial Software Diversification. Existing implementations for Software Diversification cannot be directly applied to Wasm. Current security limitations and the absence of software diversity approaches for Wasm inspire our work. In Chapter 3, we elaborate on the technical details that guide our contributions.

3

AUTOMATIC SOFTWARE DIVERSIFICATION FOR WEBASSEMBLY

All problems in computer science can be solved by another level of indirection, except for the problem of too many layers of indirection.

— David Wheeler

THE process of generating WebAssembly binaries starts with the original source code, which is then processed by a compiler to produce a WebAssembly binary. This compiler is generally divided into three main components: a frontend that converts the source code into an intermediate representation, an optimizer/transformer that modifies this representation usually for performance, and a backend that compiles the final WebAssembly binary. This architecture is illustrated in the left most part of Figure 3.1.

TODO Map concepts with chapter2

Software Diversification, a preemptive security measure, can be integrated at various stages of this compilation process. However, applying diversification at the front-end has its limitations, as it would need a unique diversification mechanism for each language compatible with the frontend component. Conversely, diversification at later compiler stages, such as the optimizer or backend, offers a more practical alternative. This makes the latter stages of the compilers an ideal point for introducing practical Wasm diversification techniques. Our compiler-based strategies, represented in red and green in Figure 3.1, introduce a diversifier component into the optimizer/transformer and backend stages. This optimization/transformer component generates variants in the intermediate representation of a compiler, thereby creating artificial software diversity for WebAssembly. The variants are then compiled into WebAssembly binaries by the backend component of the compiler. Specifically, we propose two tools: CROW, which generates WebAssembly program variants, and MEWE,

⁰Compilation probe time 2023/10/24 14:23:31

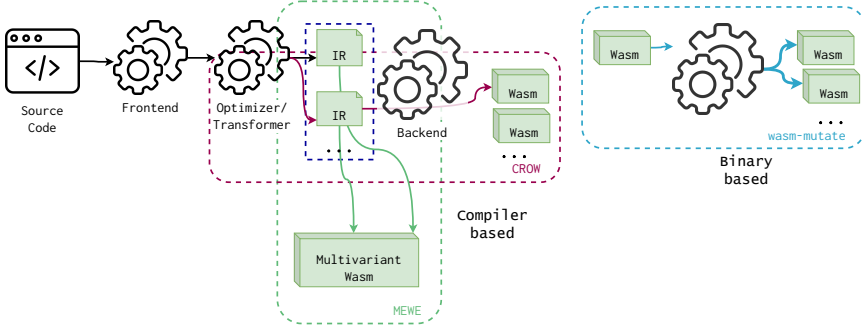


Figure 3.1: Approach landscape containing our three technical contributions: CROW squared in red, MEWE squared in green and WASM-MUTATE squared in blue. We annotate where our contributions, compiler-based and binary-based, stand in the landscape of generating WebAssembly programs.

which packages these variants to enable multivariant execution [?]. Alternatively, diversification can be directly applied to the WebAssembly binary, offering a language and compiler-agnostic approach. Our binary-based strategy, WASM-MUTATE, represented in blue in Figure 3.1, employs rewriting rules on an e-graph data structure to generate a variety of WebAssembly program variants.

This dissertation contributes to the field of Software Diversification for WebAssembly by presenting two primary strategies: compiler-based and binary-based. Within this chapter, we introduce three technical contributions: CROW, MEWE, and WASM-MUTATE. We also compare these contributions, highlighting their complementary nature. Additionally, we provide the artifacts for our contributions to promote open research and reproducibility of our main takeaways.

3.1 CROW: Code Randomization of WebAssembly

This section details CROW [?], represented as the red squared tooling in Figure 3.1. CROW is designed to produce functionally equivalent Wasm variants from the output of an LLVM front-end, utilizing a custom Wasm LLVM backend.

Figure 3.2 illustrates CROW’s workflow in generating program variants, a process compound of two core stages: *exploration* and *combination*. During the *exploration* stage, CROW processes every instruction within each function of the LLVM input, creating a set of functionally equivalent code variants. This process ensures a rich pool of options for the subsequent stage. In the *combination* stage, these alternatives are assembled to form diverse LLVM IR variants, a task achieved through the exhaustive traversal of the power set of all potential combinations of code replacements. The final step involves the custom

Wasm LLVM backend, which compiles the crafted LLVM IR variants into Wasm binaries.

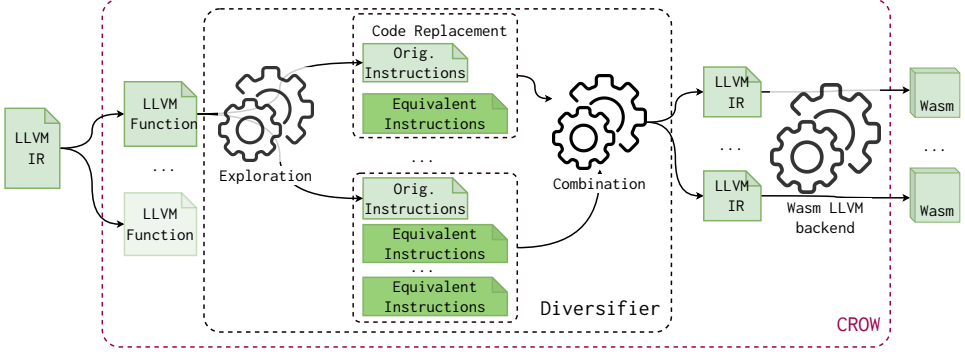


Figure 3.2: CROW components following the diagram in Figure 3.1. CROW takes LLVM IR to generate functionally equivalent code replacements. Then, CROW assembles program variants by combining them. Figure taken from [?].

3.1.1 Enumerative synthesis

The cornerstone of CROW’s exploration mechanism is its code replacement generation strategy, which is inspired by the superdiversifier methodology proposed by Jacob et al. [?]. The search space for generating variants is delineated through an enumerative synthesis process, which systematically produces all possible code replacements for each instruction and its data flow graph in the original program. If a code replacement is identified to perform identically to the original program, it is reported as a functionally equivalent variant. This equivalence is confirmed using a theorem solver for rigorous verification.

Concretely, CROW is developed by extending the enumerative synthesis implementation found in Souper [?], an LLVM-based superoptimizer. Specifically, CROW constructs a Data Flow Graph for each LLVM instruction that returns an integer. Subsequently, it generates all viable expressions derived from a selected subset of the LLVM Intermediate Representation language for each DFG. The enumerative synthesis process incrementally generates code replacements, starting with the simplest expressions (those composed of a single instruction) and gradually increasing in complexity. The exploration process continues either until a timeout occurs or the size of the generated replacements exceeds a predefined threshold.

Notice that the search space increases exponentially with the size of the language used for enumerative synthesis. To mitigate this issue, we prevent CROW from synthesizing instructions without correspondence in the Wasm

backend, effectively reducing the searching space. For example, creating an expression having the `freeze` LLVM instructions will increase the searching space for instruction without a Wasm’s opcode in the end.

CROW is carefully designed to boost the generation of variants as much as possible. First, we disable the majority of the pruning strategies. Instead of preventing the generation of commutative operations during the searching, CROW still uses such transformation as a strategy to generate program variants. Second, CROW applies code transformations independently. For instance, if a suitable replacement is identified that can be applied at N different locations in the original program, CROW will generate 2^N distinct program variants, i.e., the power set of applying the transformation or not to each location. This approach leads to a combinatorial explosion in the number of available program variants, especially as the number of possible replacements increases.

Leveraging the ascending nature of its enumerative synthesis process, CROW is capable of creating variants that may outperform the original program in both size and efficiency. For instance, the first functionally equivalent transformation identified is typically the most optimal in terms of code size. This approach offers developers a range of performance options, allowing them to balance between diversification and performance without compromising the latter.

The last stage at CROW involves a custom Wasm LLVM backend, which generates the Wasm programs. For it, we remove all built-in optimizations in the LLVM backend that could reverse Wasm variants, i.e., we disable all optimizations in the Wasm backend that could reverse the CROW transformations.

3.1.2 Constant inferring

CROW inherently introduces a novel transformation strategy called *constant inferring*, which significantly expands the variety of WebAssembly program variants. Specifically, CROW identifies segments of code that can be simplified into a single constant assignment, with a particular focus on variables that control branching logic. After applying this *constant inferring* technique, the resulting program diverges substantially from the original program structure. This is crucial for diversification efforts, as one of the primary objectives is to create variants that are as distinct as possible from the original source code [?]. In essence, the more divergent the variant, the more challenging it becomes to trace it back to its original form.

Let us illustrate the case with an example. The Babbage problem code in Listing 3.1 is composed of a loop that stops when it discovers the smallest number that fits with the Babbage condition in Line 4.

```

1  int babbage() {
2      int current = 0,
3      square;
4      while ((square=current*current) %
5          ↪ 1000000 != 269696) {
6          current++;
7      }
8      printf ("The number is %d\n",
9          ↪ current);
10     return 0 ;
11 }

```

Listing 3.1: Babbage problem. Taken from [?].

```

1  int babbage() {
2      int current = 25264;
3
4
5
6
7      printf ("The number is %d\n", current)
8          ↪ ;
9      return 0 ;
10 }

```

Listing 3.2: Constant inferring transformation over the original Babbage problem in Listing 3.1. Taken from [?].

CROW deals with this case, generating the program in Listing 3.2. It infers the value of `current` in Line 2 such that the Babbage condition is reached¹. Therefore, the condition in the loop will always be false. Then, the loop is dead code and is removed in the final compilation. The new program in Listing 3.2 is remarkably smaller and faster than the original code. Therefore, it offers differences both statically and at runtime²

3.1.3 Exemplifying CROW

Let us illustrate how CROW works with the example code in Listing 3.3. The `f` function calculates the value of $2 * x + x$ where `x` is the input for the function. CROW compiles this source code and generates the intermediate LLVM bitcode in the left most part of Listing 3.4. CROW potentially finds two integer returning instructions to look for variants, as the right-most part of Listing 3.4 shows.

```

1  int f(int x) {
2      return 2 * x + x;
3  }

```

Listing 3.3: *C* function that calculates the quantity $2x + x$.

¹In theory, this value can also be inferred by unrolling the loop the correct number of times with the LLVM toolchain. However, standard LLVM tools cannot unroll the `while`-loop because the loop count is too large.

²Notice that for the sake of illustration, we show both codes in C language, this process inside CROW is performed directly in LLVM IR.

| | Replacement candidates for code_1 | Replacement candidates for code_2 |
|---------------------------------------|---|--------------------------------------|
| <code>define i32 @f(i32) {</code> | | |
| <code> %2 = mul nsw i32 %0,2</code> | <code>%2 = mul nsw i32 %0,2</code> | <code>%3 = add nsw i32 %0,%2</code> |
| <code> %3 = add nsw i32 %0,%2</code> | | |
| <code> ret i32 %3</code> | <code>%2 = add nsw i32 %0,%0</code> | <code>%3 = mul nsw %0, 3:i32</code> |
| <code>}</code> | <code>%2 = shl nsw i32 %0, 1:i32</code> | |
| <code>define i32 @main() {</code> | | |
| <code> %1 = tail call i32 @f(</code> | | |
| <code> i32 10)</code> | | |
| <code> ret i32 %1</code> | | |
| <code>}</code> | | |

Listing 3.4: LLVM’s intermediate representation program, its extracted instructions and replacement candidates. Gray highlighted lines represent original code, green for code replacements.

| | |
|---|---|
| <code>%2 = mul nsw i32 %0,2</code> | <code>%2 = mul nsw i32 %0,2</code> |
| <code>%3 = add nsw i32 %0,%2</code> | <code>%3 = mul nsw %0, 3:i32</code> |
| | |
| <code>%2 = add nsw i32 %0,%0</code> | <code>%2 = add nsw i32 %0,%0</code> |
| <code>%3 = add nsw i32 %0,%2</code> | <code>%3 = mul nsw %0, 3:i32</code> |
| | |
| <code>%2 = shl nsw i32 %0, 1:i32</code> | <code>%2 = shl nsw i32 %0, 1:i32</code> |
| <code>%3 = add nsw i32 %0,%2</code> | <code>%3 = mul nsw %0, 3:i32</code> |

Listing 3.5: Candidate code replacements combination. Orange highlighted code illustrate replacement candidate overlapping.

CROW, detects `code_1` and `code_2` as the enclosing boxes in the left most part of Listing 3.4 shows. CROW synthesizes $2 + 1$ candidate code replacements for each code respectively as the green highlighted lines show in the right most parts of Listing 3.4. The baseline strategy of CROW is to generate variants out of all possible combinations of the candidate code replacements, *i.e.*, uses the power set of all candidate code replacements.

In the example, the power set is the cartesian product of the found candidate code replacements for each code block, including the original ones, as Listing 3.5 shows. The power set size results in 6 potential function variants. Yet, the generation stage would eventually generate 4 variants from the original program. CROW generated 4 statically different Wasm files, as Listing 3.6 illustrates. This gap between the potential and the actual number of variants is a consequence of the redundancy among the bitcode variants when composed into one. In other words, if the replaced code removes other code blocks, all possible combinations having it will be in the end the same program. In the example case, replacing `code_2` by `mul nsw %0, 3`, turns `code_1` into dead code, thus, later replacements generate the same program variants. The rightmost part of Listing 3.5 illustrates how for three different combinations, CROW produces the same variant. We call this phenomenon a *code replacement overlapping*.

| | |
|--|--|
| <pre>func \$f (param i32) (result i32) local.get 0 i32.const 2 i32.mul local.get 0 i32.add</pre> | <pre>func \$f (param i32) (result i32) local.get 0 i32.const 1 i32.shl local.get 0 i32.add</pre> |
| <pre>func \$f (param i32) (result i32) local.get 0 local.get 0 i32.add local.get 0 i32.add</pre> | <pre>func \$f (param i32) (result i32) local.get 0 i32.const 3 i32.mul</pre> |

Listing 3.6: Wasm program variants generated from program Listing 3.3.

Contribution paper and artifact

CROW is a compiler-based approach. It leverages enumerative synthesis to generate functionally equivalent code replacements and assembles them into diverse Wasm program variants. CROW uses SMT solvers to guarantee functional equivalence.

CROW is fully presented in Cabrera-Arteaga et al. "CROW: Code Randomization of WebAssembly" *at proceedings of Measurements, Attacks, and Defenses for the Web (MADWeb), NDSS 2021* <https://doi.org/10.14722/madweb.2021.23004>.

CROW source code is available at <https://github.com/ASSERT-KTH/slumps>

3.2 MEWE: Multi-variant Execution for WebAssembly

This section describes MEWE [?]. MEWE synthesizes diversified function variants by using CROW. It then provides execution-path randomization in a Multivariant Execution (MVE) [?]. Execution path randomization is a technique that randomizes the execution path of a program at runtime, i.e. at each invocation of a function, a different variant is executed [?]. MEWE generates application-level multivariant binaries without changing the operating system or Wasm runtime. It creates an MVE by intermixing functions for which CROW generates variants, as illustrated by the green square in Figure 3.1. MEWE inlines function variants when appropriate, resulting in call stack diversification at runtime.

As illustrated in Figure 3.3, MEWE takes the LLVM IR variants generated by CROW’s diversifier. It then merges LLVM IR variants into a Wasm multivariant. In the figure, we highlight the two components of MEWE, *Multivariant Generation* and the *Mixer*. In the *Multivariant Generation* process, MEWE gathers the LLVM IR variants created by CROW. The Mixer component, on the other hand, links the multivariant binary and creates a new entrypoint for the binary called *entrypoint tampering*. The tampering is needed in case the output of CROW are variants of the original entrypoint, e.g. the *main* function. Concretely, it wraps the dispatcher for the entrypoint variants as a new function for the final Wasm binary and is declared as the application entrypoint. The random generator is needed to perform the execution-path randomization. For the random generator, we rely on WASI’s specification [?] for the random behavior of the dispatchers. However, its exact implementation is dependent on the platform on which the binary is deployed. Finally, using the same custom Wasm LLVM backend as CROW, we generate a standalone multivariant Wasm binary. Once generated, the multivariant Wasm binary can be deployed to any Wasm engine.

3.2.1 Multivariant call graph

The key component of MEWE consists of combining the variants into a single binary. The core idea is to introduce one dispatcher function per original function with variants. A dispatcher function is a synthetic function in charge of choosing a variant at random when the original function is called. With the introduction of the dispatcher function, MEWE turns the original call graph into a multivariant call graph, defined as follows.

Definition 1. *Multivariant Call Graph (MCG): A multivariant call graph is a call graph $\langle N, E \rangle$ where the nodes in N represent all the functions in the binary and an edge $(f_1, f_2) \in E$ represents a possible invocation of f_2 by f_1 [?]. The nodes in N have three possible types: a function present in the original program, a generated function variant, or a dispatcher function.*

3.2.2 Exemplifying a Multivariant binary

In Figure 3.4, we show the original static call graph for an original program (top of the figure), as well as the multivariant call graph generated with MEWE (bottom of the figure). The gray nodes represent function variants, the green nodes function dispatchers, and the yellow nodes are the original functions. The directed edges represent the possible calls. The original program includes three functions. MEWE generates 43 variants for the first function, none for the second, and three for the third. MEWE introduces two dispatcher nodes for the first and third functions. Each dispatcher is connected to the corresponding function variants to invoke one variant randomly at runtime.

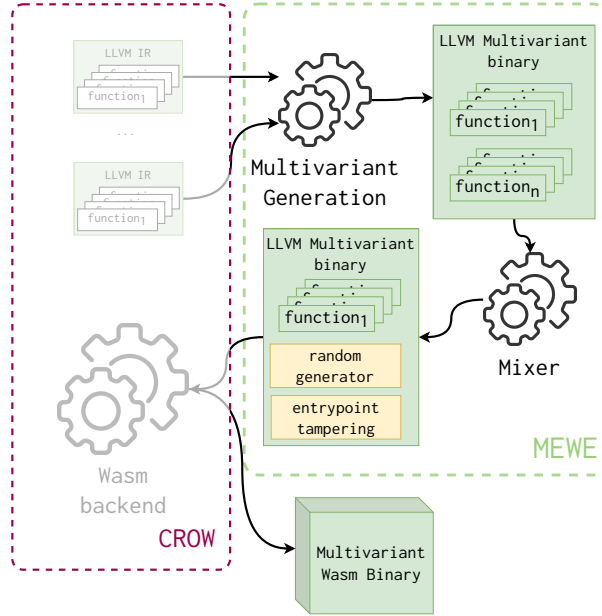


Figure 3.3: Overview of MEWE workflow. It takes as input an LLVM binary. It first generates a set of functionally equivalent variants for each function in the binary using CROW. Then, MEWE generates an LLVM multivariant binary composed of all the function variants. Finally, the Mixer includes the behavior in charge of selecting a variant when a function is invoked. Finally, the MEWE mixer composes the LLVM multivariant binary with a random number generation library and tampers the original application entrypoint. The final process produces a Wasm multivariant binary ready to be deployed. Figure partially taken from [?].

In Listing 3.7, we demonstrate how MEWE constructs the function dispatcher, corresponding to the rightmost green node in Figure 3.4, which handles three created variants including the original. The dispatcher function retains the same signature as the original function. Initially, the dispatcher invokes a random number generator, the output of which is used to select a specific function variant for execution (as seen on line 6 in Listing 3.7). To enhance security, we employ a switch-case structure within the dispatcher, mitigating vulnerabilities associated with speculative execution-based attacks [?] (refer to lines 12 to 19 in Listing 3.7). This approach also eliminates the need for multiple function definitions with identical signatures, thereby reducing the potential attack surface in cases where the function signature itself is vulnerable [?]. Additionally, MEWE can inline function variants directly into the dispatcher, obviating the need for redundant definitions (as illustrated on line 16 in Listing 3.7). Remarkably, we prioritize security over performance, i.e., while using indirect



Figure 3.4: Example of two static call graphs. At the top, is the original call graph, and at the bottom, is the multivariant call graph, which includes nodes that represent function variants (in gray), dispatchers (in green), and original functions (in yellow). Figure taken from [?].

calls in place of a switch-case could offer constant-time performance benefits, we implement switch-case structures.


```

2 ; Multivariant foo wrapping ;
3 define internal i32 @foo(i32 %0) {
4     entry:
5         ; It first calls the dispatcher to discriminate between the created
           variants ;
6         %1 = call i32 @discriminate(i32 3)
7         switch i32 %1, label %end [
8             i32 0, label %case_43_
9             i32 1, label %case_44_
10        ]
11        ;One case for each generated variant of foo ;
12    case_43_:
13        %2 = call i32 @foo_43_(%0)
14        ret i32 %2
15    case_44_:
16        ; MEWE can inline the body of the a function variant ;
17        %3 = <body of foo_44_ inlined>
18        ret i32 %3
19    end:
20        ; The original is also included ;
21        %4 = call i32 @foo_original(%0)
22        ret i32 %4
23 }
```

Listing 3.7: Dispatcher function embedded in the multivariant binary of the original function in the rightmost green node in Figure 3.4. The code is commented for the sake of understanding.

In Listing 3.7, we illustrate the LLVM construction for the function dispatcher corresponding to the right most green node of Figure 3.4. Notice that, the dispatcher function is constructed using the same signature as the original function. It first calls the random generator, which returns a value used to invoke a specific function variant (see line 6 in Listing 3.7). We utilize a switch-case structure in the dispatchers to prevent indirect calls, which are vulnerable to speculative execution-based attacks [?] (see lines 12 to 19 in Listing 3.7), i.e., the choice of a switch-case also avoids having multiple function definitions with the same signature, which could increase the attack surface in case the function signature is vulnerable [?]. In addition, MEWE can inline function variants inside the dispatcher instead of defining them again (see line 16 in Listing 3.7). Remarkably, we trade security over performance since dispatcher functions that perform indirect calls, instead of a switch-case, could improve the performance of the dispatchers as indirect calls have constant time.

Contribution paper and artifact

MEWE provides dynamic execution path randomization by packaging variants generated out of CROW.

MEWE is fully presented in Cabrera-Arteaga et al. "Multi-Variant Execution at the Edge" *Proceedings of Moving Target Defense, 2022, ACM* <https://dl.acm.org/doi/abs/10.1145/3560828.3564007>

MEWE is also available as an open-source tool at <https://github.com/ASSERT-KTH/MEWE>

3.3 WASM-MUTATE: Fast and Effective Binary for WebAssembly

In this section, we introduce our third technical contribution, WASM-MUTATE [?], a tool that generates thousands of functionally equivalent variants out from a WebAssembly binary input. Leveraging rewriting rules and e-graphs [?] for software diversification, WASM-MUTATE synthesizes program variants by transforming parts of the original binary. In Figure 3.1, we highlight WASM-MUTATE as the blue squared tooling.



Figure 3.5: WASM-MUTATE high-level architecture. It generates functionally equivalent variants from a given WebAssembly binary input. Its central approach involves synthesizing these variants by substituting parts of the original binary using rewriting rules, boosted by diversification space traversals using e-graphs.

Figure 3.5 illustrates the workflow of WASM-MUTATE, which initiates with a WebAssembly binary as its input. The first step involves parsing this binary to create suitable abstractions, e.g. an intermediate representation. Subsequently, WASM-MUTATE utilizes predefined rewriting rules to construct an e-graph for the initial program, encapsulating all potential equivalent codes derived from the rewriting rules. The assurance of functional equivalence is rooted in the inherent

properties of the individual rewrite rules employed. Then, pieces of the original program are randomly substituted by the result of random e-graph traversals, resulting in a variant that maintains functional equivalence to the original binary.

WASM-MUTATE applies one transformation at a time. Notice that, the output of one applied transformation can be chained again as an input WebAssembly binary, enabling the generation of many variants, leading us to enunciate the notion of *Stacked transformation*

Definition 2. *Stacked transformation:* Given an original input WebAssembly binary I and a diversifier D , stacked transformations are defined as the application of D over the binary I multiple times, i.e., $D(D(D(...(I))))$. Notice that, the number of stacked transformations are the number of times the diversifier D is applied.

3.3.1 WebAssembly Rewriting Rules

WASM-MUTATE contains a comprehensive set of 135 rewriting rules. In this context, a rewriting rule is a tuple (**LHS**, **RHS**, **Cond**) where **LHS** specifies the segment of binary targeted for replacement, **RHS** describes its functionally equivalent substitute, and **Cond** outlines the conditions that must be met for the replacement to take place, e.g. enhancing type constraints. WASM-MUTATE groups these rewriting rules into meta-rules depending on their target inside a Wasm binary, ranging from high-level changes affecting binary section structure to low-level modifications within the code section. This section focuses on the biggest meta-rule implemented in WASM-MUTATE, the **Peephole** meta-rule³.

Rewriting rules inside the *Peephole* meta-rule, operate over the data flow graph of instructions within a function body, representing the lowest level of rewriting. In WASM-MUTATE, we have implemented 125 rewriting rules specifically for this category, each one avoiding targeting instructions that might induce undefined behavior, e.g., function calls.

Moreover, we augment the internal representation of a Wasm program to bolster WASM-MUTATE's transformation capabilities through the **Peephole** meta-rule. Concretely, we augment the parsing stage in WASM-MUTATE by including custom operator instructions. These custom operator instructions are designed to use well-established code diversification techniques through rewriting rules. When converting back to the WebAssembly binary format from the intermediate representation, custom instructions are meticulously handled to retain the original functionality of the WebAssembly program.

In the following example, we demonstrate a rewriting rule within the **Peephole** meta-rule that utilizes a custom **rand** operator to expand statically declared constants within any WebAssembly program function body. The **unfold** rewriting rule, as the name suggests, transforms statically declared constants into the sum

³For an in-depth explanation of the remaining meta-rules, refer to [?] .

of two random numbers. During the generation of the WebAssembly variant, the custom `rand` operator is substituted with a randomly chosen static constant. Notice that the condition specified in the last part of the rewriting rule ensures that this predicate is satisfied.

| | |
|--|--|
| <p>LHS <code>i32.const x</code></p> | |
| | |
| <p>RHS <code>(i32.add (i32.rand i32.const y))</code></p> | |
| | |
| <p>Cond <code>y = x - i32.rand</code></p> | |

Although this rewriting approach may appear simplistic, especially because compilers often eliminate it through *Constant Folding* optimization [?], it stresses on the spill/reload component of the compiler when the WebAssembly binary is JITed to machine code. Spill/reloads occur when the compiler runs out of physical registers to store intermediate calculations, resorting to specific memory locations for temporary storage. The unfold rewriting rule indirectly stresses this segment of memory. Notably, with this specific rewriting rule, we have found a CVE in the wasmtime standalone engine [?].

3.3.2 E-Graphs traversals

We developed WASM-MUTATE leveraging e-graphs, a specific graph data structure for representing and applying rewriting rules [?]. In the context of WASM-MUTATE, e-graphs are constructed from the input WebAssembly program and the implemented rewriting rules (we detail the e-graph construction process in Section 3 of [?]).

Willsey et al. highlight the potential for high flexibility in extracting code fragments from e-graphs, a process that can be recursively orchestrated through a cost function applied to e-nodes and their respective operands. This methodology ensures the functional equivalence of the derived code [?]. For instance, e-graphs solve the problem of providing the best code out of several optimization rules [?]. To extract the "optimal" code from an e-graph, one might commence the extraction at a specific e-node, subsequently selecting the AST with the minimal size from the available options within the corresponding e-class's operands. In omitting the cost function from the extraction strategy leads us to a significant property: *any path navigated through the e-graph yields a functionally equivalent code variant*.

We exploit such property to fastly generate diverse WebAssembly variants. We propose and implement an algorithm that facilitates the random traversal of an e-graph to yield functionally equivalent program variants, as detailed in Algorithm 1. This algorithm operates by taking an e-graph, an e-class node (starting with the root's e-class), and a parameter specifying the maximum extraction depth of the expression, to prevent infinite recursion. Within the

algorithm, a random e-node is chosen from the e-class (as seen in lines 5 and 6), setting the stage for a recursive continuation with the offspring of the selected e-node (refer to line 8). Once the depth parameter reaches zero, the algorithm extracts the most concise expression available within the current e-class (line 3). Following this, the subexpressions are built (line 10) for each child node, culminating in the return of the complete expression (line 11).

Algorithm 1 e-graph traversal algorithm taken from [?].

```

1: procedure TRAVERSE(egraph, eclass, depth)
2:   if depth = 0 then
3:     return smallest_tree_from(egraph, eclass)
4:   else
5:     nodes  $\leftarrow$  egraph[eclass]
6:     node  $\leftarrow$  random_choice(nodes)
7:     expr  $\leftarrow$  (node, operands = [])
8:     for each child  $\in$  node.children do
9:       subexpr  $\leftarrow$  TRAVERSE(egraph, child, depth - 1)
10:      expr.operands  $\leftarrow$  expr.operands  $\cup$  {subexpr}
11:   return expr

```

3.3.3 Exemplifying WASM-MUTATE

Let us illustrate how WASM-MUTATE generates variant programs by using the before enunciated algorithm. Here, we use Algorithm 1 with a maximum depth of 1. In Listing 3.8 a hypothetical original Wasm binary is illustrated. In this context, a potential user has set two pivotal rewriting rules: (**x**, **container** (**x nop**),) and (**x**, **x i32.add 0**, **x instanceof i32**). The former rule, grants the ability to append a **nop** instruction to any subexpression, a well-known low-level diversification strategy [?]. Conversely, the latter rule adds zero to any numeric value.

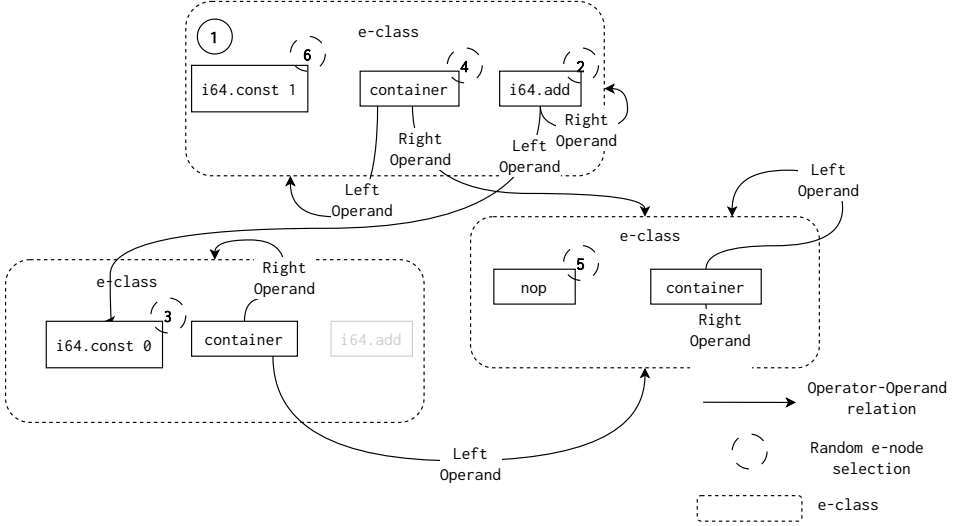


Figure 3.6: e-graph built for rewriting the first instruction of Listing 3.8.

```
(module
  (type (;0;) (func (param i32 f32) (result i64)))
  (func (;0;) (type 0) (param i32 f32) (result i64)
    i64.const 1)
)
```

Listing 3.8: Wasm function.

```
(module
  (type (;0;) (func (param i32 f32) (result i64)))
  (func (;0;) (type 0) (param i32 f32) (result i64)
    (i64.add (
      i64.const 0
      i64.const 1
      nop
    )))
)
```

Listing 3.9: Random peephole mutation using egraph traversal for Listing 3.8 over e-graph Figure 3.6. The textual format is folded for better understanding.

Leveraging the code presented in Listing 3.8 alongside the defined rewriting rules, we build the e-graph, simplified in Figure 3.6. In the figure, we highlight various stages of Algorithm 1 in the context of the scenario previously described. The algorithm initiates at the e-class with the instruction `i64.const 1`, as seen in Listing 3.8. At ②, it randomly selects an equivalent node within the e-class, in this instance taking the `i64.add` node, resulting: `expr`

= `i64.add 1 r`. As the traversal advances, it follows on the left operand of the previously chosen node, settling on the `i64.const 0` node within the same e-class ③. Then, the right operand of the `i64.add` node is chosen, selecting the `container` ④ operator yielding: `expr = i64.or (i64.const 0 container (r nop))`. The algorithm chooses the right operand of the `container` ⑤, which correlates to the initial instruction e-node highlighted in ⑥, culminating in the final expression: `expr = i64.or (i64.const 0 container(i64.const 1 nop)) i64.const 1`. As we proceed to the encoding phases, the `container` operator is ignored as a real Wasm instruction, finally resulting in the program in Listing 3.9.

Notice that, within the e-graph showcased in Figure 3.6, the `container` node maintains equivalence across all e-classes. Consequently, increasing the depth parameter in Algorithm 1 would potentially escalate the number of viable variants infinitely.

Contribution paper and artifact

WASM-MUTATE uses hand-made rewriting rules and random traversals over e-graphs to provide a binary-based solution for WebAssembly diversification.

WASM-MUTATE is fully presented in Cabrera-Arteaga et al. "WASM-MUTATE: Fast and Effective Binary Diversification for WebAssembly" *Under review at Computers & Security* <https://arxiv.org/pdf/2309.07638.pdf>.

WASM-MUTATE is available at <https://github.com/bytecodealliance/wasm-tools/tree/main/crates/wasm-mutate> as a contribution to the Bytecode Alliance organization ^a. The Bytecode Alliance is dedicated to creating secure new software foundations, building on standards such as WebAssembly and WASI.

^a<https://bytecodealliance.org/>

3.4 Comparing CROW, MEWE, and WASM-MUTATE

In this section, we compare CROW, MEWE, and WASM-MUTATE, highlighting their key differences. These distinctions are summarized in Table 3.1. The table is organized into columns that represent attributes of each tool: the tool's name, input format, core diversification strategy, number of variants generated within an hour, targeted sections of the WebAssembly binary for diversification, strength of the generated variants, and the security applications of these variants. Each row in the table corresponds to a specific tool. The *Variant strength* accounts for the capability of each tool on generating variants that are preserved after the JIT

compilation of V8 and wasmtime in average. For example, a higher value of the *Variant strength* indicates that the generated variants are not reversed by JIT compilers, ensuring that the diversification is preserved in an end-to-end scenario of a WebAssembly program, i.e. from the source code to its final execution. Notice that, the data and insights presented in the table are sourced from the respective papers of each tool and, from the previous discussion in this chapter.

CROW is a compiler-based strategy, needing access to the source code or its LLVM IR representation to work. Its core is an enumerative synthesis implementation with functionality verification using SMT solvers, ensuring the functional equivalence of the generated variants. In addition, MEWE extends the capabilities of CROW, utilizing the same underlying technology to create program variants. It goes a step further by packaging the LLVM IR variants into a Wasm multivariant, providing MVE through execution path randomization. Both CROW and MEWE are fully automated, requiring no user intervention besides the input source code. WASM-MUTATE, on the other hand, is a binary-based tool. It uses a set of rewriting rules and the input Wasm binary to generate program variants, centralizing its core around random e-graph traversals. Remarkably, WASM-MUTATE removes the need for compiler adjustments, offering compatibility with any existing WebAssembly binary.

We have observed several interesting phenomena when aggregating the empirical data presented in the corresponding papers of CROW, MEWE and WASM-MUTATE [? ? ?]. This can be appreciated in the fourth, fifth and sixth columns of Table 3.1. We have observed that WASM-MUTATE generates more unique variants in one hour than CROW and MEWE in at least one order of magnitude. This is mainly because of three reasons. First, CROW and MEWE rely on SMT solvers to prove functionally equivalence, placing a bottleneck when generating variants. Second, CROW and MEWE generation capabilities are limited by the *overlapping* phenomenon discussed in Section 3.1.3. Third, WASM-MUTATE can generate variants in any part of the Wasm binary, while CROW and MEWE are limited to the code and function sections.

On the other hand, CROW and MEWE, by using enumerative synthesis, ensure that the generated variants are preserved. In other words, the transformations generated out of CROW and MEWE are virtually irreversible by JIT compilers, such as V8 and wasmtime. This phenomenon is highlighted in the *Variants strength* column of Table 3.1, where we show that CROW and MEWE generate variants with 96% of preservation against 75% of WASM-MUTATE. High preservation is especially important where the preservation of the diversification is crucial, e.g. to hinder reverse engineering.

| Tool | Input | Core | Variants in 1h | Target | Variants Strength | Security applications |
|-------------|------------------------|--|-----------------|----------------------------|-------------------|---|
| CROW | Source code or LLVM Ir | Enumerative synthesis with functional equivalence proved through SMT solvers | > 1k | Code section | 96% | Hinders static analysis and reverse engineering. |
| MEWE | Source code or LLVM Ir | CROW, Multivariant execution | > 1k | Code and Function sections | 96% | Hinders static and dynamic analysis, reverse engineering and, web timing-based attacks. |
| WASM-MUTATE | Wasm binary | hand-made rewriting rules, e-graph random traversals | > 10k | Any Wasm section | 76% | Hinders signature-based identification, and cache timing side-channel attacks. |

Table 3.1: Comparing CROW, MEWE and WASM-MUTATE. The table columns are: the tool’s name, input format, core diversification strategy, number of variants generated within an hour, targeted sections of the WebAssembly binary, strength of the generated variants, and the security applications of these variants. The Variant strength accounts for the capability of each tool on generating variants that are preserved after the JIT compilation of V8 and wasmtime in average. Our three technical contributions are complementary tools that can be combined.

Takeaway

Our three technical contributions serve as complementary tools that can be combined. For instance, when the source code for a WebAssembly binary is either non-existent or inaccessible, WASM-MUTATE offers a viable solution for generating code variants. On the other hand, CROW and MEWE excel in scenarios where high preservation is crucial.

3.4.1 Security applications

The final column of Table 3.1 emphasizes the security benefits derived from the variants produced by our three key technical contributions. One immediate advantage of altering the structure of WebAssembly binaries across different variants is the mitigation of signature-based identification, thereby enhancing resistance to static reverse engineering. Additionally, our tools generate a diverse array of code variants that are highly preserved. This implies that these variants, each with their unique WebAssembly code, retain their distinct characteristics even after being translated into machine code by JIT compilers. This high level of preservation significantly mitigates the risks associated with side-channel attacks that target specific machine code instructions, such as port contention attacks [?]. For instance, if a WebAssembly binary is transformed in such a manner that its resulting machine code instructions differ from the original, it becomes more challenging for a side-channel attack. Conversely, if the compiler translates the variant into machine code that closely resembles the original, the side-channel attack could still exploit those instructions to extract information about the original WebAssembly binary.

Altering the layout of a WebAssembly program inherently influences its managed memory during runtime (see ??). This phenomenon is especially important for CROW and MEWE, given that they do not directly address the WebAssembly memory model. Significantly, CROW and MEWE considerably alter the managed memory by modifying the layout of the WebAssembly program. For example, the *constant inferring* transformations significantly alter the layout of program variants, affecting unmanaged memory elements such as the returning address of a function. Furthermore, WASM-MUTATE not only affects managed memory through changes in the WebAssembly program layout. It also adds rewriting rules to transform unmanaged memory instructions. Memory alterations, either to the unmanaged or managed memories, have substantial security implications, by eliminating potential cache timing side-channels [?].

Last but not least, our technical contributions enhance security against web timing-based attacks [?] by creating variants that exhibit a wide range of execution times, including faster variants compared to the original program. This strategy is especially prominent in MEWE’s approach, which develops

multivariants functioning on randomizing execution paths, thereby thwarting attempts at timing-based inference attacks [?]. Adding another layer benefit from MEWE, the integration of diverse variants into multivariants can potentially disrupt dynamic reverse engineering tools such as symbolic executors [?]. Concretely, different control flows through a random discriminator, exponentially increase the number of possible execution paths, making multivariant binaries virtually unexplorable.

Takeaway

CROW, MEWE and WASM-MUTATE generate WebAssembly variants that can be used to enhance security. Overall, they generate variants that are suitable for hardening static and dynamic analysis, side-channel attacks, and, to thwart signature-based identification.

■ Conclusions

In this chapter, we discuss the technical specifics underlying our primary technical contributions. We elucidate the mechanisms through which CROW generates program variants. Subsequently, we discuss MEWE, offering a detailed examination of its role in forging MVE for WebAssembly. We also explore the details of WASM-MUTATE, proposing a novel e-graph traversal algorithm to fast spawn Wasm program variants. Remarkably, we undertake a comparative analysis of the three tools, highlighting their respective benefits and limitations, alongside the potential security applications of the generated Wasm variants.

In Chapter 4, we present two use cases that support the exploitation of these tools. Chapter 4 serves to bridge theory with practice, showcasing the tangible impacts and benefits realized through the deployment of CROW, MEWE, and WASM-MUTATE.

4

EXPLOITING SOFTWARE DIVERSIFICATION FOR WEBASSEMBLY

If you find that you're spending all your time on theory, start turning some attention to practical things; it will improve your theories. If you find that you're spending almost all your time on practice, start turning some attention to theoretical things; it will improve your practice.

— Donald Knuth

IN this chapter, we illustrate the application of Software Diversification for both offensive and defensive purposes. We discuss two selected use cases that demonstrate practical applications of our contributions.

4.1 Offensive Diversification: Malware evasion

The primary malicious use of WebAssembly in browsers is cryptojacking [?]. This is due to the essence of cryptojacking, the faster the mining, the better. Although Lehmann and colleagues [?] observe a decline in browser-based cryptominers, mainly due to the shutdown of Coinhive, a 2022 report by Kaspersky indicates that the use of cryptominers is on the rise [?].

Let us illustrate how a malicious WebAssembly binary could be involved into browser cryptojacking. Figure 4.1 illustrates a browser attack scenario: a practical WebAssembly cryptojacking attack consists of three components: a WebAssembly binary, a JavaScript wrapper, and a backend cryptominer pool. The WebAssembly binary is responsible for executing the hash calculations, which consume significant computational resources. The JavaScript wrapper facilitates the communication between the WebAssembly binary and the cryptominer pool.

⁰Compilation probe time 2023/10/24 14:23:31

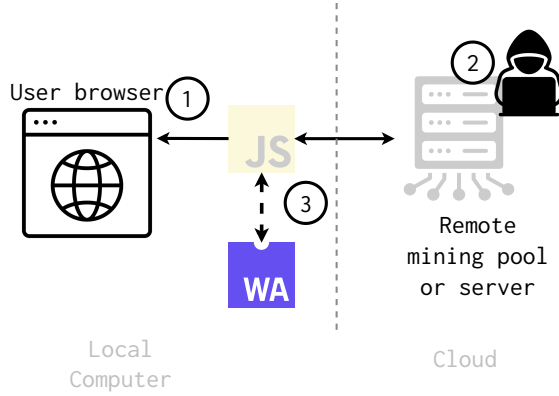


Figure 4.1: A remote mining pool server, a JavaScript wrapper and the WebAssembly binary form the triad of a cryptojacking attack in browser clients.

The aforementioned components require the following steps to succeed in cryptomining. First, the victim visits a web page infected with the cryptojacking code. The web page establishes a channel to the cryptominer pool, which then assigns a hashing job to the infected browser. The WebAssembly cryptominer calculates thousands of hashes inside the browser. Once the malware server receives acceptable hashes, it is rewarded with cryptocurrencies for the mining. Then, the server assigns a new job, and the mining process starts over.

Both antivirus software and browsers have implemented measures to detect cryptojacking. For instance, Firefox employs deny lists to detect cryptomining activities [?]. The academic community has also contributed to the body of work on detecting or preventing WebAssembly-based cryptojacking, as outlined in Section 2.1.6. However, malicious actors can employ evasion techniques to circumvent these detection mechanisms. Bhansali et al. are among the first who have investigated how WebAssembly cryptojacking could potentially evade detection [?], highlighting the critical importance of this use case. For an in-depth discussion on this topic, we direct the reader to our contribution [?]. The case illustrated in the subsequent sections uses Offensive Software Diversification for evading malware detection in WebAssembly.

4.1.1 Cryptojacking defense evasion

Considering the previous scenario, several techniques can be directly implemented in browsers to thwart cryptojacking by identifying the malicious WebAssembly components. Such defense scenario is illustrated in Figure 4.2, where the WebAssembly malicious binary is blocked in ③. The primary aim of our use case is to investigate the effectiveness of code diversification as a means to

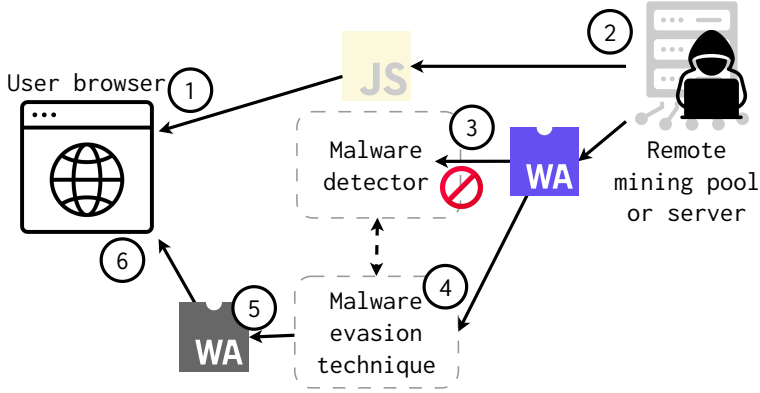


Figure 4.2: Cryptojacking scenario in which the malware detection mechanism is bypassed by using an evasion technique.

circumvent cryptojacking defenses. Specifically, we assess whether the following evasion workflow can successfully bypass existing security measures:

1. The user loads a webpage infected with cryptojacking malware, which leverages network resources for execution—corresponding to ① and ② in Figure 4.2.
2. A malware detection mechanism (malware oracle) identifies and blocks malicious WebAssembly binaries at ③. For example, a network proxy could intercept and forward these resources to an external detection service via its API.
3. Anticipating that a specific malware detection system is consistently used for defense, the attacker swiftly generates a variant of the WebAssembly cryptojacking malware designed to evade detection at ④.
4. The attacker delivers the modified binary instead of the original one ⑤, which initiates the cryptojacking process and compromises the browser ⑥. The detection method is completely oblivious to the malicious nature of the binary, and the attack is successful.

4.1.2 Methodology

In this study, we categorize malware detection mechanisms as malware oracles, which can be of two types: binary and numeric. A binary oracle provides a binary decision, labeling a WebAssembly binary as either malicious or benign. In contrast, a numeric oracle returns a numerical value representing the confidence level of the detection.

Definition 3. *Malware oracle: A malware oracle is a detection mechanism that returns either a binary decision or a numerical value indicating the confidence level of the detection.*

For empirical validation, we employ VirusTotal as a numeric oracle and MINOS [?] as a binary oracle. VirusTotal is an online service that analyzes files and returns a confidence score in the form of the number of antivirus that flag the input file as malware, thus qualifying as a numeric oracle. MINOS, on the other hand, converts WebAssembly binaries into grayscale images and employs a convolutional neural network for classification. It returns a binary decision, making it a binary oracle.

We use the wasmbench dataset [?] to establish a ground truth. After running the wasmbench dataset through VirusTotal and MINOS, we identify 33 binaries flagged as malicious by at least one VirusTotal vendor and also detected by MINOS. Then, to simulate the evasion scenario, we use WASM-MUTATE to generate WebAssembly binary variants to evade malware detection. We use WASM-MUTATE in two configurations: controlled and uncontrolled diversification.

Definition 4. *Controlled Diversification: In controlled diversification, the transformation process of a WebAssembly program is guided by a numeric oracle, which influences the probability of each transformation. For instance, WASM-MUTATE can be configured to apply transformations that minimize the oracle’s confidence score. Note that controlled diversification needs a numeric oracle.*

Definition 5. *Uncontrolled Diversification: Unlike controlled diversification, uncontrolled diversification is a stochastic process where each transformation has an equal likelihood of being applied to the input WebAssembly binary.*

Based on the two types of malware oracles and diversification configurations, we examine three scenarios: 1) VirusTotal with a controlled diversification, 2) VirusTotal with an uncontrolled diversification, and 3) MINOS with an uncontrolled diversification. Notice that, the fourth scenario with MINOS and a controlled diversification is not feasible, as MINOS is a binary oracle and cannot provide the numerical values required for controlled diversification.

Our evaluation focuses on two key metrics: the success rate of evading detection mechanisms in VirusTotal and MINOS across the 33 flagged binaries, and the performance impact on the variants that successfully evade detection. The first metric measures the efficacy of WASM-MUTATE in bypassing malware detection systems. For each flagged binary, we input it into WASM-MUTATE, configured with the selected oracle and diversification strategy. We then iteratively apply transformations to the output from the preceding step. This iterative process is halted either when the binary is no longer flagged by the oracle or when a maximum of 1000 stacked transformations have been applied (see Definition 2). This process is repeated with 10 random seeds per binary

to simulate 10 different evasion experiments per binary. The second metric is crucial for validating the real-world applicability of WASM-MUTATE in evading malware detection. Specifically, if the evasion process significantly degrades the performance of the resulting binary compared to its original version, it becomes less likely to be employed in practical scenarios, such as cryptojacking. For this, we execute, end-to-end, the variants that fully evade VirusTotal when generated with WASM-MUTATE in controlled and uncontrolled diversification configurations. We select variants for which we could completely reproduce the three components in Figure 4.1.

4.1.3 Results

In Table 4.1, we present a comprehensive summary of the evasion experiments presented in [?], focusing on two oracles: VirusTotal and MINOS[?]. The table is organized into two main categories to separate the results for each malware oracle. For VirusTotal, we further subdivide the results based on the two diversification configurations we employ: uncontrolled and controlled diversification. In these subsections, the columns indicate the number of VirusTotal vendors that flag the original binary as malware ($\#D$), the maximum number of successfully evaded detectors (Max. $\#evaded$), and the average number of transformations required (Mean $\#trans.$) for each sample. We highlight in bold text the values for which the uncontrolled diversification or controlled diversification setups best, the lower, the better. The MINOS section solely includes a column that specifies the number of transformations needed for complete evasion. The table has $33 + 1$ rows, each representing a unique WebAssembly malware study subject. The final row offers the median number of transformations required for evasion across our evaluated setups and oracles.

Uncontrolled diversification to evade VirusTotal: We execute an uncontrolled diversification with WASM-MUTATE, setting a limit of 1000 iterations for each binary. In every iteration, we query VirusTotal to determine if the newly generated binary can elude detection. We repeat this procedure with ten distinct seeds for each binary, replicating ten different evasion experiments. As the uncontrolled diversification section of Table 4.1 illustrates, we successfully produce variants that fully evade detection for 30 out of 33 binaries. The average amount of iterations required to produce a variant that evades all detectors oscillates between 120 to 635 stacked transformations. The mean number of iterations needed never exceeds 1000 stacked transformations. However, three binaries remain detectable under the uncontrolled diversification setup. In these instances, the algorithm fails to evade 5 out of 31, 6 out of 30, and 5 out of 26 detectors. This shortfall can be attributed to the maximum number of iterations, 1000, that we employ in our experiments. Increasing iterations further, however, seems unrealistic. If certain transformations enlarge the binary size, a significantly large binary could become impractical due to

| Hash | #D | VirusTotal | | | | MINOS[?] |
|----------|----|------------------------------|-------------|----------------------------|-------------|-------------|
| | | Uncontrolled diversification | | Controlled diversification | | Mean trans. |
| | | Max. evaded | Mean trans. | Max. evaded | Mean trans. | |
| 47d29959 | 31 | 26 | N/A | 19 | N/A | 100 |
| 9d30e7f0 | 30 | 24 | N/A | 17 | N/A | 419 |
| 8ebf4e44 | 26 | 21 | N/A | 13 | N/A | 92 |
| c11d82d | 20 | 20 | 355 | 20 | 446 | 115 |
| 0d996462 | 19 | 19 | 401 | 19 | 697 | 24 |
| a32a6f4b | 18 | 18 | 635 | 18 | 625 | 1 |
| fbdd1efa | 18 | 18 | 310 | 18 | 726 | 1 |
| d2141ff2 | 9 | 9 | 461 | 9 | 781 | 81 |
| aa5ff587 | 6 | 6 | 484 | 6 | 331 | 1 |
| 046dc081 | 6 | 6 | 404 | 6 | 159 | 33 |
| 643116ff | 6 | 6 | 144 | 6 | 436 | 47 |
| 15b86a25 | 4 | 4 | 253 | 4 | 131 | 1 |
| 006b2fb6 | 4 | 4 | 282 | 4 | 380 | 1 |
| 942be4f7 | 4 | 4 | 200 | 4 | 200 | 29 |
| 7c36f462 | 4 | 4 | 236 | 4 | 221 | 85 |
| fb15929f | 4 | 4 | 297 | 4 | 475 | 1 |
| 24aae13a | 4 | 4 | 252 | 4 | 401 | 980 |
| 000415b2 | 3 | 3 | 302 | 3 | 34 | 960 |
| 4cbdbbb1 | 3 | 3 | 295 | 3 | 72 | 1 |
| 65debcbe | 2 | 2 | 131 | 2 | 33 | 38 |
| 59955b4c | 2 | 2 | 130 | 2 | 33 | 38 |
| 89a3645c | 2 | 2 | 431 | 2 | 107 | 108 |
| a74a7cb8 | 2 | 2 | 124 | 2 | 33 | 38 |
| 119c53eb | 2 | 2 | 104 | 2 | 18 | 1 |
| 089dd312 | 2 | 2 | 153 | 2 | 123 | 68 |
| c1be4071 | 2 | 2 | 130 | 2 | 33 | 38 |
| dceaf65b | 2 | 2 | 140 | 2 | 132 | 66 |
| 6b8c7899 | 2 | 2 | 143 | 2 | 33 | 38 |
| a27b45ef | 2 | 2 | 145 | 2 | 33 | 33 |
| 68ca7c0e | 2 | 2 | 137 | 2 | 33 | 38 |
| f0b24409 | 2 | 2 | 127 | 2 | 11 | 33 |
| 5bc53343 | 2 | 2 | 118 | 2 | 33 | 33 |
| e09c32c5 | 1 | 1 | 120 | 1 | 488 | 15 |
| Median | | | 218 | | 131 | 38 |

Table 4.1: The table has two main categories for each malware oracle, corresponding to the two oracles we use: VirusTotal and MINOS. For VirusTotal, divide the results based on the two diversification configurations: uncontrolled and controlled diversification. We provide columns that indicate the number of VirusTotal vendors that flag the original binary as malware (#D), the maximum number of successfully evaded detectors (Max. #evaded), and the average number of transformations required (Mean #trans.) for each sample. We highlight in bold text the values for which diversification setups are best, the lower, the better. The MINOS section includes a column that specifies the number of transformations needed for complete evasion. The final row offers the median number of transformations required for evasion across our evaluated setups and oracles.

bandwidth limitations. In summary, uncontrolled diversification with WASM-MUTATE markedly reduces the detection rate by VirusTotal antivirus vendors for cryptojacking malware, achieving total evasion in 30 out of 33 (90%) cases within the malware dataset. WASM-MUTATE proves capable of successfully evading detection systems in just a few minutes.

Controlled diversification to evade VirusTotal: Uncontrolled diversification does not guide the diversification based on the number of evaded detectors, it is purely random, and has some drawbacks. For example, some transformations might suppress other transformations previously applied. We have observed that, by carefully selecting the order and type of transformations applied, it is possible to evade detection systems in fewer iterations. This can be appreciated in the results of the controlled diversification part of Table 4.1. Analyzing the data in Table 4.1, we observe that the controlled diversification setup successfully generates variants that totally evade the detection for 30 out of 33 binaries, it is thus as good as the uncontrolled setup. The iterations needed for the controlled diversification setup are 92% of the iterations needed on average for the uncontrolled diversification setup. For 21 of 30 binaries that evade detection entirely, we observe that the mean number of oracle calls needed is lower than those in the baseline evasion algorithm. For example, `f0b24409` needs 11 oracle calls with controlled diversification setup to fully evade VirusTotal, while for the uncontrolled one, it needs 127 oracles calls. For those 21 binaries, it needs only 40% of the calls the controlled diversification setup needs. The controlled diversification setup, having fewer stacked transformations overall, demonstrates larger efficiency than the uncontrolled diversification setup. For instance, a potential attacker may be limited by budget on the number of transformations applicable to the malware binary, e.g., the number of queries to VirusTotal. Additionally, the performance of the resulting binary benefits from this approach.

Uncontrolled diversification to evade MINOS: Relying exclusively on VirusTotal for detection could pose issues, particularly given the existence of specialized solutions for WebAssembly, which differ from the general-purpose vendors within VirusTotal. In Section 2.1.6 we highlight several examples of such solutions. Yet, for its simplicity, we extend this experiment by using MINOS[?], an antivirus specifically designed for WebAssembly. We incrementally apply stacked transformations to the original malware binary until MINOS is completely evaded or the maximum iteration limit is achieved. We repeat this procedure ten times for every binary. The results of these trials can be seen in the final column of Table 4.1. The bottom row of Table 4.1 highlights that fewer iterations are required to evade MINOS than VirusTotal through WebAssembly diversification, indicating a greater ease in eluding MINOS. The median iteration count needed to evade VirusTotal is 218 for the uncontrolled diversification setup, and 131 for the controlled diversification setup; however, only 38 iterations are needed for MINOS. Interestingly, WASM-MUTATE managed to evade detection for 8

out of 33 binaries in just a single iteration when testing against MINOS. This suggests the MINOS model’s vulnerability to binary diversification. We have also noted an interesting phenomenon. Based on our data, VirusTotal appears to outperform MINOS in terms of detecting cryptojacking. The primary reason for this is VirusTotal’s use of a wider array of antivirus vendors, encompassing several diverse detection approaches. In contrast, MINOS operates as a standalone detector. Consequently, this supports the employment of multiple malware oracles (meta-oracles) for the detection of cryptojacking malware in browsers, even when it is possible a Wasm-specific detection mechanism.

WebAssembly execution impact: To evaluate the real-world efficacy of WASM-MUTATE in evading malware detection, we focused on six binaries that we could build and execute end-to-end, as these had all three components outlined in Figure 4.1. We select only six binaries because the process of building and executing the binaries involves three components. As detailed in Figure 4.1, they include the binary, its JavaScript complement, and the miner pool. These components were not found for the remaining 27 binaries in the study subjects. For the six binaries, we then replace the original WebAssembly code with variants generated using VirusTotal as the malware oracle and WASM-MUTATE for both controlled and uncontrolled diversification configurations. We then execute both the original and the generated variants. We assessed the variants based on the hash generation rate, providing a hint on the impact of diversification in the WebAssembly variants execution.

We have found that 19% of the generated variants outperformed the original cryptojacking binaries. This improvement is attributed to WASM-MUTATE’s ability to introduce code optimizations. Additionally, debloating transformations, which eliminate unnecessary structures and dead code, resulted in a higher hash generation rate during the initial seconds of mining, likely due to faster compilation times. This suggests that focused optimization serves as a valuable tool for evasion in browsers. On the contrary, 80% of the generated variants are less efficient than the original binary, with the least efficient variant operating at only 20% of the original hash generation rate. This performance drop is primarily due to non-optimal transformations introduced by WASM-MUTATE. Variants generated through uncontrolled diversification are generally slower. In summary, controlled diversification yielded variants that evaded VirusTotal detection with minimal performance overhead—the worst-performing variant was only 1.93 times slower than the original.

Contribution paper

Our work provides evidence that the malware detection community has opportunities to strengthen the automatic detection of cryptojacking WebAssembly malware. The results of our work are actionable, as we also provide quantitative evidence on specific malware transformations on which detection methods can focus. The case discussed in this section is fully detailed in Cabrera-Arteaga et al. "WebAssembly Diversification for Malware Evasion" at *Computers & Security, 2023* <https://www.sciencedirect.com/science/article/pii/S0167404823002067>.

4.2 Defensive Diversification: Speculative Side-channel protection

As discussed in Section 2.1, WebAssembly is quickly becoming a cornerstone technology in backend systems. Leading companies like Cloudflare and Fastly are championing the integration of WebAssembly into their edge computing platforms, thereby enabling developers to deploy applications that are both modular and securely sandboxed. These server-side WebAssembly applications are generally architected as isolated, single-responsibility services, a model referred to as Function-as-a-Service (FaaS) [? ?]. The operational flow of WebAssembly binaries in FaaS platforms is illustrated in Figure 4.3.

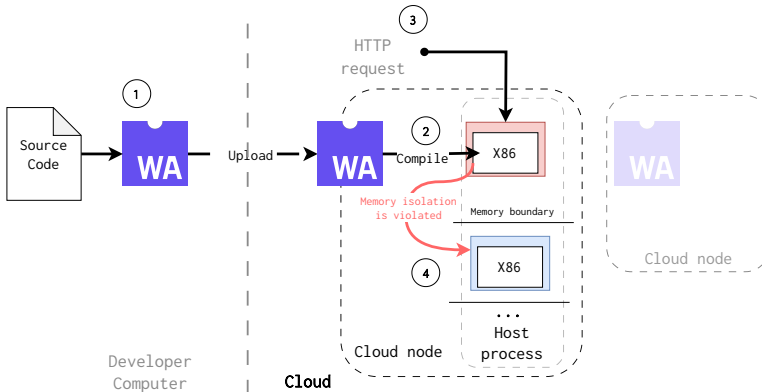


Figure 4.3: WebAssembly binaries on FaaS platforms. Developers can submit any WebAssembly binary to the platform to be executed as a service in a sandboxed and isolated manner. Yet, WebAssembly binaries are not immune to Spectre attacks.

The fundamental advantage of using WebAssembly in FaaS platforms lies in its ability to encapsulate thousands of client WebAssembly binaries within

a singular host process. A developer could compile its source code into a WebAssembly program suitable for the cloud platform and then submit it (① in Figure 4.3). This host process is then disseminated across a network of servers and data centers (② in Figure 4.3). These platforms convert WebAssembly programs into native code, which is subsequently executed in a sandboxed environment. Host processes can then instantiate new WebAssembly sandboxes for each client function, executing them in response to specific user requests with nanosecond-level latency (③ in Figure 4.3). This architecture inherently isolates WebAssembly binary executions from each other as well as from the host process, enhancing security.

However, while WebAssembly is engineered with a strong focus on security and isolation, it is not entirely immune to vulnerabilities such as Spectre attacks [? ?] (④ in Figure 4.3). In the sections that follow, we explore how software diversification techniques can be employed to harden WebAssembly binaries against such attacks. For an in-depth discussion on this topic, we direct the reader to our contribution [?].

4.2.1 Threat model: speculative side-channel attacks

To illustrate the threat model concerning WebAssembly programs in FaaS platforms, consider the following scenarios. Developers, including potentially malicious actors, have the ability to submit any WebAssembly binary to the FaaS platform. A malicious actor could then upload a WebAssembly binary that, once compiled to native code, employs Spectre attacks to either leak sensitive information from the host process or violate Control Flow Integrity (CFI). Furthermore, even if a submitted WebAssembly binary is not intentionally malicious, it may still be vulnerable to Spectre attacks. For instance, a malicious actor could exploit this vulnerability by executing the susceptible binary through the FaaS service.

Spectre attacks exploit hardware-based prediction mechanisms to trigger mispredictions, leading to the speculative execution of specific instruction sequences that are not part of the original, sequential execution flow. By taking advantage of this speculative execution, an attacker can potentially access sensitive information stored in the memory allocated to other WebAssembly instance (including itself) or even the host process itself. This poses a significant risk, compromising both the security and integrity of the overall system.

Narayan and colleagues [?] have categorized potential Spectre attacks on WebAssembly binaries into three distinct types, each corresponding to a specific hardware predictor being exploited and a particular FaaS scenario: Branch Target Buffer Attacks, Return Stack Buffer Attacks, and Pattern History Table Attacks defined as follows:

1. The Spectre Branch Target Buffer (btb) attack exploits the branch target buffer by predicting the target of an indirect jump, thereby rerouting

| Program | Attack |
|--------------|-------------------------------------|
| btb_breakout | Spectre branch target buffer (btb) |
| btb_leakage | Spectre branch target buffer (btb) |
| ret2spec | Spectre Return Stack Buffer (rsb) |
| pht | Spectre Pattern History Table (pht) |

Table 4.2: WebAssembly program name and its respective attack.

speculative control flow to an arbitrary target.

2. The Spectre Return Stack Buffer (rsb) attack exploits the return stack buffer that stores the locations of recently executed call instructions to predict the target of `ret` instructions.
3. The Spectre Pattern History Table (pht) takes advantage of the pattern history table to anticipate the direction of a conditional branch during the ongoing evaluation of a condition.

4.2.2 Methodology

Our goal is to empirically validate that Software Diversification can effectively mitigate the risks associated with Spectre attacks in WebAssembly binaries. The green-highlighted section in Figure 4.4 illustrates how Software Diversification can be integrated into the FaaS platform workflow. The core idea is to generate unique and diverse WebAssembly variants that can be randomized at the time of deployment. For this use case, we employ WASM-MUTATE as our tool for Software Diversification.

To empirically demonstrate that Software Diversification can indeed mitigate Spectre vulnerabilities, we reuse the WebAssembly attack scenarios proposed by Narayan and colleagues in their work on Swivel [?]. Swivel is a compiler-based strategy designed to counteract Spectre attacks on WebAssembly binaries by linearizing their control flow during machine code compilation. Our approach differs from theirs in that it is binary-based, compiler-agnostic, and platform-agnostic; we do not propose altering the deployment or toolchain of FaaS platforms.

To measure the efficacy of WASM-MUTATE in mitigating Spectre, we diversify four WebAssembly binaries proposed in the Swivel study. The names of these programs and the specific attacks we examine are available in Table 4.2. For each of these four binaries, we generate up to 1000 random stacked transformations (see Definition 2) using 100 distinct seeds, resulting in a total of 100,000 variants for each original binary. At every 100th stacked transformation for each binary and seed, we assess the impact of diversification on the Spectre attacks by measuring the attack bandwidth for data exfiltration. This metric not

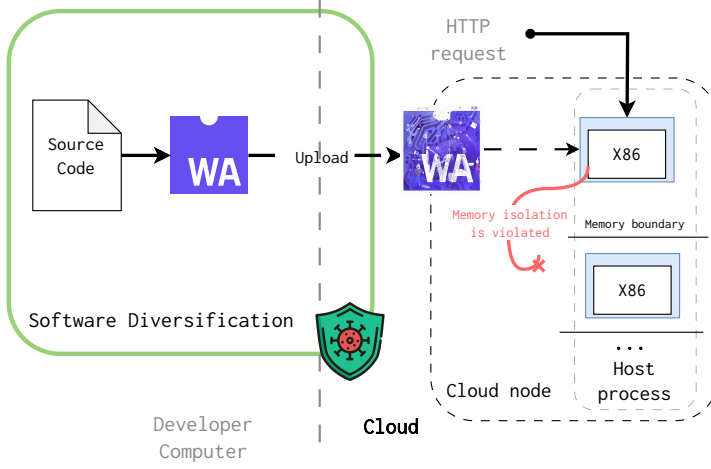


Figure 4.4: Diversifying WebAssembly binaries to mitigate Spectre attacks in FaaS platforms.

only captures the success or failure of the attacks but also quantifies the extent to which data exfiltration is hindered. For example, a variant that still leaks data but does so at an impractically slow rate would be considered hardened against the attack.

Definition 6. *Attack bandwidth:* Given data $D = \{b_0, b_1, \dots, b_C\}$ being exfiltrated in time T and $K = k_1, k_2, \dots, k_N$ the collection of correct data bytes, the bandwidth metric is defined as:

$$\frac{|b_i \text{ such that } b_i \in K|}{T}$$

4.2.3 Results

Figure 4.5 offers a graphical representation of WASM-MUTATE’s influence on the Swivel original programs: `btb_breakout` and `btb_leakage` with the `btb` attack. The Y-axis represents the exfiltration bandwidth (see Definition 6). The bandwidth of the original binary under attack is marked as a blue dashed horizontal line. In each plot, the variants are grouped in clusters of 100 stacked transformations. These are indicated by the green violinplots.

Population Strength: For the binaries `btb_breakout` and `btb_leakage`, WASM-MUTATE exhibits a high level of effectiveness, generating variants that leak less information than the original in 78% and 70% of instances, respectively. For both programs, after applying 200 stacked transformations, the exfiltration bandwidth drops to zero. This implies that WASM-MUTATE is capable of

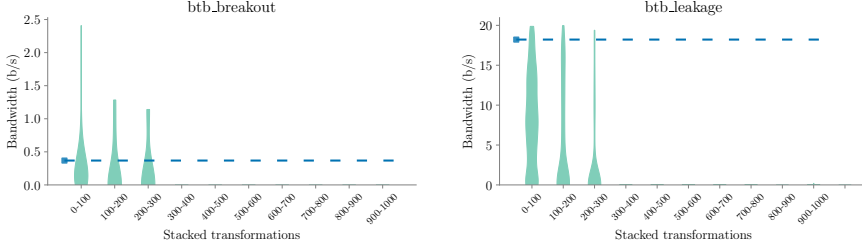


Figure 4.5: Impact of WASM-MUTATE over *btb_breakout* and *btb_leakage* binaries. The Y-axis denotes exfiltration bandwidth, with the original binary’s bandwidth under attack highlighted by a blue marker and dashed line. Variants are clustered in groups of 100 stacked transformations, denoted by green violinplots. Overall, for all 100000 variants generated out of each original program, 70% have less data leakage bandwidth. After 200 stacked transformations, the exfiltration bandwidth drops to zero.

synthesizing variants that are entirely protected from the original attack. If we consider the results in Table 3.1, generating a variant with 200 stacked transformations can be accomplished in just a matter of seconds for a single WebAssembly binary. When scaled to the scope of a global FaaS platform, this means that a unique, hardened variant could be deployed for each machine and even for each fresh WebAssembly spawned per user request.

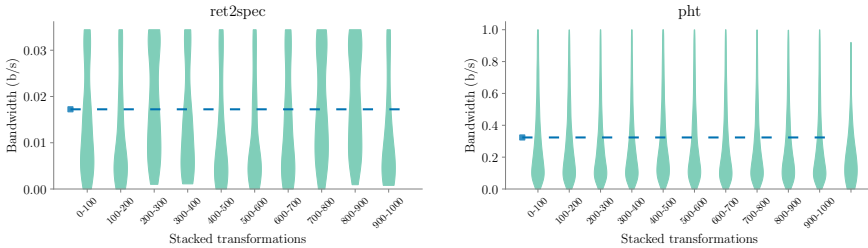


Figure 4.6: Impact of WASM-MUTATE over *ret2spec* and *pht* binaries. The Y-axis denotes exfiltration bandwidth, with the original binary’s bandwidth under attack highlighted by a blue marker and dashed line. Variants are clustered in groups of 100 stacked transformations, denoted by green violinplots. Overall, for both programs approximately 70% of the variants have less data leakage bandwidth.

As illustrated in Figure 4.6, similarly to Figure 4.5, WASM-MUTATE significantly impacts the programs *ret2spec* and *pht* when subjected to their respective attacks. In 76% of instances for *ret2spec* and 71% for *pht*, the generated variants demonstrated reduced attack bandwidth compared to the

original binaries. The plots reveal that a notable decrease in exfiltration bandwidth occurs after applying at least 100 stacked transformations. While both programs show signs of hardening through reduced attack bandwidth, this effect is not immediate and requires a substantial number of transformations to become effective. Additionally, the bandwidth distribution is more varied for these two programs compared to the two previous ones. Our analysis suggests a correlation between the reduction in attack bandwidth and the complexity of the binary being diversified. Specifically, `ret2spec` and `pht` are substantially larger programs, containing over 300,000 instructions, compared to `btb_breakout` and `btb_leakage`, which have fewer than 800 instructions. Therefore, given that WASM-MUTATE performs one transformation per invocation, the probability of affecting critical components to hinder attacks decreases in larger binaries.

Managed memory impact: The success in diminishing Spectre attacks is explained by the fact that WASM-MUTATE synthesizes variants that effectively alter memory access patterns. We have identified four primary factors responsible for the divergence in memory accesses among WASM-MUTATE generated variants. First, modifications to the binary layout—even those that do not affect executed code—inevitably alter memory accesses within the program’s stack. Specifically, WASM-MUTATE generates variants that modify the return addresses of functions, which consequently leads to differences in execution flow and memory accesses. Second, one of our rewriting rules incorporates artificial global values into WebAssembly binaries. The access to these global variables inevitably affects the managed memory (see Section 2.1.4). Third, WASM-MUTATE injects ‘phantom’ instructions which do not aim to modify the outcome of a transformed function during execution. These intermediate calculations trigger the spill/reload component of the `wasmtime` compiler, varying spill and reload operations. In the context of limited physical resources, these operations temporarily store values in memory for later retrieval and use, thus creating diverse managed memory accesses (see the example at Section 3.3.1). Finally, certain rewriting rules implemented by WASM-MUTATE replicate fragments of code, e.g., performing commutative operations. These code segments may contain memory accesses, and while neither the memory addresses nor their values change, the frequency of these operations does.

Contribution paper

WASM-MUTATE crafts WebAssembly binaries that are resilient to Spectre-like attacks. By integrating a software diversification layer into WebAssembly binaries deployed on Function-as-a-Service (FaaS) platforms, security can be significantly bolstered. This approach allows for the deployment of unique and diversified WebAssembly binaries, potentially utilizing a distinct variant for each cloud node, thereby enhancing the overall security. The case discussed in this section is fully detailed in Cabrera-Arteaga et al. "WASM-MUTATE: Fast and Effective Binary Diversification for WebAssembly" *Under review* <https://arxiv.org/pdf/2309.07638.pdf>.

4.3 Intrinsic properties of diversification

In Section 4.2, we have noted an increasing trend of exfiltration bandwidth in certain variants. Section 4.1 presents a similar case, indicating that without a clear objective in the diversification process, uncontrolled diversification can be counterproductive. This implies that not all transformations contribute equally to the diversification objectives of WebAssembly. In the following, we elaborate on three cornerstones properties for improving Software Diversification with relation to WebAssembly.

Preservation: Some transformations yield distinct WebAssembly binaries, yet their JIT compilation produces identical machine code. Non-preserved transformations undermine the effectiveness of diversification, as discussed in Section 3.4. Incorporating random `nop` operations directly into WebAssembly, for instance, does not alter the final machine code because JIT compilers typically eliminate these `nop` operations. This phenomenon is also observed with transformations to the custom sections of WebAssembly binaries. Identical machine code, even when their WebAssembly variants are different, can be detected by malware detectors. For practitioners, malware detection tools can be enhanced by incorporating a pre-compilation step to normalize WebAssembly binaries. Besides, developers could focus on transformations that preserve the machine code, as they are more likely to contribute to the diversification objectives, e.g., evasion. On the other hand, side-channel attacks occur at the machine code level. Thus, making WebAssembly variants preservation is essential code for successful defensive diversification, i.e., if the machine code is preserved, the side-channel attack will not be effective against the WebAssembly variant.

Disrupting timers: Cache timing side-channel attacks, including for the four binaries analyzed in Section 4.2, depend on precise timers to measure cache access times. Disrupting these timers can effectively neutralize the attack [?

]. The WebAssembly variants inherently adopt a similar approach, introducing perturbations in the timing steps of WebAssembly variants. This is illustrated in Listing 4.1 and Listing 4.2, where the former shows the original time measurement and the latter presents a variant with introduced operations. By introducing additional instructions, the inherent randomness in the time measurement of a single or a few instructions is amplified, thereby reducing the timer’s accuracy.

```
;; Code from original btb_breakout
...
(call $readTimer)
(set_local $end_time)
... access to mem
(i64.sub (get_local $end_time ) (get_local $start_time))
(set_local $duration)
...
```

Listing 4.1: Wasm timer code.

```
;; Variant code
...
(call $readTimer)
(set_local $end_time)
<inserted instructions>
... access to mem
<inserted instructions>
(i64.sub (get_local $end_time ) (get_local $start_time))
(set_local $duration)
...
```

Listing 4.2: WebAssembly variant with more instructions added in between time measurement.

TODO Recheck term-citation padding here

Padding speculated instructions: CPUs have a limit on the number of instructions they can cache. Diversification injects instructions to potentially exceed this limit, effectively disabling the speculative execution of memory accesses. This approach is akin to padding [?], as demonstrated in Listing 4.3 and Listing 4.4. This padding disrupts the binary code’s layout in memory, hindering the attacker’s ability to initiate speculative execution. Even if speculative execution occurs, the memory access does not proceed as the attacker intended.

```

;; Code from original btb_breakout
...
;; train the code to jump here (index 1)
(i32.load (i32.const 2000))
(i32.store (i32.const 83)) ;; just prevent optimization
...
;; transiently jump here
(i32.load (i32.const 339968)) ;; S(83) is the secret
(i32.store (i32.const 83)) ;; just prevent optimization

```

Listing 4.3: Two jump locations. The top one trains the branch predictor, the bottom one is the expected jump that exfiltrates the memory access.

```

;; Variant code
...
;; train the code to jump here (index 1)
<inserted instructions>
(i32.load (i32.const 2000))
<inserted instructions>
(i32.store (i32.const 83)) ;; just prevent optimization
...
;; transiently jump here
<inserted instructions>
(i32.load (i32.const 339968)) ;; "S"(83) is the secret
<inserted instructions>
(i32.store (i32.const 83)) ;; just prevent optimization
...

```

Listing 4.4: WebAssembly variant with more instructions added indindinctly between jump places.

■ Conclusions

In this chapter, we discuss two sides of Software Diversification as applied to WebAssembly: Offensive Software Diversification and Defensive Software Diversification. Offensive Software Diversification underscores both the capabilities and the latent security risks inherent in applying Software Diversification to WebAssembly malware. Our research indicates that there are ways for enhancing the automated detection of cryptojacking malware in WebAssembly, e.g. by stressing their resilience with WebAssembly malware variants. On the other hand, Defensive Software Diversification acts as a preemptive safeguard, specifically to mitigate the risks posed by Spectre attacks. In the subsequent chapter, we will consolidate the principal conclusions of this dissertation and describe directions for future research.

5

CONCLUSIONS AND FUTURE WORK

The experience gave me enough of the mathematical viewpoint that it enabled me to find my way in the future, to be a rather theoretical computer scientist and yet still worry about the engineering consequences of what I was doing.

— Jeffrey D. Ullman

IN this thesis, we have presented a comprehensive suite of methods and tools for Software Diversification in WebAssembly. This chapter summarizes the technical contributions of this dissertation and the empirical findings of our research. Besides, we outline directions for future research.

5.1 Summary of technical contributions

We present three tools for Software Diversification in WebAssembly: CROW, MEWE and WASM-MUTATE. CROW is a compiler-based approach. It leverages enumerative synthesis to generate functionally equivalent code replacements and assembles them into diverse Wasm program variants. CROW uses SMT solvers to guarantee functional equivalence. MEWE provides dynamic execution path randomization by packaging variants generated out of CROW. Finally WASM-MUTATE, uses hand-made rewriting rules and random traversals over e-graphs to provide a binary-based solution for WebAssembly diversification.

TODO Wrapping up of the technical contributions and main challenges per tool. We provide all our tools

5.2 Summary of empirical findings

We have conducted a series of experiments to evaluate the effectiveness of our tools. In concrete we use WASM-MUTATE to demonstrate two scenarios of

⁰Compilation probe time 2023/10/24 14:23:31

Software Diversification for WebAssembly: Offensive Software Diversification and Defensive Software Diversification.

Our work provides evidence that the malware detection community has opportunities to strengthen the automatic detection of cryptojacking WebAssembly malware. The results of our work are actionable, as we also provide quantitative evidence on specific malware transformations on which detection methods can focus. The case discussed in this section is fully detailed in Cabrera-Arteaga et al. "WebAssembly Diversification for Malware Evasion"

WASM-MUTATE crafts WebAssembly binaries that are resilient to Spectre-like attacks. By integrating a software diversification layer into WebAssembly binaries deployed on Function-as-a-Service (FaaS) platforms, security can be significantly bolstered. This approach allows for the deployment of unique and diversified WebAssembly binaries, potentially utilizing a distinct variant for each cloud node, thereby enhancing the overall security. The case discussed in this section is fully detailed in Cabrera-Arteaga et al. "WASM-MUTATE: Fast and Effective Binary Diversification for WebAssembly"

TODO Overall results for Offensive **TODO** Overall results for Defensive
TODO General thoughts on the results

Although our experiments are conducted prior to submitting the WebAssembly binary to the FaaS platform, we argue that WebAssembly binary diversification could be implemented at any stage of the FaaS workflow. The same argument holds by using any other diversification tool presented in this dissertation (see Chapter 3).

5.3 Future Work

Along with this dissertation we have highlighted several open challenges related to Software Diversification in WebAssembly. These challenges open up several directions for future research. In the following, we outline some of these directions.

Extending WASM-MUTATE: WASM-MUTATE may gain advantages from the enumerative synthesis techniques employed by CROW and MEWE. Specifically, WASM-MUTATE could adopt the transformations generated by these tools as rewriting rules. This approach could enhance WASM-MUTATE in two specific ways. Firstly, it could improve the preservation of the variants generated by WASM-MUTATE. The primary reason for this is that enumerative synthesis outperforms compiler optimizations, making it more challenging for reverse engineers to identify the original program. Secondly, this method would inevitably expand the diversification space of WASM-MUTATE e-graphs.

Program Normalization: We successfully employed WASM-MUTATE for the evasion of malware detection (see Section 4.1). The proposed mitigation in the prior study involved code normalization as a means of reducing the

spectrum of malware variants. Our current work provides insights into the potential effectiveness of this approach. Specifically, a practically costless process of pre-compiling Wasm binaries could be employed as a preparatory measure for malware classifiers. In other words, a Wasm binary can first be JITed to machine code, effectively eliminating approx. 24% of malware variants according to our preservation statistics highlighted in Table 3.1. This approach could substantially enhance the efficiency and precision of malware detection systems.

Fuzzing WebAssembly compilers Generating well-formed inputs in fuzzing campaigns presents a significant challenge [?]. This challenge is particularly prevalent in fuzzing compilers, where the inputs need to be executable yet complex enough programs to test various compiler components. To address this issue, our tools can generate semantically equivalent variants from an original Wasm binary, thereby improving the scope and efficiency of the fuzzing process. A practical instance of the effectiveness of this approach occurred in 2021, when it led to the discovery of a security CVE in wasmtime [?].

Mitigating Port Contention Rokicki et al. [?] demonstrated the feasibility of a covert side-channel attack using port contention within WebAssembly code in the browser. This attack essentially depends on the precise prediction of Wasm instructions that trigger port contention. To address this security issue, one could conveniently implement Software Diversification as a browser plugin. Software Diversification has the capability to substitute the Wasm instructions used as port contention predictors with other instructions. This is very similar to the effect on timers and padding previously discussed in Section 4.3. Such an approach would inevitably eliminate the port contention in the specific port used for the attack, thereby strengthening browsers against such harmful actions.

Dataset augmentation: The WebAssembly ecosystem is still in its infancy compared to more mature programming environments. The study by Hilbig et al. in 2021 found only 8,000 unique WebAssembly binaries globally[?], a fraction of the 1.5 million and 1.7 million packages available in npm and PyPI, respectively. This limited dataset poses challenges for machine learning-based analysis tools, which require extensive data for effective training. The scarcity of WebAssembly programs also exacerbates the problem of software monoculture, increasing the risk of compromised WebAssembly programs being consumed[?].

AI and Software Diversification As we discussed in Chapter 3, having a diversifier at the high language level seems impractical due to the wide range of existing frontends. With the appearing of Large Language Models and their accuracy in generating high-level language such issue could be solved. Yet, we believe it is not only a matter of connecting the LLM to the diversifier, studies on preservation should be accomplished. In concrete, high-level diversification might lead to low preservation, making false the assumption of diversification at low-level.

REFERENCES

- [1] M. R. Cox, *Cinderella: Three hundred and forty-five variants of Cinderella, Catskin, and Cap o'Rushes*. No. 31, Folk-lore Society, 1893.
- [2] B. Baudry and M. Monperrus, “The multiple facets of software diversity: Recent developments in year 2000 and beyond,” *ACM Comput. Surv.*, vol. 48, sep 2015.
- [3] T. Jackson, *On the Design, Implications, and Effects of Implementing Software Diversity for Security*. PhD thesis, University of California, Irvine, 2012.
- [4] Tim Berners-Lee, “The WorldWideWeb browser.” <https://www.w3.org/People/Berners-Lee/WorldWideWeb.html>, 1990.
- [5] A. Guha, C. Saftoiu, and S. Krishnamurthi, “The essence of javascript,” in *ECOOP 2010 – Object-Oriented Programming* (T. D’Hondt, ed.), (Berlin, Heidelberg), pp. 126–150, Springer Berlin Heidelberg, 2010.
- [6] M. Mulazzani, P. Reschl, M. Huber, M. Leithner, S. Schrittwieser, E. Weippl, and F. Wien, “Fast and reliable browser identification with javascript engine fingerprinting,” in *Web 2.0 Workshop on Security and Privacy (W2SP)*, vol. 5, p. 4, Citeseer, 2013.
- [7] D. Yu, A. Chander, N. Islam, and I. Serikov, “Javascript instrumentation for browser security,” in *Proceedings of the 34th Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages*, POPL ’07, (New York, NY, USA), p. 237–249, Association for Computing Machinery, 2007.
- [8] Y. Ko, T. Rezk, and M. Serrano, “Securejs compiler: Portable memory isolation in javascript,” in *Proceedings of the 36th Annual ACM Symposium on Applied Computing*, SAC ’21, (New York, NY, USA), p. 1265–1274, Association for Computing Machinery, 2021.
- [9] A. Haas, A. Rossberg, D. L. Schuff, D. L. Schuff, B. L. Titzer, M. Holman, D. Gohman, L. Wagner, A. Zakai, and J. F. Bastien, “Bringing the web up to speed with webassembly,” *PLDI*, 2017.
- [10] WebAssembly Community Group, “WebAssembly Specification.” <https://webassembly.github.io/spec/core/syntax/index.html>, 2017.

- [11] P. Mendki, “Evaluating webassembly enabled serverless approach for edge computing,” in *2020 IEEE Cloud Summit*, pp. 161–166, 2020.
- [12] M. Jacobsson and J. Wåhslén, “Virtual machine execution for wearables based on webassembly,” in *EAI International Conference on Body Area Networks*, pp. 381–389, Springer, Cham, 2018.
- [13] Bytecode Alliance, “Bytecode Alliance.” <https://bytecodealliance.org/>, 2019.
- [14] “Webassembly system interface.” <https://github.com/WebAssembly/WASI>, 2021.
- [15] D. Bryant, “Webassembly outside the browser: A new foundation for pervasive computing,” in *Proc. of ICWE 2020*, pp. 9–12, 2020.
- [16] B. Spies and M. Mock, “An evaluation of webassembly in non-web environments,” in *2021 XLVII Latin American Computing Conference (CLEI)*, pp. 1–10, 2021.
- [17] E. Wen and G. Weber, “Wasmachine: Bring iot up to speed with a webassembly os,” in *2020 IEEE International Conference on Pervasive Computing and Communications Workshops (PerCom Workshops)*, pp. 1–4, IEEE, 2020.
- [18] A. Grosskurth and M. W. Godfrey, “A reference architecture for web browsers,” in *21st IEEE International Conference on Software Maintenance (ICSM’05)*, pp. 661–664, IEEE, 2005.
- [19] L. Garcés, S. Martínez-Fernández, L. Oliveira, P. Valle, C. Ayala, X. Franch, and E. Y. Nakagawa, “Three decades of software reference architectures: A systematic mapping study,” *Journal of Systems and Software*, vol. 179, p. 111004, 2021.
- [20] G. Goth, “Addressing the monoculture,” *IEEE Security & Privacy*, vol. 1, no. 06, pp. 8–10, 2003.
- [21] J. H. Lala and F. B. Schneider, “It monoculture security risks and defenses,” *IEEE Security & Privacy*, vol. 7, no. 1, pp. 12–13, 2009.
- [22] J. Cabrera Arteaga, M. Monperrus, and B. Baudry, “Scalable comparison of javascript v8 bytecode traces,” in *Proceedings of the 11th ACM SIGPLAN International Workshop on Virtual Machines and Intermediate Languages, VMIL 2019, (New York, NY, USA)*, p. 22–31, Association for Computing Machinery, 2019.
- [23] D. Chen and W3C group, “WebAssembly documentation: Security.” <https://webassembly.org/docs/security/>, 2020. Accessed: 18 June 2020.

- [24] S. Narayan, C. Disselkoen, D. Moghimi, S. Cauligi, E. Johnson, Z. Gang, A. Vahldiek-Oberwagner, R. Sahita, H. Shacham, D. Tullsen, *et al.*, “Swivel: Hardening webassembly against spectre,” in *USENIX Security Symposium*, 2021.
- [25] Q. Stiévenart, C. De Roover, and M. Ghafari, “Security risks of porting c programs to webassembly,” in *Proceedings of the 37th ACM/SIGAPP Symposium on Applied Computing*, SAC ’22, (New York, NY, USA), p. 1713–1722, Association for Computing Machinery, 2022.
- [26] “Global CDN Disruption.” <https://www.fastly.com/blog/summary-of-june-8-outage>, 2021.
- [27] “Stop a wasm compiler bug before it becomes a problem | fastly.” <https://www.fastly.com/blog/defense-in-depth-stopping-a-wasm-compiler-bug-before-it-became-a-problem>, 2021.
- [28] J. Cabrera Arteaga, O. Floros, O. Vera Perez, B. Baudry, and M. Monperrus, “Crow: code diversification for webassembly,” in *MADWeb, NDSS 2021*, 2021.
- [29] H. Okhravi, M. Rabe, T. Mayberry, W. Leonard, T. Hobson, D. Bigelow, and W. Streilein, “Survey of cyber moving targets,” *Massachusetts Inst of Technology Lexington Lincoln Lab, No. MIT/LL-TR-1166*, 2013.
- [30] F. B. Cohen, “Operating system protection through program evolution,” *Computers & Security*, vol. 12, no. 6, pp. 565–584, 1993.
- [31] S. Forrest, A. Somayaji, and D. Ackley, “Building diverse computer systems,” in *Proceedings. The Sixth Workshop on Hot Topics in Operating Systems (Cat. No.97TB100133)*, pp. 67–72, 1997.
- [32] L. Davi, C. Liebchen, A.-R. Sadeghi, K. Z. Snow, and F. Monrose, “Isomeron: Code randomization resilient to (just-in-time) return-oriented programming,” in *NDSS*, 2015.
- [33] E. G. Barrantes, D. H. Ackley, S. Forrest, T. S. Palmer, D. Stefanovic, and D. D. Zovi, “Randomized instruction set emulation to disrupt binary code injection attacks,” in *Proc. CCS*, pp. 281–289, 2003.
- [34] M. Chew and D. Song, “Mitigating buffer overflows by operating system randomization,” Tech. Rep. CS-02-197, Carnegie Mellon University, 2002.
- [35] A. Romano, D. Lehmann, M. Pradel, and W. Wang, “Wobfuscator: Obfuscating javascript malware via opportunistic translation to webassembly,” in *2022 IEEE Symposium on Security and Privacy (SP)* (SP), (Los Alamitos, CA, USA), pp. 1101–1116, IEEE Computer Society, may 2022.

- [36] J. Cabrera Arteaga, “Artificial software diversification for webassembly,” 2022. QC 20220909.
- [37] A. Rossberg, B. L. Titzer, A. Haas, D. L. Schuff, D. Gohman, L. Wagner, A. Zakai, J. F. Bastien, and M. Holman, “Bringing the web up to speed with webassembly,” *Commun. ACM*, vol. 61, p. 107–115, nov 2018.
- [38] A. Hilbig, D. Lehmann, and M. Pradel, “An empirical study of real-world webassembly binaries: Security, languages, use cases,” *Proceedings of the Web Conference 2021*, 2021.
- [39] L. Wagner, M. Mayer, A. Marino, A. Soldani Nezhad, H. Zwaan, and I. Malavolta, “On the energy consumption and performance of webassembly binaries across programming languages and runtimes in iot,” in *Proceedings of the 27th International Conference on Evaluation and Assessment in Software Engineering, EASE '23*, (New York, NY, USA), p. 72–82, Association for Computing Machinery, 2023.
- [40] D. Lehmann, J. Kinder, and M. Pradel, “Everything old is new again: Binary security of webassembly,” in *29th USENIX Security Symposium (USENIX Security 20)*, USENIX Association, Aug. 2020.
- [41] N. Mäkitalo, T. Mikkonen, C. Pautasso, V. Bankowski, P. Daubaris, R. Mikkola, and O. Beletski, “Webassembly modules as lightweight containers for liquid iot applications,” in *International Conference on Web Engineering*, pp. 328–336, Springer, 2021.
- [42] P. K. Gadepalli, S. McBride, G. Peach, L. Cherkasova, and G. Parmer, “Sledge: A serverless-first, light-weight wasm runtime for the edge,” in *Proceedings of the 21st International Middleware Conference*, p. 265–279, 2020.
- [43] R. Gurdeep Singh and C. Scholliers, “Warduino: A dynamic webassembly virtual machine for programming microcontrollers,” in *Proceedings of the 16th ACM SIGPLAN International Conference on Managed Programming Languages and Runtimes, MPLR 2019*, (New York, NY, USA), pp. 27–36, ACM, 2019.
- [44] I. Bastys, M. Algehed, A. Sjösten, and A. Sabelfeld, “Secwasm: Information flow control for webassembly,” in *Static Analysis* (G. Singh and C. Urban, eds.), (Cham), pp. 74–103, Springer Nature Switzerland, 2022.
- [45] T. Brito, P. Lopes, N. Santos, and J. F. Santos, “Wasmati: An efficient static vulnerability scanner for webassembly,” *Computers & Security*, vol. 118, p. 102745, 2022.

- [46] F. Marques, J. Fragoso Santos, N. Santos, and P. Adão, “Concolic execution for webassembly (artifact),” Schloss Dagstuhl-Leibniz-Zentrum für Informatik, 2022.
- [47] E. Johnson, D. Thien, Y. Alhessi, S. Narayan, F. Brown, S. Lerner, T. McMullen, S. Savage, and D. Stefan, “, : Sfi safety for native-compiled wasm,” *Network and Distributed Systems Security (NDSS) Symposium*.
- [48] C. Watt, J. Renner, N. Popescu, S. Cauligi, and D. Stefan, “Ct-wasm: Type-driven secure cryptography for the web ecosystem,” *Proc. ACM Program. Lang.*, vol. 3, jan 2019.
- [49] R. M. Tsoupidi, M. Balliu, and B. Baudry, “Vivienne: Relational verification of cryptographic implementations in webassembly,” in *2021 IEEE Secure Development Conference (SecDev)*, pp. 94–102, 2021.
- [50] Q. Stiévenart and C. De Roover, “Wassail: a webassembly static analysis library,” in *Fifth International Workshop on Programming Technology for the Future Web*, 2021.
- [51] F. Breitfelder, T. Roth, L. Baumgärtner, and M. Mezini, “Wasma: A static webassembly analysis framework for everyone,” in *2023 IEEE International Conference on Software Analysis, Evolution and Reengineering (SANER)*, pp. 753–757, 2023.
- [52] W. Fu, R. Lin, and D. Inge, “Taintassembly: Taint-based information flow control tracking for webassembly,” *arXiv preprint arXiv:1802.01050*, 2018.
- [53] D. Lehmann, M. T. Torp, and M. Pradel, “Fuzzm: Finding memory bugs through binary-only instrumentation and fuzzing of webassembly,” *arXiv preprint arXiv:2110.15433*, 2021.
- [54] Q. Stiévenart, D. Binkley, and C. De Roover, “Dynamic slicing of webassembly binaries,” in *39th IEEE International Conference on Software Maintenance and Evolution*, IEEE, 2023.
- [55] Q. Stiévenart, D. W. Binkley, and C. De Roover, “Static stack-preserving intra-procedural slicing of webassembly binaries,” in *Proceedings of the 44th International Conference on Software Engineering, ICSE ’22*, (New York, NY, USA), p. 2031–2042, Association for Computing Machinery, 2022.
- [56] D. Lehmann and M. Pradel, “Wasabi: A framework for dynamically analyzing webassembly,” in *Proceedings of the Twenty-Fourth International Conference on Architectural Support for Programming Languages and Operating Systems*, pp. 1045–1058, 2019.

- [57] S. Narayan, C. Disselkoen, D. Moghimi, S. Cauligi, E. Johnson, Z. Gang, A. Vahldiek-Oberwagner, R. Sahita, H. Shacham, D. Tullsen, and D. Stefan, “Swivel: Hardening WebAssembly against spectre,” in *30th USENIX Security Symposium (USENIX Security 21)*, pp. 1433–1450, USENIX Association, Aug. 2021.
- [58] M. Kolosick, S. Narayan, E. Johnson, C. Watt, M. LeMay, D. Garg, R. Jhala, and D. Stefan, “Isolation without taxation: Near-zero-cost transitions for webassembly and sfi,” *Proc. ACM Program. Lang.*, vol. 6, jan 2022.
- [59] E. Johnson, E. Laufer, Z. Zhao, D. Gohman, S. Narayan, S. Savage, D. Stefan, and F. Brown, “Wave: a verifiably secure webassembly sandboxing runtime,” in *2023 IEEE Symposium on Security and Privacy (SP)*, pp. 2940–2955, 2023.
- [60] M. Musch, C. Wressnegger, M. Johns, and K. Rieck, “New kid on the web: A study on the prevalence of webassembly in the wild,” in *Detection of Intrusions and Malware, and Vulnerability Assessment: 16th International Conference, DIMVA 2019, Gothenburg, Sweden, June 19–20, 2019, Proceedings 16*, pp. 23–42, Springer, 2019.
- [61] R. K. Konoth, E. Vineti, V. Moonsamy, M. Lindorfer, C. Kruegel, H. Bos, and G. Vigna, “Minesweeper: An in-depth look into drive-by cryptocurrency mining and its defense,” in *Proceedings of the 2018 ACM SIGSAC Conference on Computer and Communications Security*, pp. 1714–1730, 2018.
- [62] A. Romano, Y. Zheng, and W. Wang, “Minerray: Semantics-aware analysis for ever-evolving cryptojacking detection,” in *Proceedings of the 35th IEEE/ACM International Conference on Automated Software Engineering*, pp. 1129–1140, 2020.
- [63] F. N. Naseem, A. Aris, L. Babun, E. Tekiner, and A. S. Uluagac, “Minos: A lightweight real-time cryptojacking detection system,” in *NDSS*, 2021.
- [64] W. Wang, B. Ferrell, X. Xu, K. W. Hamlen, and S. Hao, “Seismic: Secure in-lined script monitors for interrupting cryptojacks,” in *Computer Security: 23rd European Symposium on Research in Computer Security, ESORICS 2018, Barcelona, Spain, September 3-7, 2018, Proceedings, Part II 23*, pp. 122–142, Springer, 2018.
- [65] J. D. P. Rodriguez and J. Posegga, “Rapid: Resource and api-based detection against in-browser miners,” in *Proceedings of the 34th Annual Computer Security Applications Conference*, pp. 313–326, 2018.
- [66] A. Kharraz, Z. Ma, P. Murley, C. Lever, J. Mason, A. Miller, N. Borisov, M. Antonakakis, and M. Bailey, “Outguard: Detecting in-browser covert cryptocurrency mining in the wild,” in *The World Wide Web Conference*, pp. 840–852, 2019.

- [67] S. Bhansali, A. Aris, A. Acar, H. Oz, and A. S. Uluagac, “A first look at code obfuscation for webassembly,” in *Proceedings of the 15th ACM Conference on Security and Privacy in Wireless and Mobile Networks*, WiSec ’22, (New York, NY, USA), p. 140–145, Association for Computing Machinery, 2022.
- [68] D. Genkin, L. Pachmanov, E. Tromer, and Y. Yarom, “Drive-by key-extraction cache attacks from portable code,” *IACR Cryptol. ePrint Arch.*, vol. 2018, p. 119, 2018.
- [69] G. Maisuradze and C. Rossow, “Ret2spec: Speculative execution using return stack buffers,” in *Proceedings of the 2018 ACM SIGSAC Conference on Computer and Communications Security*, CCS ’18, (New York, NY, USA), p. 2109–2122, Association for Computing Machinery, 2018.
- [70] T. Rokicki, C. Maurice, M. Botvinnik, and Y. Oren, “Port contention goes portable: Port contention side channels in web browsers,” in *Proceedings of the 2022 ACM on Asia Conference on Computer and Communications Security*, ASIA CCS ’22, (New York, NY, USA), p. 1182–1194, Association for Computing Machinery, 2022.
- [71] K. Pohl, G. Böckle, and F. Van Der Linden, *Software product line engineering: foundations, principles, and techniques*, vol. 1. Springer, 2005.
- [72] T. Y. Chen, F.-C. Kuo, R. G. Merkel, and T. H. Tse, “Adaptive random testing: The art of test case diversity,” *J. Syst. Softw.*, vol. 83, pp. 60–66, 2010.
- [73] S. Sidiroglou-Douskos, S. Misailovic, H. Hoffmann, and M. Rinard, “Managing performance vs. accuracy trade-offs with loop perforation,” in *Proceedings of the 19th ACM SIGSOFT Symposium and the 13th European Conference on Foundations of Software Engineering*, ESEC/FSE ’11, (New York, NY, USA), p. 124–134, Association for Computing Machinery, 2011.
- [74] Avizienis and Kelly, “Fault tolerance by design diversity: Concepts and experiments,” *Computer*, vol. 17, no. 8, pp. 67–80, 1984.
- [75] G. R. Lundquist, V. Mohan, and K. W. Hamlen, “Searching for software diversity: Attaining artificial diversity through program synthesis,” in *Proceedings of the 2016 New Security Paradigms Workshop*, NSPW ’16, (New York, NY, USA), p. 80–91, Association for Computing Machinery, 2016.
- [76] B. Randell, “System structure for software fault tolerance,” *SIGPLAN Not.*, vol. 10, p. 437–449, apr 1975.
- [77] J. V. Cleemput, B. Coppens, and B. De Sutter, “Compiler mitigations for time attacks on modern x86 processors,” *ACM Trans. Archit. Code Optim.*, vol. 8, jan 2012.

- [78] A. Homescu, S. Neisius, P. Larsen, S. Brunthaler, and M. Franz, “Profile-guided automated software diversity,” in *Proceedings of the 2013 IEEE/ACM International Symposium on Code Generation and Optimization (CGO)*, pp. 1–11, IEEE, 2013.
- [79] S. Bhatkar, D. C. DuVarney, and R. Sekar, “Address obfuscation: an efficient approach to combat a board range of memory error exploits,” in *Proceedings of the USENIX Security Symposium*, 2003.
- [80] S. Bhatkar, R. Sekar, and D. C. DuVarney, “Efficient techniques for comprehensive protection from memory error exploits,” in *Proceedings of the USENIX Security Symposium*, pp. 271–286, 2005.
- [81] K. Pettis and R. C. Hansen, “Profile guided code positioning,” in *Proceedings of the ACM SIGPLAN 1990 Conference on Programming Language Design and Implementation, PLDI ’90*, (New York, NY, USA), p. 16–27, Association for Computing Machinery, 1990.
- [82] S. Crane, A. Homescu, S. Brunthaler, P. Larsen, and M. Franz, “Thwarting cache side-channel attacks through dynamic software diversity,” in *NDSS*, pp. 8–11, 2015.
- [83] M. T. Aga and T. Austin, “Smokestack: thwarting dop attacks with runtime stack layout randomization,” in *Proc. of CGO*, pp. 26–36, 2019.
- [84] S. Lee, H. Kang, J. Jang, and B. B. Kang, “Savior: Thwarting stack-based memory safety violations by randomizing stack layout,” *IEEE Transactions on Dependable and Secure Computing*, 2021.
- [85] Y. Younan, D. Pozza, F. Piessens, and W. Joosen, “Extended protection against stack smashing attacks without performance loss,” in *2006 22nd Annual Computer Security Applications Conference (ACSAC’06)*, pp. 429–438, 2006.
- [86] Y. Xu, Y. Solihin, and X. Shen, “Merr: Improving security of persistent memory objects via efficient memory exposure reduction and randomization,” in *Proc. of ASPLOS*, pp. 987–1000, 2020.
- [87] G. S. Kc, A. D. Keromytis, and V. Prevelakis, “Countering code-injection attacks with instruction-set randomization,” in *Proc. of CCS*, pp. 272–280, 2003.
- [88] D. Couroussé, T. Barry, B. Robisson, P. Jaillon, O. Potin, and J.-L. Lanet, “Runtime code polymorphism as a protection against side channel attacks,” in *IFIP International Conference on Information Security Theory and Practice*, pp. 136–152, Springer, 2016.

- [89] S. Cao, N. He, Y. Guo, and H. Wang, “WASMixer: Binary Obfuscation for WebAssembly,” *arXiv e-prints*, p. arXiv:2308.03123, Aug. 2023.
- [90] M. Jacob, M. H. Jakubowski, P. Naldurg, C. W. N. Saw, and R. Venkatesan, “The superdiversifier: Peephole individualization for software protection,” in *International Workshop on Security*, pp. 100–120, Springer, 2008.
- [91] M. Henry, “Superoptimizer: a look at the smallest program,” *ACM SIGARCH Computer Architecture News*, vol. 15, pp. 122–126, Nov 1987.
- [92] V. Le, M. Afshari, and Z. Su, “Compiler validation via equivalence modulo inputs,” in *Proceedings of the 35th ACM SIGPLAN Conference on Programming Language Design and Implementation*, PLDI ’14, p. 216–226, 2014.
- [93] B. Churchill, O. Padon, R. Sharma, and A. Aiken, “Semantic program alignment for equivalence checking,” in *Proceedings of the 40th ACM SIGPLAN Conference on Programming Language Design and Implementation*, PLDI 2019, (New York, NY, USA), p. 1027–1040, Association for Computing Machinery, 2019.
- [94] N. Harrand, C. Soto-Valero, M. Monperrus, and B. Baudry, “Java decompiler diversity and its application to meta-decompilation,” *Journal of Systems and Software*, vol. 168, p. 110645, 2020.
- [95] M. Zalewski, “American fuzzy lop,” 2017.
- [96] L. de Moura and N. Bjørner, “Z3: An efficient smt solver,” in *Tools and Algorithms for the Construction and Analysis of Systems* (C. R. Ramakrishnan and J. Rehof, eds.), (Berlin, Heidelberg), pp. 337–340, Springer Berlin Heidelberg, 2008.
- [97] P. M. Phothilimthana, A. Thakur, R. Bodik, and D. Dhurjati, “Scaling up superoptimization,” *SIGARCH Comput. Archit. News*, vol. 44, p. 297–310, mar 2016.
- [98] R. El-Khalil and A. D. Keromytis, “Hydan: Hiding information in program binaries,” in *Information and Communications Security* (J. Lopez, S. Qing, and E. Okamoto, eds.), (Berlin, Heidelberg), pp. 187–199, Springer Berlin Heidelberg, 2004.
- [99] V. Singhal, A. A. Pillai, C. Saumya, M. Kulkarni, and A. Machiry, “Cornucopia: A framework for feedback guided generation of binaries,” in *Proceedings of the 37th IEEE/ACM International Conference on Automated Software Engineering*, ASE ’22, (New York, NY, USA), Association for Computing Machinery, 2023.

- [100] B. Cox, D. Evans, A. Filipi, J. Rowanhill, W. Hu, J. Davidson, J. Knight, A. Nguyen-Tuong, and J. Hiser, “N-variant systems: a secretless framework for security through diversity,” in *Proc. of USENIX Security Symposium*, USENIX-SS’06, 2006.
- [101] D. Bruschi, L. Cavallaro, and A. Lanzi, “Diversified process replicas for defeating memory error exploits,” in *Proc. of the Int. Performance, Computing, and Communications Conference*, 2007.
- [102] B. Salamat, A. Gal, T. Jackson, K. Manivannan, G. Wagner, and M. Franz, “Stopping buffer overflow attacks at run-time: Simultaneous multi-variant program execution on a multicore processor,” tech. rep., Technical Report 07-13, School of Information and Computer Sciences, UC Irvine, 2007.
- [103] G. Agosta, A. Barengi, G. Pelosi, and M. Scandale, “The MEET approach: Securing cryptographic embedded software against side channel attacks,” *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, vol. 34, no. 8, pp. 1320–1333, 2015.
- [104] T. Jackson, B. Salamat, A. Homescu, K. Manivannan, G. Wagner, A. Gal, S. Brunthaler, C. Wimmer, and M. Franz, “Compiler-generated software diversity,” in *Moving Target Defense*, pp. 77–98, Springer, 2011.
- [105] A. Amarilli, S. Müller, D. Naccache, D. Page, P. Rauzy, and M. Tunstall, “Can code polymorphism limit information leakage?,” in *IFIP International Workshop on Information Security Theory and Practices*, pp. 1–21, Springer, 2011.
- [106] A. Voulimeneas, D. Song, P. Larsen, M. Franz, and S. Volckaert, “dmvx: Secure and efficient multi-variant execution in a distributed setting,” in *Proceedings of the 14th European Workshop on Systems Security*, pp. 41–47, 2021.
- [107] I. Bow, N. Bete, F. Saqib, W. Che, C. Patel, R. Robucci, C. Chan, and J. Plusquellic, “Side-channel power resistance for encryption algorithms using implementation diversity,” *Cryptography*, vol. 4, no. 2, 2020.
- [108] R. L. Castro, C. Schmitt, and G. D. Rodosek, “Armed: How automatic malware modifications can evade static detection?,” in *2019 5th International Conference on Information Management (ICIM)*, pp. 20–27, 2019.
- [109] R. Sasnauskas, Y. Chen, P. Collingbourne, J. Ketema, G. Lup, J. Taneja, and J. Regehr, “Souper: A Synthesizing Superoptimizer,” *arXiv preprint 1711.04422*, 2017.
- [110] J. Cabrera Arteaga, P. Laperdrix, M. Monperrus, and B. Baudry, “Multi-Variant Execution at the Edge,” *arXiv e-prints*, p. arXiv:2108.08125, Aug. 2021.

- [111] J. Lettner, D. Song, T. Park, P. Larsen, S. Volckaert, and M. Franz, “Partisan: fast and flexible sanitization via run-time partitioning,” in *International Symposium on Research in Attacks, Intrusions, and Defenses*, pp. 403–422, Springer, 2018.
- [112] B. G. Ryder, “Constructing the call graph of a program,” *IEEE Transactions on Software Engineering*, no. 3, pp. 216–226, 1979.
- [113] E. Johnson, D. Thien, Y. Alhessi, S. Narayan, F. Brown, S. Lerner, T. McMullen, S. Savage, and D. Stefan, “Sfi safety for native-compiled wasm,” *NDSS. Internet Society*, 2021.
- [114] J. Cabrera-Arteaga, N. Fitzgerald, M. Monperrus, and B. Baudry, “WASM-MUTATE: Fast and Effective Binary Diversification for WebAssembly,” *arXiv e-prints*, p. arXiv:2309.07638, Sept. 2023.
- [115] M. Willsey, C. Nandi, Y. R. Wang, O. Flatt, Z. Tatlock, and P. Panchekha, “Egg: Fast and extensible equality saturation,” *Proc. ACM Program. Lang.*, vol. 5, jan 2021.
- [116] D. Cao, R. Kunkel, C. Nandi, M. Willsey, Z. Tatlock, and N. Polikarpova, “Babble: Learning better abstractions with e-graphs and anti-unification,” *Proc. ACM Program. Lang.*, vol. 7, jan 2023.
- [117] R. Tate, M. Stepp, Z. Tatlock, and S. Lerner, “Equality saturation: A new approach to optimization,” in *Proceedings of the 36th Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages*, POPL ’09, (New York, NY, USA), p. 264–276, Association for Computing Machinery, 2009.
- [118] T. D. Morgan and J. W. Morgan, “Web timing attacks made practical,” *Black Hat*, 2015.
- [119] T. Schnitzler, K. Kohls, E. Bitsikas, and C. Pöpper, “Hope of delivery: Extracting user locations from mobile instant messengers,” in *30th Annual Network and Distributed System Security Symposium, NDSS 2023, San Diego, California, USA, February 27 - March 3, 2023*, The Internet Society, 2023.
- [120] Kaspersky, “The state of cryptojacking in the first three quarters of 2022,” 2022.
- [121] Mozilla, “Protections Against Fingerprinting and Cryptocurrency Mining Available in Firefox Nightly and Beta ,” 2019.
- [122] J. Cabrera-Arteaga, M. Monperrus, T. Toady, and B. Baudry, “Webassembly diversification for malware evasion,” *Computers & Security*, vol. 131, p. 103296, 2023.

- [123] P. Kocher, J. Horn, A. Fogh, D. Genkin, D. Gruss, W. Haas, M. Hamburg, M. Lipp, S. Mangard, T. Prescher, M. Schwarz, and Y. Yarom, “Spectre attacks: Exploiting speculative execution,” in *2019 IEEE Symposium on Security and Privacy (SP)*, pp. 1–19, 2019.
- [124] M. Schwarz, C. Maurice, D. Gruss, and S. Mangard, “Fantastic timers and where to find them: High-resolution microarchitectural attacks in javascript,” in *Financial Cryptography and Data Security* (A. Kiayias, ed.), (Cham), pp. 247–267, Springer International Publishing, 2017.
- [125] G. J. Duck, X. Gao, and A. Roychoudhury, “Binary rewriting without control flow recovery,” in *Proceedings of the 41st ACM SIGPLAN Conference on Programming Language Design and Implementation*, PLDI 2020, (New York, NY, USA), p. 151–163, Association for Computing Machinery, 2020.
- [126] J. Wang, B. Chen, L. Wei, and Y. Liu, “Skyfire: Data-driven seed generation for fuzzing,” in *2017 IEEE Symposium on Security and Privacy (SP)*, pp. 579–594, 2017.

Part II

Included papers

SUPEROPTIMIZATION OF WEBASSEMBLY BYTECODE

Javier Cabrera-Arteaga, Shrinish Donde, Jian Gu, Orestis Floros, Lucas Satabin, Benoit Baudry, Martin Monperrus

Conference Companion of the 4th International Conference on Art, Science, and Engineering of Programming (Programming 2021), MoreVMs

<https://doi.org/10.1145/3397537.3397567>

CROW: CODE DIVERSIFICATION FOR WEBASSEMBLY

Javier Cabrera-Arteaga, Orestis Floros, Oscar Vera-Pérez, Benoit Baudry,
Martin Monperrus

Network and Distributed System Security Symposium (NDSS 2021), MADWeb

<https://doi.org/10.14722/madweb.2021.23004>

MULTI-VARIANT EXECUTION AT THE EDGE

Javier Cabrera-Arteaga, Pierre Laperdrix, Martin Monperrus, Benoit Baudry
*Conference on Computer and Communications Security (CCS 2022), Moving
Target Defense (MTD)*

<https://dl.acm.org/doi/abs/10.1145/3560828.3564007>

WEBASSEMBLY DIVERSIFICATION FOR MALWARE EVASION

Javier Cabrera-Arteaga, Tim Toady, Martin Monperrus, Benoit Baudry
Computers & Security, Volume 131, 2023

<https://www.sciencedirect.com/science/article/pii/S0167404823002067>

WASM-MUTATE: FAST AND EFFECTIVE BINARY DIVERSIFICATION FOR WEBASSEMBLY

Javier Cabrera-Arteaga, Nick Fitzgerald, Martin Monperrus, Benoit Baudry
Under revision

SCALABLE COMPARISON OF JAVASCRIPT V8 BYTECODE TRACES

Javier Cabrera-Arteaga, Martin Monperrus, Benoit Baudry

*11th ACM SIGPLAN International Workshop on Virtual Machines and
Intermediate Languages (SPLASH 2019)*

<https://doi.org/10.1145/3358504.3361228>