Design and Analysis of Algorithms

L24: Prim’s Algorithm
Minimum Cost Spanning Tree

Dr. Ram P Rustagi
Sem IV (2019-H1)
Dept of CSE, KSIT/KSSEM
rprustagi@ksit.edu.in

Resources

- Text book 1: Sec 9.1-5.4 - Levitin
- R1: Introduction to Algorithms
    - Cormen et al.

Spanning Tree

- Consider N number of villages in a district
- Government would like to ensure that these villages are connected by road
  - reachable from each other, may be via other villages
- The cost of laying road from one village to other villages is known
- Govt would like to incur minimum cost
- Which roads government should lay down
  - How many roads needs to be layed down.
- Answer: Minimum Cost Spanning Tree
- Q: Provide other examples:

Spanning Tree

- Graph: G={V,E}
  - A set of nodes V
  - A set of edges E =(u,v) connecting node u to node v.
- Connected Graph:
  - each node is reachable from any other node via some path.
  - There may exist multiple paths, (have cycles)
- Spanning tree:
  - A subgraph T of G i.e. $T \subseteq G$ such that
    - It contains all the vertices V of G i.e. if $v \in G \Rightarrow v \in T$
    - Between any two nodes u and v, $\exists$ only one path
    - i.e. T is acyclic

Minimum Spanning Tree

- A minimum spanning tree of weighted connected graph G is a spanning tree T with minimum total weight.
- Examples:

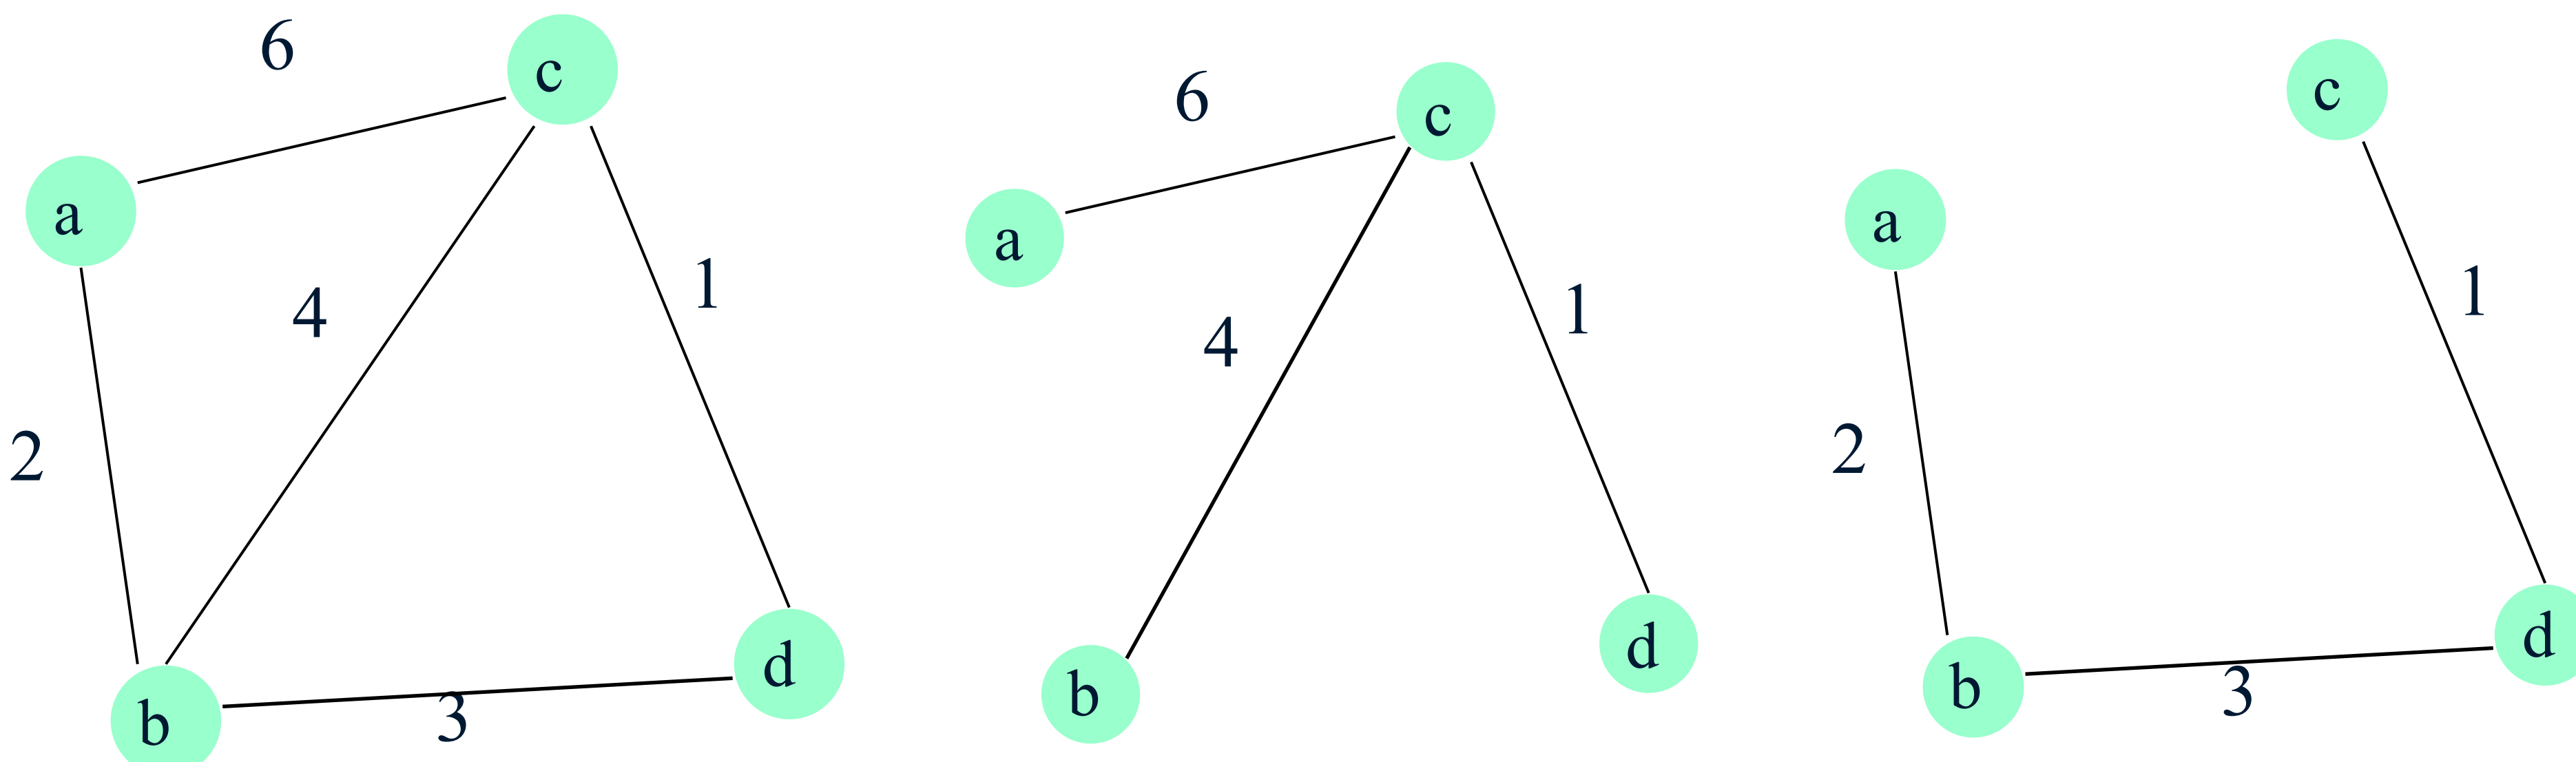

- Q: Are other spanning tree possible?
- Q: What happens when all edges have same weight?

Prim's MST Algorithm

- Approach:
  - Start with tree $\mathtt{T}_1$ consisting of one (any) vertex, and
    - *grow* tree one vertex at a time to produce MST
    - through a series of expanding subtrees $\mathtt{T}_1, \mathtt{T}_2, \ldots, \mathtt{T}_n$
- Greedy Appraoch:
  - On each iteration, construct $\mathtt{T}_{i+1}$ from $\mathtt{T}_i$
    - Add a vertex not in $\mathtt{T}_i$ which is
      - closest to those already in $\mathtt{T}_i$
      - this is a **greedy** step!
- Stop when all vertices are included.

Example 1: Prim's MST

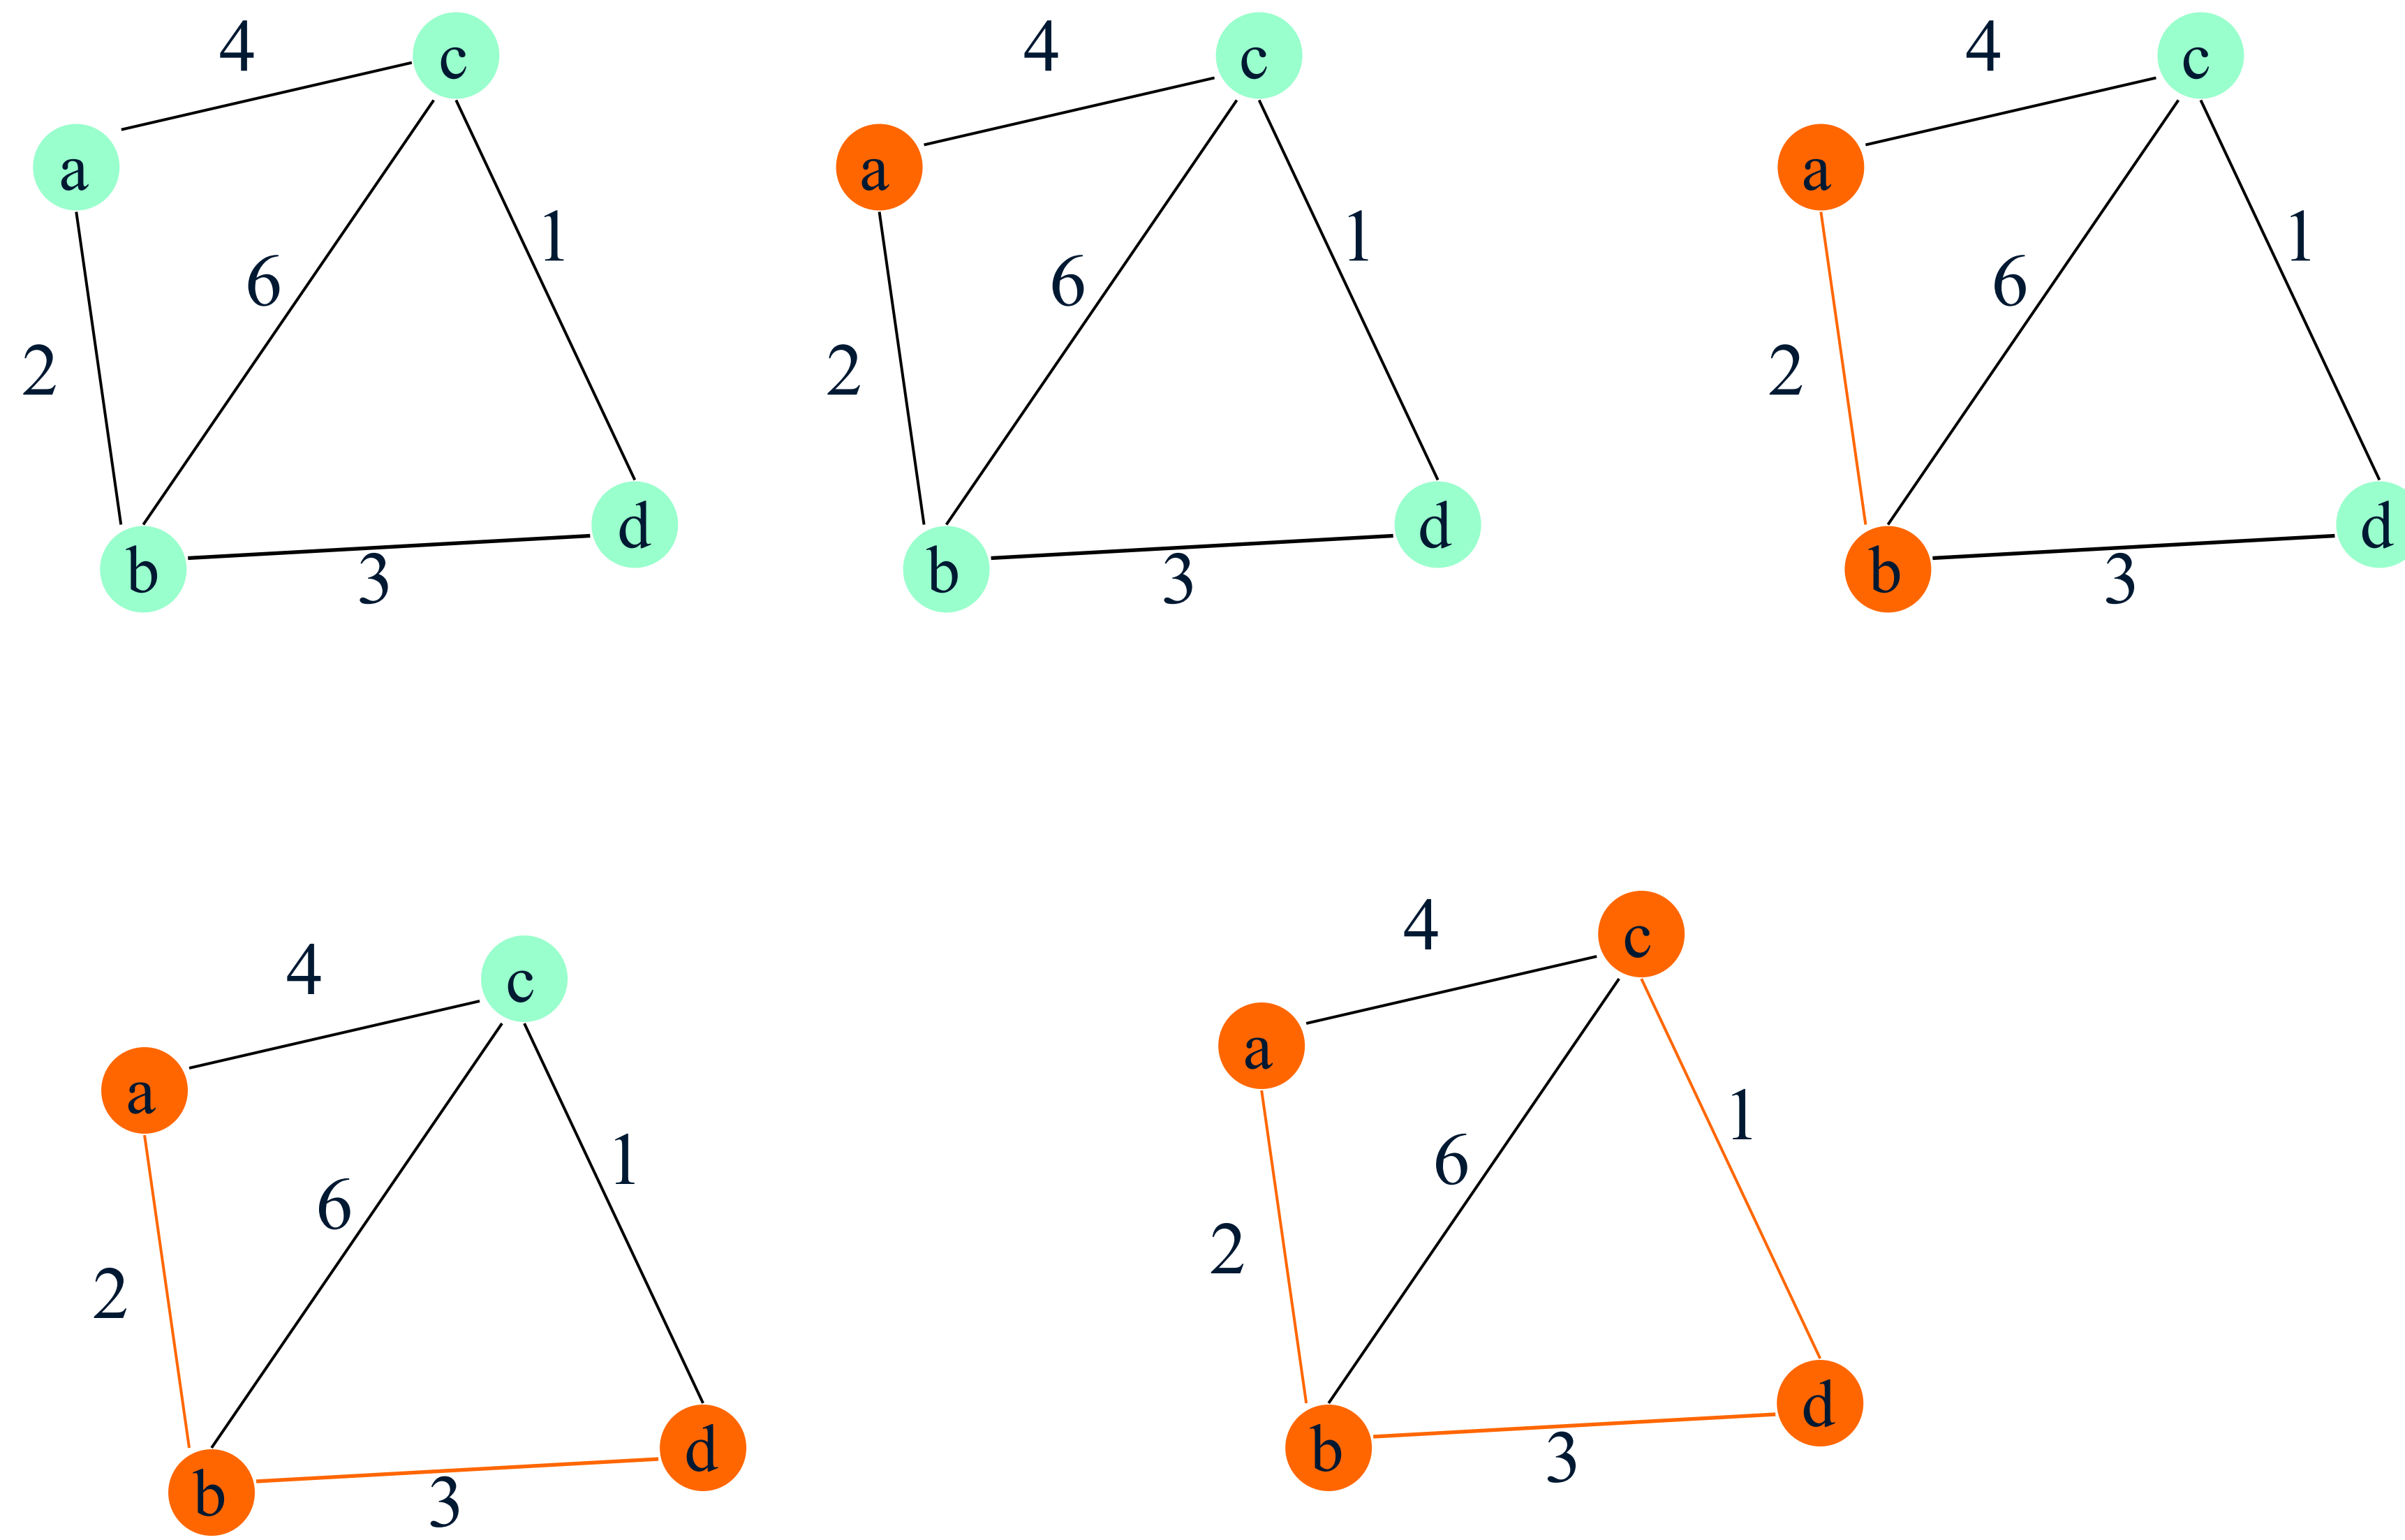

Example 2: Prim's MST

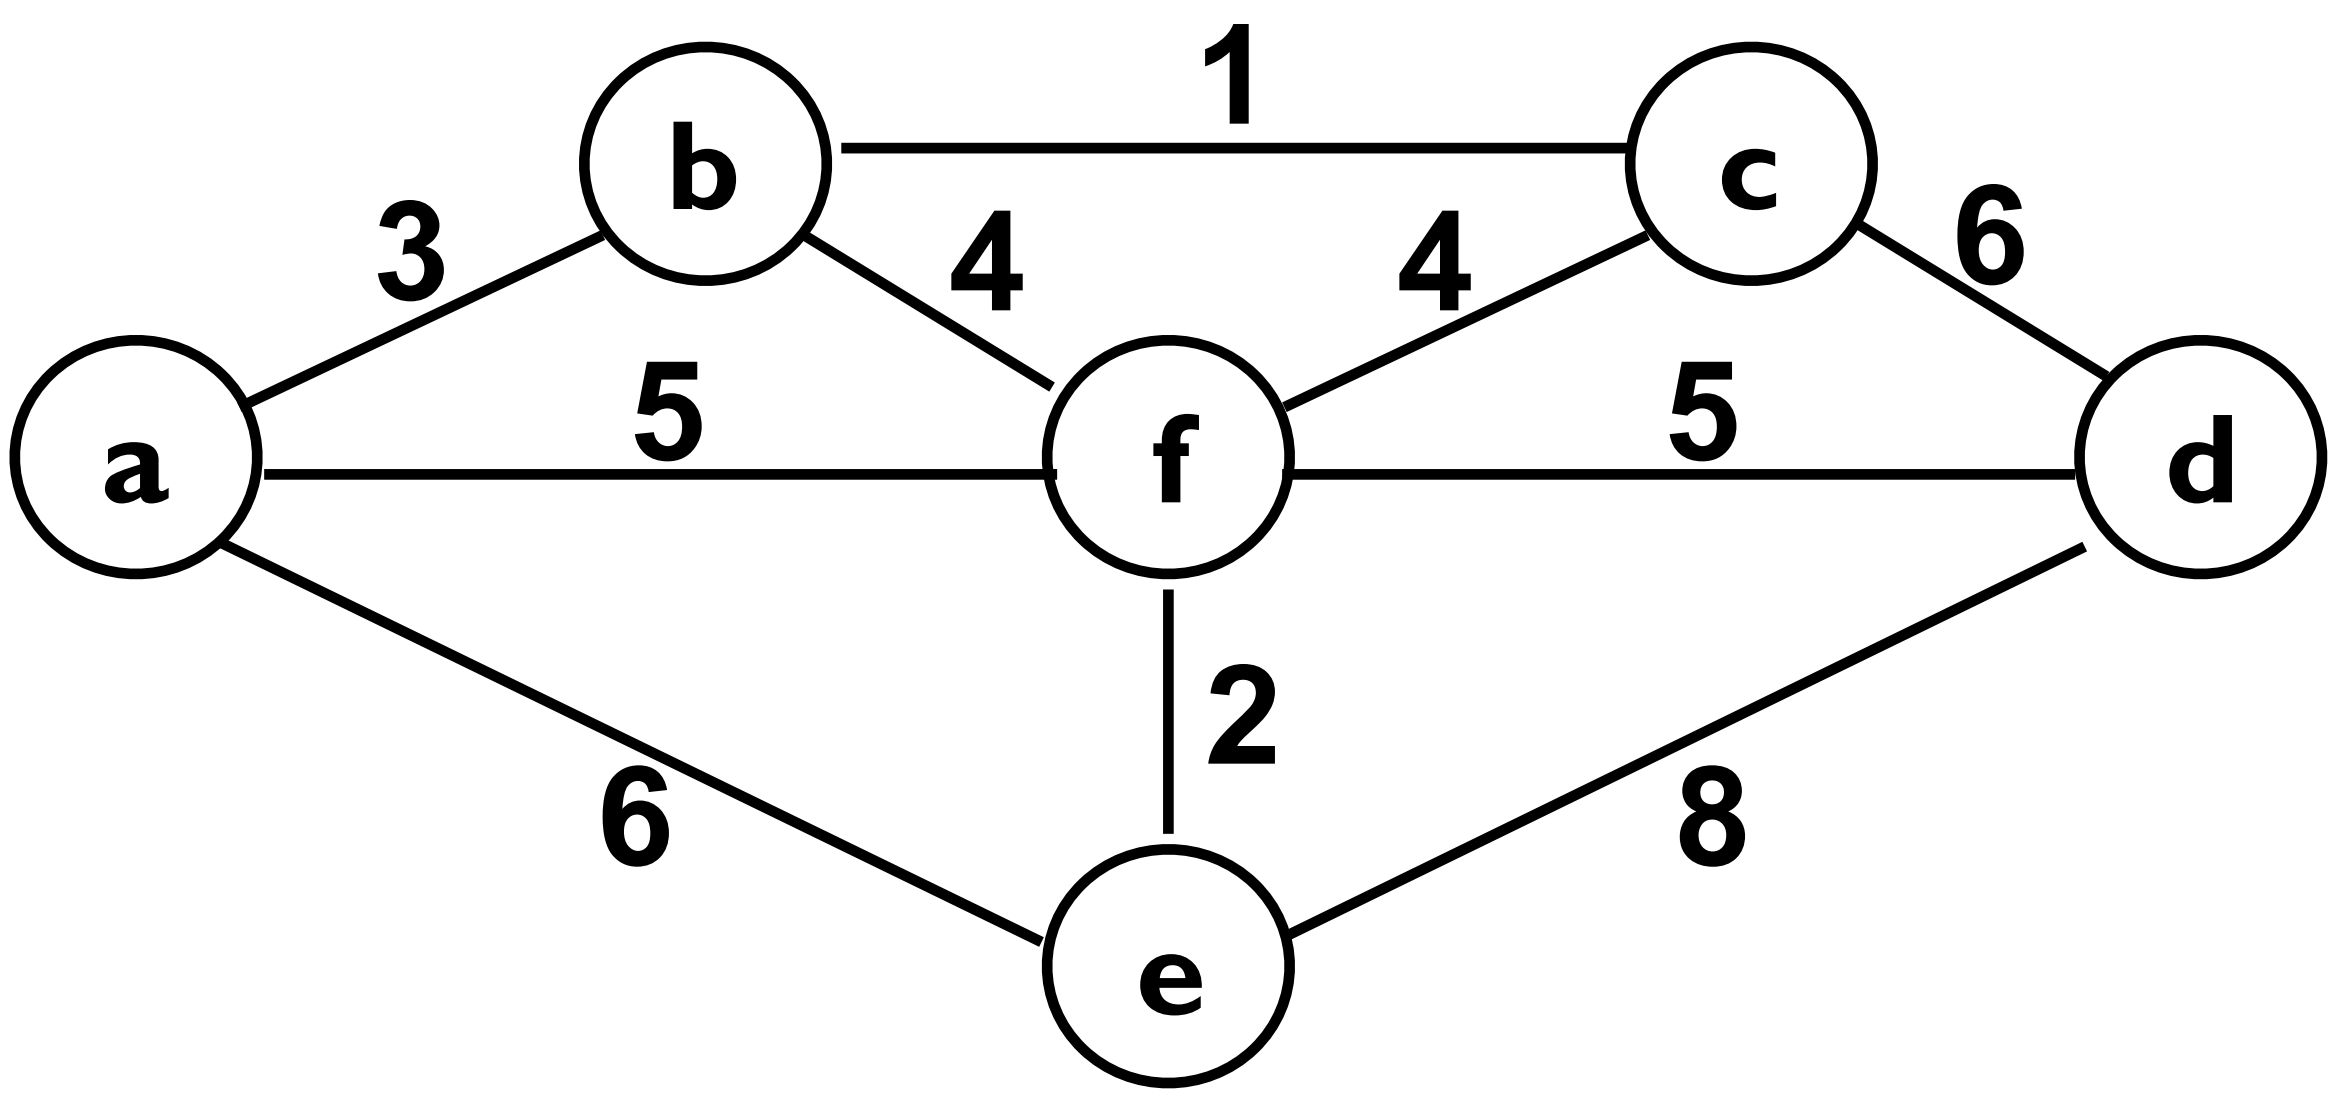

- Q: Construct an MST starting from vertex `a`

Example 2: Prim's MST

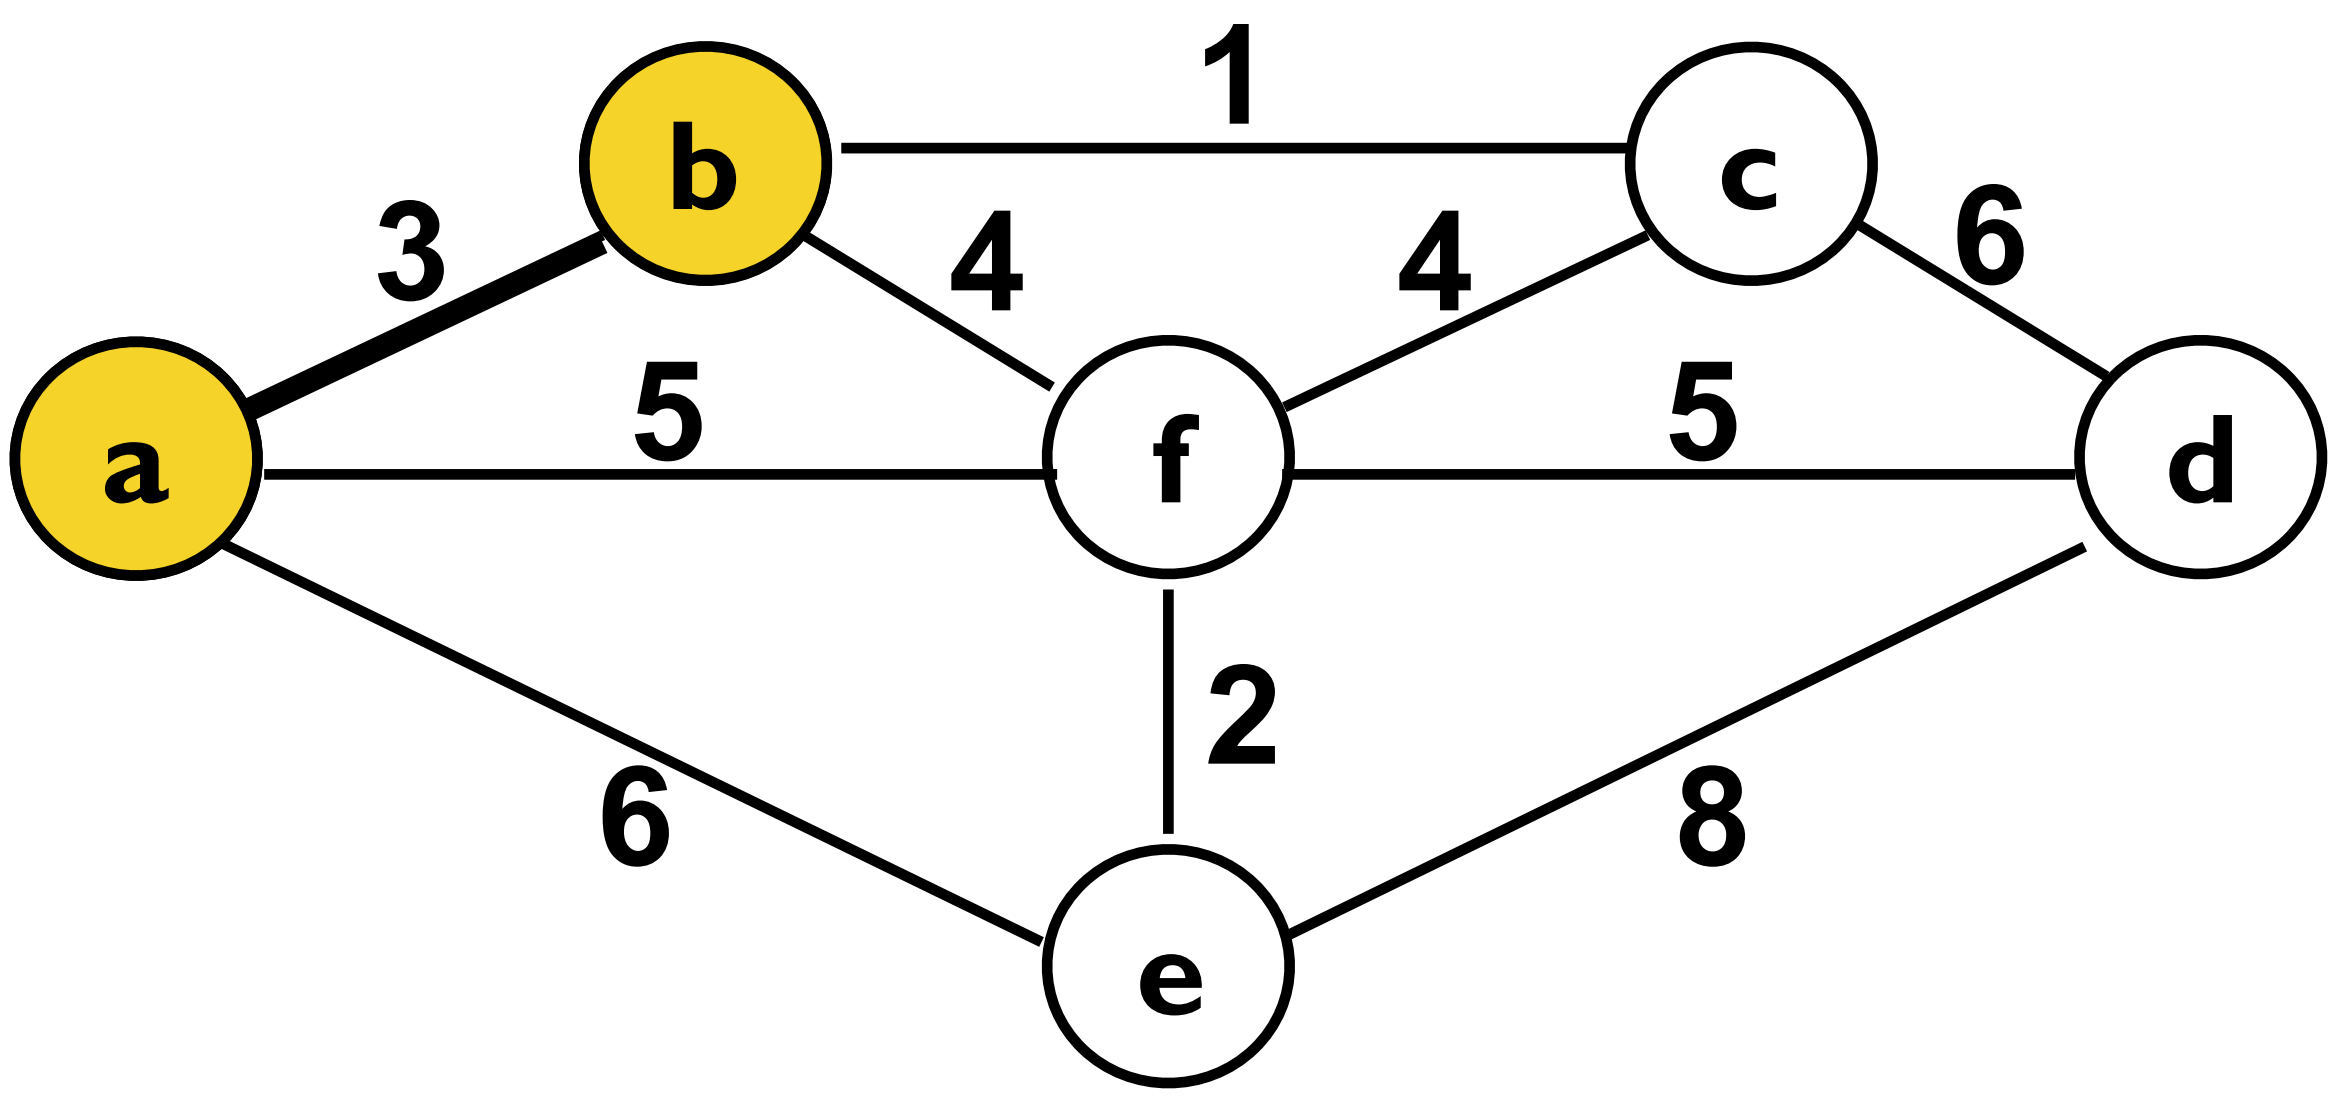

Example 2: Prim's MST

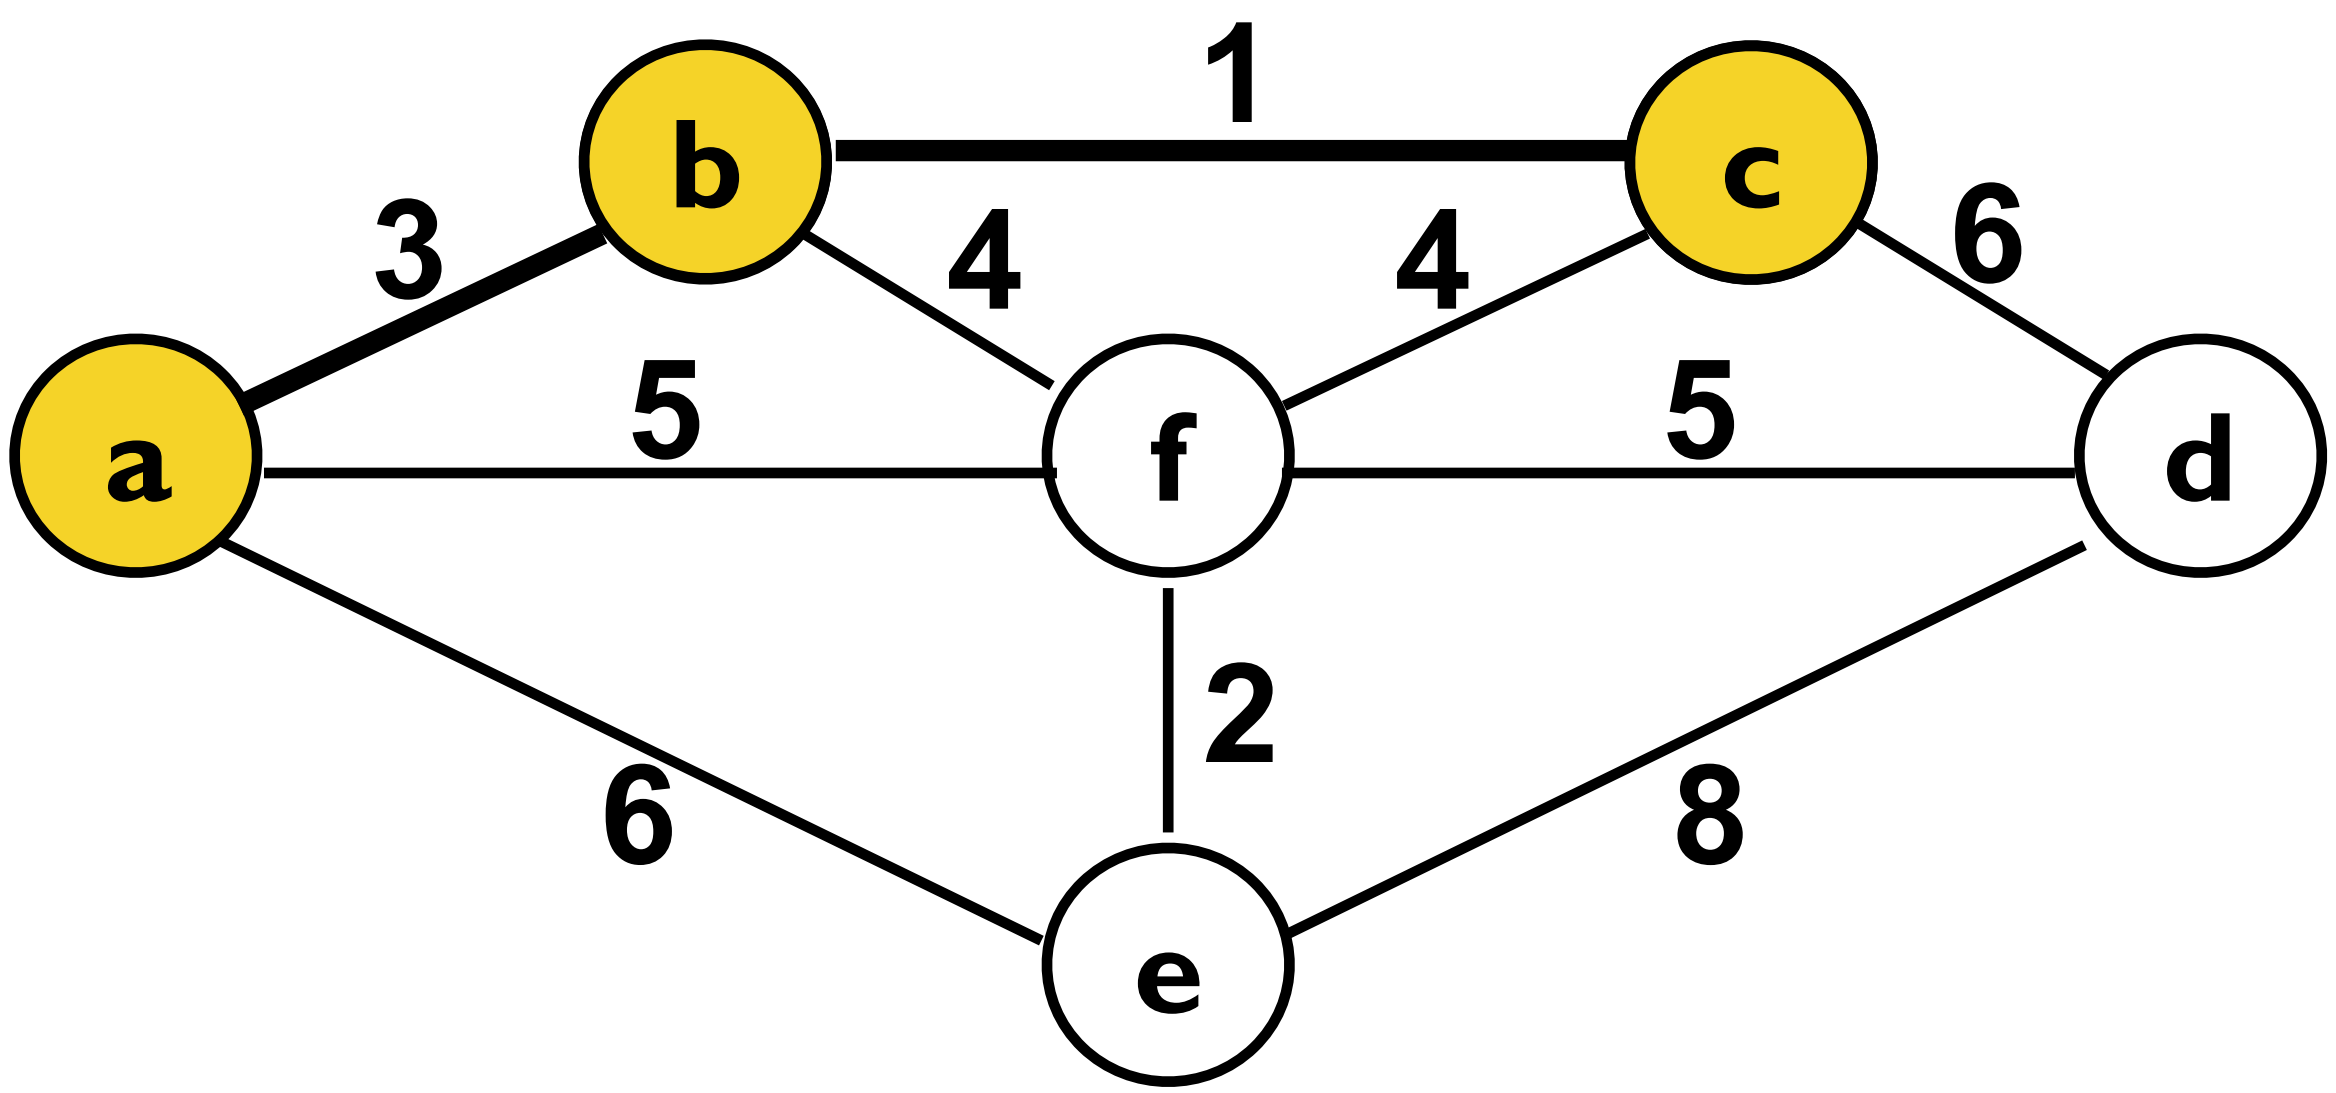

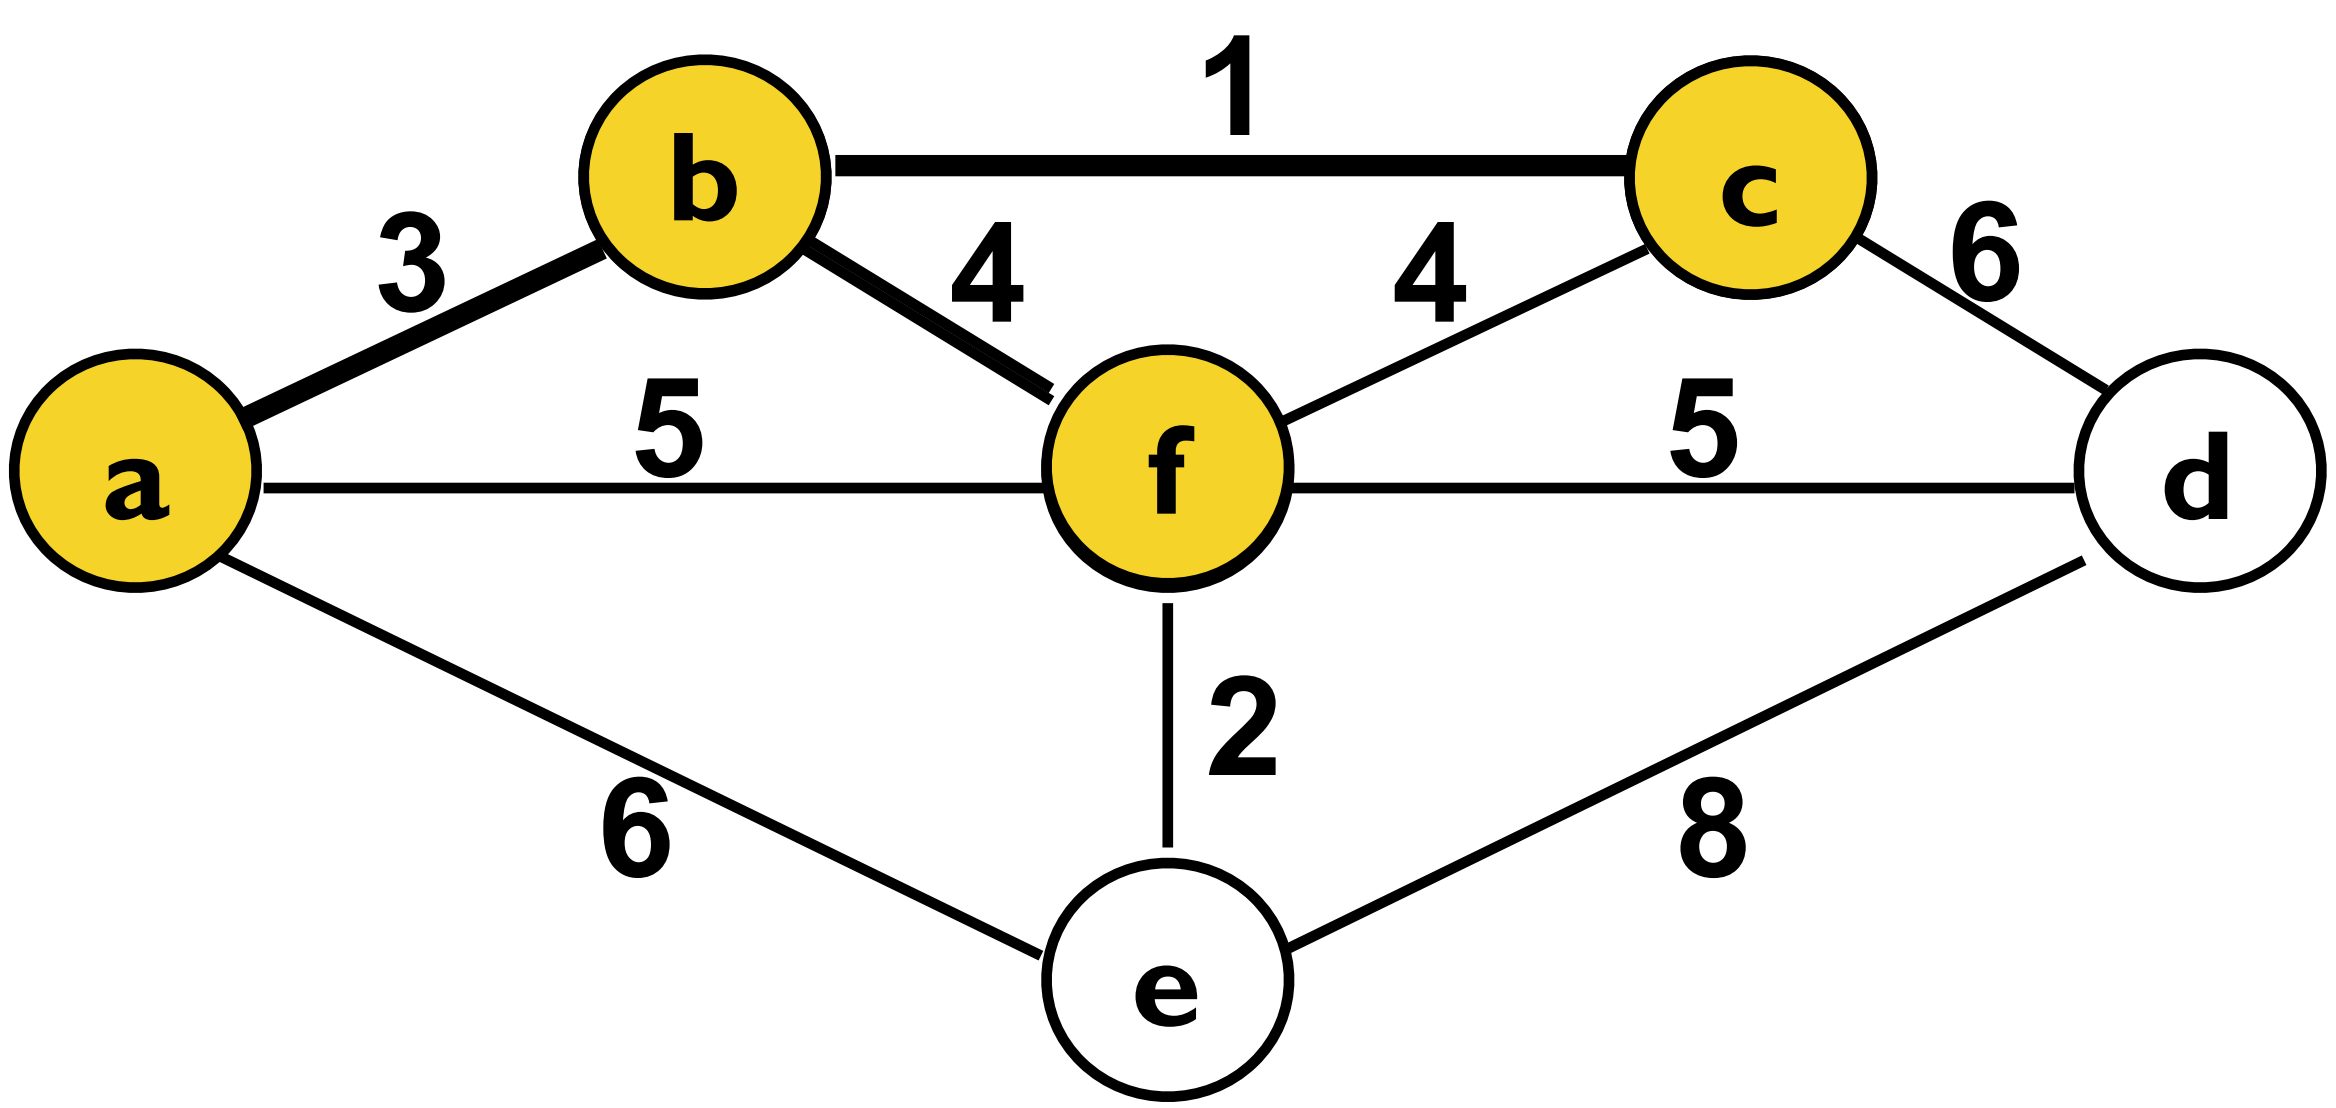

Example 2: Prim's MST

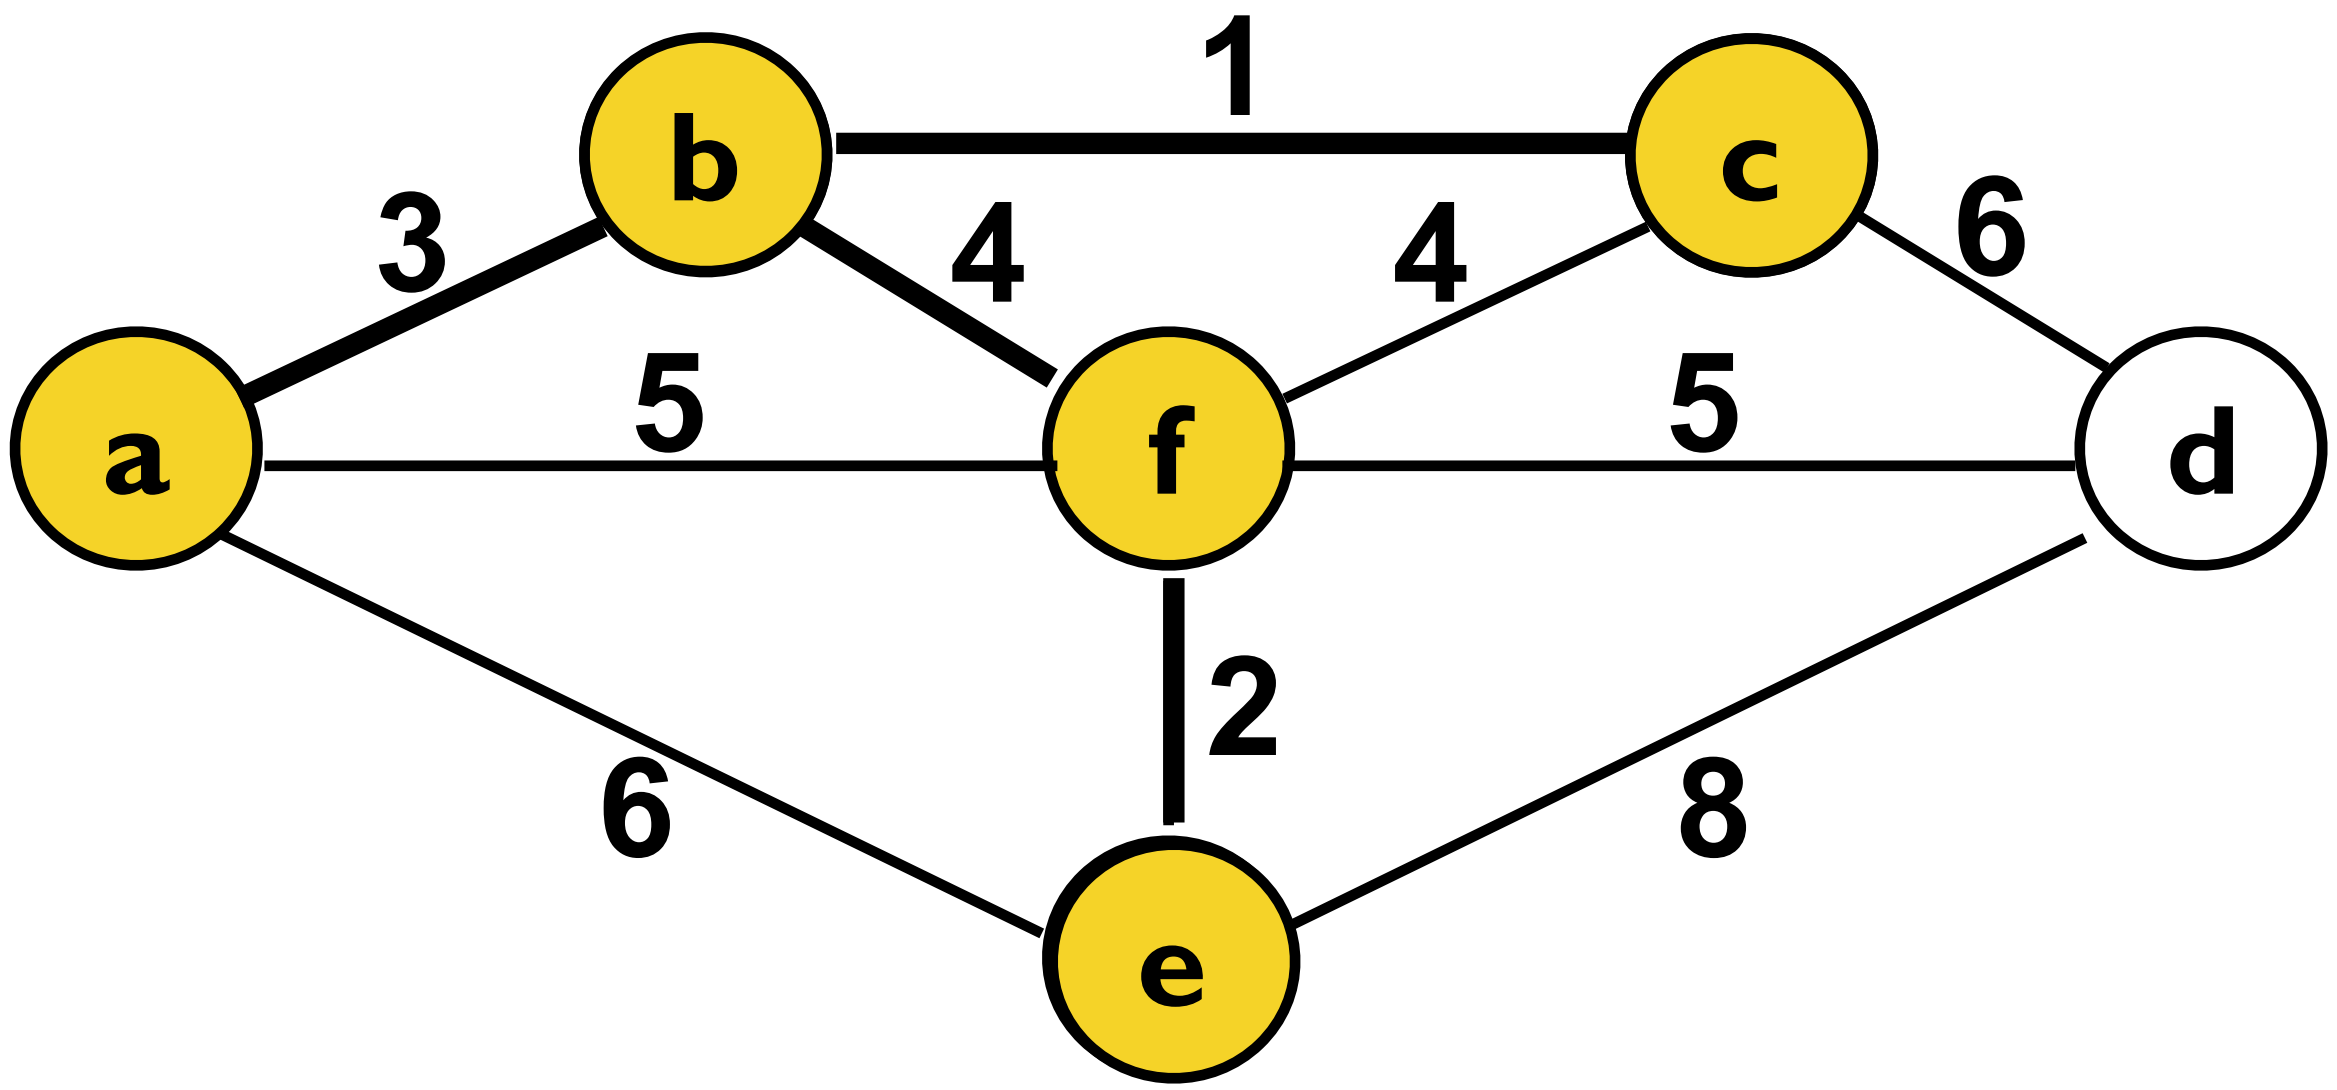

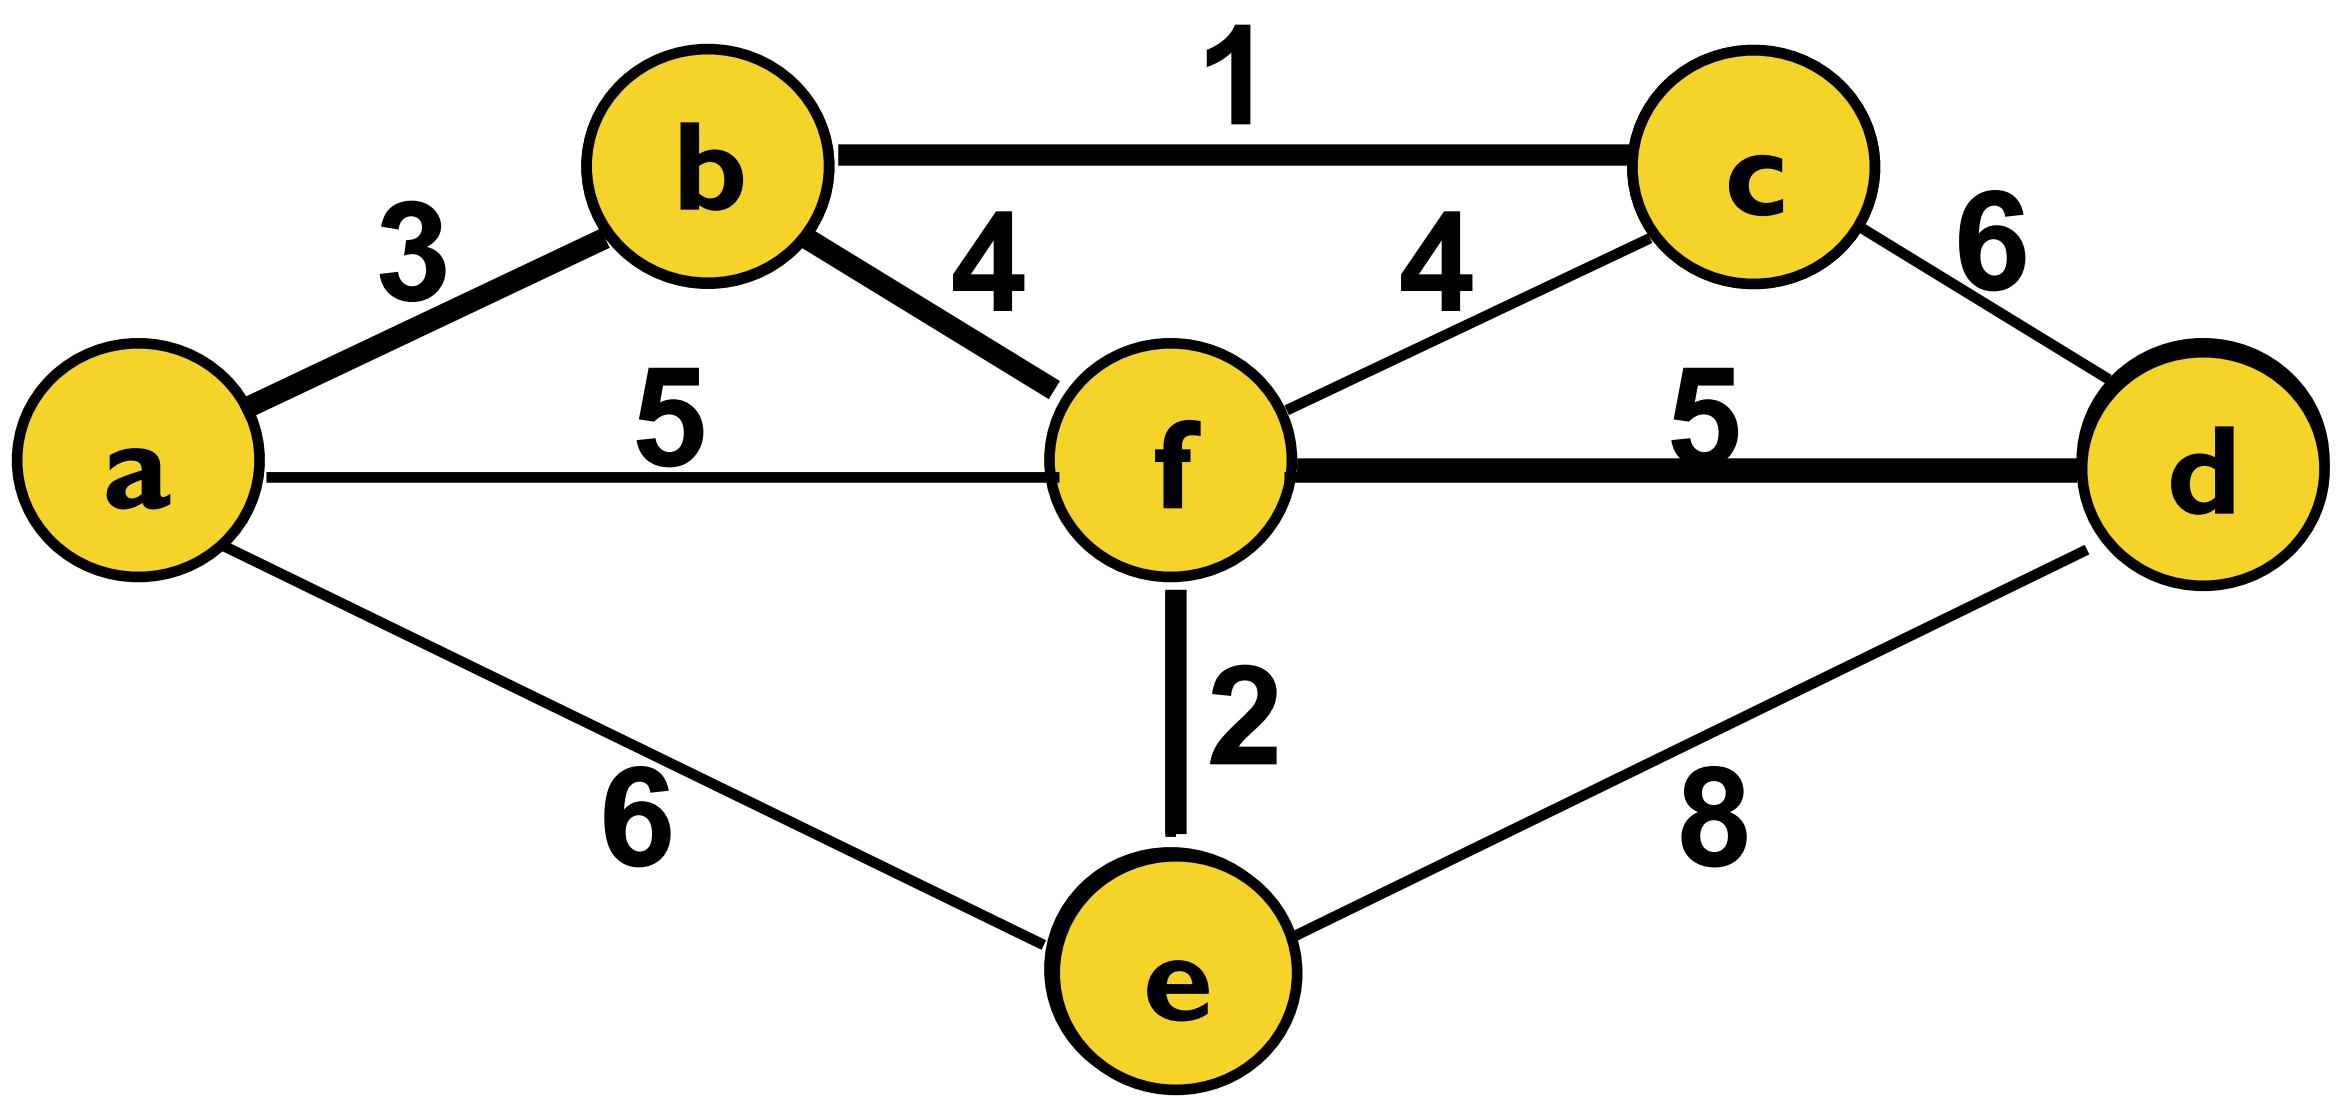

Prim's Algo: Proof by Induction

- Claim: Let $G = (V,E)$ be a weighted graph and (X,Y) be a partition of V (called a *cut*).
- Suppose $e = (x,y)$ is an edge of E across the cut, where
  - x is in X, and
  - y is in Y, and
  - e has the minimum weight among all such crossing edges (called a light edge).
- Then there is an MST containing e.

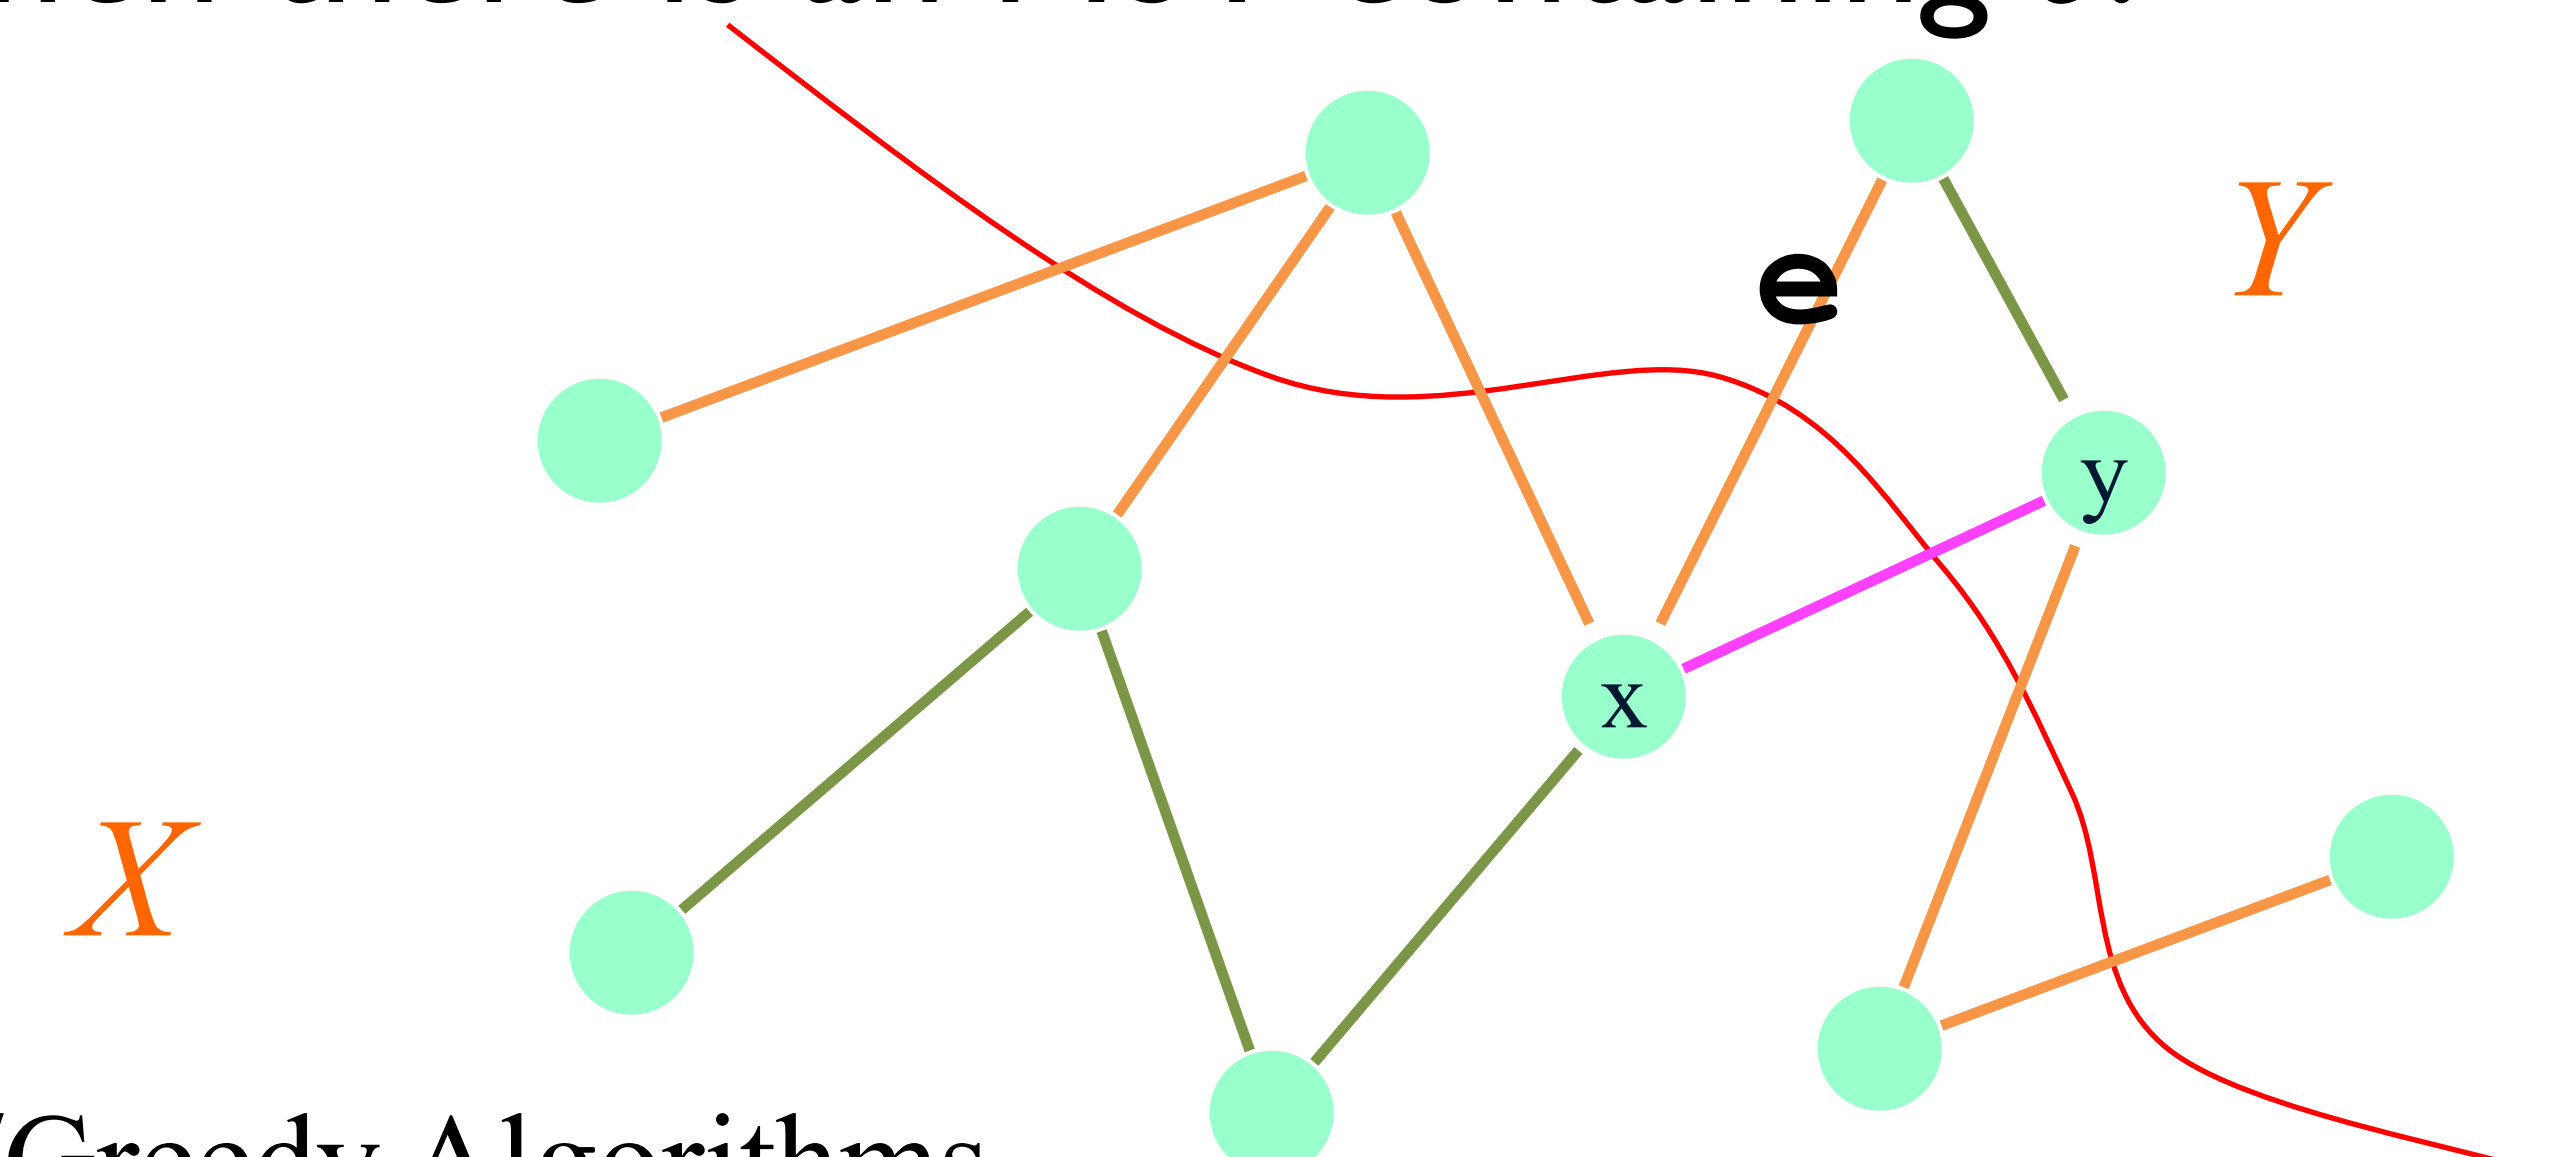

Prim's Algo

- Needs priority queue for implementation

Algo: `Prim(G)`

// i/p: A weighted connected graph $G=(V,E)$

// o/p: E_T, the set of edges composing an MST of G

$V_T \leftarrow \{v_0\}$ # initialize with any vertex

$E_T \leftarrow \varnothing$

for $i=1$ to $|V|-1$ do

  find a min weight edge $e^*=(v^*,u^*)$ among all edges (v,u) such that $v \in V_T$ and $u \in |V|-V_T$

  $V_T \leftarrow V_T$ **U** $\{v^*\}$

  $E_T \leftarrow E_T$ **U** $\{e^*\}$

return E_T

Prim's Algo: Efficiency

- Efficiency depends upon implementation
- Maintain $V-V_T$ in priority queue
- Initially, assign a weight(value) of ∞ to each vertex
- Weight of each edge is known (given graph G)
- Using Adjacency weight matrix
  - If priority queue is maintained in an unordered array
    - vertex can be accessed by index in the array
  - Picking min vertex `u` takes `|V|` time.
    - Requires linear search in array
  - For each edge `(u,w)`, update the weight of w
    - `weight(w)=min(weight(w),weight(u,w))`
  - Total time: $O(|V|^2+|E|)=O(|V|^2)$

Prim's Algo: Efficiency

- Efficiency depends upon implementation
- Maintain $V-V_T$ in priority queue
- Initially, assign a weight(value) of ∞ to each vertex
- Weight of each edge is known (given graph G)
- Using Adjacency weight List
  - Maintain priority queue is `BinSearch` Tree
    - Height of the tree is `lg|V|`
  - Find vertex `u` with min weight is `O(1)` time
  - For each edge `(u,w)`, update the weight of w
    - `weight(w)=min(weight(w),weight(u,w))`
    - TIme taken to adjust `BinSearch` Tree is `O(lg|V|)`
  - Total time: `O(E*lg|V|)`

Summary

- Minimum Spanning Tree
- Prim's algorithm
- Time efficiency
  - Depends upon implementation