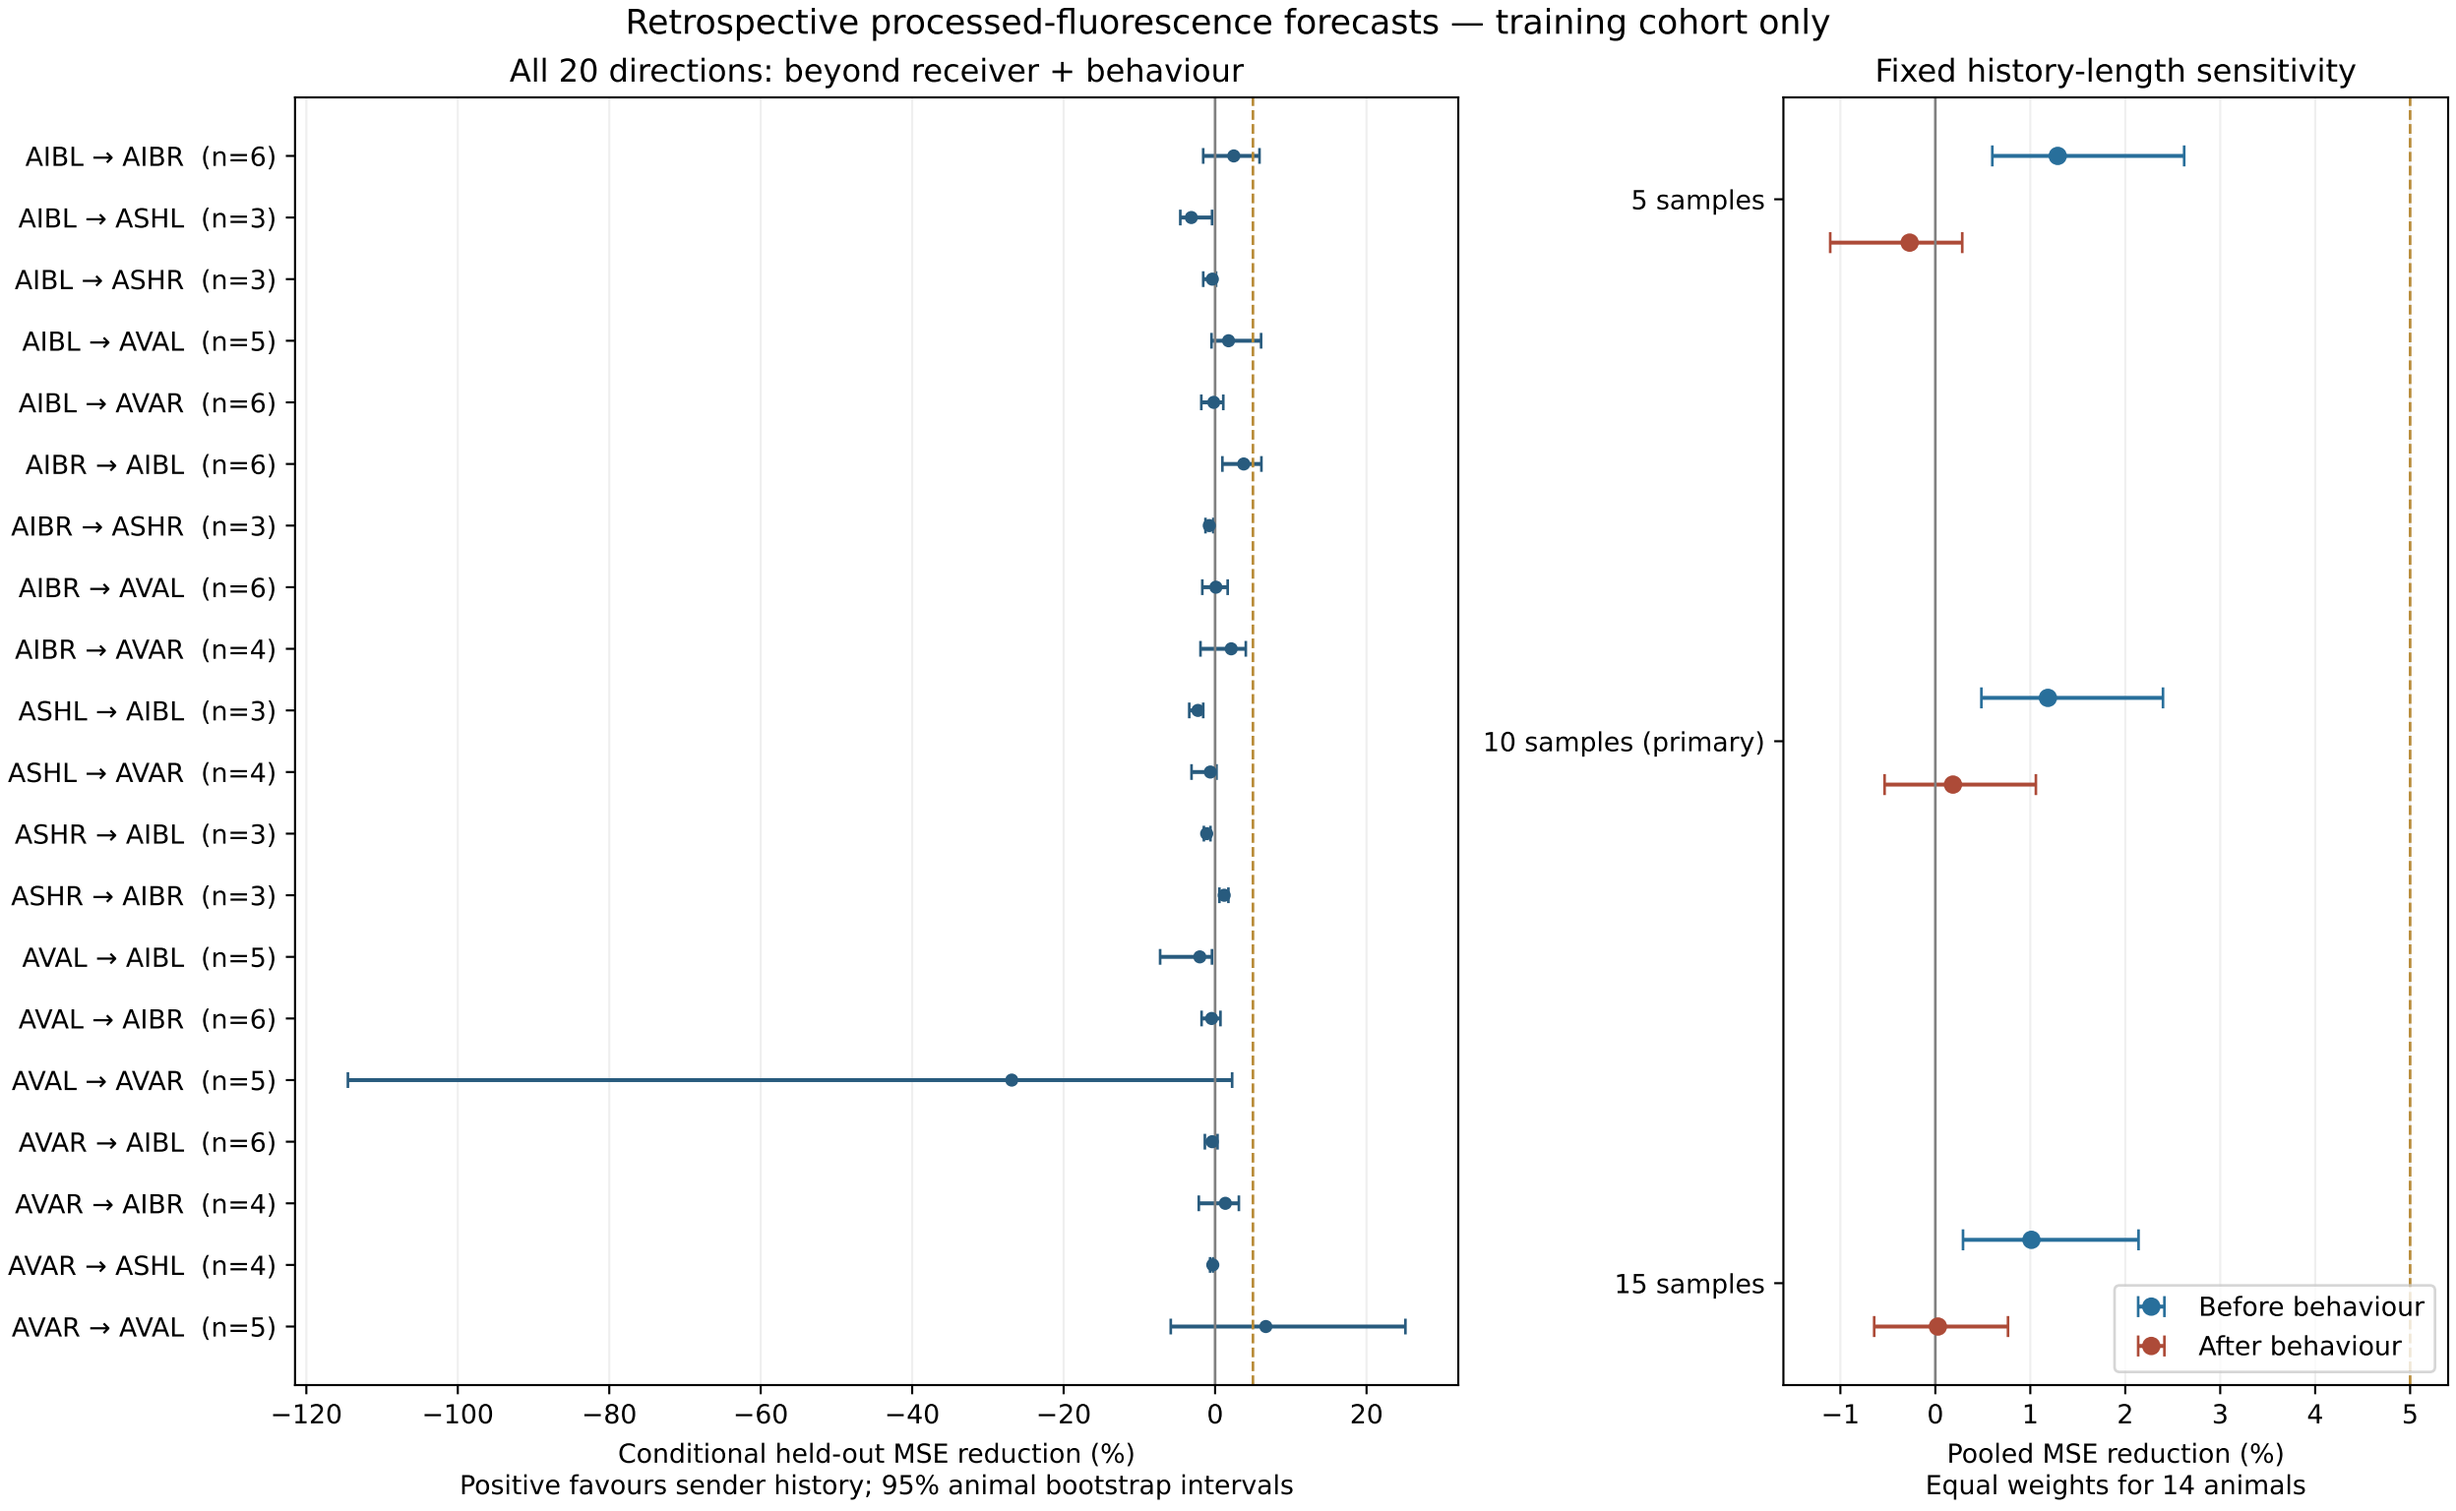
Retrospective processed-fluorescence forecasts — training cohort only
All 20 directions: beyond receiver + behaviour
AIBL → AIBR (n=6)
AIBL → ASHL (n=3)
AIBL → ASHR (n=3)
AIBL → AVAL (n=5)
AIBL → AVAR (n=6)
AIBR → AIBL (n=6)
AIBR → ASHR (n=3)
AIBR → AVAL (n=6)
AIBR → AVAR (n=4)
ASHL → AIBL (n=3)
ASHL → AVAR (n=4)
ASHR → AIBL (n=3)
ASHR → AIBR (n=3)
AVAL → AIBL (n=5)
AVAL → AIBR (n=6)
AVAL → AVAR (n=5)
AVAR → AIBL (n=6)
AVAR → AIBR (n=4)
AVAR → ASHL (n=4)
AVAR → AVAL (n=5)
−120
−100
−80
−60
−40
−20
0
20
Conditional held-out MSE reduction (%)
Positive favours sender history; 95% animal bootstrap intervals
Fixed history-length sensitivity
5 samples
10 samples (primary)
15 samples
Before behaviour
After behaviour
−1
0
1
2
3
4
5
Pooled MSE reduction (%)
Equal weights for 14 animals