Postman Collection Documentation

Boyu Yuan
B01089181

Contents

Contents 2

Published Postman documentation 4

1. Import and run 4

2. Authentication and resource semantics 4

3. Parameters and input schemas 4

- SampleInput . . . 4
- NoteInput . . . 5
- AnalysisInput . . . 5
- Login . . . 5
- Register . . . 5
- PasswordChange . . . 5
- UserUpdate . . . 5

4. Complete operation reference 6

- POST /api/v1/auth/register . . . 6
- POST /api/v1/auth/login . . . 6
- POST /api/v1/auth/logout . . . 6
- GET /api/v1/auth/me . . . 7
- PUT /api/v1/auth/password . . . 7
- GET /api/v1/samples . . . 7
- POST /api/v1/samples . . . 8
- GET /api/v1/samples/{sample_id} . . . 9
- PATCH /api/v1/samples/{sample_id} . . . 9
- PUT /api/v1/samples/{sample_id} . . . 9
- DELETE /api/v1/samples/{sample_id} . . . 10
- GET /api/v1/samples/{sample_id}/notes . . . 10
- POST /api/v1/samples/{sample_id}/notes . . . 11
- DELETE /api/v1/samples/{sample_id}/notes/{child_id} . . . 11
- GET /api/v1/samples/{sample_id}/notes/{child_id} . . . 12
- PATCH /api/v1/samples/{sample_id}/notes/{child_id} . . . 12
- PUT /api/v1/samples/{sample_id}/notes/{child_id} . . . 12
- GET /api/v1/samples/{sample_id}/analyses . . . 13
- POST /api/v1/samples/{sample_id}/analyses . . . 13
- DELETE /api/v1/samples/{sample_id}/analyses/{child_id} . . . 14
- GET /api/v1/samples/{sample_id}/analyses/{child_id} . . . 14
- PATCH /api/v1/samples/{sample_id}/analyses/{child_id} . . . 15
- PUT /api/v1/samples/{sample_id}/analyses/{child_id} . . . 15
- GET /api/v1/statistics/overview . . . 15

GET /api/v1/statistics/cohorts . . . 16
GET /api/v1/statistics/maturity . . . 17
GET /api/v1/statistics/comparison . . . 17
GET /api/v1/exports/cohorts . . . 18
GET /api/v1/users . . . 19
GET /api/v1/users/{user_id} . . . 19
PATCH /api/v1/users/{user_id} . . . 20
PUT /api/v1/users/{user_id} . . . 20
GET /api/v1/audit-logs . . . 21
GET /api/v1/health . . . 22
GET /api/v1/openapi.json . . . 22

5. Errors and interpretation 23

6. Native Postman documentation screenshots 24

7. Original Postman documentation printout 28

Published Postman documentation

Official Postman documentation URL: https://documenter.getpostman.com/view/59247931/2sBYHXQdXe

This public URL was generated by Postman from the same synthetic-only 48-request collection. No environment was published. The link opens the live Postman documentation; this PDF also includes the original 57-page printed documentation for offline marking.

1. Import and run

Import postman/BrainAgeConnect.postman_collection.json and postman/LocalDemo.postman_environment.json into Postman. Select the local demo environment, start START_DEMO.cmd and run the complete collection in order. Demo administrator: demo.admin / DemoAdmin!2026; demonstration researcher: demo.researcher / DemoResearch!2026. These credentials are only for the synthetic fixture database.

For isolated repeatable evidence, run python -m scripts.run_postman. The installed Newman runner requires Node and its local dependency. Requests obtain tokens and IDs automatically; saved-example IDs are disposable and should not be pasted into live requests.

2. Authentication and resource semantics

Only health, schema, registration and login are public. Approved accounts use a Bearer token. Administrators manage other users. Private samples are invisible to other researchers. Sample writes require owner/admin; nested writes require author/admin. Credentials, auth_version and password hashes are never returned as user resource fields.

JSON requests reject unknown fields and wrong types/ranges. Public IDs are 24-hex strings and dates are UTC ISO 8601. Responses use data/pagination or error.status/error.message. PUT/PATCH are partial updates; successful DELETE/logout returns no body. Child arrays are capped at 200. Statistics respect the same visibility predicate as record reads.

3. Parameters and input schemas

SampleInput

Field	Validation
sample_code	string; maxLength: 120; pattern: ^[A-Za-z0-9_.-]+$
age_at_scan_weeks	number; nullable; minimum: 20; maximum: 80
birth_age_weeks	number; nullable; minimum: 20; maximum: 45
sex	string; allowed: Female, Male, Unknown
has_dmri	boolean
has_fmri	boolean
status	string; allowed: registered, ready, processing, completed, failed
visibility	string; allowed: private, shared
description	string; maxLength: 2000

NoteInput

Field	Validation
text	string; minLength: 1; maxLength: 4000
category	string; allowed: research, quality, review

AnalysisInput

Field	Validation
modality	string; allowed: dmri, fmri, combined
estimated_age_weeks	number; minimum: 20; maximum: 80
method	string; minLength: 1; maxLength: 120
model_version	string; minLength: 1; maxLength: 120
provenance	string; minLength: 1; maxLength: 1000
quality_score	number; nullable; minimum: 0; maximum: 1

Login

Field	Validation
username	string
password	string; format: password

Register

Field	Validation
username	string
password	string; format: password
display_name	string

PasswordChange

Field	Validation
current_password	string; format: password
new_password	string; format: password

UserUpdate

Field	Validation
active	boolean
role	string; allowed: admin, researcher

4. Complete operation reference

POST /api/v1/auth/register

Access: Public.

New accounts are inactive researchers. Reject role escalation; approval is required before login.

JSON body: username, password, display_name. Required: username, password, display_name.

Observed example: 04 Register new researcher; HTTP 201.

Request body

```
{
  "username": "pm.{{run_id}}",
  "password": "PostmanPass!2026",
  "display_name": "Postman Test"
}
```

Response body (token values redacted)

```
{
  "data": {
    "_id": "6ae09f8d1852441fce9d6e4a",
    "active": false,
    "created_at": "2026-10-27T12:56:45.172084Z",
    "display_name": "Postman Test",
    "role": "researcher",
    "username": "pm.17931058037217004"
  },
  "message": "Account created. Administrator approval is required."
}
```

POST /api/v1/auth/login

Access: Public.

The response describes the current service. This endpoint does not expose raw MRI files or perform prediction.

JSON body: username, password. Required: username, password.

Observed example: 03 Administrator login; HTTP 200.

Request body

```
{
  "username": "{{admin_username}}",
  "password": "{{admin_password}}"
}
```

Response body (token values redacted)

```
{
  "access_token": "<redacted-token>",
  "expires_in": 3600,
  "token_type": "Bearer",
  "user": {
    "_id": "6ae09f8887e81a2487ce1416",
    "active": true,
    "created_at": "2026-10-27T12:56:40.711000Z",
    "display_name": "Synthetic Demo Administrator",
    "role": "admin",
    "username": "demo.admin"
  }
}
```

POST /api/v1/auth/logout

Access: Approved user; visible samples only.

Revokes the current jti immediately. The TTL index eventually removes expired revocation records; no response body is returned.

Observed example: 45 Logout; HTTP 204.

Response body (token values redacted)

[No body]

GET /api/v1/auth/me

Access: Approved user; visible samples only.

The response describes the current service. This endpoint does not expose raw MRI files or perform prediction.

Observed example: 08 Current profile; HTTP 200.

Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f8d1852441fce9d6e4a",
    "active": true,
    "created_at": "2026-10-27T12:56:45.172000Z",
    "display_name": "Postman Test",
    "role": "researcher",
    "username": "pm.17931058037217004"
  }
}
```


PUT /api/v1/auth/password

Access: Approved user; visible samples only.

Changing the password increments auth_version, invalidating all existing sessions. Passwords: at least 10 characters, at most 72 UTF-8 bytes.

JSON body: current_password, new_password. Required: current_password, new_password.

Observed example: 42 Change password; HTTP 200.

Request body


```
{
  "current_password": "PostmanPass!2026",
  "new_password": "PostmanChanged!2026"
}
```


Response body (token values redacted)


```
{
  "message": "Password changed. All existing sessions are now invalid."
}
```


GET /api/v1/samples

Access: Approved user; visible samples only.

A session record is the main resource. Creation assigns caller ownership, manual source and private visibility by default. Imported identity and modality-presence fields cannot be changed through the API. Changing reference age recomputes derived differences.

Parameter	Location	Definition
q	query	string
age_min	query	number; minimum: 20; maximum: 80
age_max	query	number; minimum: 20; maximum: 80
modality	query	string; allowed: dmri, fmri, both, neither
source	query	string; allowed: dhcp_local, manual, synthetic
status	query	string; allowed: registered, ready, processing, completed, failed
sex	query	string; allowed: Female, Male, Unknown
page	query	integer; minimum: 1; maximum: 1000000; default: 1
page_size	query	integer; minimum: 1; maximum: 100; default: 20

Parameter	Location	Definition
sort	query	string; allowed: sample_code, age_at_scan_weeks, created_at, updated_at; default: sample_code
order	query	string; allowed: asc, desc; default: asc

Observed example: 14 Search and pagination; HTTP 200.

Response body (token values redacted)


```
{
  "data": [
    {
      "_id": "6ae09f8f1852441fce9d6e4c",
      "age_at_scan_weeks": 40,
      "birth_age_weeks": 38,
      "created_at": "2026-10-27T12:56:47.687000Z",
      "description": "",
      "has_dmri": true,
      "has_fmri": true,
      "owner_id": "6ae09f8d1852441fce9d6e4a",
      "sample_code": "PM-17931058037217004",
      "sex": "Unknown",
      "source": "manual",
      "status": "registered",
      "updated_at": "2026-10-27T12:56:47.687000Z",
      "version": 1,
      "visibility": "private"
    }
  ],
  "pagination": {
    "page": 1,
    "page_size": 1,
    "pages": 1,
    "total": 1
  }
}
```


POST /api/v1/samples

Access: Approved user; visible samples only.

A session record is the main resource. Creation assigns caller ownership, manual source and private visibility by default. Imported identity and modality-presence fields cannot be changed through the API. Changing reference age recomputes derived differences.

JSON body: sample_code, age_at_scan_weeks, birth_age_weeks, sex, has_dmri, has_fmri, status, visibility, description. Required: sample_code, age_at_scan_weeks.

Observed example: 11 Create private sample; HTTP 201.

Request body


```
{
  "sample_code": "PM-{{run_id}}",
  "age_at_scan_weeks": 40,
  "birth_age_weeks": 38,
  "has_dmri": true,
  "has_fmri": true
}
```


Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f8f1852441fce9d6e4c",
    "age_at_scan_weeks": 40,
    "analyses": [],
    "birth_age_weeks": 38,
    "created_at": "2026-10-27T12:56:47.687991Z",
    "description": "",
    "files": [],
    "has_dmri": true,
    "has_fmri": true,
    "notes": [],
    "owner_id": "6ae09f8d1852441fce9d6e4a",
    "sample_code": "PM-17931058037217004",
    "sex": "Unknown",
    "source": "manual",
```

```
    "status": "registered",
    "updated_at": "2026-10-27T12:56:47.687991Z",
    "version": 1,
    "visibility": "private"
  }
}
```


GET /api/v1/samples/{sample_id}

Access: Approved user; visible samples only.

A session record is the main resource. Creation assigns caller ownership, manual source and private visibility by default. Imported identity and modality-presence fields cannot be changed through the API. Changing reference age recomputes derived differences.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$

Observed example: 13 Retrieve created sample; HTTP 200.

Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f8f1852441fce9d6e4c",
    "age_at_scan_weeks": 40,
    "analyses": [],
    "birth_age_weeks": 38,
    "created_at": "2026-10-27T12:56:47.687000Z",
    "description": "",
    "files": [],
    "has_dmri": true,
    "has_fmri": true,
    "notes": [],
    "owner_id": "6ae09f8d1852441fce9d6e4a",
    "sample_code": "PM-17931058037217004",
    "sex": "Unknown",
    "source": "manual",
    "status": "registered",
    "updated_at": "2026-10-27T12:56:47.687000Z",
    "version": 1,
    "visibility": "private"
  }
}
```


PATCH /api/v1/samples/{sample_id}

Access: Owner/admin.

A session record is the main resource. Creation assigns caller ownership, manual source and private visibility by default. Imported identity and modality-presence fields cannot be changed through the API. Changing reference age recomputes derived differences.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: sample_code, age_at_scan_weeks, birth_age_weeks, sex, has_dmri, has_fmri, status, visibility, description. Required: one or more editable fields.

No separate observed example for this exact method variant is saved. The documented field/access rules apply; PUT and PATCH share their implemented handler. This statement is not a claim that this variant was exercised in the connected Newman run.

PUT /api/v1/samples/{sample_id}

Access: Owner/admin.

A session record is the main resource. Creation assigns caller ownership, manual source and private visibility by default. Imported identity and modality-presence fields cannot be changed through the API. Changing reference age recomputes derived differences.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: sample_code, age_at_scan_weeks, birth_age_weeks, sex, has_dmri, has_fmri, status, visibility, description. Required: one or more editable fields.

Observed example: 18 Partial sample update; HTTP 200.

Request body


```
{
  "description": "Postman lifecycle demonstration"
}
```


Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f8f1852441fce9d6e4c",
    "age_at_scan_weeks": 40,
    "analyses": [],
    "birth_age_weeks": 38,
    "created_at": "2026-10-27T12:56:47.687000Z",
    "description": "Postman lifecycle demonstration",
    "files": [],
    "has_dmri": true,
    "has_fmri": true,
    "notes": [],
    "owner_id": "6ae09f8d1852441fce9d6e4a",
    "sample_code": "PM-17931058037217004",
    "sex": "Unknown",
    "source": "manual",
    "status": "registered",
    "updated_at": "2026-10-27T12:56:48.375000Z",
    "version": 2,
    "visibility": "private"
  }
}
```


DELETE /api/v1/samples/{sample_id}

Access: Owner/admin.

A session record is the main resource. Creation assigns caller ownership, manual source and private visibility by default. Imported identity and modality-presence fields cannot be changed through the API. Changing reference age recomputes derived differences.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$

Observed example: 40 Delete sample and embedded records; HTTP 204.

Response body (token values redacted)

[No body]

GET /api/v1/samples/{sample_id}/notes

Access: Approved user; visible samples only.

Notes have an independent ID, author, category and timestamps. A user who can see a sample can add a note; mutation requires the note author or admin. At most 200 notes per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
page	query	integer; minimum: 1; maximum: 1000000; default: 1
page_size	query	integer; minimum: 1; maximum: 100; default: 20
sort	query	string; allowed: created_at, updated_at; default: created_at

Parameter	Location	Definition
order	query	string; allowed: asc, desc; default: asc

Observed example: 20 List notes; HTTP 200.

Response body (token values redacted)


```
{
  "data": [
    {
      "_id": "6ae09f901852441fce9d6e50",
      "author_id": "6ae09f8d1852441fce9d6e4a",
      "category": "research",
      "created_at": "2026-10-27T12:56:48.499000Z",
      "text": "Postman note",
      "updated_at": "2026-10-27T12:56:48.499000Z"
    }
  ],
  "pagination": {
    "page": 1,
    "page_size": 1,
    "pages": 1,
    "total": 1
  }
}
```


POST /api/v1/samples/{sample_id}/notes

Access: Approved user; visible samples only.

Notes have an independent ID, author, category and timestamps. A user who can see a sample can add a note; mutation requires the note author or admin. At most 200 notes per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: text, category. Required: text.

Observed example: 19 Create embedded note; HTTP 201.

Request body

```
{
  "text": "Postman note",
  "category": "research"
}
```

Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f901852441fce9d6e50",
    "author_id": "6ae09f8d1852441fce9d6e4a",
    "category": "research",
    "created_at": "2026-10-27T12:56:48.499401Z",
    "text": "Postman note",
    "updated_at": "2026-10-27T12:56:48.499401Z"
  }
}
```


DELETE /api/v1/samples/{sample_id}/notes/{child_id}

Access: Author/admin.

Notes have an independent ID, author, category and timestamps. A user who can see a sample can add a note; mutation requires the note author or admin. At most 200 notes per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
child_id	path	string; pattern: ^[a-fA-F0-9]{24}$

Observed example: 39 Delete note; HTTP 204.

Response body (token values redacted)

[No body]

GET /api/v1/samples/{sample_id}/notes/{child_id}

Access: Approved user; visible samples only.

Notes have an independent ID, author, category and timestamps. A user who can see a sample can add a note; mutation requires the note author or admin. At most 200 notes per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
child_id	path	string; pattern: ^[a-fA-F0-9]{24}$

Observed example: 21 Retrieve note; HTTP 200.

Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f901852441fce9d6e50",
    "author_id": "6ae09f8d1852441fce9d6e4a",
    "category": "research",
    "created_at": "2026-10-27T12:56:48.499000Z",
    "text": "Postman note",
    "updated_at": "2026-10-27T12:56:48.499000Z"
  }
}
```


PATCH /api/v1/samples/{sample_id}/notes/{child_id}

Access: Author/admin.

Notes have an independent ID, author, category and timestamps. A user who can see a sample can add a note; mutation requires the note author or admin. At most 200 notes per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
child_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: text, category. Required: one or more editable fields.

No separate observed example for this exact method variant is saved. The documented field/access rules apply; PUT and PATCH share their implemented handler. This statement is not a claim that this variant was exercised in the connected Newman run.

PUT /api/v1/samples/{sample_id}/notes/{child_id}

Access: Author/admin.

Notes have an independent ID, author, category and timestamps. A user who can see a sample can add a note; mutation requires the note author or admin. At most 200 notes per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
child_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: text, category. Required: one or more editable fields.

Observed example: 22 Edit note; HTTP 200.

Request body


```
{
  "text": "Updated test note"
}
```


Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f901852441fce9d6e50",
```

```
    "author_id": "6ae09f8d1852441fce9d6e4a",
    "category": "research",
    "created_at": "2026-10-27T12:56:48.499000Z",
    "text": "Updated test note",
    "updated_at": "2026-10-27T12:56:48.808848Z"
  }
}
```


GET /api/v1/samples/{sample_id}/analyses

Access: Approved user; visible samples only.

Store a supplied result, never run a model. Required modality availability is checked. Difference = estimated_age_weeks - age_at_scan_weeks, or null when reference age is unknown. At most 200 analyses per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
page	query	integer; minimum: 1; maximum: 1000000; default: 1
page_size	query	integer; minimum: 1; maximum: 100; default: 20
sort	query	string; allowed: created_at, updated_at; default: created_at
order	query	string; allowed: asc, desc; default: asc

Observed example: 24 List analysis history; HTTP 200.

Response body (token values redacted)


```
{
  "data": [
    {
      "_id": "6ae09f901852441fce9d6e53",
      "age_difference_weeks": 1.5,
      "author_id": "6ae09f8d1852441fce9d6e4a",
      "created_at": "2026-10-27T12:56:48.918000Z",
      "estimated_age_weeks": 41.5,
      "method": "Postman invented fixture",
      "modality": "dmri",
      "model_version": "test-1",
      "provenance": "Synthetic test request; not an MRI-derived estimate",
      "quality_score": 0.8,
      "result_type": "user_supplied_precomputed",
      "updated_at": "2026-10-27T12:56:48.918000Z"
    }
  ],
  "pagination": {
    "page": 1,
    "page_size": 10,
    "pages": 1,
    "total": 1
  }
}
```


POST /api/v1/samples/{sample_id}/analyses

Access: Approved user; visible samples only.

Store a supplied result, never run a model. Required modality availability is checked. Difference = estimated_age_weeks - age_at_scan_weeks, or null when reference age is unknown. At most 200 analyses per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: modality, estimated_age_weeks, method, model_version, provenance, quality_score. Required: modality, estimated_age_weeks, method, model_version, provenance.

Observed example: 23 Create precomputed result; HTTP 201.

Request body


```
{
  "modality": "dmri",
  "estimated_age_weeks": 41.5,
```

```
  "method": "Postman invented fixture",
  "model_version": "test-1",
  "provenance": "Synthetic test request; not an MRI-derived estimate",
  "quality_score": 0.8
}
```


Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f901852441fce9d6e53",
    "age_difference_weeks": 1.5,
    "author_id": "6ae09f8d1852441fce9d6e4a",
    "created_at": "2026-10-27T12:56:48.918637Z",
    "estimated_age_weeks": 41.5,
    "method": "Postman invented fixture",
    "modality": "dmri",
    "model_version": "test-1",
    "provenance": "Synthetic test request; not an MRI-derived estimate",
    "quality_score": 0.8,
    "result_type": "user_supplied_precomputed",
    "updated_at": "2026-10-27T12:56:48.918637Z"
  }
}
```


DELETE /api/v1/samples/{sample_id}/analyses/{child_id}

Access: Author/admin.

Store a supplied result, never run a model. Required modality availability is checked. Difference = estimated_age_weeks - age_at_scan_weeks, or null when reference age is unknown. At most 200 analyses per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
child_id	path	string; pattern: ^[a-fA-F0-9]{24}$

Observed example: 38 Delete analysis; HTTP 204.

Response body (token values redacted)

```
[No body]
```

GET /api/v1/samples/{sample_id}/analyses/{child_id}

Access: Approved user; visible samples only.

Store a supplied result, never run a model. Required modality availability is checked. Difference = estimated_age_weeks - age_at_scan_weeks, or null when reference age is unknown. At most 200 analyses per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
child_id	path	string; pattern: ^[a-fA-F0-9]{24}$

Observed example: 25 Retrieve analysis; HTTP 200.

Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f901852441fce9d6e53",
    "age_difference_weeks": 1.5,
    "author_id": "6ae09f8d1852441fce9d6e4a",
    "created_at": "2026-10-27T12:56:48.918000Z",
    "estimated_age_weeks": 41.5,
    "method": "Postman invented fixture",
    "modality": "dmri",
    "model_version": "test-1",
    "provenance": "Synthetic test request; not an MRI-derived estimate",
    "quality_score": 0.8,
    "result_type": "user_supplied_precomputed",
    "updated_at": "2026-10-27T12:56:48.918000Z"
  }
}
```

PATCH /api/v1/samples/{sample_id}/analyses/{child_id}

Access: Author/admin.

Store a supplied result, never run a model. Required modality availability is checked. Difference = estimated_age_weeks - age_at_scan_weeks, or null when reference age is unknown. At most 200 analyses per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
child_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: modality, estimated_age_weeks, method, model_version, provenance, quality_score. Required: one or more editable fields.

No separate observed example for this exact method variant is saved. The documented field/access rules apply; PUT and PATCH share their implemented handler. This statement is not a claim that this variant was exercised in the connected Newman run.

PUT /api/v1/samples/{sample_id}/analyses/{child_id}

Access: Author/admin.

Store a supplied result, never run a model. Required modality availability is checked. Difference = estimated_age_weeks - age_at_scan_weeks, or null when reference age is unknown. At most 200 analyses per session.

Parameter	Location	Definition
sample_id	path	string; pattern: ^[a-fA-F0-9]{24}$
child_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: modality, estimated_age_weeks, method, model_version, provenance, quality_score. Required: one or more editable fields.

Observed example: 26 Edit analysis; HTTP 200.

Request body


```
{
  "estimated_age_weeks": 42
}
```


Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f901852441fce9d6e53",
    "age_difference_weeks": 2,
    "author_id": "6ae09f8d1852441fce9d6e4a",
    "created_at": "2026-10-27T12:56:48.918000Z",
    "estimated_age_weeks": 42,
    "method": "Postman invented fixture",
    "modality": "dmri",
    "model_version": "test-1",
    "provenance": "Synthetic test request; not an MRI-derived estimate",
    "quality_score": 0.8,
    "result_type": "user_supplied_precomputed",
    "updated_at": "2026-10-27T12:56:49.197933Z"
  }
}
```


GET /api/v1/statistics/overview

Access: Approved user; visible samples only.

The response describes the current service. This endpoint does not expose raw MRI files or perform prediction.

Parameter	Location	Definition
q	query	string
age_min	query	number; minimum: 20; maximum: 80
age_max	query	number; minimum: 20; maximum: 80

Parameter	Location	Definition
modality	query	string; allowed: dmri, fmri, both, neither
source	query	string; allowed: dhcp_local, manual, synthetic
status	query	string; allowed: registered, ready, processing, completed, failed
sex	query	string; allowed: Female, Male, Unknown

Observed example: 29 Overview aggregation; HTTP 200.

Response body (token values redacted)


```
{
  "data": {
    "by_source": [
      {
        "_id": "manual",
        "count": 1
      }
    ],
    "by_status": [
      {
        "_id": "registered",
        "count": 1
      }
    ],
    "modalities": [
      {
        "_id": null,
        "both": 1,
        "dmri": 1,
        "fmri": 1
      }
    ],
    "total": 1
  }
}
```


GET /api/v1/statistics/cohorts

Access: Approved user; visible samples only.

Counts are scan sessions. Age bins: <32, 32-<37, 37-<42, >=42 weeks and unknown; sources separated. Null ages do not contribute to mean scan age. CSV includes a header and Content-Disposition.

Parameter	Location	Definition
q	query	string
age_min	query	number; minimum: 20; maximum: 80
age_max	query	number; minimum: 20; maximum: 80
modality	query	string; allowed: dmri, fmri, both, neither
source	query	string; allowed: dhcp_local, manual, synthetic
status	query	string; allowed: registered, ready, processing, completed, failed
sex	query	string; allowed: Female, Male, Unknown

Observed example: 30 Age cohort aggregation; HTTP 200.

Response body (token values redacted)


```
{
  "data": [
    {
      "_id": {
        "age_group": "37-<42 weeks",
        "source": "manual"
      },
      "dmri_count": 1,
      "fmri_count": 1,
```

```
      "mean_scan_age_weeks": 40.0,
      "sample_count": 1
    }
  ],
  "unit": "postmenstrual weeks at scan"
}
```


GET /api/v1/statistics/maturity

Access: Approved user; visible samples only.

Select optional method and version before newest CREATED result per session/modality. Optional age bands and non-null difference counts are available. Unfiltered models may be mixed.

Parameter	Location	Definition
q	query	string
age_min	query	number; minimum: 20; maximum: 80
age_max	query	number; minimum: 20; maximum: 80
modality	query	string; allowed: dmri, fmri, both, neither
source	query	string; allowed: dhcp_local, manual, synthetic
status	query	string; allowed: registered, ready, processing, completed, failed
sex	query	string; allowed: Female, Male, Unknown
method	query	string; maxLength: 120
model_version	query	string; maxLength: 120
group_by	query	string; allowed: overall, age_group; default: overall

Observed example: 31 Maturity aggregation; HTTP 200.

Response body (token values redacted)


```
{
  "data": [
    {
      "_id": {
        "modality": "dmri",
        "source": "manual"
      },
      "mean_age_difference_weeks": 2.0,
      "mean_estimated_age_weeks": 42.0,
      "sample_count": 1
    },
    {
      "_id": {
        "modality": "fmri",
        "source": "manual"
      },
      "mean_age_difference_weeks": 0.5,
      "mean_estimated_age_weeks": 40.5,
      "sample_count": 1
    }
  ],
  "interpretation": "Descriptive summary of supplied results; no diagnostic classification."
}
```


GET /api/v1/statistics/comparison

Access: Approved user; visible samples only.

Paired sessions only: optional separate method/version filters precede newest dMRI and fMRI selection. Grouped by source; unfiltered models may be mixed.

Parameter	Location	Definition
q	query	string
age_min	query	number; minimum: 20; maximum: 80
age_max	query	number; minimum: 20; maximum: 80
modality	query	string; allowed: dmri, fmri, both, neither
source	query	string; allowed: dhcp_local, manual, synthetic
status	query	string; allowed: registered, ready, processing, completed, failed
sex	query	string; allowed: Female, Male, Unknown
dmri_method	query	string; maxLength: 120
dmri_model_version	query	string; maxLength: 120
fmri_method	query	string; maxLength: 120
fmri_model_version	query	string; maxLength: 120

Observed example: 32 Paired modality comparison; HTTP 200.

Response body (token values redacted)


```
{
  "comparison": "Latest dMRI minus latest fMRI estimate for paired samples only.",
  "data": [
    {
      "_id": "manual",
      "mean_dmri_minus_fmri_weeks": 1.5,
      "paired_sample_count": 1
    }
  ]
}
```


GET /api/v1/exports/cohorts

Access: Approved user; visible samples only.

Counts are scan sessions. Age bins: <32, 32-<37, 37-<42, >=42 weeks and unknown; sources separated. Null ages do not contribute to mean scan age. CSV includes a header and Content-Disposition.

Parameter	Location	Definition
q	query	string
age_min	query	number; minimum: 20; maximum: 80
age_max	query	number; minimum: 20; maximum: 80
modality	query	string; allowed: dmri, fmri, both, neither
source	query	string; allowed: dhcp_local, manual, synthetic
status	query	string; allowed: registered, ready, processing, completed, failed
sex	query	string; allowed: Female, Male, Unknown
format	query	string; allowed: json, csv; default: json

Observed example: 33 Export JSON summary; HTTP 200.

Response body (token values redacted)


```
{
  "data": [
    {
      "_id": {
```

```
      "age_group": "37-<42 weeks",
      "source": "manual"
    },
    "dmri_count": 1,
    "fmri_count": 1,
    "mean_scan_age_weeks": 40.0,
    "sample_count": 1
   }
  ]
}
```


GET /api/v1/users

Access: Administrator.

Administrator-only accounts. Public JSON excludes password_hash/auth_version. Role/activation changes invalidate sessions. An administrator cannot use this route to alter their own role or activation.

Parameter	Location	Definition
page	query	integer; minimum: 1; maximum: 1000000; default: 1
page_size	query	integer; minimum: 1; maximum: 100; default: 20

Observed example: 35 Administrator users; HTTP 200.

Response body (token values redacted)


```
{
  "data": [
    {
      "_id": "6ae09f8887e81a2487ce1416",
      "active": true,
      "created_at": "2026-10-27T12:56:40.711000Z",
      "display_name": "Synthetic Demo Administrator",
      "role": "admin",
      "username": "demo.admin"
    },
    {
      "_id": "6ae09f8887e81a2487ce1417",
      "active": true,
      "created_at": "2026-10-27T12:56:41.011000Z",
      "display_name": "Synthetic Demo Researcher",
      "role": "researcher",
      "username": "demo.researcher"
    },
    {
      "_id": "6ae09f8d1852441fce9d6e4a",
      "active": true,
      "created_at": "2026-10-27T12:56:45.172000Z",
      "display_name": "Postman Test",
      "role": "researcher",
      "username": "pm.17931058037217004"
    }
  ],
  "pagination": {
    "page": 1,
    "page_size": 100,
    "pages": 1,
    "total": 3
  }
}
```


GET /api/v1/users/{user_id}

Access: Administrator.

Administrator-only accounts. Public JSON excludes password_hash/auth_version. Role/activation changes invalidate sessions. An administrator cannot use this route to alter their own role or activation.

Parameter	Location	Definition
user_id	path	string; pattern: ^[a-fA-F0-9]{24}$

Observed example: 36 Administrator user detail; HTTP 200.

Response body (token values redacted)

```
{
  "data": {
    "_id": "6ae09f8d1852441fce9d6e4a",
    "active": true,
    "created_at": "2026-10-27T12:56:45.172000Z",
    "display_name": "Postman Test",
    "role": "researcher",
    "username": "pm.17931058037217004"
  }
}
```


PATCH /api/v1/users/{user_id}

Access: Administrator.

Administrator-only accounts. Public JSON excludes password_hash/auth_version. Role/activation changes invalidate sessions. An administrator cannot use this route to alter their own role or activation.

Parameter	Location	Definition
user_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: active, role. Required: one or more editable fields.

Observed example: 47 Deactivate test account; HTTP 200.

Request body


```
{
  "active": false
}
```


Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f8d1852441fce9d6e4a",
    "active": false,
    "created_at": "2026-10-27T12:56:45.172000Z",
    "display_name": "Postman Test",
    "role": "researcher",
    "username": "pm.17931058037217004"
  }
}
```


PUT /api/v1/users/{user_id}

Access: Administrator.

Administrator-only accounts. Public JSON excludes password_hash/auth_version. Role/activation changes invalidate sessions. An administrator cannot use this route to alter their own role or activation.

Parameter	Location	Definition
user_id	path	string; pattern: ^[a-fA-F0-9]{24}$

JSON body: active, role. Required: one or more editable fields.

Observed example: 06 Approve researcher; HTTP 200.

Request body


```
{
  "active": true
}
```


Response body (token values redacted)


```
{
  "data": {
    "_id": "6ae09f8d1852441fce9d6e4a",
    "active": true,
    "created_at": "2026-10-27T12:56:45.172000Z",
    "display_name": "Postman Test",
    "role": "researcher",
    "username": "pm.17931058037217004"
  }
}
```

GET /api/v1/audit-logs

Access: Administrator.

Read-only paginated mutation events. Resource writes and audit writes are separate operations on the standalone database, not an atomic cross-collection transaction.

Parameter	Location	Definition
page	query	integer; minimum: 1; maximum: 1000000; default: 1
page_size	query	integer; minimum: 1; maximum: 100; default: 20

Observed example: 37 Administrator audit history; HTTP 200.

Response body (token values redacted)


```
{
  "data": [
    {
      "_id": "6ae09f911852441fce9d6e57",
      "action": "analyses_created",
      "actor_id": "6ae09f8d1852441fce9d6e4a",
      "created_at": "2026-10-27T12:56:49.401000Z",
      "resource": "samples",
      "resource_id": "6ae09f8f1852441fce9d6e4c"
    },
    {
      "_id": "6ae09f911852441fce9d6e55",
      "action": "analyses_updated",
      "actor_id": "6ae09f8d1852441fce9d6e4a",
      "created_at": "2026-10-27T12:56:49.199000Z",
      "resource": "samples",
      "resource_id": "6ae09f8f1852441fce9d6e4c"
    },
    {
      "_id": "6ae09f901852441fce9d6e54",
      "action": "analyses_created",
      "actor_id": "6ae09f8d1852441fce9d6e4a",
      "created_at": "2026-10-27T12:56:48.919000Z",
      "resource": "samples",
      "resource_id": "6ae09f8f1852441fce9d6e4c"
    },
    {
      "_id": "6ae09f901852441fce9d6e52",
      "action": "notes_updated",
      "actor_id": "6ae09f8d1852441fce9d6e4a",
      "created_at": "2026-10-27T12:56:48.809000Z",
      "resource": "samples",
      "resource_id": "6ae09f8f1852441fce9d6e4c"
    },
    {
      "_id": "6ae09f901852441fce9d6e51",
      "action": "notes_created",
      "actor_id": "6ae09f8d1852441fce9d6e4a",
      "created_at": "2026-10-27T12:56:48.501000Z",
      "resource": "samples",
      "resource_id": "6ae09f8f1852441fce9d6e4c"
    },
    {
      "_id": "6ae09f901852441fce9d6e4f",
      "action": "updated",
      "actor_id": "6ae09f8d1852441fce9d6e4a",
      "created_at": "2026-10-27T12:56:48.377000Z",
      "resource": "samples",
      "resource_id": "6ae09f8f1852441fce9d6e4c"
    },
    {
      "_id": "6ae09f8f1852441fce9d6e4d",
      "action": "created",
      "actor_id": "6ae09f8d1852441fce9d6e4a",
      "created_at": "2026-10-27T12:56:47.689000Z",
      "resource": "samples",
      "resource_id": "6ae09f8f1852441fce9d6e4c"
    },
    {
      "_id": "6ae09f8e1852441fce9d6e4b",
      "action": "permissions_updated",
      "actor_id": "6ae09f8887e81a2487ce1416",
```

"created_at": "2026-10-27T12:56:46.282000Z",
"resource": "users",
"resource_id": "6ae09f8d1852441fce9d6e4a"
[Excerpt ends here; the complete saved example is in the Postman collection.]

GET /api/v1/health

Access: Public.

The response describes the current service. This endpoint does not expose raw MRI files or perform prediction.

Observed example: 01 Health; HTTP 200.

Response body (token values redacted)

{
"application": "BrainAge Connect",
"status": "ok",
"version": "1.0.0"
}

GET /api/v1/openapi.json

Access: Public.

The response describes the current service. This endpoint does not expose raw MRI files or perform prediction.

Observed example: 48 API schema available; HTTP 200.

Response body (token values redacted)

{
"openapi": "3.0.3",
"info": {
"title": "BrainAge Connect",
"version": "1.0.0",
"description": "Research metadata and precomputed-result management. No MRI-to-brain-age inference.
All ages are postmenstrual weeks. See API.md for permissions and examples."
},
"servers": [
{
"url": "http://127.0.0.1:5000"
},
{
"url": "http://127.0.0.1:5001"
}
],
"security": [
{
"BearerAuth": []
}
],
"paths": {
"/api/v1/auth/register": {
"post": {
"operationId": "auth_register_post",
"summary": "Register",
"description": "See docs/API.md for data semantics and authorization.",
"responses": {
"201": {
"description": "Success"
},
"400": {
"description": "Invalid input",
"content": {
"application/json": {
"schema": {
"$ref": "#/components/schemas/Error"
}
}
}
},
"401": {
"description": "Missing/expired/revoked session",
"content": {
"application/json": {
"schema": {
"$ref": "#/components/schemas/Error"
}
}
}

```
    },
    "403": {
      "description": "Insufficient permission",
      "content": {
        "application/json": {
          "schema": {
            "$ref": "#/components/schemas/Error"
          }
        }
      }
    },
    "404": {
      "description": "Not found or not visible",
      "content": {
        "application/json": {
          "schema": {
```


[Excerpt ends here; the complete saved example is in the Postman collection.]

5. Errors and interpretation


```
{"error": {"status": 400, "message": "age_at_scan_weeks must be a finite number between 20 and 80."}}
```


400 input/ID validation; 401 missing/invalid/revoked session; 403 permission/inactive login; 404 missing or invisible record; 409 duplicate, version conflict, dependent modality or capped history; 413 request size; 415 JSON type; 503 database availability. Applicable exits depend on the individual handler.

6. Native Postman documentation screenshots

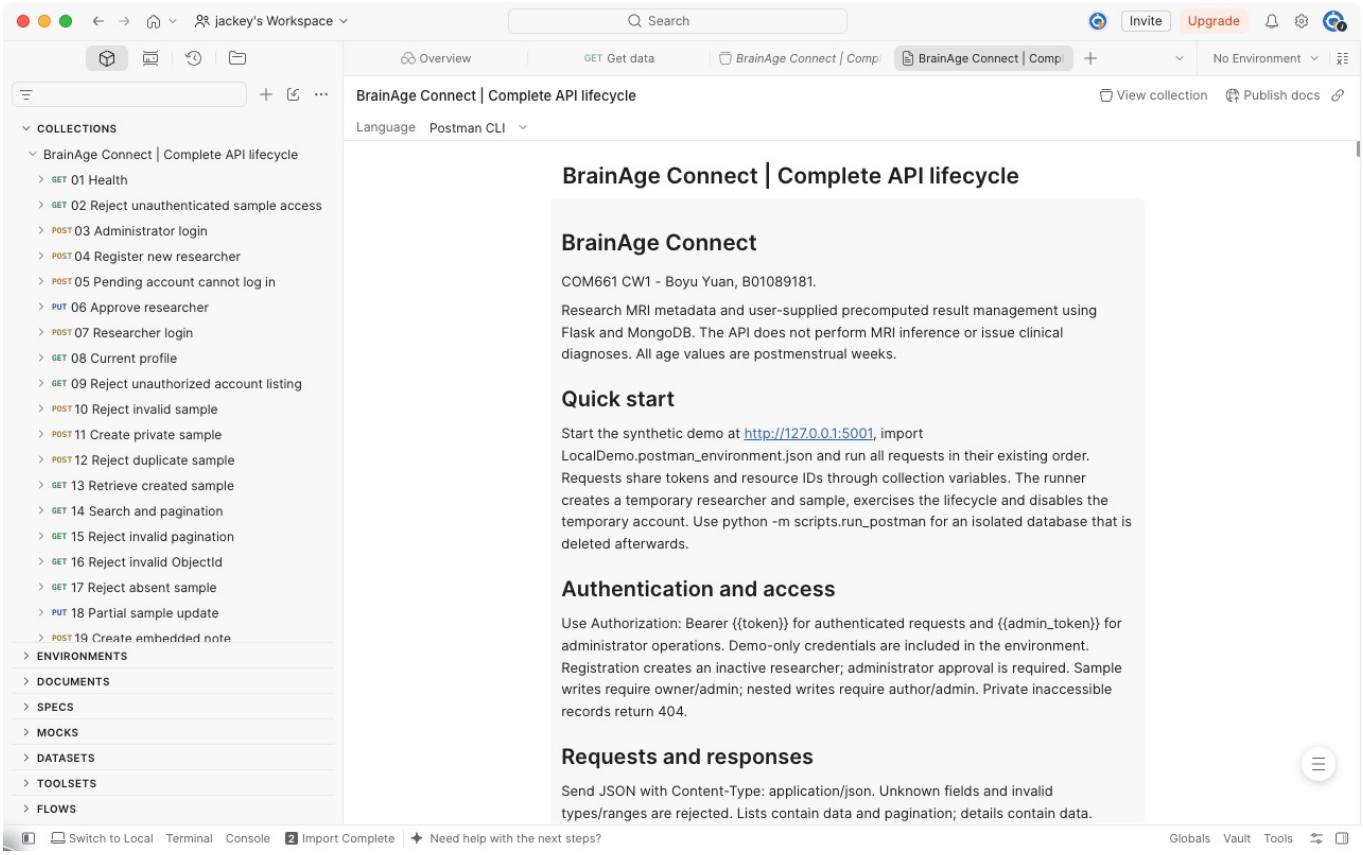


Figure 1. Collection overview: native Postman 12.34.1 documentation for the imported 48-request collection, including synthetic-demo setup, access rules and visible request list.

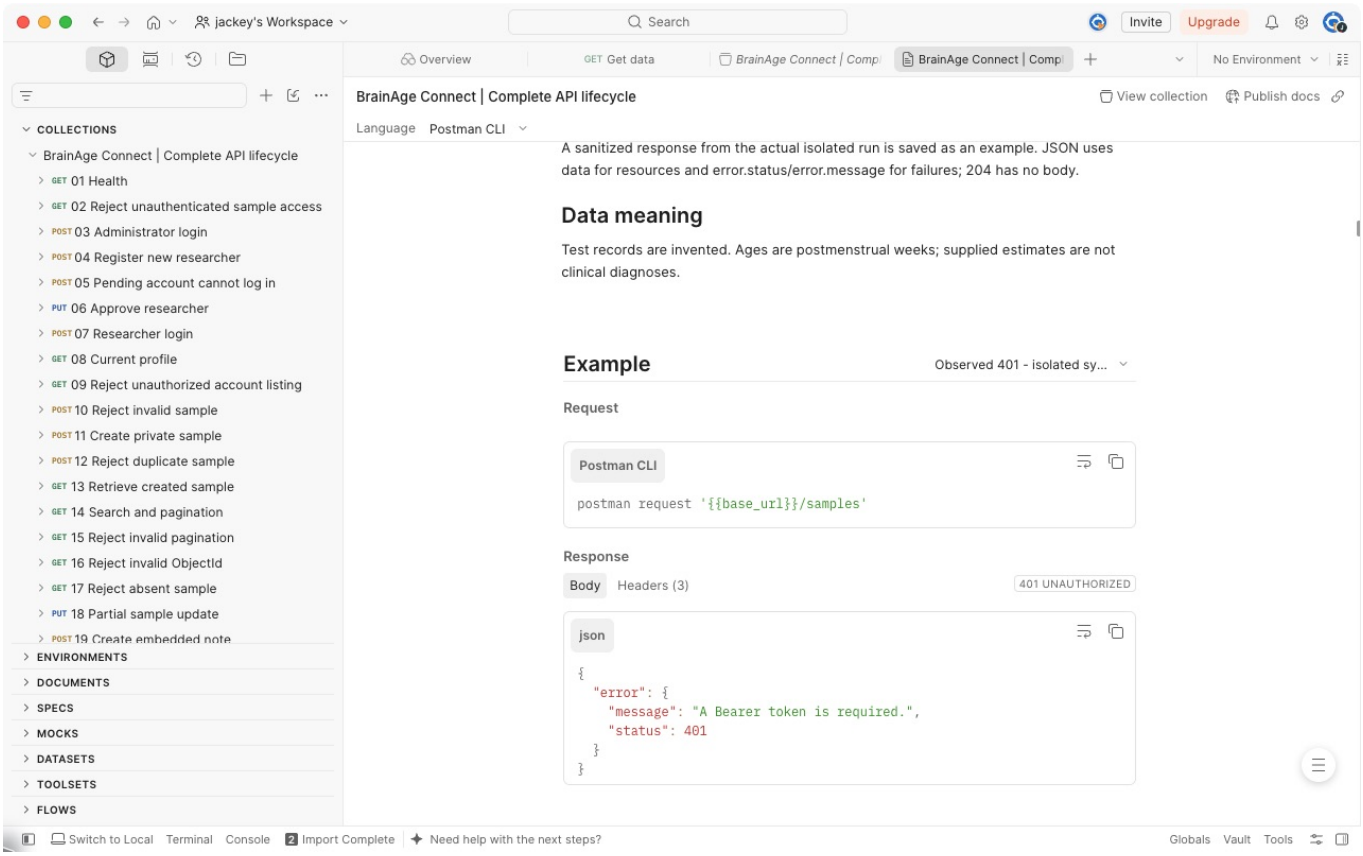


Figure 2. Authentication failure: the saved GET /samples example displays HTTP 401 and the JSON error explaining that a Bearer token is required.

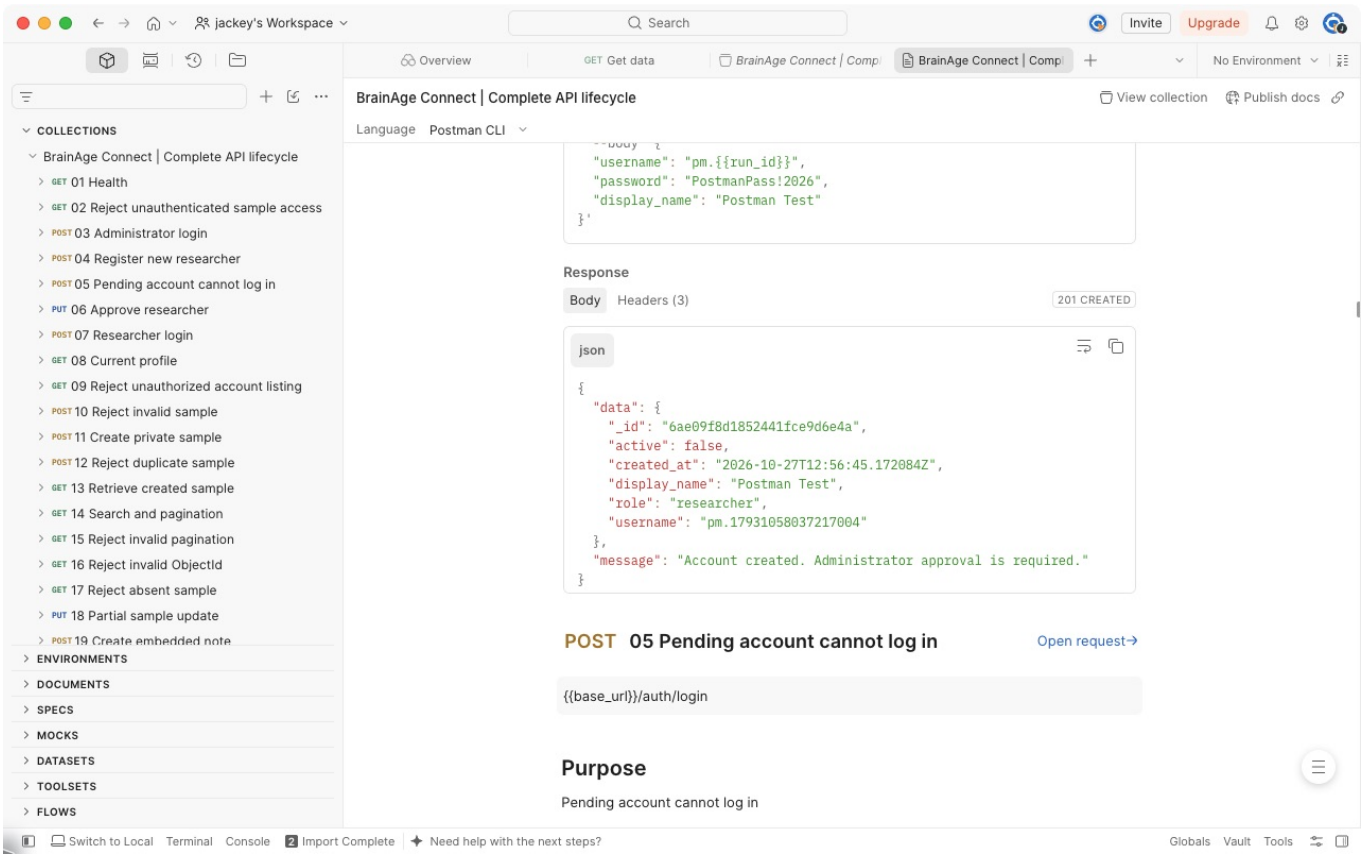


Figure 3. Registration lifecycle: the POST /auth/register example displays HTTP 201, a new inactive researcher and the administrator-approval message.

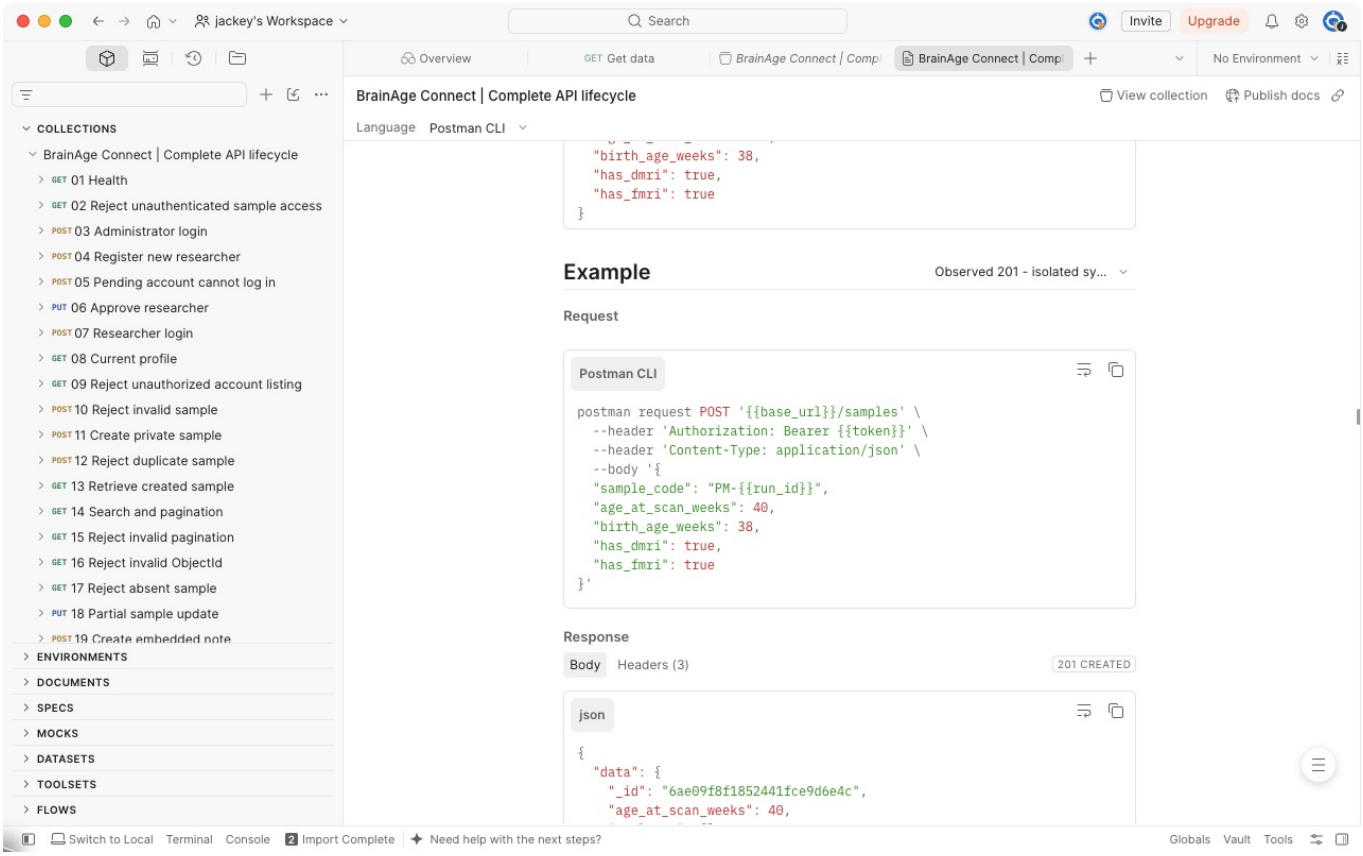


Figure 4. Sample creation: the POST /samples example shows the synthetic request fields and a successful HTTP 201 response.

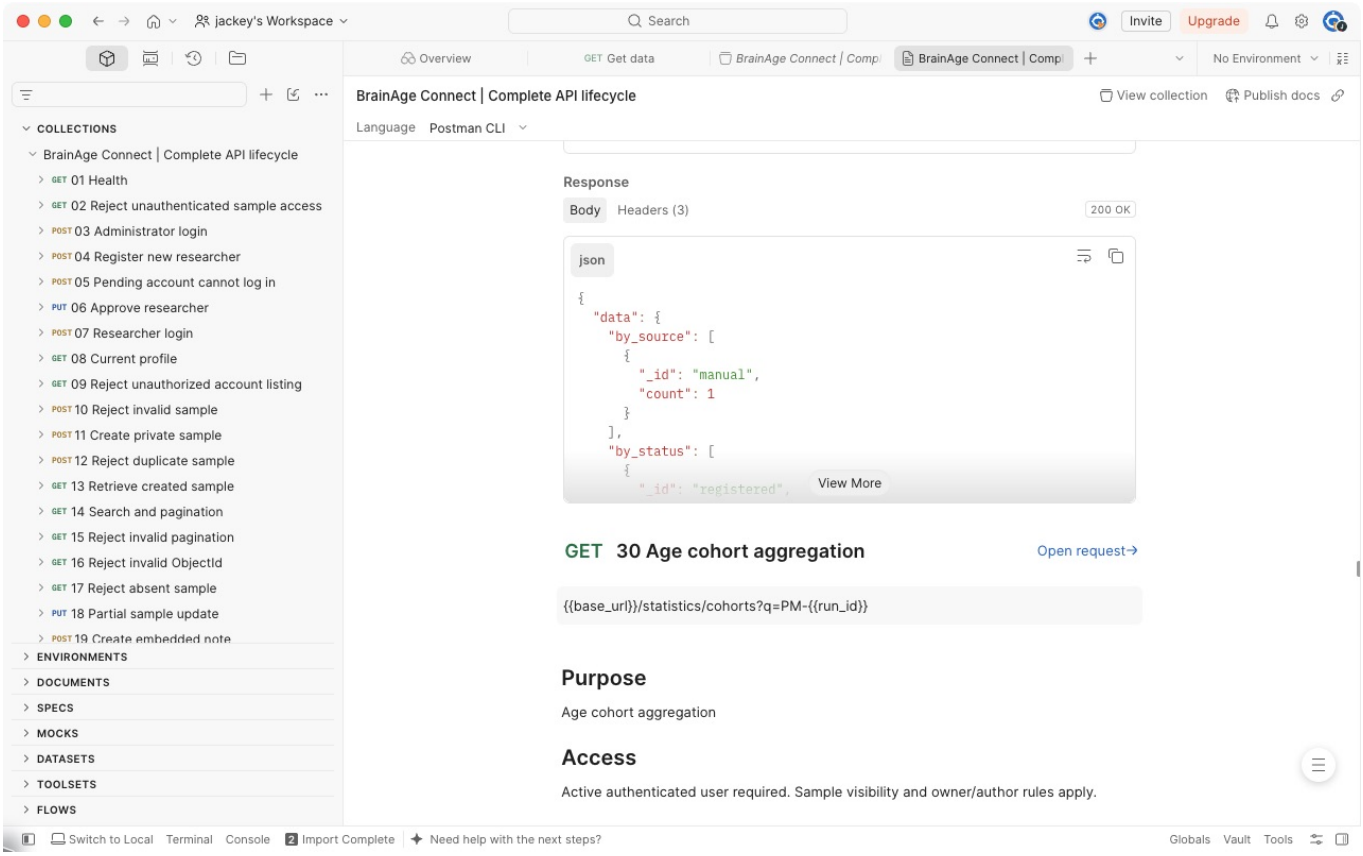


Figure 5. Aggregation: a saved age-cohort HTTP 200 response appears above the documented GET /statistics/cohorts request.

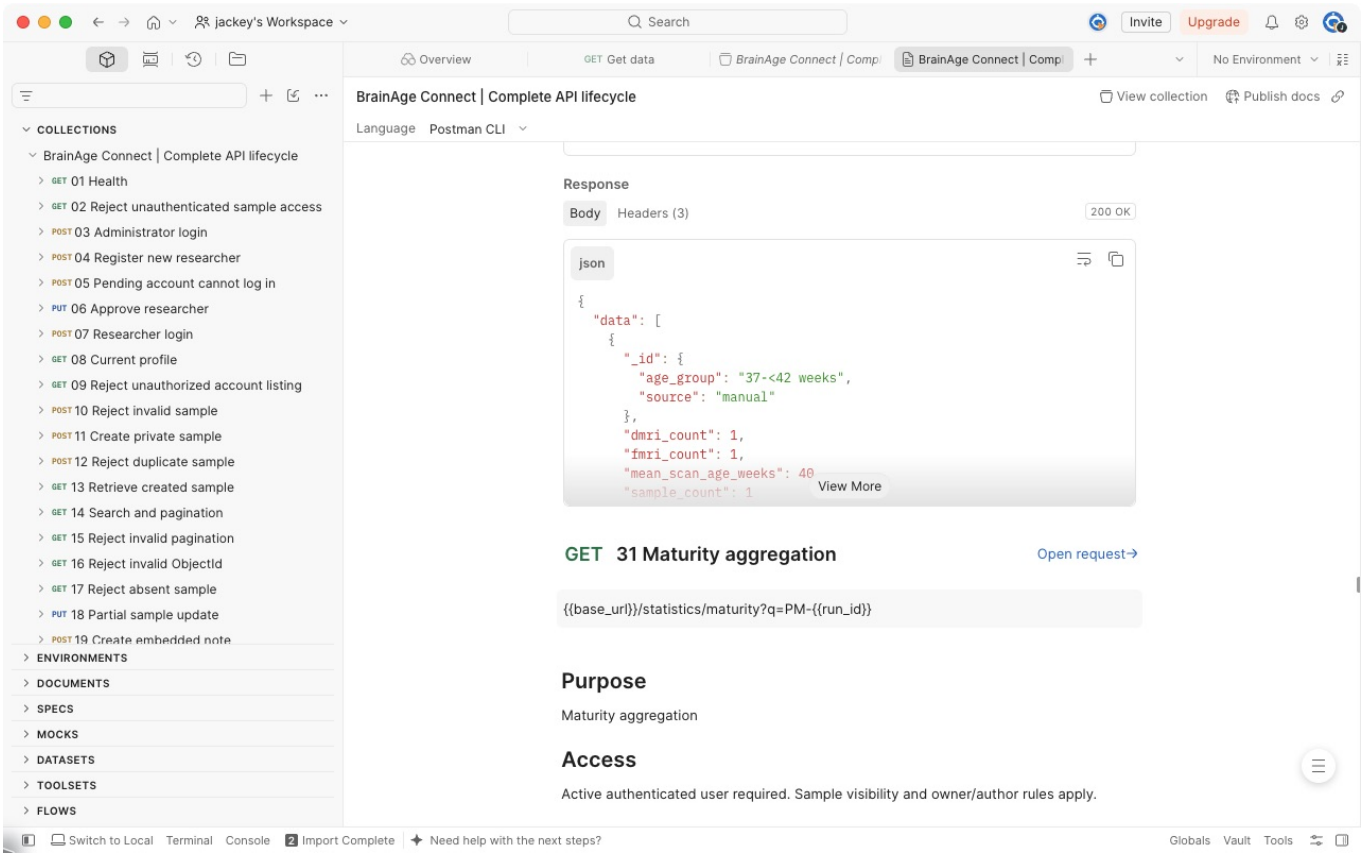


Figure 6. Maturity endpoint: the documented GET /statistics/maturity request follows the age-cohort response.

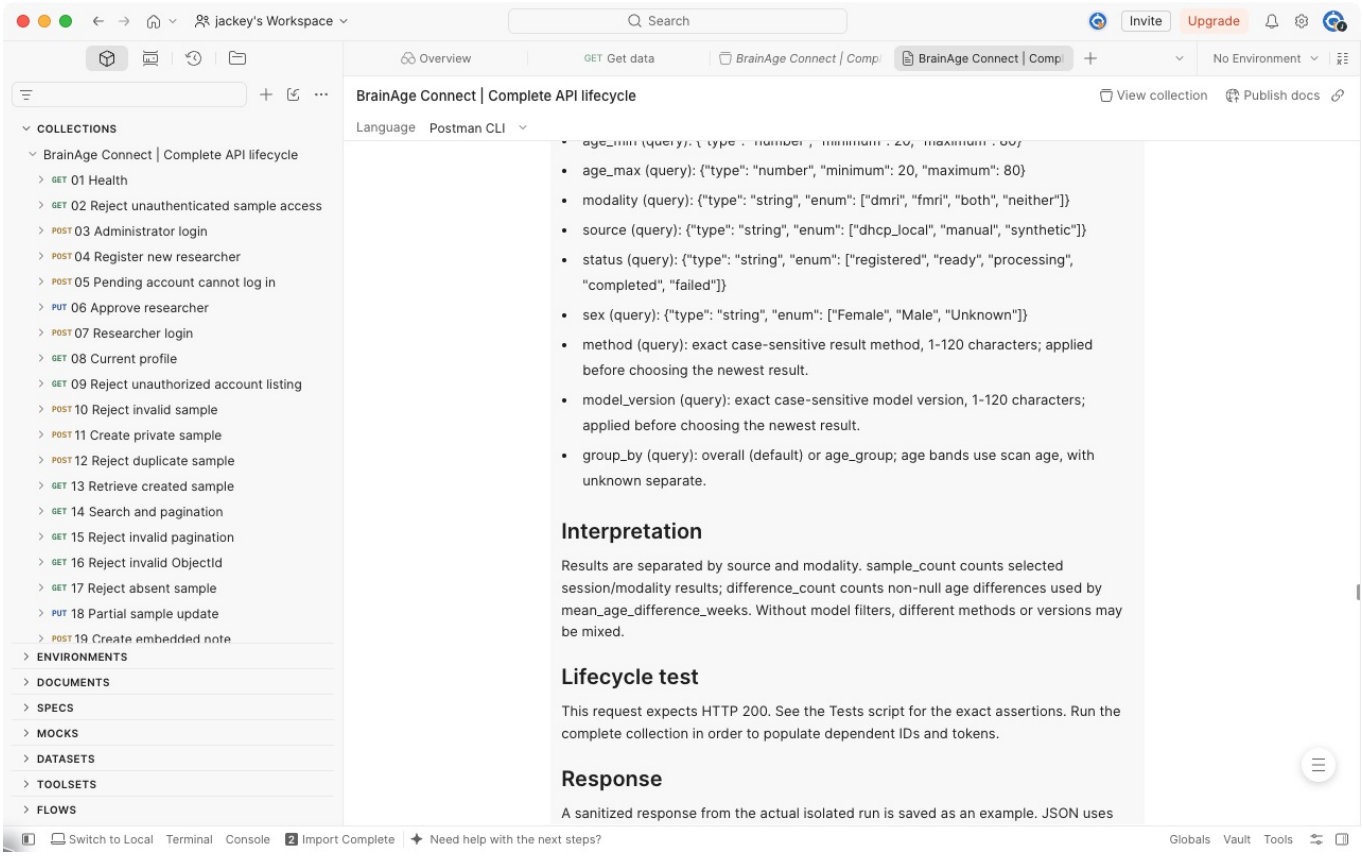


Figure 7. Maturity interpretation: exact method and model-version filters apply before newest-result selection, with optional age-group summaries and explicit limits on mixed-model means.

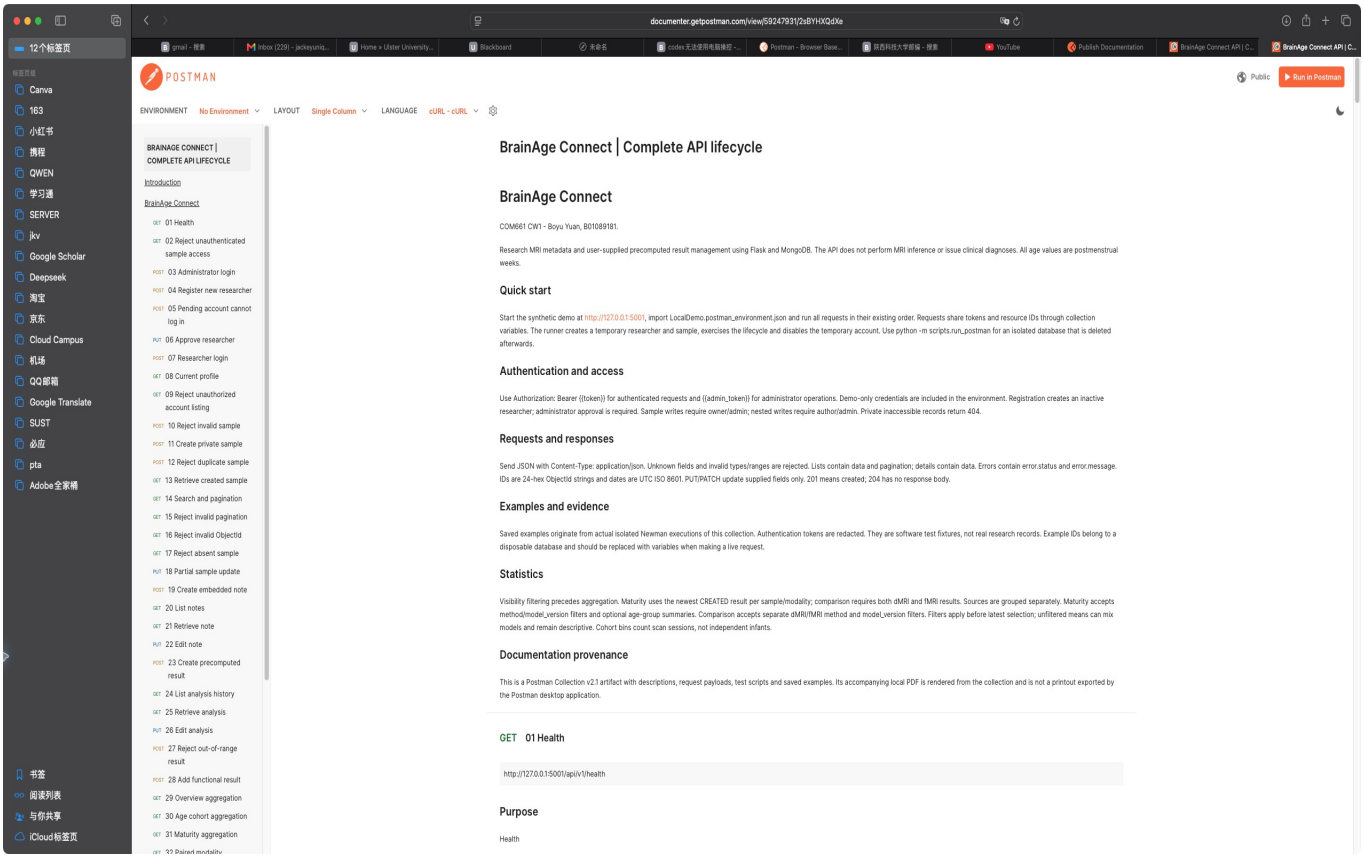


Figure 8. Public Postman-hosted page: the address, Public badge, No Environment status, collection introduction and request navigation are visible. The URL is independently reachable without signing in.

7. Original Postman documentation printout

Figures 1-7 are genuine pointer-free desktop Postman screenshots from 2 November 2026; Figure 8 is a pointer-free view of the published documentation from 3 November 2026. The preceding operation reference was typeset locally.

The following 57 pages reproduce the live Postman-hosted documentation as printed to PDF from Safari on 3 November 2026. It includes the collection introduction, all 48 saved requests and their saved examples. The public link above leads to the same published collection. No Postman environment was published.

BrainAge Connect | Complete API lifecycle

BrainAge Connect

COM661 CW1 - Boyu Yuan, B01089181.

Research MRI metadata and user-supplied precomputed result management using Flask and MongoDB. The API does not perform MRI inference or issue clinical diagnoses. All age values are postmenstrual weeks.

Quick start

Start the synthetic demo at http://127.0.0.1:5001, import LocalDemo.postman_environment.json and run all requests in their existing order. Requests share tokens and resource IDs through collection variables. The runner creates a temporary researcher and sample, exercises the lifecycle and disables the temporary account. Use python -m scripts.run_postman for an isolated database that is deleted afterwards.

Authentication and access

Use Authorization: Bearer {{token}} for authenticated requests and {{admin_token}} for administrator operations. Demo-only credentials are included in the environment. Registration creates an inactive researcher; administrator approval is required. Sample writes require owner/admin; nested writes require author/admin. Private inaccessible records return 404.

Requests and responses

Send JSON with Content-Type: application/json. Unknown fields and invalid types/ranges are rejected. Lists contain data and pagination; details contain data. Errors contain error.status and error.message. IDs are 24-hex ObjectId strings and dates are UTC ISO 8601. PUT/PATCH update supplied fields only. 201 means created; 204 has no response body.

Examples and evidence

Saved examples originate from actual isolated Newman executions of this collection. Authentication tokens are redacted.

They are software test fixtures, not real research records. Example IDs belong to a disposable database and should be replaced with variables when making a live request.

Statistics

Visibility filtering precedes aggregation. Maturity uses the newest CREATED result per sample/modality; comparison requires both dMRI and fMRI results. Sources are grouped separately. Maturity accepts method/model_version filters and optional age-group summaries. Comparison accepts separate dMRI/fMRI method and model_version filters. Filters apply before latest selection; unfiltered means can mix models and remain descriptive. Cohort bins count scan sessions, not independent infants.

Documentation provenance

This is a Postman Collection v2.1 artifact with descriptions, request payloads, test scripts and saved examples. Its accompanying local PDF is rendered from the collection and is not a printout exported by the Postman desktop application.

GET 01 Health

http://127.0.0.1:5001/api/v1/health

Purpose

Health

Access

Public; no token required.

Contract

GET /api/v1/health

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

GET 02 Reject unauthenticated sample access

http://127.0.0.1:5001/api/v1/samples

Purpose

Reject unauthenticated sample access

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples

Parameters

- q (query): {"type": "string"}
- age_min (query): {"type": "number", "minimum": 20, "maximum": 80}
- age_max (query): {"type": "number", "minimum": 20, "maximum": 80}
- modality (query): {"type": "string", "enum": ["dmri", "fmri", "both", "neither"]}
- source (query): {"type": "string", "enum": ["dhcp_local", "manual", "synthetic"]}
- status (query): {"type": "string", "enum": ["registered", "ready", "processing", "completed", "failed"]}
- sex (query): {"type": "string", "enum": ["Female", "Male", "Unknown"]}
- page (query): {"type": "integer", "minimum": 1, "maximum": 1000000, "default": 1}
- page_size (query): {"type": "integer", "minimum": 1,

"maximum": 100, "default": 20}

- sort (query): {"type": "string", "enum": ["sample_code", "age_at_scan_weeks", "created_at", "updated_at"], "default": "sample_code"}
- order (query): {"type": "string", "enum": ["asc", "desc"], "default": "asc"}

Lifecycle test

This request expects HTTP 401. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

POST 03 Administrator login

http://127.0.0.1:5001/api/v1/auth/login

Purpose

Administrator login

Access

Public; no token required.

Contract

POST /api/v1/auth/login

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Content-Type	application/json

Body raw (json)

```json
{
  "username": "demo.admin",
  "password": "DemoAdmin!2026"
}
```

POST 04 Register new researcher

http://127.0.0.1:5001/api/v1/auth/register

Purpose

Register new researcher

Access

Public; no token required. A successful registration is inactive until approved.

Contract

POST /api/v1/auth/register

Lifecycle test

This request expects HTTP 201. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Content-Type	application/json

Body raw (json)

```json
{
  "username": "pm.{{run_id}}",
  "password": "PostmanPass!2026",
  "display_name": "Postman Test"
}
```

POST 05 Pending account cannot log in

http://127.0.0.1:5001/api/v1/auth/login

Purpose

Pending account cannot log in

Access

Public; no token required.

Contract

POST /api/v1/auth/login

Lifecycle test

This request expects HTTP 403. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Content-Type	application/json

Body raw (json)

```json
{
  "username": "pm.{{run_id}}",
  "password": "PostmanPass!2026"
}
```

PUT 06 Approve researcher

http://127.0.0.1:5001/api/v1/users/{{new_user_id}}

Purpose

Approve researcher

Access

Administrator Bearer token required.

Contract

PUT /api/v1/users/{{new_user_id}}

Parameters

- user_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{admin_token}}
Content-Type	application/json

Body raw (json)

```json
{
  "active": true
}
```

POST 07 Researcher login

http://127.0.0.1:5001/api/v1/auth/login

Purpose

Researcher login

Access

Public; no token required.

Contract

POST /api/v1/auth/login

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Content-Type	application/json

Body raw (json)

```json
{
  "username": "pm.{{run_id}}",
  "password": "PostmanPass!2026"
}
```

GET 08 Current profile

http://127.0.0.1:5001/api/v1/auth/me

Purpose

Current profile

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/auth/me

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

GET 09 Reject unauthorized account listing

http://127.0.0.1:5001/api/v1/users

Purpose

Reject unauthorized account listing

Access

Administrator Bearer token required.

Contract

GET /api/v1/users

Parameters

- page (query): {"type": "integer", "minimum": 1, "maximum": 1000000, "default": 1}
- page_size (query): {"type": "integer", "minimum": 1, "maximum": 100, "default": 20}

Lifecycle test

This request expects HTTP 403. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

POST 10 Reject invalid sample

http://127.0.0.1:5001/api/v1/samples

Purpose

Reject invalid sample

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

POST /api/v1/samples

Lifecycle test

This request expects HTTP 400. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

```json
{
  "sample_code": "PM-invalid",
  "age_at_scan_weeks": true
}
```

POST 11 Create private sample

http://127.0.0.1:5001/api/v1/samples

Purpose

Create private sample

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

POST /api/v1/samples

Lifecycle test

This request expects HTTP 201. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

```
json
```

```
{
  "sample_code": "PM-{{run_id}}",
  "age_at_scan_weeks": 40,
  "birth_age_weeks": 38,
  "has_dmri": true,
  "has_fmri": true
}
```

POST 12 Reject duplicate sample

http://127.0.0.1:5001/api/v1/samples

Purpose

Reject duplicate sample

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

POST /api/v1/samples

Lifecycle test

This request expects HTTP 409. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

Content-Type	application/json

Body raw (json)

```
json

{
  "sample_code": "PM-{{run_id}}",
  "age_at_scan_weeks": 40
}
```

GET 13 Retrieve created sample

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}

Purpose

Retrieve created sample

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples/{sample_id}

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and

error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

GET 14 Search and pagination

http://127.0.0.1:5001/api/v1/samples?q=PM-{{run_id}}&age_min=39&age_max=41&modality=both&page_size=1&sort=age_at_scan_weeks&order=desc

Purpose

Search and pagination

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples

Parameters

- q (query): {"type": "string"}
- age_min (query): {"type": "number", "minimum": 20, "maximum": 80}
- age_max (query): {"type": "number", "minimum": 20, "maximum": 80}
- modality (query): {"type": "string", "enum": ["dmri", "fmri", "both", "neither"]}
- source (query): {"type": "string", "enum": ["dhcp_local", "manual", "synthetic"]}
- status (query): {"type": "string", "enum": ["registered", "ready", "processing", "completed", "failed"]}
- sex (query): {"type": "string", "enum": ["Female", "Male",

"Unknown"]}

- page (query): {"type": "integer", "minimum": 1, "maximum": 1000000, "default": 1}
- page_size (query): {"type": "integer", "minimum": 1, "maximum": 100, "default": 20}
- sort (query): {"type": "string", "enum": ["sample_code", "age_at_scan_weeks", "created_at", "updated_at"], "default": "sample_code"}
- order (query): {"type": "string", "enum": ["asc", "desc"], "default": "asc"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PARAMS

q	PM-{{run_id}}
age_min	39
age_max	41
modality	both
page_size	1
sort	age_at_scan_weeks
order	desc

GET 15 Reject invalid pagination

http://127.0.0.1:5001/api/v1/samples?page=0

Purpose

Reject invalid pagination

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples

Parameters

- q (query): {"type": "string"}
- age_min (query): {"type": "number", "minimum": 20, "maximum": 80}
- age_max (query): {"type": "number", "minimum": 20, "maximum": 80}
- modality (query): {"type": "string", "enum": ["dmri", "fmri", "both", "neither"]}
- source (query): {"type": "string", "enum": ["dhcp_local", "manual", "synthetic"]}
- status (query): {"type": "string", "enum": ["registered", "ready", "processing", "completed", "failed"]}
- sex (query): {"type": "string", "enum": ["Female", "Male", "Unknown"]}
- page (query): {"type": "integer", "minimum": 1, "maximum": 1000000, "default": 1}
- page_size (query): {"type": "integer", "minimum": 1, "maximum": 100, "default": 20}
- sort (query): {"type": "string", "enum": ["sample_code", "age_at_scan_weeks", "created_at", "updated_at"], "default": "sample_code"}
- order (query): {"type": "string", "enum": ["asc", "desc"], "default": "asc"}

Lifecycle test

This request expects HTTP 400. See the Tests script for the

exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PARAMS

page	0

GET 16 Reject invalid ObjectId

http://127.0.0.1:5001/api/v1/samples/invalid

Purpose

Reject invalid ObjectId

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples/invalid

Lifecycle test

This request expects HTTP 400. See the Tests script for the exact assertions. Run the complete collection in order to

populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

GET 17 Reject absent sample

http://127.0.0.1:5001/api/v1/samples/000000000000000000000000

Purpose

Reject absent sample

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples/000000000000000000000000

Lifecycle test

This request expects HTTP 404. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an

example. JSON uses data for resources and

error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PUT 18 Partial sample update

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}

Purpose

Partial sample update

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

PUT /api/v1/samples/{sample_id}

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and

error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

```json
{
  "description": "Postman lifecycle demonstration"
}
```

POST 19 Create embedded note

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/notes

Purpose

Create embedded note

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

POST /api/v1/samples/{sample_id}/notes

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 201. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

```json
{
  "text": "Postman note",
  "category": "research"
}
```

GET 20 List notes

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/notes?page_size=1&order=desc

Purpose

List notes

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples/{sample_id}/notes

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}
- page (query): {"type": "integer", "minimum": 1, "maximum": 1000000, "default": 1}
- page_size (query): {"type": "integer", "minimum": 1, "maximum": 100, "default": 20}
- sort (query): {"type": "string", "enum": ["created_at", "updated_at"], "default": "created_at"}
- order (query): {"type": "string", "enum": ["asc", "desc"], "default": "asc"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PARAMS

page_size	1
order	desc

GET 21 Retrieve note

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/notes/{{note_id}}

Purpose

Retrieve note

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples/{sample_id}/notes/{child_id}

Parameters

- child_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}
- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PUT 22 Edit note

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/notes/{{note_id}}

Purpose

Edit note

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

PUT /api/v1/samples/{sample_id}/notes/{child_id}

Parameters

- child_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}
- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

```
json

{
  "text": "Updated test note"
}
```

POST 23 Create precomputed result

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/analyses

Purpose

Create precomputed result

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

POST /api/v1/samples/{sample_id}/analyses

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 201. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

```
json

{
  "modality": "dmri",
  "estimated_age_weeks": 41.5,
  "method": "Postman invented fixture",
  "model_version": "test-1",
  "provenance": "Synthetic test request; not an MR
  "quality_score": 0.8
}
```

GET 24 List analysis history

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/analyses?page=1&page_size=10

Purpose

List analysis history

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples/{sample_id}/analyses

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}
- page (query): {"type": "integer", "minimum": 1, "maximum": 1000000, "default": 1}
- page_size (query): {"type": "integer", "minimum": 1, "maximum": 100, "default": 20}
- sort (query): {"type": "string", "enum": ["created_at", "updated_at"], "default": "created_at"}
- order (query): {"type": "string", "enum": ["asc", "desc"], "default": "asc"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PARAMS

page	1
page_size	10

GET 25 Retrieve analysis

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/analyses/{{analysis_id}}

Purpose

Retrieve analysis

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples/{sample_id}/analyses/{child_id}

Parameters

- child_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}
- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PUT 26 Edit analysis

PUT 26 Edit analysis

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/analyses/{{analysis_id}}

Purpose

Edit analysis

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

PUT /api/v1/samples/{sample_id}/analyses/{child_id}

Parameters

- child_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}
- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

```
json

{
  "estimated_age_weeks": 42
}
```

POST 27 Reject out-of-range result

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/analyses

Purpose

Reject out-of-range result

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

POST /api/v1/samples/{sample_id}/analyses

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 400. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

json


```
{
  "modality": "dmri",
  "estimated_age_weeks": 41.5,
  "method": "Postman invented fixture",
  "model_version": "test-1",
  "provenance": "Synthetic test request; not an MR
  "quality_score": 1.1
}
```


POST 28 Add functional result

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/analyses

Purpose

Add functional result

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

POST /api/v1/samples/{sample_id}/analyses

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 201. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

```json
{
  "modality": "fmri",
  "estimated_age_weeks": 40.5,
  "method": "Postman invented fixture",
  "model_version": "test-1",
  "provenance": "Synthetic test request; not an MR
  "quality_score": 0.8
}
```

GET 29 Overview aggregation

http://127.0.0.1:5001/api/v1/statistics/overview?q=PM-{{run_id}}

Purpose

Overview aggregation

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/statistics/overview

Parameters

- q (query): {"type": "string"}
- age_min (query): {"type": "number", "minimum": 20, "maximum": 80}
- age_max (query): {"type": "number", "minimum": 20, "maximum": 80}
- modality (query): {"type": "string", "enum": ["dmri", "fmri", "both", "neither"]}
- source (query): {"type": "string", "enum": ["dhcp_local", "manual", "synthetic"]}
- status (query): {"type": "string", "enum": ["registered", "ready", "processing", "completed", "failed"]}
- sex (query): {"type": "string", "enum": ["Female", "Male", "Unknown"]}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PARAMS

q	PM-{{run_id}}

GET 30 Age cohort aggregation

http://127.0.0.1:5001/api/v1/statistics/cohorts?q=PM-{{run_id}}

Purpose

Age cohort aggregation

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/statistics/cohorts

Parameters

- q (query): {"type": "string"}
- age_min (query): {"type": "number", "minimum": 20, "maximum": 80}
- age_max (query): {"type": "number", "minimum": 20, "maximum": 80}
- modality (query): {"type": "string", "enum": ["dmri", "fmri", "both", "neither"]}
- source (query): {"type": "string", "enum": ["dhcp_local", "manual", "synthetic"]}
- status (query): {"type": "string", "enum": ["registered", "ready", "processing", "completed", "failed"]}
- sex (query): {"type": "string", "enum": ["Female", "Male", "Unknown"]}

Lifecycle test

This request expects HTTP 200. See the Tests script for the

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PARAMS

q	PM-{{run_id}}

GET 31 Maturity aggregation

http://127.0.0.1:5001/api/v1/statistics/maturity?q=PM-{{run_id}}

Purpose

Maturity aggregation

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/statistics/maturity

Parameters

- q (query): {"type": "string"}
- age_min (query): {"type": "number", "minimum": 20,

"maximum": 80}

- age_max (query): {"type": "number", "minimum": 20, "maximum": 80}
- modality (query): {"type": "string", "enum": ["dmri", "fmri", "both", "neither"]}
- source (query): {"type": "string", "enum": ["dhcp_local", "manual", "synthetic"]}
- status (query): {"type": "string", "enum": ["registered", "ready", "processing", "completed", "failed"]}
- sex (query): {"type": "string", "enum": ["Female", "Male", "Unknown"]}
- method (query): exact case-sensitive result method, 1-120 characters; applied before choosing the newest result.
- model_version (query): exact case-sensitive model version, 1-120 characters; applied before choosing the newest result.
- group_by (query): overall (default) or age_group; age bands use scan age, with unknown separate.

Interpretation

Results are separated by source and modality. sample_count counts selected session/modality results; difference_count counts non-null age differences used by mean_age_difference_weeks. Without model filters, different methods or versions may be mixed.

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PARAMS

q	PM-{{run_id}}

GET 32 Paired modality comparison

http://127.0.0.1:5001/api/v1/statistics/comparison?q=PM-{{run_id}}

Purpose

Paired modality comparison

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/statistics/comparison

Parameters

- q (query): {"type": "string"}
- age_min (query): {"type": "number", "minimum": 20, "maximum": 80}
- age_max (query): {"type": "number", "minimum": 20, "maximum": 80}
- modality (query): {"type": "string", "enum": ["dmri", "fmri", "both", "neither"]}
- source (query): {"type": "string", "enum": ["dhcp_local", "manual", "synthetic"]}
- status (query): {"type": "string", "enum": ["registered", "ready", "processing", "completed", "failed"]}
- sex (query): {"type": "string", "enum": ["Female", "Male", "Unknown"]}
- dmri_method, dmri_model_version (query): exact case-sensitive dMRI method/version, each 1-120 characters; applied before choosing newest dMRI.
- fmri_method, fmri_model_version (query): exact case-sensitive fMRI method/version, each 1-120 characters;

applied before choosing newest fMRI.

Interpretation

Only sessions with both matching modalities contribute. Each result is latest by creation time within its selected model range; the mean is dMRI minus fMRI, grouped by source. Without filter methods or versions may be mixed.

Lifecycle test

This request expects HTTP 200. See the Tests script for the

exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as ar example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PARAMS

q	PM-{{run_id}}

GET 33 Export JSON summary

http://127.0.0.1:5001/api/v1/exports/cohorts?q=PM-{{run_id}}&format=json

Purpose

Export JSON summary

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/exports/cohorts

Parameters

- q (query): {"type": "string"}
- age_min (query): {"type": "number", "minimum": 20, "maximum": 80}
- age_max (query): {"type": "number", "minimum": 20, "maximum": 80}
- modality (query): {"type": "string", "enum": ["dmri", "fmri", "both", "neither"]}
- source (query): {"type": "string", "enum": ["dhcp_local", "manual", "synthetic"]}
- status (query): {"type": "string", "enum": ["registered", "ready", "processing", "completed", "failed"]}
- sex (query): {"type": "string", "enum": ["Female", "Male", "Unknown"]}
- format (query): {"type": "string", "enum": ["json", "csv"], "default": "json"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PARAMS

q	PM-{{run_id}}
format	json

GET 34 Export CSV summary

http://127.0.0.1:5001/api/v1/exports/cohorts?q=PM-{{run_id}}&format=csv

Purpose

Export CSV summary

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/exports/cohorts

Parameters

- q (query): {"type": "string"}
- age_min (query): {"type": "number", "minimum": 20, "maximum": 80}
- age_max (query): {"type": "number", "minimum": 20, "maximum": 80}
- modality (query): {"type": "string", "enum": ["dmri", "fmri", "both", "neither"]}
- source (query): {"type": "string", "enum": ["dhcp_local", "manual", "synthetic"]}
- status (query): {"type": "string", "enum": ["registered", "ready", "processing", "completed", "failed"]}
- sex (query): {"type": "string", "enum": ["Female", "Male", "Unknown"]}
- format (query): {"type": "string", "enum": ["json", "csv"], "default": "json"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as ar example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses

HEADERS

Authorization	Bearer {{token}}

PARAMS

q	PM-{{run_id}}
format	csv

GET 35 Administrator users

http://127.0.0.1:5001/api/v1/users?page_size=100

Purpose

Administrator users

Access

Administrator Bearer token required.

Contract

GET /api/v1/users

Parameters

- page (query): {"type": "integer", "minimum": 1, "maximum": 1000000, "default": 1}
- page_size (query): {"type": "integer", "minimum": 1, "maximum": 100, "default": 20}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{admin_token}}

PARAMS

page_size	100

GET 36 Administrator user detail

http://127.0.0.1:5001/api/v1/users/{{new_user_id}}

Purpose

Administrator user detail

Access

Administrator Bearer token required.

Contract

GET /api/v1/users/{{new_user_id}}

Parameters

- user_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{admin_token}}

GET 37 Administrator audit history

http://127.0.0.1:5001/api/v1/audit-logs

Purpose

Administrator audit history

Access

Administrator Bearer token required.

Contract

GET /api/v1/audit-logs

Parameters

- page (query): {"type": "integer", "minimum": 1, "maximum": 1000000, "default": 1}
- page_size (query): {"type": "integer", "minimum": 1, "maximum": 100, "default": 20}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{admin_token}}

DELETE 38 Delete analysis

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/analyses/{{analysis_id}}

Purpose

Delete analysis

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

DELETE /api/v1/samples/{sample_id}/analyses/{child_id}

Parameters

- child_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}
- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 204. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

DELETE 39 Delete note

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}/notes/{{note_id}}

Purpose

Delete note

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

DELETE /api/v1/samples/{sample_id}/notes/{child_id}

Parameters

- child_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}
- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 204. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

DELETE 40 Delete sample and embedded records

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}

Purpose

Delete sample and embedded records

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

DELETE /api/v1/samples/{sample_id}

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 204. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

GET 41 Verify deletion

http://127.0.0.1:5001/api/v1/samples/{{sample_id}}

Purpose

Verify deletion

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/samples/{sample_id}

Parameters

- sample_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 404. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PUT 42 Change password

http://127.0.0.1:5001/api/v1/auth/password

Purpose

Change password

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

PUT /api/v1/auth/password

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}
Content-Type	application/json

Body raw (json)

```json
{
  "current_password": "PostmanPass!2026",
  "new_password": "PostmanChanged!2026"
}
```

GET 43 Old session revoked

http://127.0.0.1:5001/api/v1/auth/me

Purpose

Old session revoked

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/auth/me

Lifecycle test

This request expects HTTP 401. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

POST 44 Login with new password

http://127.0.0.1:5001/api/v1/auth/login

Purpose

Login with new password

Access

Public; no token required.

Contract

POST /api/v1/auth/login

Lifecycle test

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Content-Type	application/json

Body raw (json)

```json
{
  "username": "pm.{{run_id}}",
  "password": "PostmanChanged!2026"
}
```

POST 45 Logout

http://127.0.0.1:5001/api/v1/auth/logout

Purpose

Logout

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

POST /api/v1/auth/logout

Lifecycle test

This request expects HTTP 204. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

GET 46 Logged-out token rejected

http://127.0.0.1:5001/api/v1/auth/me

Purpose

Logged-out token rejected

Access

Active authenticated user required. Sample visibility and owner/author rules apply.

Contract

GET /api/v1/auth/me

Lifecycle test

This request expects HTTP 401. See the Tests script for the

This request expects HTTP 401. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{token}}

PATCH 47 Deactivate test account

http://127.0.0.1:5001/api/v1/users/{{new_user_id}}

Purpose

Deactivate test account

Access

Administrator Bearer token required.

Contract

PATCH /api/v1/users/{{new_user_id}}

Parameters

- user_id (path): {"type": "string", "pattern": "^[a-fA-F0-9]{24}$"}

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.

HEADERS

Authorization	Bearer {{admin_token}}
Content-Type	application/json

Body raw (json)

```json
{
  "active": false
}
```

GET 48 API schema available

http://127.0.0.1:5001/api/v1/openapi.json

Purpose

API schema available

Access

Public; no token required.

Contract

GET /api/v1/openapi.json

Lifecycle test

This request expects HTTP 200. See the Tests script for the exact assertions. Run the complete collection in order to populate dependent IDs and tokens.

Response

A sanitized response from the actual isolated run is saved as an example. JSON uses data for resources and error.status/error.message for failures; 204 has no body.

Data meaning

Test records are invented. Ages are postmenstrual weeks; supplied estimates are not clinical diagnoses.