

李宏毅 (Hung-yi Lee) · HYLEE | Machine Learning (2021)

HYLEE(2021) · 课程资料包 @ShowMeAI



视频

课件

笔记

代码

中英双语字幕

一键打包下载

官方笔记翻译

作业项目解析



视频 · B 站 [扫码或点击链接]

<https://www.bilibili.com/video/BV1fM4y137M4>



课件 & 代码 · 博客 [扫码或点击链接]

<http://blog.showmeai.tech/ntu-hylee-ml>

机器学习

Auto-encoder

生成式对抗网络

学习率

深度学习

卷积神经网络

GAN

自监督

自注意力机制

批次标准化

神经网络压缩

强化学习

元学习

Transformer

Awesome AI Courses Notes Cheatsheets 是 [ShowMeAI](#) 资料库的分支系列，覆盖最具知名度的 **TOP50+** 门 AI 课程，旨在为读者和学习者提供一整套高品质中文学习笔记和速查表。

点击课程名称，跳转至课程**资料包**页面，**一键下载**课程全部资料！

机器学习	深度学习	自然语言处理	计算机视觉
Stanford · CS229	Stanford · CS230	Stanford · CS224n	Stanford · CS231n
# Awesome AI Courses Notes Cheatsheets · 持续更新中			
知识图谱	图机器学习	深度强化学习	自动驾驶
Stanford · CS520	Stanford · CS224W	UCBerkeley · CS285	MIT · 6.S094



微信公众号

资料下载方式 2: 扫码点击**底部菜单栏**


称为 **AI 内容创作者**? 回复 [添砖加瓦]



When gradient is small ...

Hung-yi Lee 李宏毅

Optimization Fails because

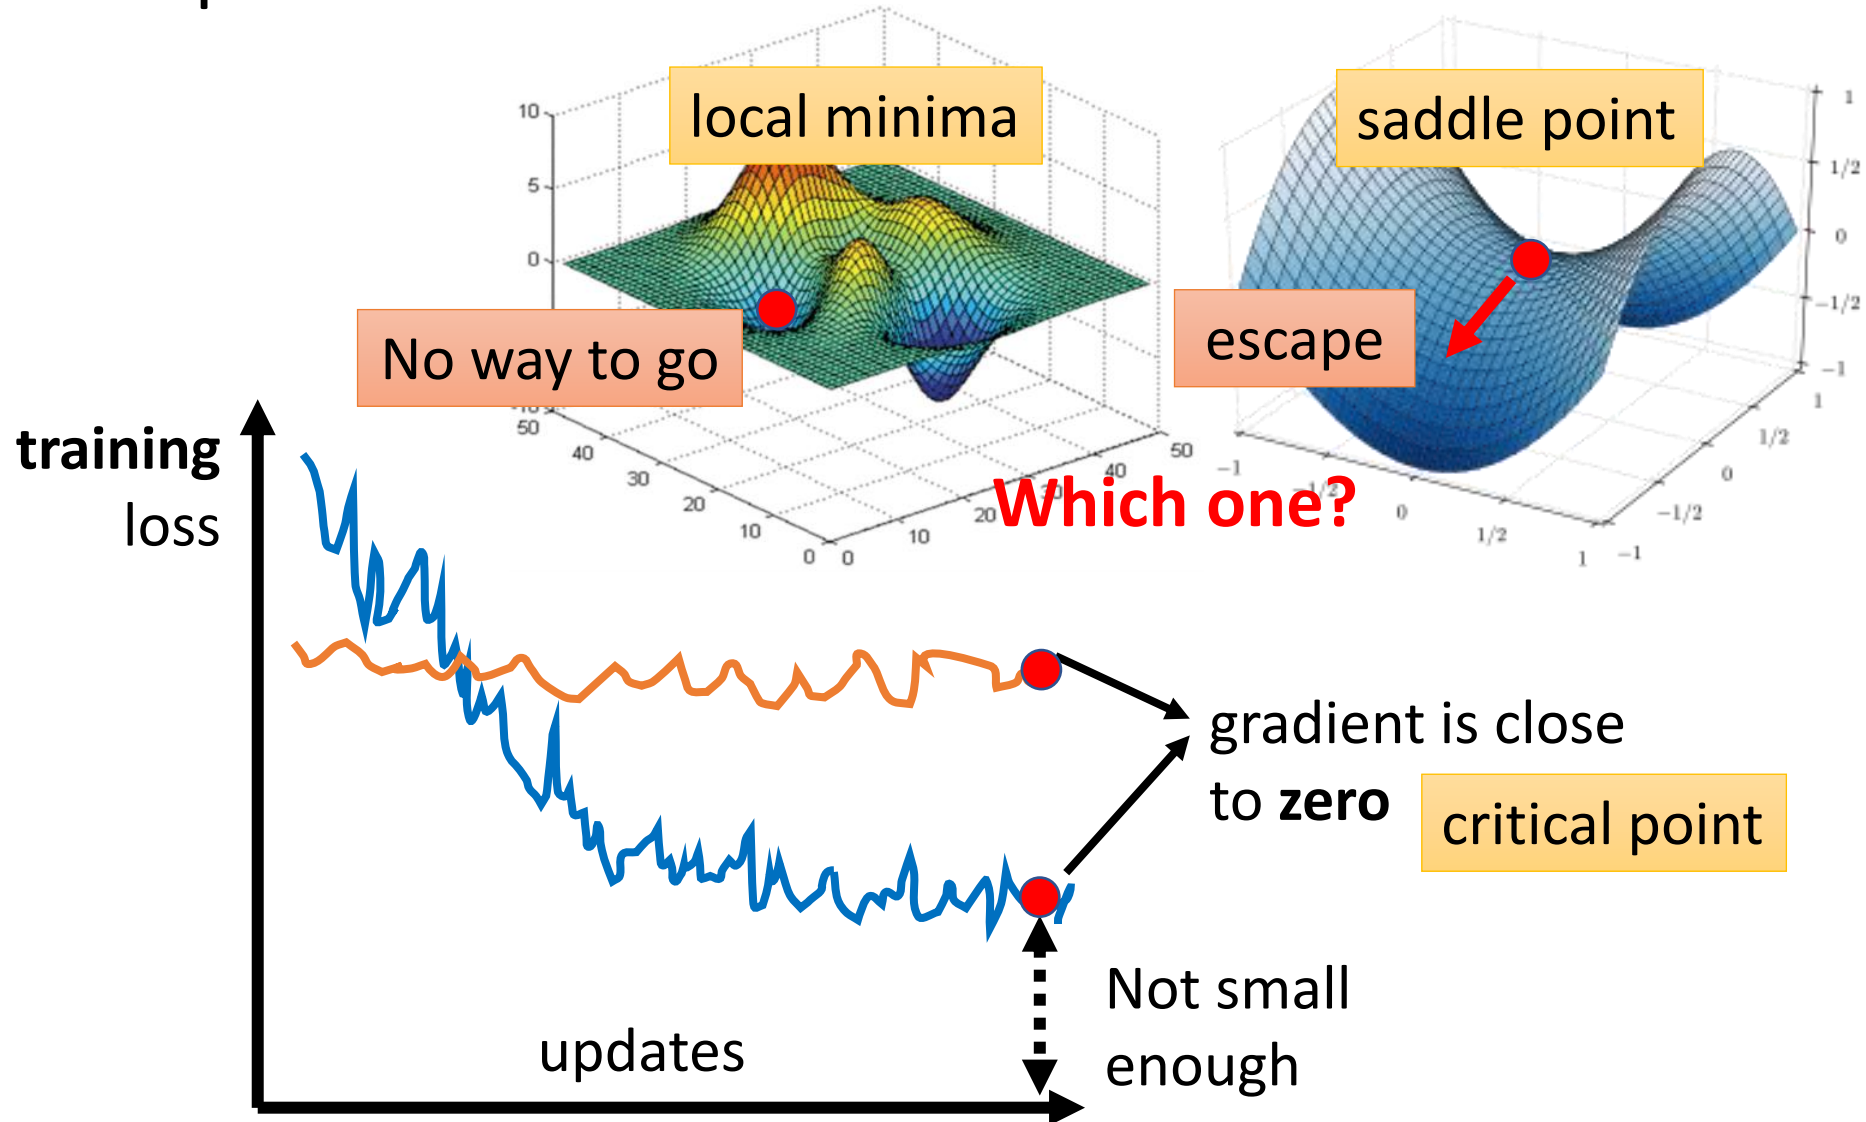

Warning of Math

Taylor Series Approximation

$L(\boldsymbol{\theta})$ around $\boldsymbol{\theta} = \boldsymbol{\theta}'$ can be approximated below


$$L(\boldsymbol{\theta}) \approx L(\boldsymbol{\theta}') + (\boldsymbol{\theta} - \boldsymbol{\theta}')^T \boldsymbol{g} + \frac{1}{2} (\boldsymbol{\theta} - \boldsymbol{\theta}')^T \boldsymbol{H} (\boldsymbol{\theta} - \boldsymbol{\theta}')$$

Gradient \boldsymbol{g} is a vector

$$\boldsymbol{g} = \nabla L(\boldsymbol{\theta}') \quad g_i = \frac{\partial L(\boldsymbol{\theta}')}{\partial \theta_i}$$

Hessian \boldsymbol{H} is a matrix

$$H_{ij} = \frac{\partial^2}{\partial \theta_i \partial \theta_j} L(\boldsymbol{\theta}')$$

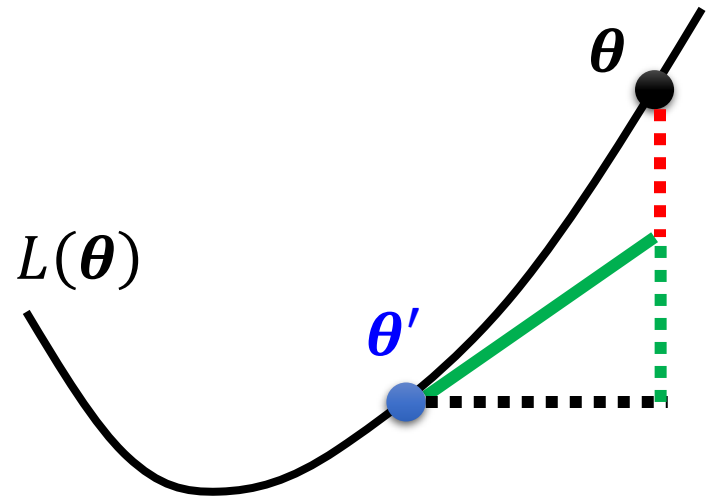

Hessian


$L(\boldsymbol{\theta})$ around $\boldsymbol{\theta} = \boldsymbol{\theta}'$ can be approximated below

$$L(\boldsymbol{\theta}) \approx L(\boldsymbol{\theta}') + \cancel{(\boldsymbol{\theta} - \boldsymbol{\theta}')^T \mathbf{g}} + \frac{1}{2} (\boldsymbol{\theta} - \boldsymbol{\theta}')^T \mathbf{H} (\boldsymbol{\theta} - \boldsymbol{\theta}')$$


At critical point

telling the properties of critical points


local min

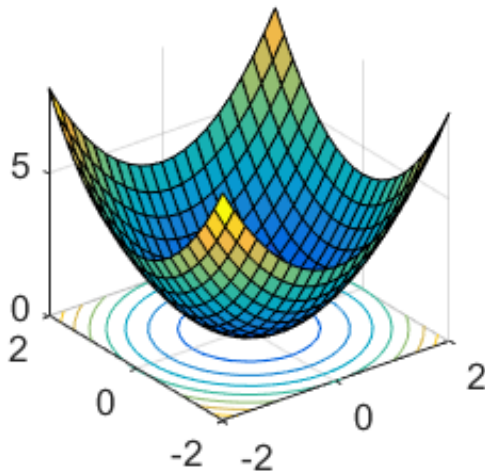

local max

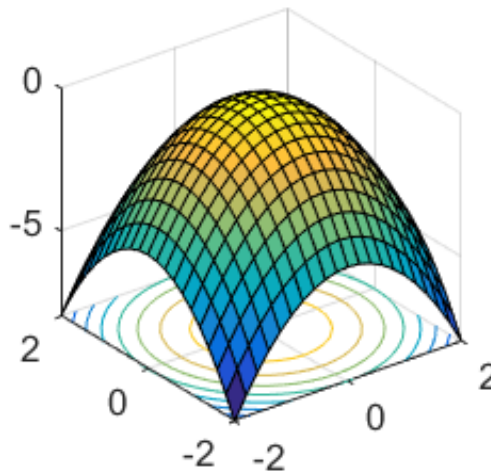

saddle point

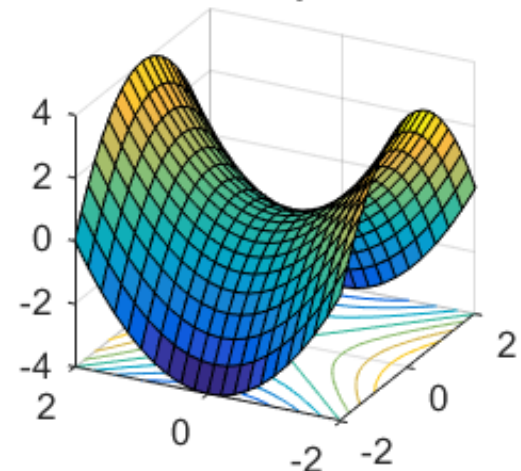

At critical point:

$$\mathbf{v}^T \mathbf{H} \mathbf{v}$$

Hessian

$$L(\boldsymbol{\theta}) \approx L(\boldsymbol{\theta}') + \frac{1}{2} (\boldsymbol{\theta} - \boldsymbol{\theta}')^T \mathbf{H} (\boldsymbol{\theta} - \boldsymbol{\theta}')$$

For all \mathbf{v}

$$\mathbf{v}^T \mathbf{H} \mathbf{v} > 0 \quad \Rightarrow \quad \text{Around } \boldsymbol{\theta}': L(\boldsymbol{\theta}) > L(\boldsymbol{\theta}') \quad \Rightarrow \quad \text{Local minima}$$

= \mathbf{H} is positive definite = All eigen values are positive. \uparrow

For all \mathbf{v}


$$\mathbf{v}^T \mathbf{H} \mathbf{v} < 0 \quad \Rightarrow \quad \text{Around } \boldsymbol{\theta}': L(\boldsymbol{\theta}) < L(\boldsymbol{\theta}') \quad \Rightarrow \quad \text{Local maxima}$$

= \mathbf{H} is negative definite = All eigen values are negative. \uparrow


$$\text{Sometimes } \mathbf{v}^T \mathbf{H} \mathbf{v} > 0, \text{ sometimes } \mathbf{v}^T \mathbf{H} \mathbf{v} < 0 \quad \Rightarrow \quad \text{Saddle point}$$



Some eigen values are positive, and some are negative. \uparrow

Example

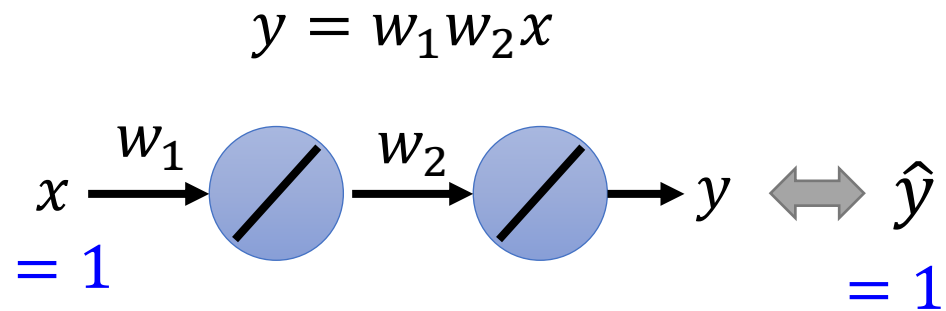

Error Surface

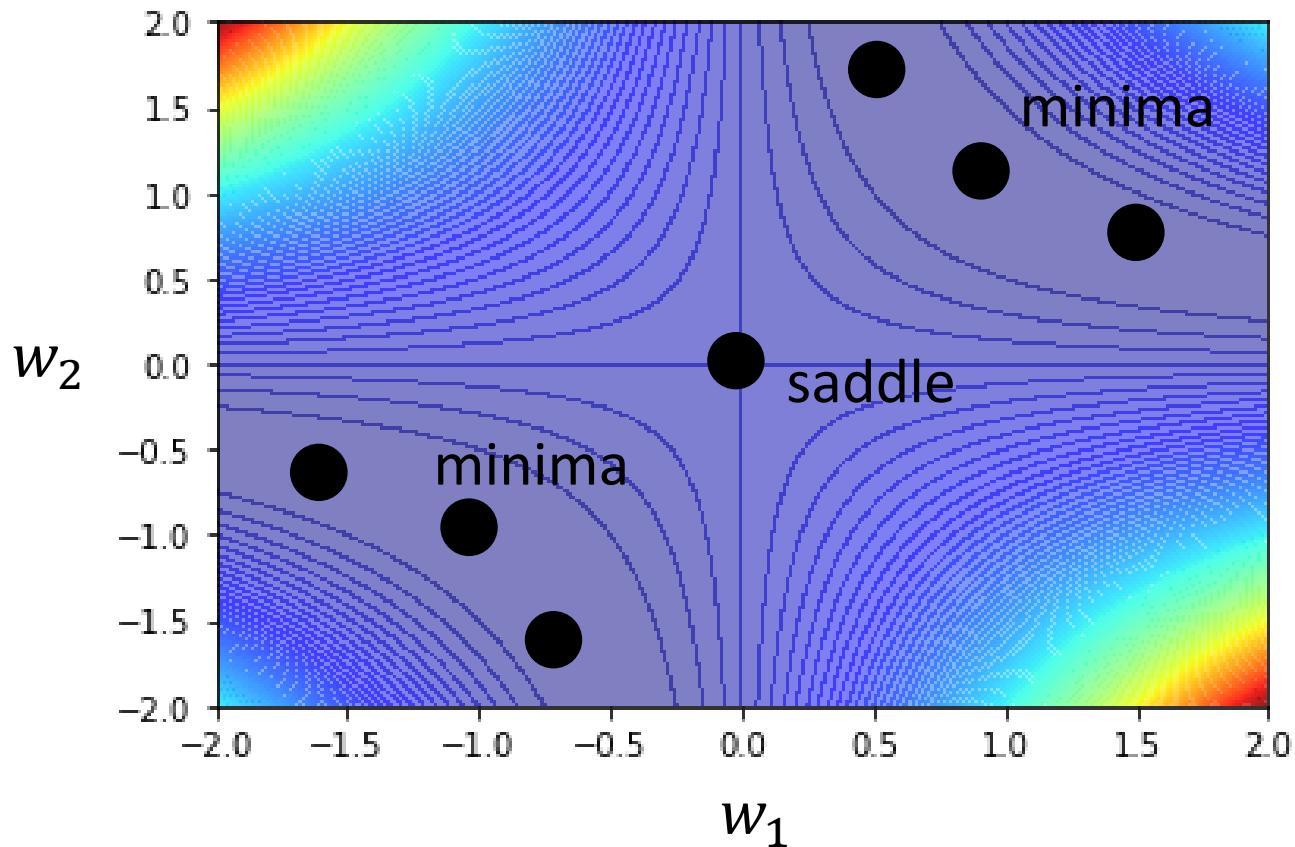

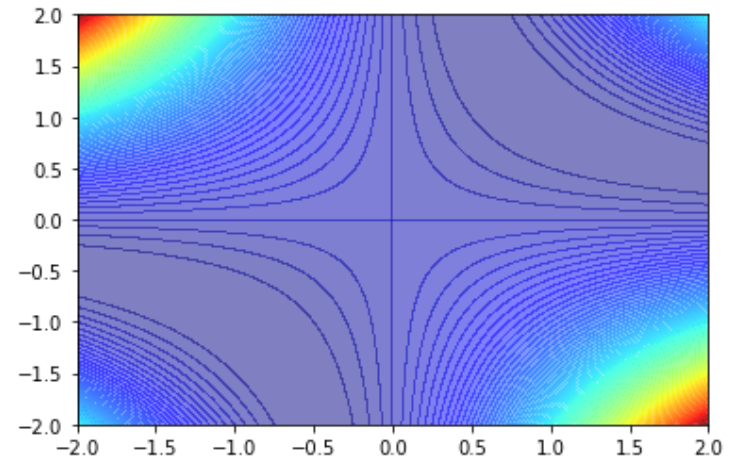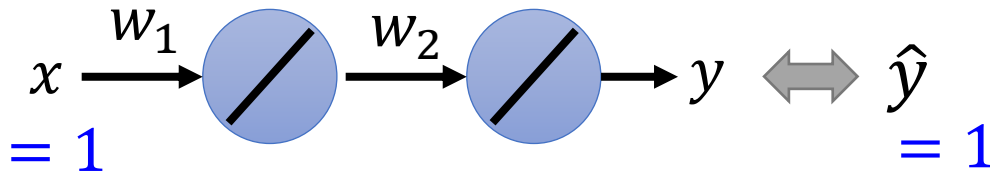

$$L = (\hat{y} - w_1 w_2 x)^2 = (1 - w_1 w_2)^2$$

$$\frac{\partial L}{\partial w_1} = 2(1 - w_1 w_2)(-w_2) = 0$$

$$\frac{\partial L}{\partial w_2} = 2(1 - w_1 w_2)(-w_1) = 0$$

Critical point: $w_1 = 0, w_2 = 0$

$$H = \begin{bmatrix} 0 & -2 \\ -2 & 0 \end{bmatrix} \quad \lambda_1 = 2, \lambda_2 = -2$$

Saddle point

g

H

$$\frac{\partial^2 L}{\partial w_1^2} = 2(-w_2)(-w_2) = 0$$

$$\frac{\partial^2 L}{\partial w_2 \partial w_1} = -2 + 4w_1 w_2 = -2$$

$$\frac{\partial^2 L}{\partial w_1 \partial w_2} = -2 + 4w_1 w_2 = -2$$

$$\frac{\partial^2 L}{\partial w_2^2} = 2(-w_1)(-w_1) = 0$$

Don't afraid of saddle point?

$$\mathbf{v}^T \mathbf{H} \mathbf{v}$$

At critical point: $L(\boldsymbol{\theta}) \approx L(\boldsymbol{\theta}') + \frac{1}{2} (\boldsymbol{\theta} - \boldsymbol{\theta}')^T \mathbf{H} (\boldsymbol{\theta} - \boldsymbol{\theta}')$

Sometimes $\mathbf{v}^T \mathbf{H} \mathbf{v} > 0$, sometimes $\mathbf{v}^T \mathbf{H} \mathbf{v} < 0 \Rightarrow$ Saddle point

\mathbf{H} may tell us parameter update direction!

\mathbf{u} is an eigen vector of \mathbf{H}

λ is the eigen value of \mathbf{u}



$$\lambda < 0$$



$$\mathbf{u}^T \mathbf{H} \mathbf{u} = \mathbf{u}^T (\lambda \mathbf{u}) = \lambda \|\mathbf{u}\|^2$$
$$< 0 \qquad \qquad \qquad < 0$$

$$L(\boldsymbol{\theta}) \approx L(\boldsymbol{\theta}') + \frac{1}{2} (\boldsymbol{\theta} - \boldsymbol{\theta}')^T \mathbf{H} (\boldsymbol{\theta} - \boldsymbol{\theta}') \Rightarrow L(\boldsymbol{\theta}) < L(\boldsymbol{\theta}')$$

$$\boldsymbol{\theta} - \boldsymbol{\theta}' = \mathbf{u} \qquad \boldsymbol{\theta} = \boldsymbol{\theta}' + \mathbf{u} \qquad \text{Decrease } L$$

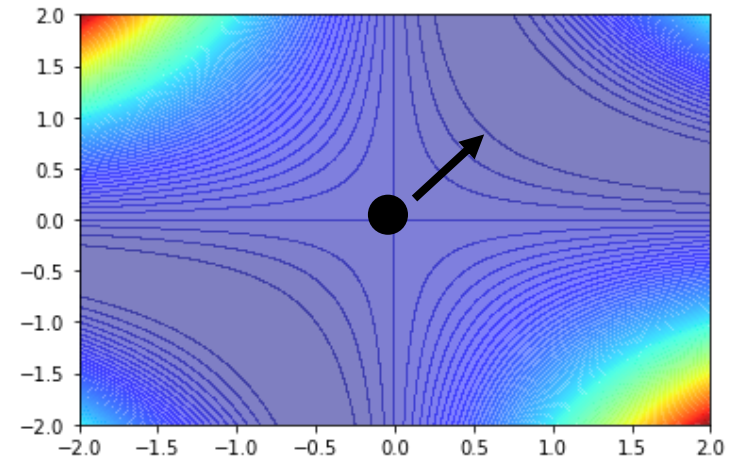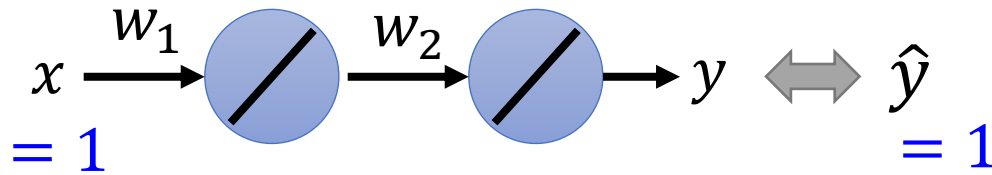

$$L = (\hat{y} - w_1 w_2 x)^2 = (1 - w_1 w_2)^2$$

$$\frac{\partial L}{\partial w_1} = 2(1 - w_1 w_2)(-w_2)$$

$$\frac{\partial L}{\partial w_2} = 2(1 - w_1 w_2)(-w_1)$$

Critical point: $w_1 = 0, w_2 = 0$

$$H = \begin{bmatrix} 0 & -2 \\ -2 & 0 \end{bmatrix} \quad \lambda_1 = 2, \lambda_2 = -2$$

Saddle point

$\lambda_2 = -2$ Has eigenvector $\mathbf{u} = \begin{bmatrix} 1 \\ 1 \end{bmatrix}$

Update the parameter along the direction of \mathbf{u}

You can escape the saddle point and decrease the loss.

(this method is seldom used in practice)

End of Warning

Saddle Point v.s. Local Minima

- A.D. 1543



Saddle Point v.s. Local Minima

- The Magician Diorena (魔法師狄奧倫娜)


From 3 dimensional space, it is sealed.

It is not in higher dimensions.



Source of image: <https://read01.com/mz2DBPE.html#.YECz22gzblU>

Saddle Point v.s. Local Minima

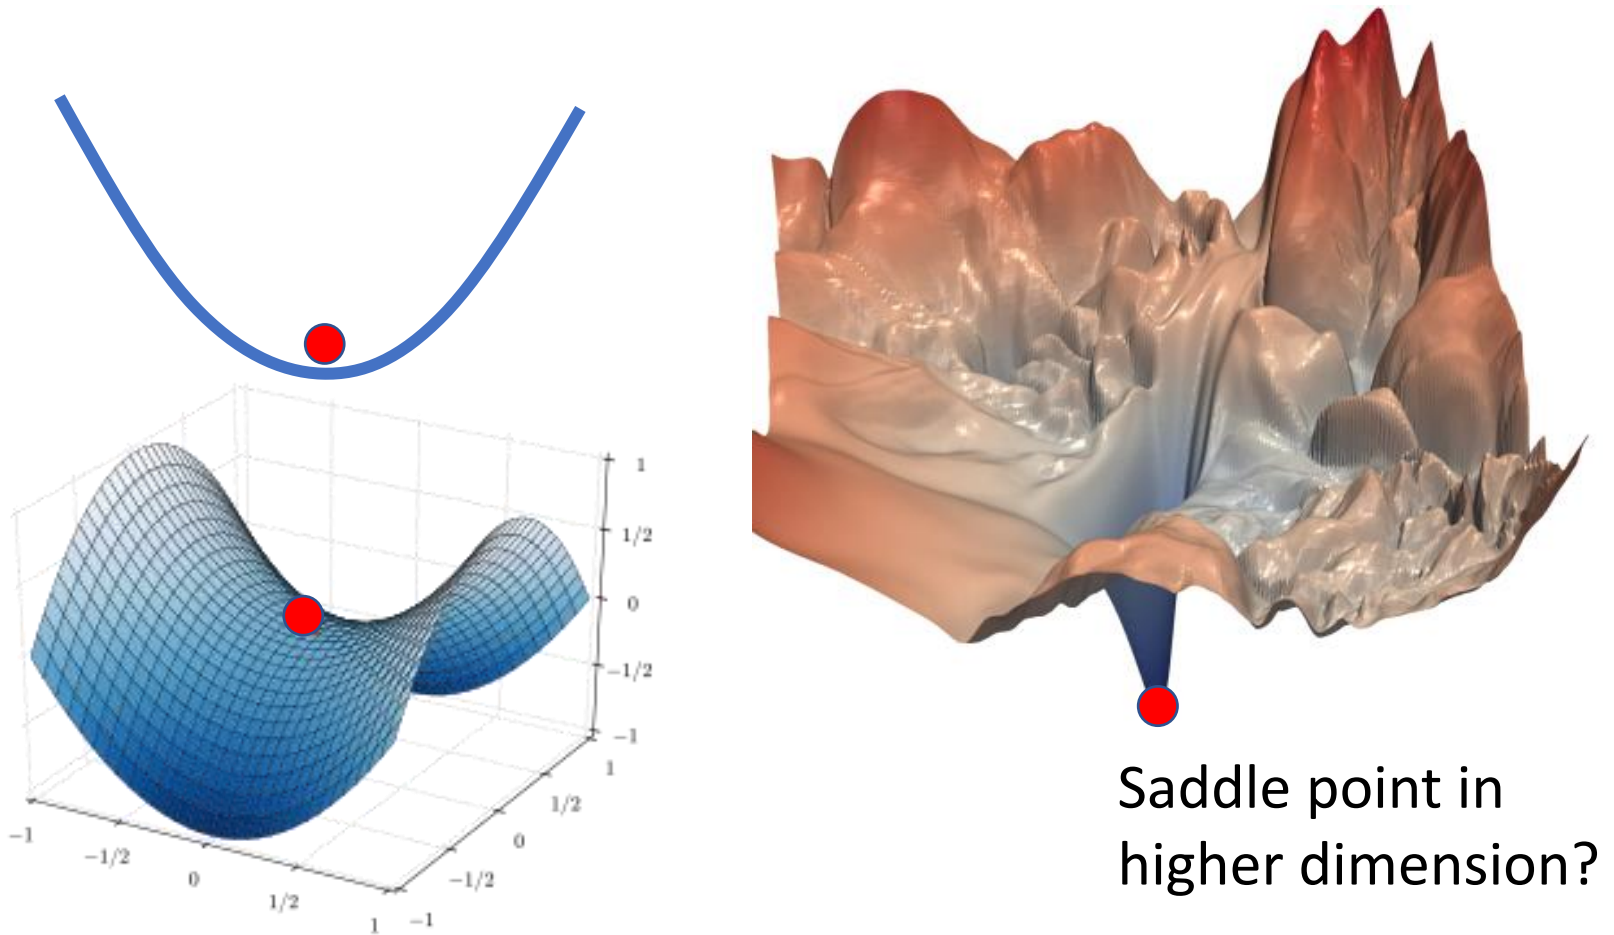


When you have lots of parameters, perhaps local minima is rare?

Empirical Study


Training
Loss

Train a network once, until it
converges to critical point.

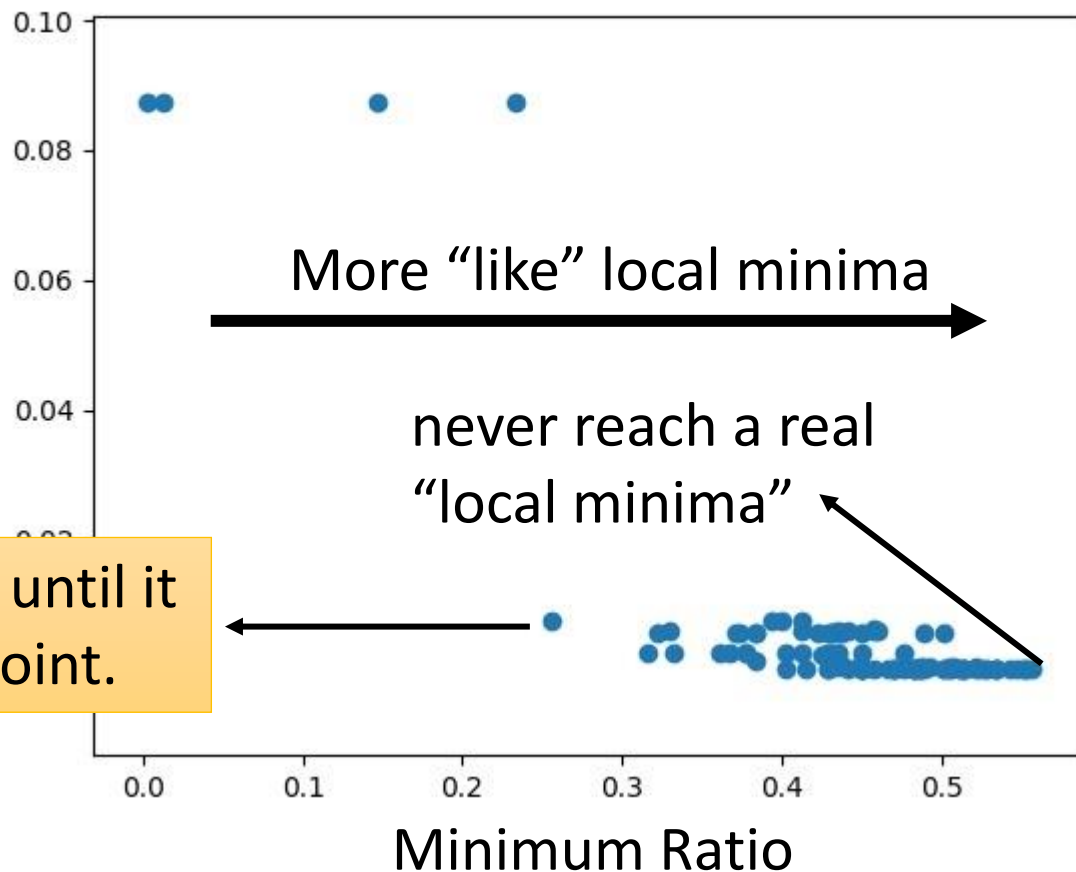

$$\text{Minimum ratio} = \frac{\text{Number of **Positive** Eigen values}}{\text{Number of Eigen values}}$$

Small Gradient ...

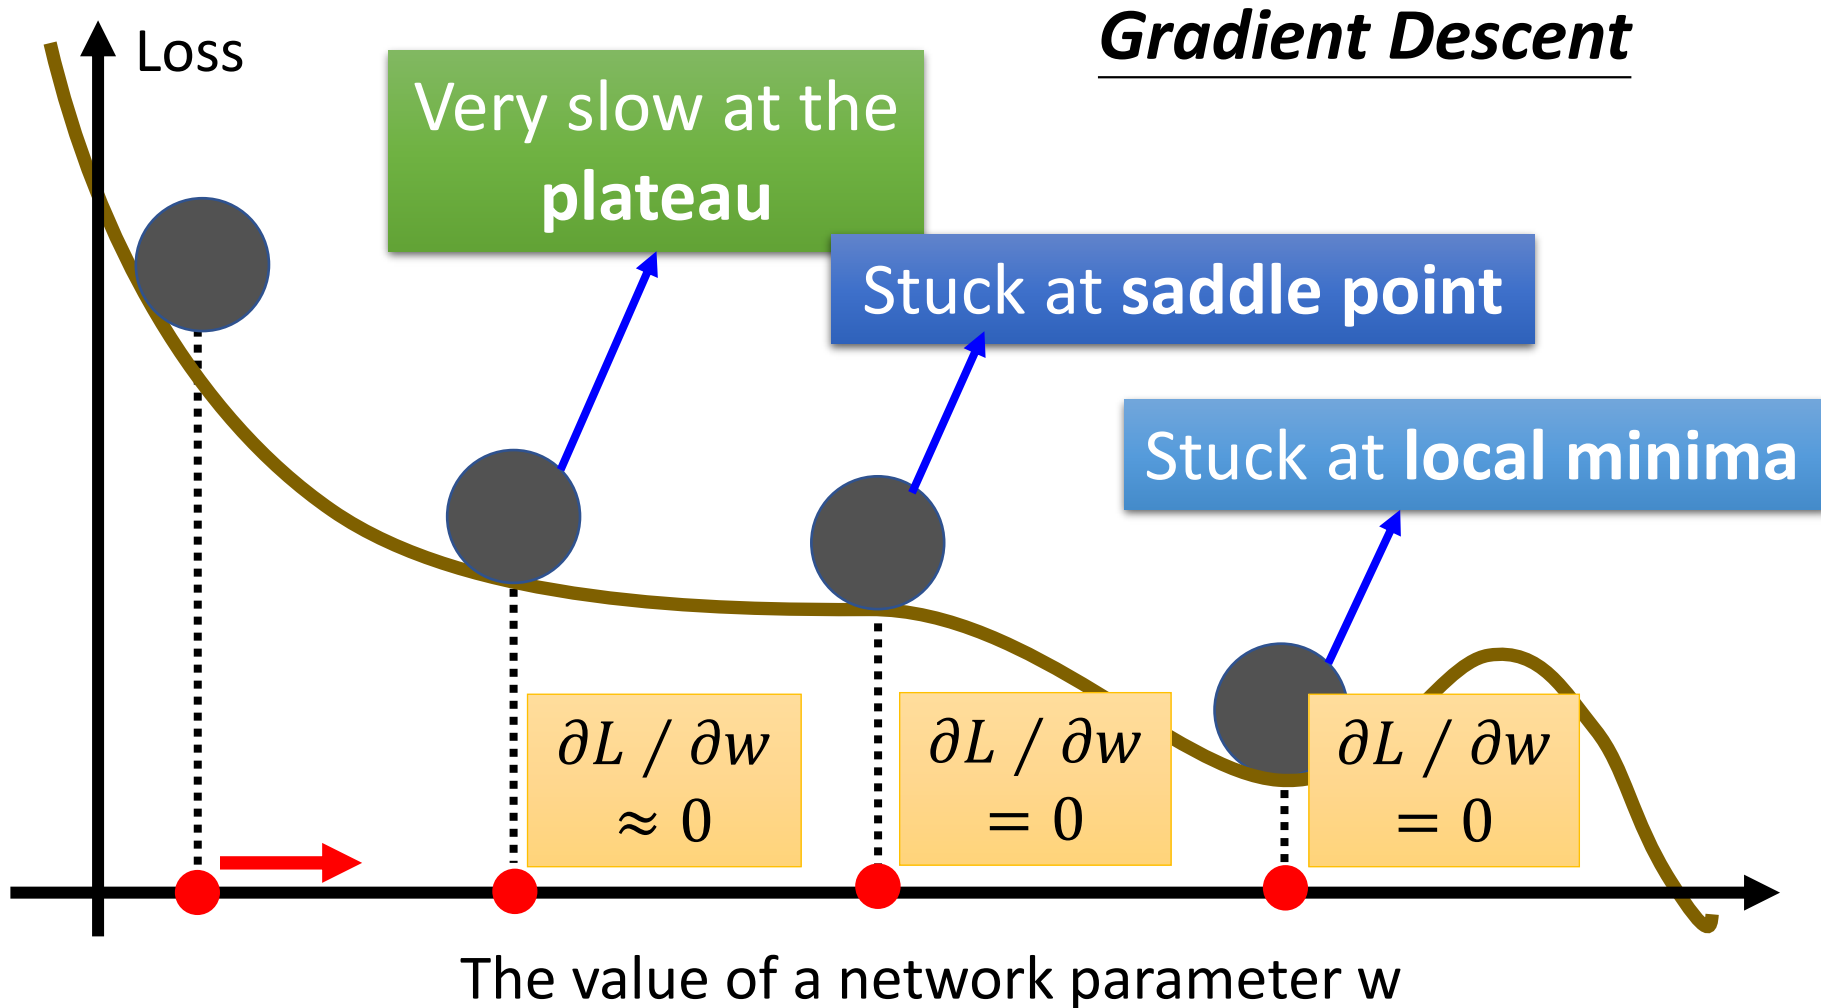

Tips for training: Batch and Momentum



Batch

Review: Optimization with Batch

$$\theta^* = \arg \min_{\theta} L$$

➤ (Randomly) Pick initial values θ^0

➤ Compute gradient $g^0 = \nabla L^1(\theta^0)$


$$\text{update } \theta^1 \leftarrow \theta^0 - \eta g^0$$

➤ Compute gradient $g^1 = \nabla L^2(\theta^1)$

$$\text{update } \theta^2 \leftarrow \theta^1 - \eta g^1$$

➤ Compute gradient $g^3 = \nabla L^3(\theta^2)$

$$\text{update } \theta^3 \leftarrow \theta^2 - \eta g^3$$

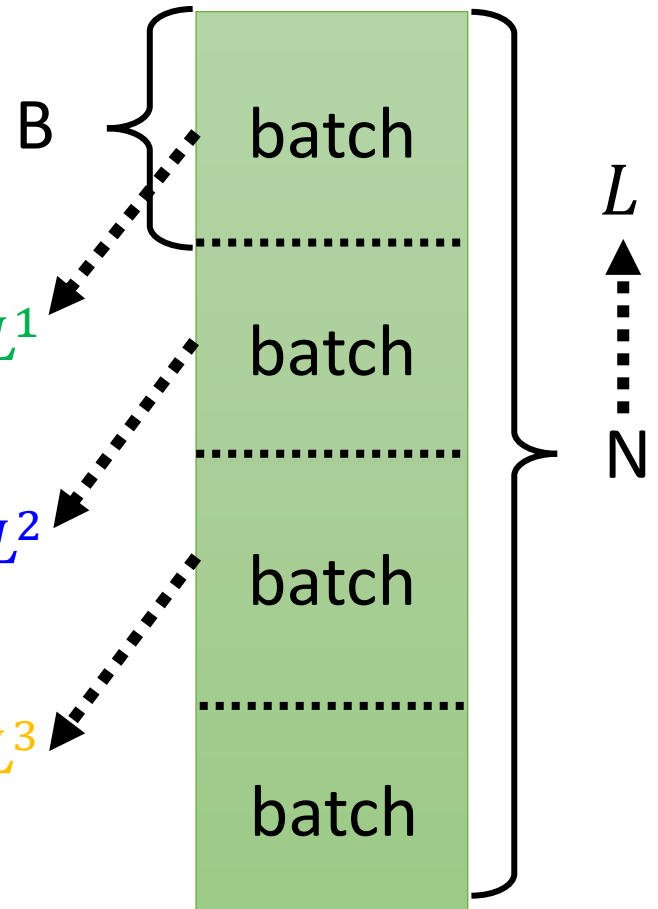


1 **epoch** = see all the batches once → **Shuffle** after each epoch

Small Batch v.s. Large Batch

Consider 20 examples ($N=20$)


Batch size = N (Full batch)

Update after seeing all
the 20 examples

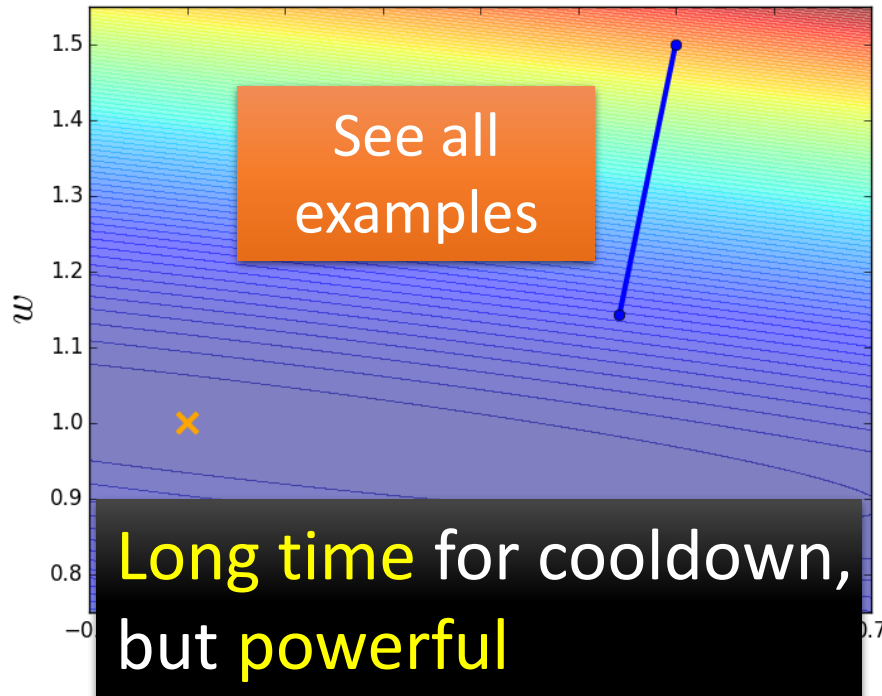

Batch size = 1

Update for each example
Update 20 times in an epoch

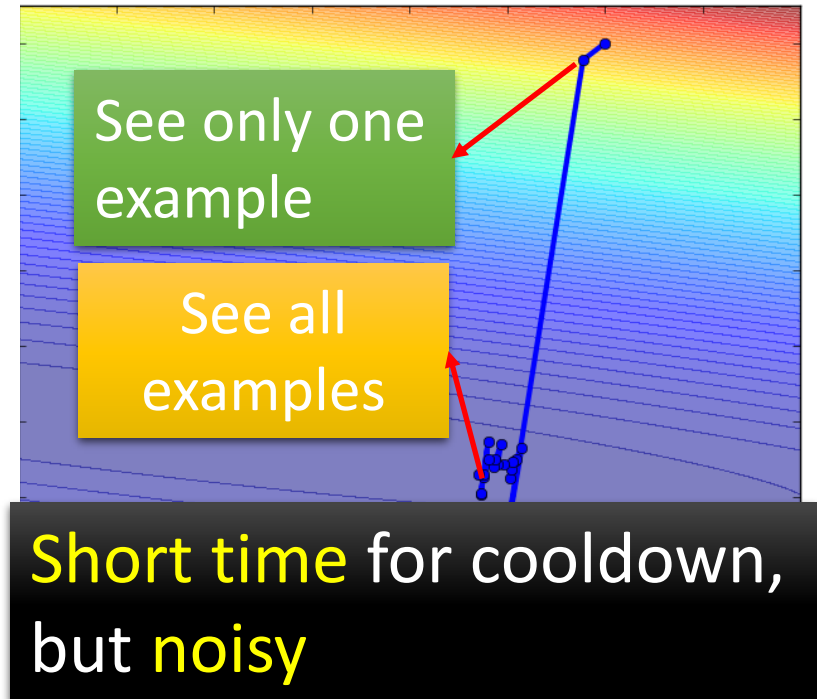


Small Batch v.s. Large Batch

- Larger batch size does **not** require longer time to compute gradient (unless batch size is too large)

**Time for
each update**

MNIST: digit
classification


Tesla V100 GPU

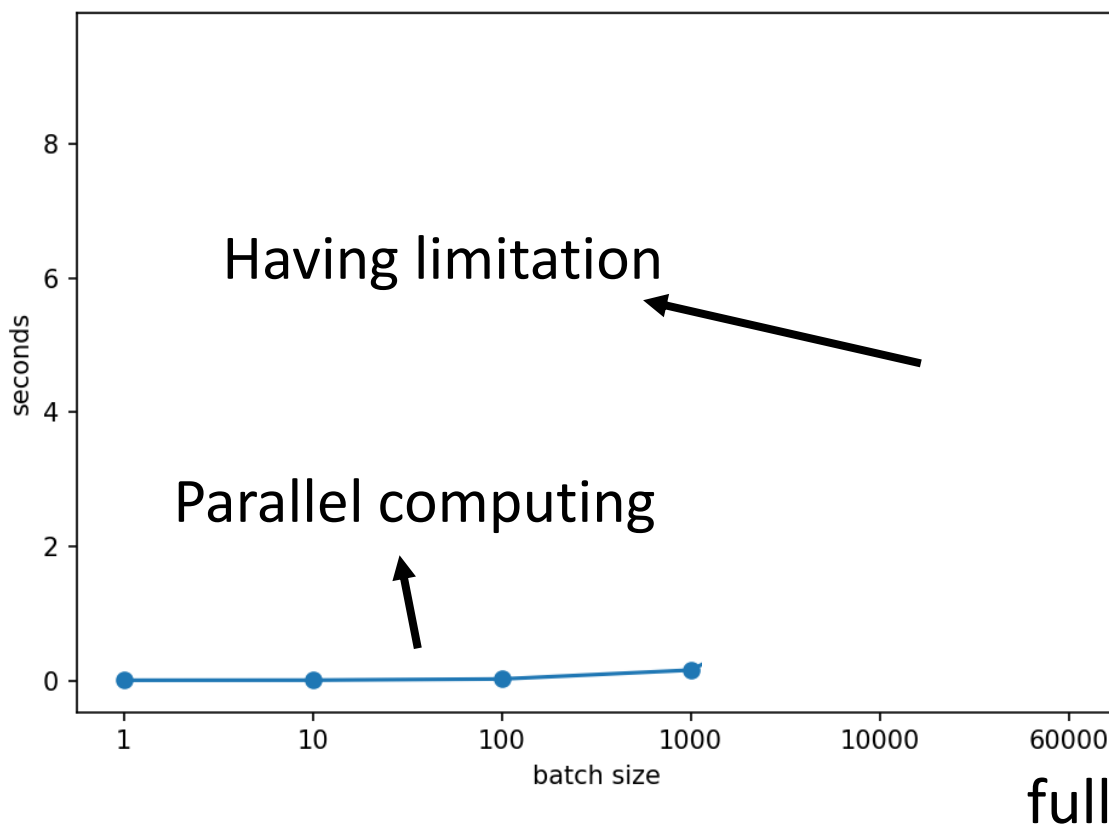


Small Batch v.s. Large Batch

- Smaller batch requires longer time for one epoch (longer time for seeing all data once)

Time for one **update**

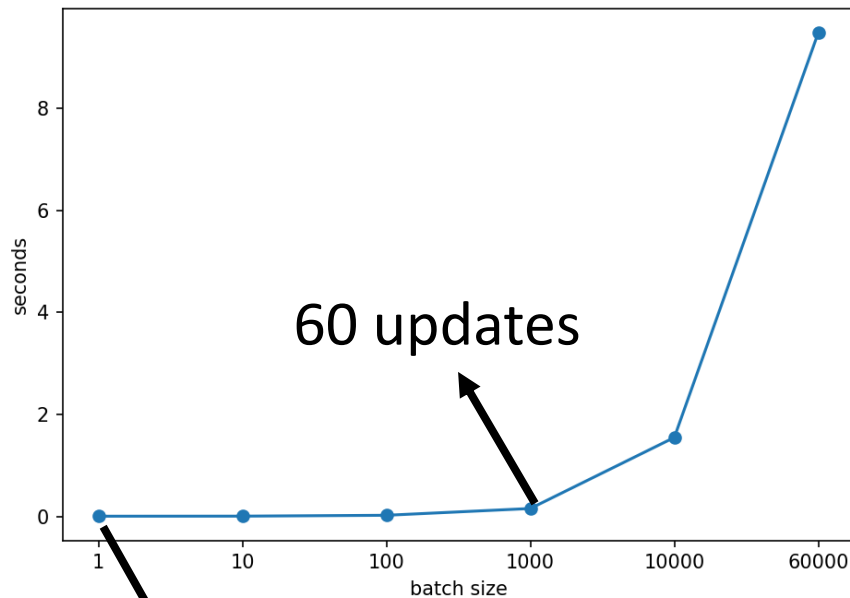

Time for one **epoch**

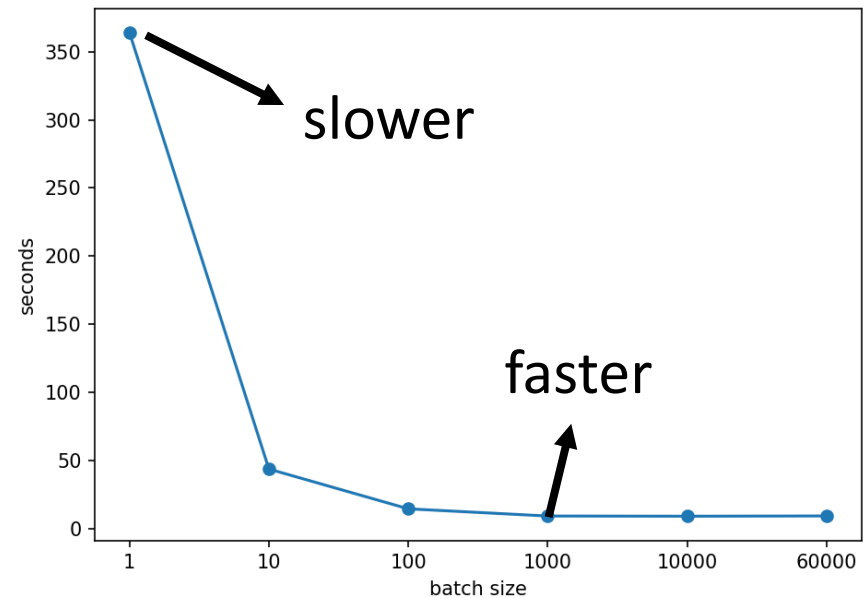


Small Batch v.s. Large Batch

Consider 20 examples ($N=20$)


Batch size = N (Full Batch)

Update after seeing all the 20 examples

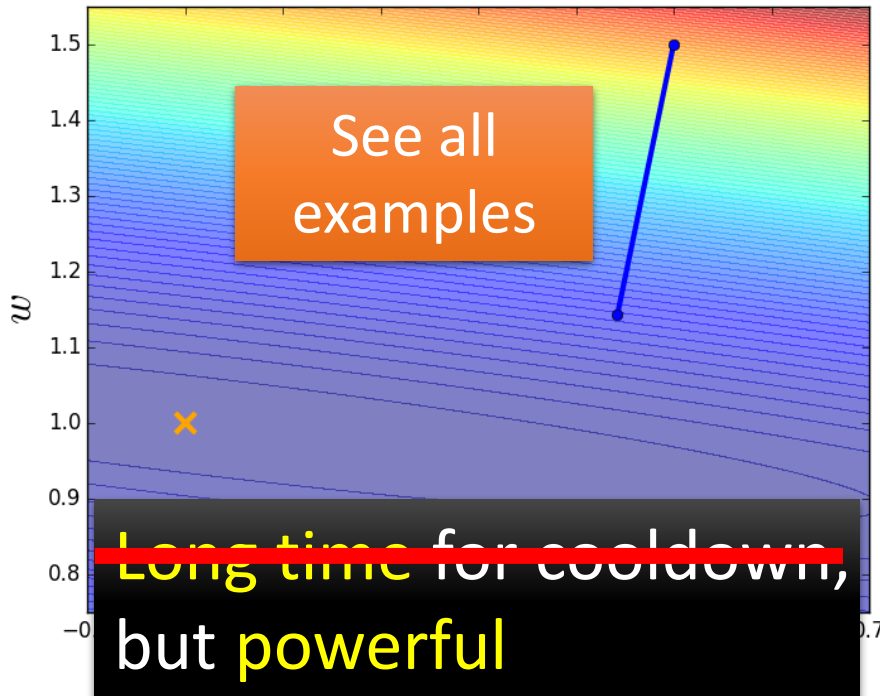

Batch size = 1


Update for each example
Update 20 times in an epoch

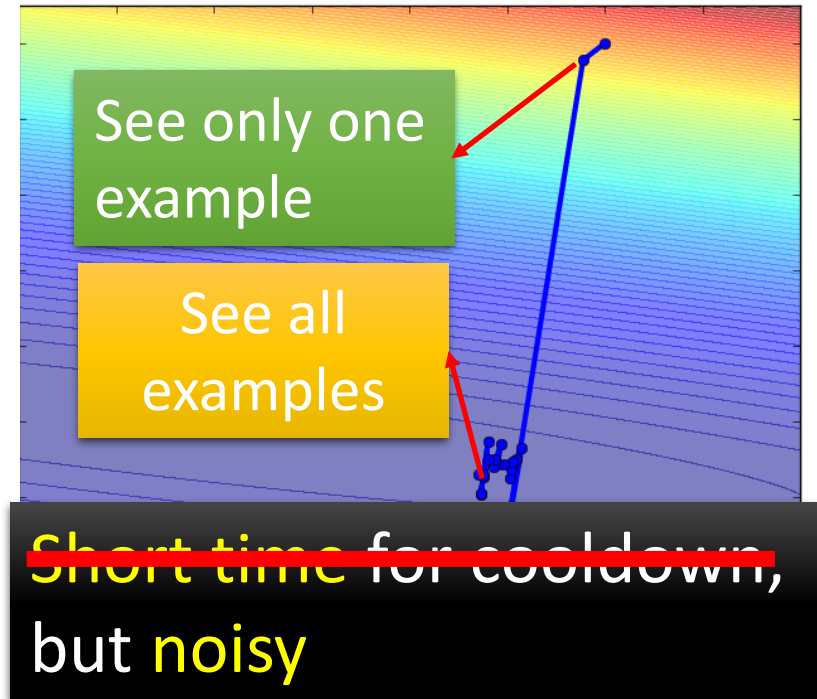

Small Batch v.s. Large Batch


MNIST

Accuracy vs. Batch Size

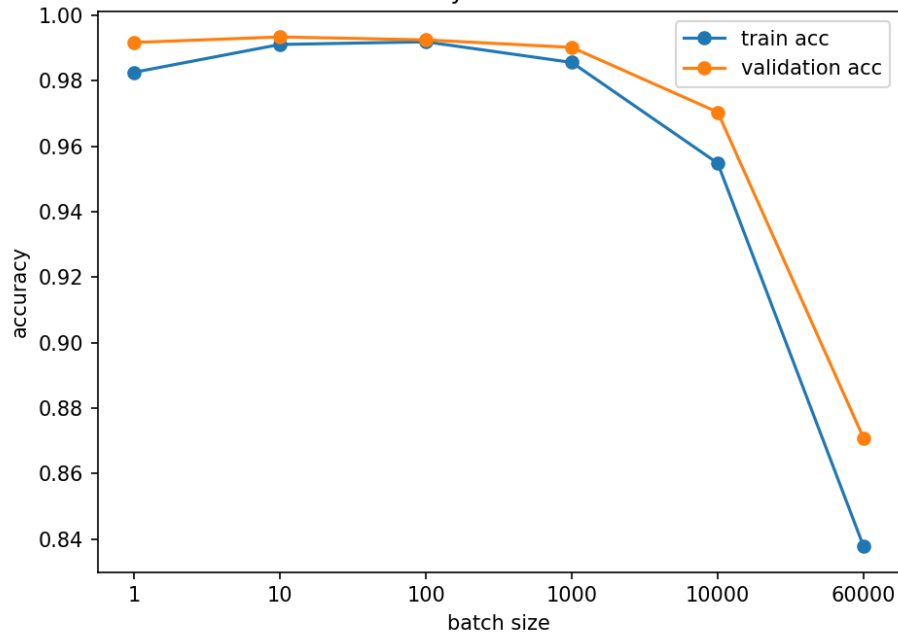

CIFAR-10



Accuracy vs. Batch Size

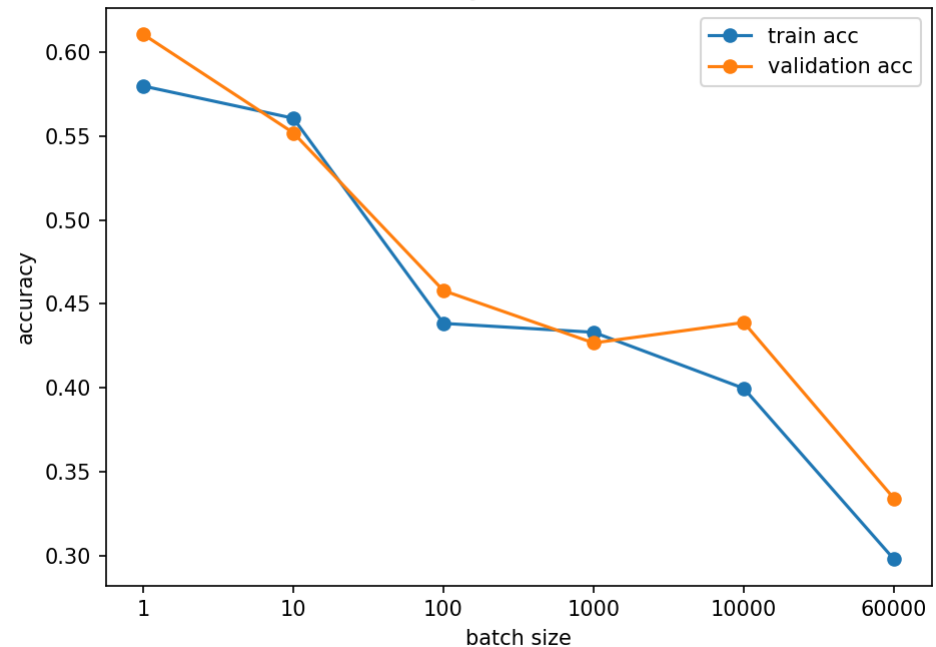

- Smaller batch size has better performance
- What's wrong with large batch size? Optimization Fails

Small Batch v.s. Large Batch

- Smaller batch size has better performance
- “Noisy” update is better for training

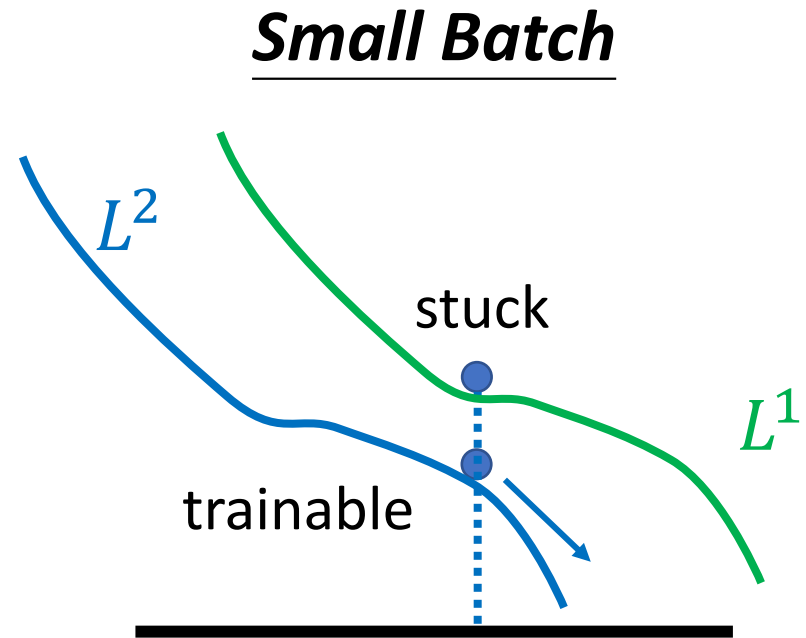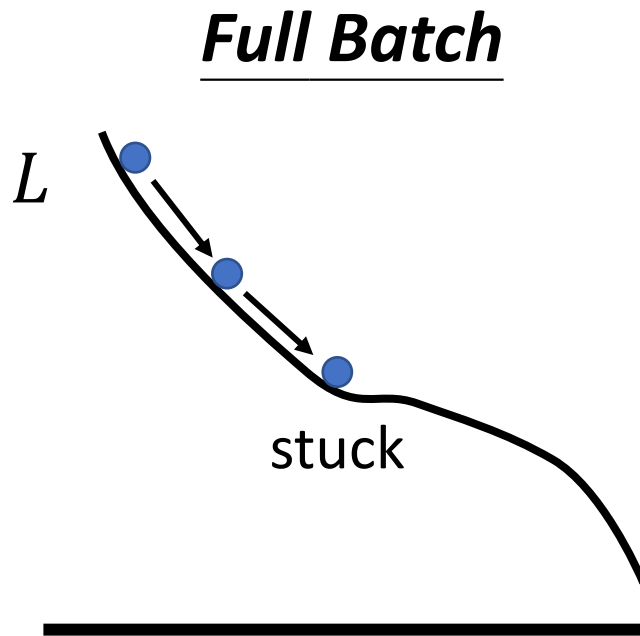

Small Batch v.s. Large Batch


- Small batch is better on testing data?

	Name	Network Type	Data set
SB = 256	F_1	Fully Connected	MNIST (LeCun et al., 1998a)
	F_2	Fully Connected	TIMIT (Garofolo et al., 1993)
LB =	C_1	(Shallow) Convolutional	CIFAR-10 (Krizhevsky & Hinton, 2009)
	C_2	(Deep) Convolutional	CIFAR-10
0.1 x data set	C_3	(Shallow) Convolutional	CIFAR-100 (Krizhevsky & Hinton, 2009)
	C_4	(Deep) Convolutional	CIFAR-100




Name	Training Accuracy		Testing Accuracy	
	SB	LB	SB	LB
F_1	99.66% \pm 0.05%	99.92% \pm 0.01%	98.03% \pm 0.07%	97.81% \pm 0.07%
F_2	99.99% \pm 0.03%	98.35% \pm 2.08%	64.02% \pm 0.2%	59.45% \pm 1.05%
C_1	99.89% \pm 0.02%	99.66% \pm 0.2%	80.04% \pm 0.12%	77.26% \pm 0.42%
C_2	99.99% \pm 0.04%	99.99% \pm 0.01%	89.24% \pm 0.12%	87.26% \pm 0.07%
C_3	99.56% \pm 0.44%	99.88% \pm 0.30%	49.58% \pm 0.39%	46.45% \pm 0.43%
C_4	99.10% \pm 1.23%	99.57% \pm 1.84%	63.08% \pm 0.5%	57.81% \pm 0.17%

Small Batch v.s. Large Batch

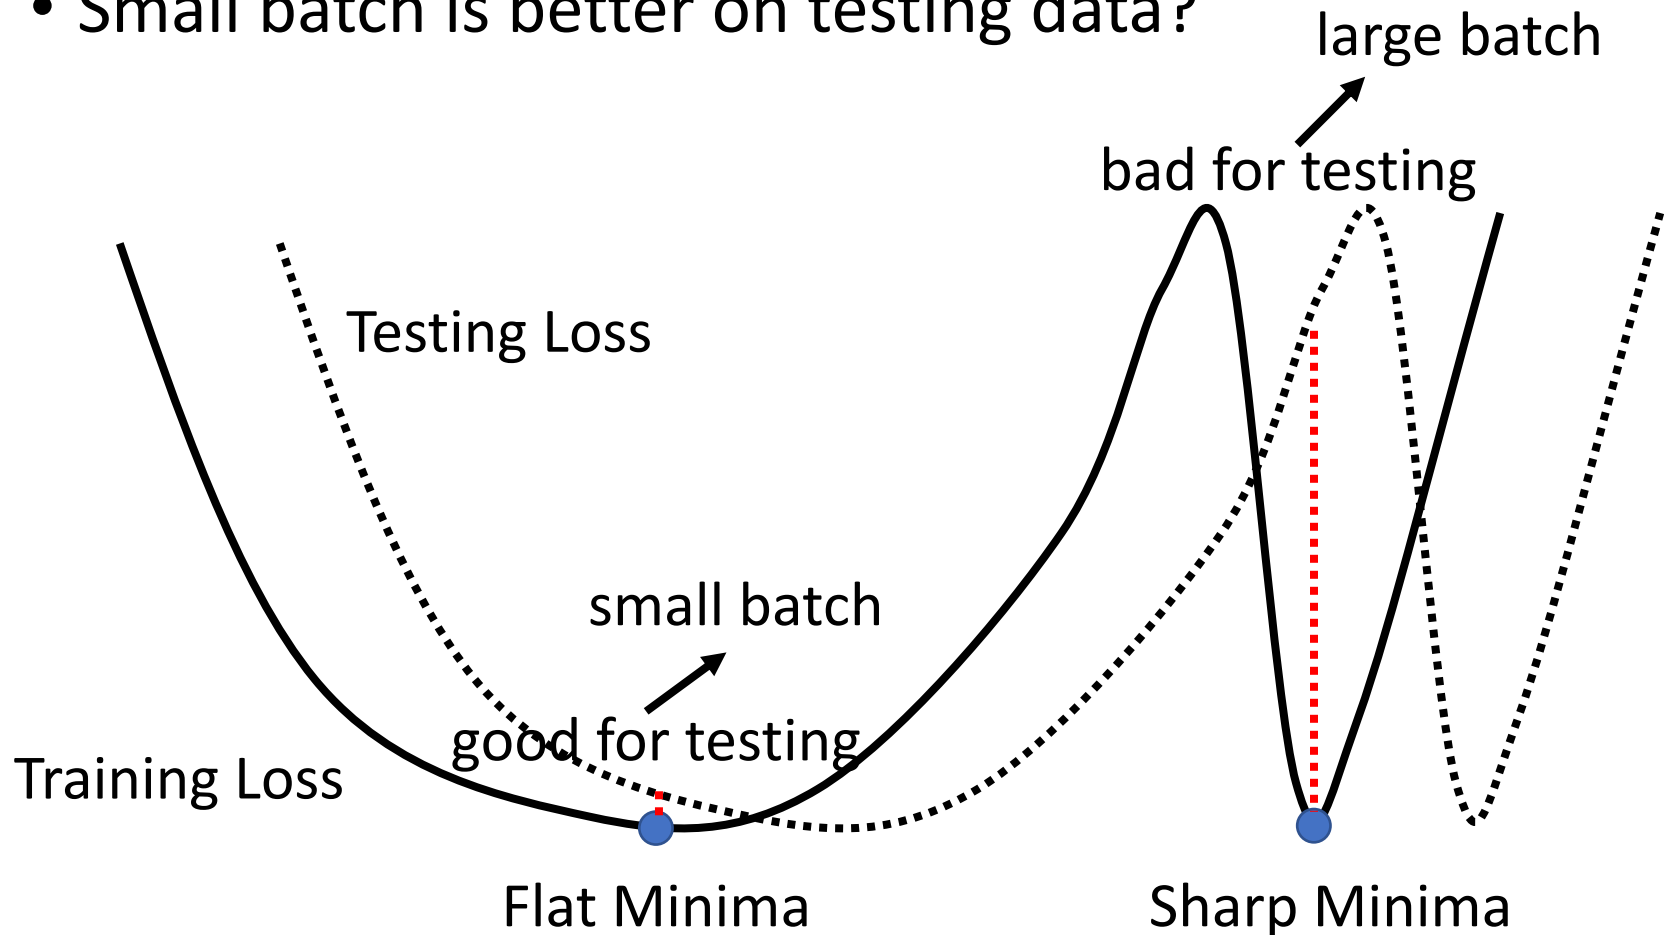- Small batch is better on testing data?



Small Batch v.s. Large Batch

	Small	Large
Speed for one update (no parallel)	Faster	Slower
Speed for one update (with parallel)	Same	Same (not too large)
Time for one epoch	Slower	Faster 
Gradient	Noisy	Stable
Optimization	Better 	Worse
Generalization	Better 	Worse

Batch size is a hyperparameter you have to decide.

Have both fish and bear's paws?


- Large Batch Optimization for Deep Learning: Training BERT in 76 minutes (<https://arxiv.org/abs/1904.00962>)
- Extremely Large Minibatch SGD: Training ResNet-50 on ImageNet in 15 Minutes (<https://arxiv.org/abs/1711.04325>)
- Stochastic Weight Averaging in Parallel: Large-Batch Training That Generalizes Well (<https://arxiv.org/abs/2001.02312>)
- Large Batch Training of Convolutional Networks (<https://arxiv.org/abs/1708.03888>)
- Accurate, large minibatch sgd: Training imagenet in 1 hour (<https://arxiv.org/abs/1706.02677>)

Momentum


Small Gradient ...

Consider the physical world ...

How about put this phenomenon
in gradient descent?

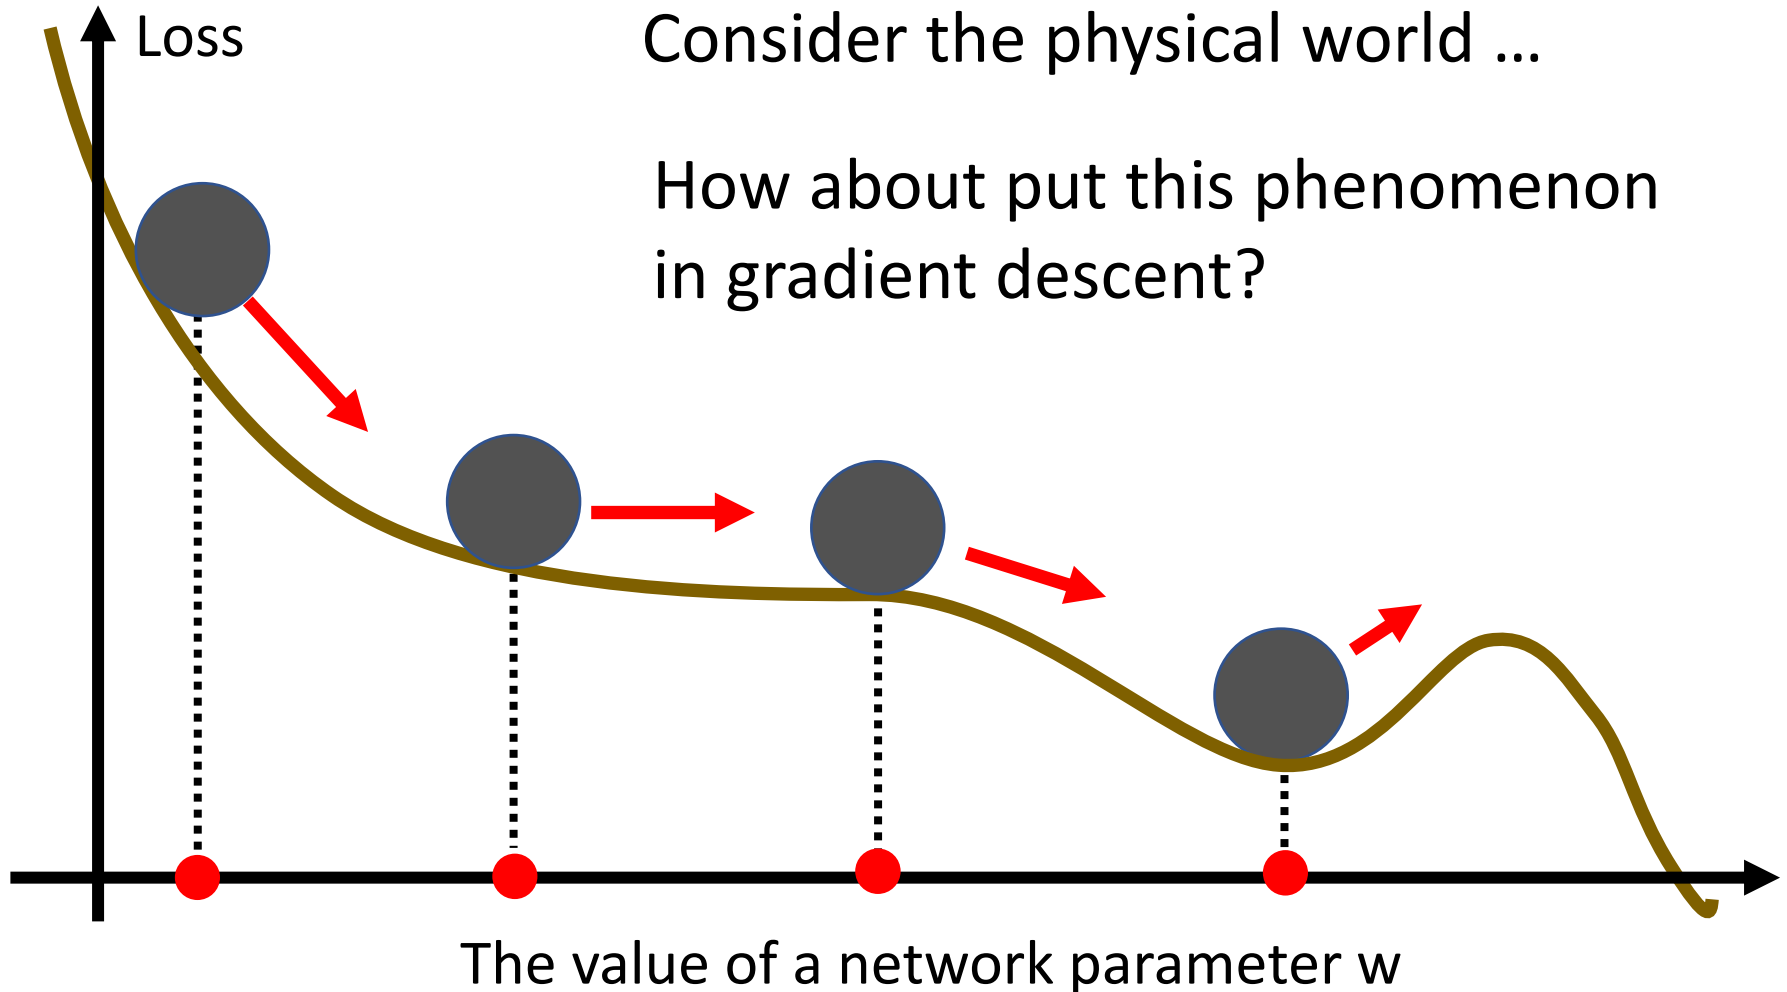

(Vanilla) Gradient Descent

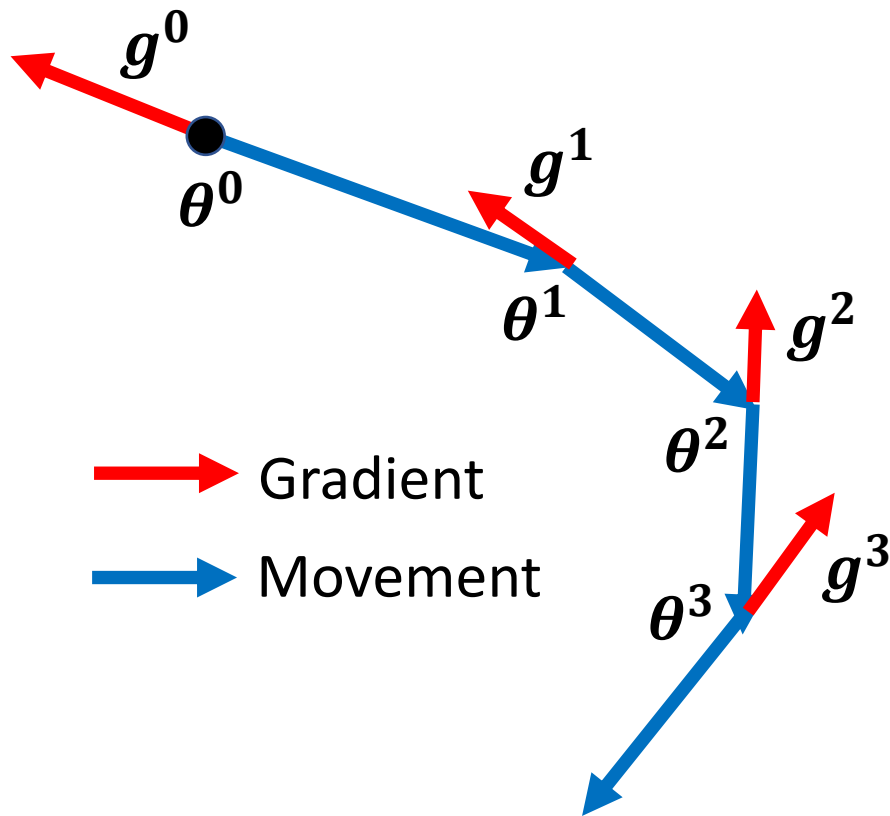

Starting at θ^0

Compute gradient g^0

Move to $\theta^1 = \theta^0 - \eta g^0$


Compute gradient g^1

Move to $\theta^2 = \theta^1 - \eta g^1$

⋮

Gradient Descent + Momentum

Movement: **movement of last step** minus **gradient** at present

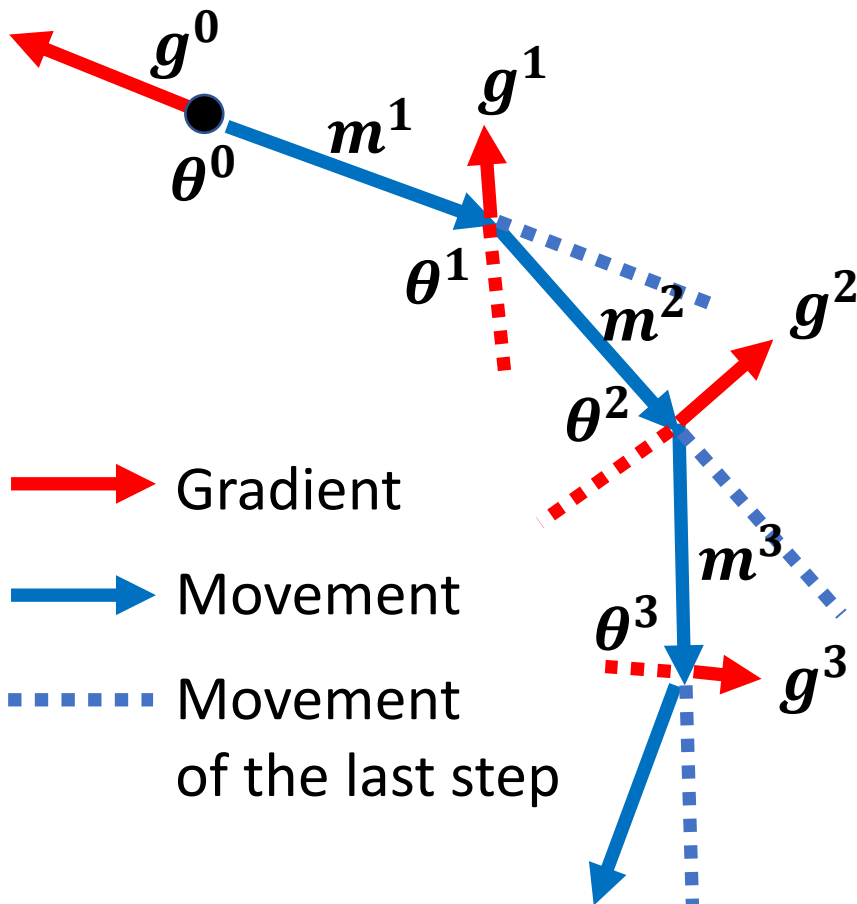

Starting at θ^0

Movement $\mathbf{m}^0 = \mathbf{0}$

Compute gradient \mathbf{g}^0

Movement $\mathbf{m}^1 = \lambda \mathbf{m}^0 - \eta \mathbf{g}^0$

Move to $\theta^1 = \theta^0 + \mathbf{m}^1$

Compute gradient \mathbf{g}^1

Movement $\mathbf{m}^2 = \lambda \mathbf{m}^1 - \eta \mathbf{g}^1$

Move to $\theta^2 = \theta^1 + \mathbf{m}^2$

Movement not just based on gradient, but previous movement.

Gradient Descent + Momentum

Movement: **movement of last step** minus **gradient** at present

\mathbf{m}^i is the weighted sum of all the previous gradient: $\mathbf{g}^0, \mathbf{g}^1, \dots, \mathbf{g}^{i-1}$

$$\mathbf{m}^0 = \mathbf{0}$$

$$\mathbf{m}^1 = -\eta \mathbf{g}^0$$

$$\mathbf{m}^2 = -\lambda \eta \mathbf{g}^0 - \eta \mathbf{g}^1$$

\vdots

Starting at $\boldsymbol{\theta}^0$

Movement $\mathbf{m}^0 = \mathbf{0}$

Compute gradient \mathbf{g}^0

Movement $\mathbf{m}^1 = \lambda \mathbf{m}^0 - \eta \mathbf{g}^0$

Move to $\boldsymbol{\theta}^1 = \boldsymbol{\theta}^0 + \mathbf{m}^1$


Compute gradient \mathbf{g}^1

Movement $\mathbf{m}^2 = \lambda \mathbf{m}^1 - \eta \mathbf{g}^1$

Move to $\boldsymbol{\theta}^2 = \boldsymbol{\theta}^1 + \mathbf{m}^2$

Movement not just based on gradient, but previous movement.

Gradient Descent + Momentum

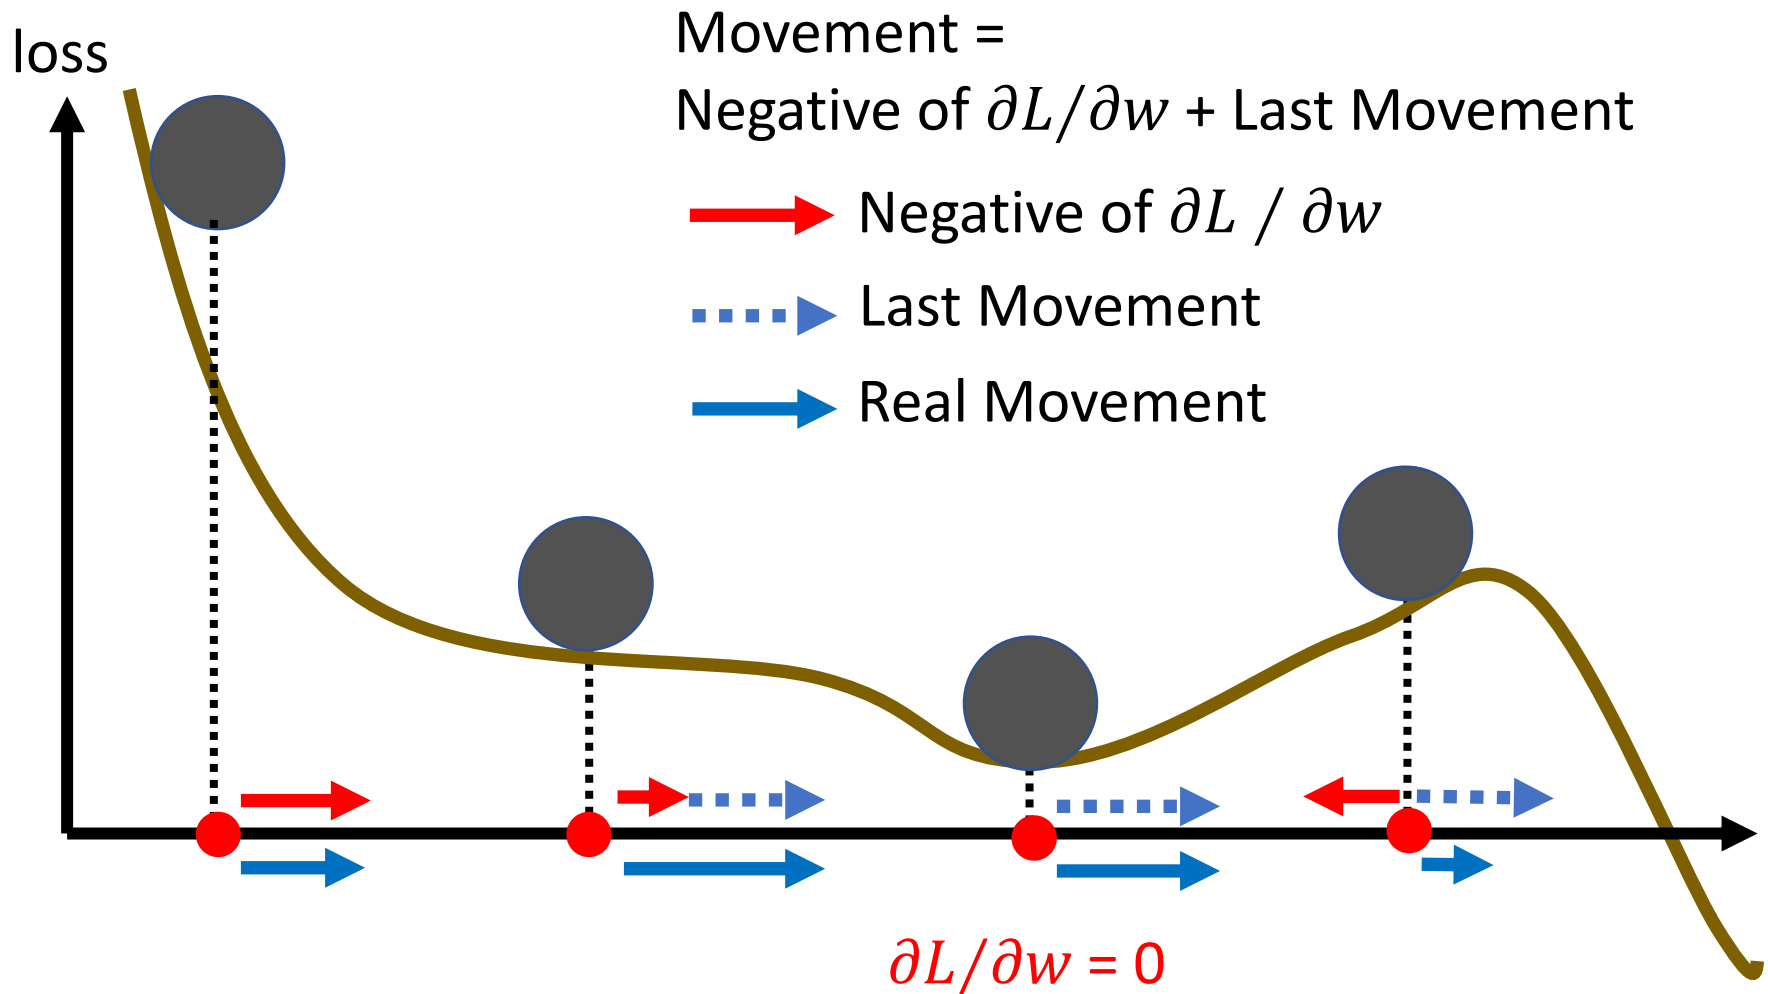

Concluding Remarks

- Critical points have zero gradients.
- Critical points can be either saddle points or local minima.
 - Can be determined by the Hessian matrix.
 - It is possible to escape saddle points along the direction of eigenvectors of the Hessian matrix.
 - Local minima may be rare.
- Smaller batch size and momentum help escape critical points.

Acknowledgement

- 感謝作業二助教團隊(陳宣叡、施貽仁、孟妍李威緒)幫忙跑實驗以及蒐集資料

李宏毅 (Hung-yi Lee) · HYLEE | Machine Learning (2021)

HYLEE(2021) · 课程资料包 @ShowMeAI



视频

课件

笔记

代码

中英双语字幕

一键打包下载

官方笔记翻译

作业项目解析



视频 · B 站 [扫码或点击链接]

<https://www.bilibili.com/video/BV1fM4y137M4>



课件 & 代码 · 博客 [扫码或点击链接]

<http://blog.showmeai.tech/ntu-hylee-ml>

机器学习

Auto-encoder

生成式对抗网络

学习率

深度学习

卷积神经网络

GAN

自监督

自注意力机制

批次标准化

神经网络压缩

强化学习

元学习

Transformer

Awesome AI Courses Notes Cheatsheets 是 [ShowMeAI](#) 资料库的分支系列，覆盖最具知名度的 **TOP50+** 门 AI 课程，旨在为读者和学习者提供一整套高品质中文学习笔记和速查表。

点击课程名称，跳转至课程**资料包**页面，**一键下载**课程全部资料！

机器学习	深度学习	自然语言处理	计算机视觉
Stanford · CS229	Stanford · CS230	Stanford · CS224n	Stanford · CS231n
# Awesome AI Courses Notes Cheatsheets · 持续更新中			
知识图谱	图机器学习	深度强化学习	自动驾驶
Stanford · CS520	Stanford · CS224W	UCBerkeley · CS285	MIT · 6.S094



微信公众号

资料下载方式 2: 扫码点击**底部菜单栏**

称为 **AI 内容创作者**? 回复 [添砖加瓦]