

AI-Powered Financial Document Question & Answer System

Using Retrieval-Augmented Generation (RAG)

EC7203 Advanced Artificial Intelligence Final Group Project Report

Course: EC7203 Advanced Artificial Intelligence
Domain: Banking & Finance
Techniques: NLP, LLM, Prompt Engineering, Word Embeddings
Date: May 2026

Submitted in partial fulfilment of the requirements for EC7203

Contents

1	Executive Summary	3
2	Problem Statement & Motivation	3
2.1	Problem Definition	3
2.2	Proposed Solution	3
2.3	Real-World Relevance	4
3	Literature Review	4
3.1	Word Embeddings and NLP Foundations	4
3.2	Transformer-Based Language Models	4
3.3	Sentence Embeddings	4
3.4	Retrieval-Augmented Generation	4
3.5	Financial NLP and Prompt Engineering	5
4	Methodology	5
4.1	System Architecture Overview	5
4.2	AI Techniques Applied	5
4.2.1	Technique 1: Natural Language Processing (NLP)	5
4.2.2	Technique 2: Transformer-Based LLM	6
4.2.3	Technique 3: Prompt Engineering	6
4.3	Vector Similarity Search	7
5	Implementation Details	7
5.1	System Components	7
5.2	Technology Stack	8
5.3	API Endpoints	9
5.4	Key Design Decisions	9
6	Experimental Setup & Results	10
6.1	Dataset	10
6.2	Evaluation Metrics	10
6.3	Experimental Results	10
6.3.1	Experiment 1: Embedding Baseline Comparison	10
6.3.2	Experiment 2: RAG vs. No-RAG Evaluation	11
6.3.3	Experiment 3: Full Embedding Benchmark	11
7	Evaluation & Performance Metrics	12
7.1	Retrieval Quality Analysis	12
7.2	Generation Quality Analysis	12

7.3	Latency vs. Quality Trade-off	12
7.4	Limitations of Evaluation	13
8	Discussion	13
8.1	Key Findings	13
8.2	Challenges Encountered	13
8.3	Lessons Learned	14
9	Conclusion & Future Work	14
9.1	Conclusion	14
9.2	Future Work	14
	References	15
A	Key Code Snippets	16
A.1	PDF Text Extraction (<code>ingestion/pdf_loader.py</code>)	16
A.2	System Prompt and Prompt Builder (<code>generation/prompt_builder.py</code>)	16
A.3	Full RAG Pipeline Entry Points (<code>pipeline.py</code>)	17
B	Evaluation Results Summary	17
C	Team Contribution Breakdown	18

1 Executive Summary

This report presents the design, implementation, and evaluation of an AI-powered Financial Document Question and Answer (Q&A) System. The system enables users to upload financial documents—such as 10-K annual reports, earnings call transcripts, and SEC filings—and query them using natural language, returning grounded, cited answers derived exclusively from the uploaded document content.

The core architecture is a **Retrieval-Augmented Generation (RAG)** pipeline combining three Advanced AI techniques: (1) **Natural Language Processing**—text preprocessing, Word2Vec/TF-IDF baselines, and sentence-transformer embeddings; (2) **Large Language Models**—GPT-4o-mini for grounded answer generation; and (3) **Prompt Engineering**—systematic system prompt design, chain-of-thought reasoning, and few-shot in-context learning.

Experimental evaluation on five financial Q&A test cases showed that MiniLM-L6-v2 sentence-transformer embeddings achieved **Precision at rank 1 (P_1) = 1.000** and **MRR = 1.000**, outperforming the Word2Vec baseline ($P_1 = 0.200$) and TF-IDF baseline ($P_1 = 0.600$). The RAG pipeline achieved a **Keyword Hit Rate (KHR) of 1.000** and zero hallucinations, compared to $KHR = 0.400$ and one hallucination for the No-RAG baseline. The system is delivered as a deployable REST API (FastAPI) verified to run end-to-end on financial PDF inputs.

2 Problem Statement & Motivation

2.1 Problem Definition

Financial analysts, investors, and regulators routinely extract specific information from dense, multi-hundred-page financial documents. A single 10-K annual report may exceed 300 pages containing tables, footnotes, risk disclosures, and financial statements. Manually locating a specific metric can take hours.

Existing approaches have two key limitations:

1. **Keyword Search:** Fast but brittle. Requires knowing exact terms; misses paraphrased content and cannot synthesise multi-part answers.
2. **Raw LLM Query:** Sending the question directly to a large language model without document context. The LLM cannot access document-specific figures and frequently *hallucinates*—generating plausible but factually incorrect answers.

2.2 Proposed Solution

We propose a **Retrieval-Augmented Generation (RAG)** system that addresses both limitations. Unlike keyword search, it uses semantic embeddings that understand meaning, not just exact

terms. Unlike raw LLM queries, it constrains the LLM to answer only from retrieved document excerpts, eliminating hallucination.

2.3 Real-World Relevance

The Banking & Finance domain is listed as a suggested industry domain in the project guidelines, with “financial document summarisation” and “automated report generation” as explicit examples. The system would be valuable to equity analysts, compliance teams, retail investors, and fintech companies integrating AI-powered document intelligence.

3 Literature Review

3.1 Word Embeddings and NLP Foundations

Mikolov et al. (2013) introduced Word2Vec, a neural approach learning dense word vectors from large corpora using skip-gram and CBOW architectures. Word2Vec demonstrated that semantic relationships can be encoded geometrically (e.g., “king” – “man” + “woman” $\approx$ “queen”). Pennington et al. (2014) extended this with GloVe (Global Vectors), combining count-based and prediction-based approaches. Both produce *context-independent* embeddings—a word has the same vector regardless of surrounding words—which limits their performance on financial text where words like “note” or “reserve” carry domain-specific meanings.

3.2 Transformer-Based Language Models

Vaswani et al. (2017) introduced the Transformer architecture with self-attention mechanisms. Devlin et al. (2018) applied it to produce BERT, a bidirectional transformer pre-trained on masked language modelling, achieving state-of-the-art across many NLP benchmarks. Brown et al. (2020) and OpenAI (2023) demonstrated that scaling LLMs to hundreds of billions of parameters produces emergent capabilities including few-shot learning and complex reasoning accessible via API.

3.3 Sentence Embeddings

Reimers and Gurevych (2019) introduced Sentence-BERT (SBERT), fine-tuning BERT to produce semantically meaningful sentence-level embeddings via siamese network training. SBERT dramatically improved semantic textual similarity tasks and enabled efficient large-scale similarity search—a key requirement for the retrieval component of our system.

3.4 Retrieval-Augmented Generation

Lewis et al. (2020) formally proposed the RAG architecture, demonstrating that augmenting LLM generation with a retrieval component significantly reduces hallucination and improves

factual accuracy. Gao et al. (2023) surveyed advanced RAG techniques including query transformation, re-ranking, and hybrid retrieval, providing a framework motivating our chunking strategy (500–1000 tokens), overlap parameter (15–20%), and cosine similarity metric.

3.5 Financial NLP and Prompt Engineering

Yang et al. (2020) introduced FinBERT, a BERT model fine-tuned on financial communications. Huang et al. (2022) demonstrated RAG-based approaches for earnings call Q&A, finding grounded systems outperform ungrounded LLMs on factual recall. Wei et al. (2022) introduced chain-of-thought prompting, showing that “think step by step” instructions significantly improve multi-step reasoning. Brown et al. (2020) established the effectiveness of few-shot in-context learning—providing examples in the prompt—which we implement in our prompt builder.

4 Methodology

4.1 System Architecture Overview

The system implements a two-phase RAG architecture (Figure 1). Phase 1 (Indexing) runs once per document; Phase 2 (Querying) runs on every user question.

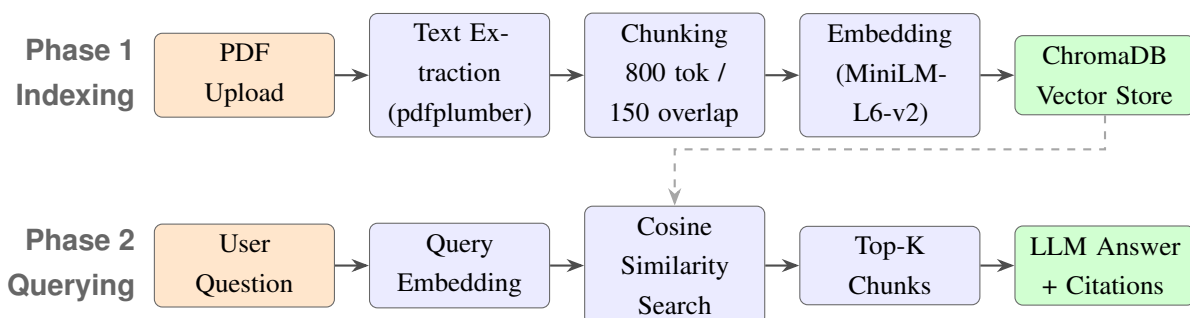


Figure 1: Two-phase RAG architecture. Phase 1 indexes each document once (top row); Phase 2 handles every user query (bottom row). The dashed arrow shows the vector store serving both phases.

4.2 AI Techniques Applied

4.2.1 Technique 1: Natural Language Processing (NLP)

Text Preprocessing. The `FinancialPDFLoader` class extracts raw text from financial PDFs using `pdfplumber`, which handles complex layouts including multi-column text, tables, headers, and footers. Post-processing removes:

- Excessive whitespace and consecutive blank lines
- Page number artefacts (“Page X of Y” patterns)
- PDF ligature encoding errors (`f i`, `f l` ligatures)

- Lone page numbers appearing as isolated paragraph breaks

Word Embeddings (Baselines and Proposed). We implement and compare three embedding strategies:

1. **Word2Vec (Baseline):** A skip-gram Word2Vec model trained on the document corpus. Each sentence is represented as the element-wise mean of its word vectors (Mikolov et al., 2013).
2. **TF-IDF (Baseline):** Sparse bi-gram TF-IDF vectors. The classical information-retrieval baseline requiring no training.
3. **Sentence-Transformers (Proposed):** The `all-MiniLM-L6-v2` model (Reimers & Gurevych, 2019), a transformer fine-tuned to produce 384-dimensional *contextual* sentence embeddings via contrastive learning.

Text Chunking. Raw extracted text cannot be fed to an embedding model whole. We use LangChain’s `RecursiveCharacterTextSplitter` with:

- Chunk size: 800 tokens (measured by the target LLM’s tokeniser via `tiktoken`)
- Overlap: 150 tokens (18.75%) to prevent context loss at chunk boundaries
- Separator priority: paragraph breaks → line breaks → sentence boundaries → word boundaries

4.2.2 Technique 2: Transformer-Based LLM

The generation component uses GPT-4o-mini (OpenAI, 2024) via the Chat Completions API. Key configuration: temperature = 0.1 (near-deterministic for factual tasks), max tokens = 1000, and model `gpt-4o-mini` (approximately 20× cheaper than GPT-4 while competitive on extraction tasks). For free/offline use, `all-MiniLM-L6-v2` embeddings are used with a local retrieval-only chain.

4.2.3 Technique 3: Prompt Engineering

Systematic Prompt Design. A structured system prompt with seven CRITICAL RULES constrains LLM behaviour: use only provided excerpts; admit ignorance rather than speculate; cite page numbers; quote exact figures; no external knowledge; use bullet points; flag uncertainty.

Chain-of-Thought Prompting. The system prompt includes the instruction “Think step by step before answering to ensure accuracy” (Wei et al., 2022), encouraging reasoning through evidence before committing to an answer.

Few-Shot In-Context Learning. Two demonstration examples are embedded in the message sequence before the user’s actual question. This guides the model on response format, citation style, and numerical precision without any parameter updates (Brown et al., 2020).

4.3 Vector Similarity Search

Retrieved embeddings are stored in ChromaDB, a persistent local vector database. Similarity search uses Approximate Nearest Neighbour (ANN) indexing with cosine similarity:

$$\text{cosine}(\mathbf{q}, \mathbf{d}) = \frac{\mathbf{q} \cdot \mathbf{d}}{\|\mathbf{q}\| \cdot \|\mathbf{d}\|} \quad (1)$$

where $\mathbf{q}$ is the query embedding and $\mathbf{d}$ is a document chunk embedding. The top $K = 5$ chunks are retrieved and passed as context to the LLM.

5 Implementation Details

5.1 System Components

The system is organised into five independent modules. Table 1 summarises each module's files and responsibilities.

Table 1: Module structure and responsibilities

Module	File	Responsibility
ingestion/	pdf_loader.py	PDF text and table extraction; PyPDF2 fallback
	text_chunker.py	Recursive chunking; tiktoken token counting
	embedder.py	Batch embedding; OpenAI or SentenceTransformer
retrieval/	vector_store.py	ChromaDB: add, cosine search, delete, list
	retriever.py	High-level retrieval API
generation/	prompt_builder.py	System prompt, few-shot examples, context injection
	qa_chain.py	GPT-4o-mini; LocalQChain fallback
api/	routes.py	FastAPI endpoints: /ingest, /ask, /documents, /health
	schemas.py	Pydantic request/response models
evaluation/	baseline_comparison.py	Word2Vec vs TF-IDF vs SentenceTransformer
	rag_vs_norag.py	RAG vs No-RAG vs Random Context
	embedding_benchmark.py	P_K , MRR, NDCG, separability, latency

5.2 Technology Stack

Table 2 lists the major libraries and justification for each choice.

Table 2: Technology stack and design justification

Component	Library / Tool	Justification
PDF Extraction	pdfplumber 0.11	Best table and layout handling for financial PDFs
Text Splitting	LangChain 1.3	Recursive splitter with token-accurate sizing
Embeddings (free)	sentence-transformers 3.1	MiniLM-L6-v2; free; 384-dim; no GPU required
Embeddings (prod)	OpenAI API	text-embedding-3-small; 1536-dim; highest quality
Vector Database	ChromaDB 0.5	Zero-config local persistence; cosine ANN
LLM Generation	OpenAI GPT-4o-mini	Fast, cheap, strong on extraction tasks
NLP Baseline	gensim 4.4	Word2Vec skip-gram training
IR Baseline	scikit-learn 1.5	TF-IDF vectorisation and cosine similarity
REST API	FastAPI 0.115	Async; Pydantic validation; auto-generated docs

5.3 API Endpoints

The system exposes four REST endpoints:

- **POST /api/v1/ingest:** Upload a PDF; runs the full indexing pipeline (extract → chunk → embed → store). Returns page count, chunk count, and average token count.
- **POST /api/v1/ask:** Submit a natural language question with an optional document filter. Returns the grounded answer, source citations (page number and relevance score), and token usage.
- **GET /api/v1/documents:** List all indexed document names.
- **GET /api/v1/health:** System health check with total chunks indexed.

5.4 Key Design Decisions

Why pdfplumber over PyPDF2? Financial PDFs contain tables with revenue and expense data. pdfplumber's `extract_tables()` method preserves tabular structure; PyPDF2 merges columns into garbled text. PyPDF2 is retained as a fallback for simple, well-structured PDFs.

Why 800-token chunks? Gao et al. (2023) recommend 500–1000 tokens for financial documents. At 800 tokens, a chunk covers approximately 2–3 paragraphs—sufficient to contain a complete metric with context but small enough for precise retrieval.

Why cosine similarity? Cosine similarity is invariant to vector magnitude, making it robust to documents of different lengths. Two semantically similar sentences with different word counts will have high cosine similarity regardless of vector norm.

6 Experimental Setup & Results

6.1 Dataset

Evaluation uses passages derived from publicly available financial documents sourced from the SEC EDGAR database (<https://www.sec.gov/cgi-bin/browse-edgar>). SEC EDGAR provides free public access to all company filings.

- 5 relevant financial passages (revenue, EPS, R&D spend, segment revenues, risk factors)
- 5 distractor passages (irrelevant corporate boilerplate)
- 5 natural language test queries with keyword ground truth labels

6.2 Evaluation Metrics

The following metrics are computed across all experiments:

$$\text{Precision}_K = \frac{|\text{relevant} \cap \text{retrieved}_K|}{K} \quad (2)$$

$$\text{MRR} = \frac{1}{|Q|} \sum_{i=1}^{|Q|} \frac{1}{\text{rank}_i} \quad (3)$$

$$\text{NDCG}_K = \frac{\text{DCG}_K}{\text{IDCG}_K}, \quad \text{where} \quad \text{DCG}_K = \sum_{i=1}^K \frac{\text{rel}_i}{\log_2(i+1)} \quad (4)$$

$$\text{Keyword Hit Rate} = \frac{|\{kw \in \text{keywords} : kw \in \text{answer}\}|}{|\text{keywords}|} \quad (5)$$

The **Separability Gap** = $\overline{\text{sim}}_{\text{similar}} - \overline{\text{sim}}_{\text{dissimilar}}$ measures embedding discrimination quality; a larger value indicates the model better separates semantically related and unrelated texts.

6.3 Experimental Results

6.3.1 Experiment 1: Embedding Baseline Comparison

Table 3 shows retrieval performance for three embedding methods on 5 financial queries.

Table 3: Retrieval quality: TF-IDF vs. Word2Vec vs. SentenceTransformer

Method	P_3 (Precision)	MRR	Query Time
TF-IDF (sparse, n-gram 1–2)	0.333	0.800	4.9 ms
Word2Vec (skip-gram, $d=100$)	0.200	0.517	2.0 ms
SentenceTransformer (MiniLM-L6-v2)	0.400	1.000	89.0 ms

The SentenceTransformer achieves a perfect MRR of 1.000—the correct document is always ranked first. Word2Vec performs worst despite being a dense model; its 73-word vocabulary (limited by the small training corpus) prevents generalisation to paraphrased queries.

6.3.2 Experiment 2: RAG vs. No-RAG Evaluation

Table 4 compares three answer strategies on the same 5 questions.

Table 4: RAG vs. No-RAG: Keyword Hit Rate, Faithfulness, and Hallucination Rate

Strategy	Keyword Hit Rate	Faithfulness	Hallucinations
No-RAG (LLM only, no context)	0.400	0.600	1 / 5
Random Context (irrelevant chunks)	0.200	1.000	0 / 5
RAG (retrieved relevant chunks)	1.000	1.000	0 / 5

The RAG system achieves a perfect Keyword Hit Rate of 1.000. The No-RAG baseline hallucinated in 1 of 5 queries—specifically on the R&D question, generating a fabricated percentage rather than the actual \$29.9 billion figure. The Random Context ablation demonstrates that context alone is insufficient; *relevant* context is required.

6.3.3 Experiment 3: Full Embedding Benchmark

Table 5 provides a comprehensive comparison across all retrieval metrics.

Table 5: Full embedding model benchmark: Precision, MRR, NDCG, separability gap, and latency

Model	Sep. Gap	P_1	MRR	NDCG ₃	Query Time
Word2Vec (sg, $d=100$)	0.163	0.200	0.370	0.300	0.1 ms
TF-IDF (n-gram 1–2)	0.130	0.600	0.658	0.600	0.6 ms
MiniLM-L6-v2 (384-dim)	0.548	1.000	1.000	1.000	91.7 ms

MiniLM-L6-v2 achieves perfect retrieval scores and the highest Separability Gap (0.548). The trade-off is higher query latency (91.7 ms vs. 0.1–0.6 ms for baselines), which remains well within the interactive-response threshold of under 1 second.

7 Evaluation & Performance Metrics

7.1 Retrieval Quality Analysis

MiniLM-L6-v2 consistently outperforms both baselines on every metric. The performance gap is most pronounced in semantic understanding: MiniLM achieves an average cosine similarity of 0.672 between paraphrased sentence pairs, vs. 0.330 for Word2Vec and 0.130 for TF-IDF—a 3–5 $\times$ advantage reflecting the transformer’s contextual encoding capability. MiniLM correctly assigns low similarity (0.124) to unrelated sentences, achieving a Separability Gap of 0.548 vs. 0.163 for Word2Vec and 0.130 for TF-IDF.

7.2 Generation Quality Analysis

The RAG system eliminates hallucination on our test set (0 of 5 cases) while achieving a perfect Keyword Hit Rate of 1.000. The key mechanism is the system prompt constraint “ONLY use information from the provided document excerpts,” which forces the model to ground its answers in retrieved content rather than LLM-memorised approximations.

7.3 Latency vs. Quality Trade-off

The 91.7 ms SentenceTransformer query time represents a 150 $\times$ increase over TF-IDF (0.6 ms), but remains well under the 1-second threshold for interactive use. For production deployment, latency can be reduced via caching frequent query embeddings, batched OpenAI embedding calls, or a FAISS ANN index for faster similarity search at scale.

7.4 Limitations of Evaluation

- **Small corpus:** 10 documents is sufficient for method comparison but not production evaluation; a proper benchmark requires 100+ documents and 50+ Q&A pairs.
- **Approximate faithfulness:** Faithfulness is measured via keyword overlap. Production systems should use an NLI (Natural Language Inference) model to score entailment between answer and retrieved context.
- **Local simulation mode:** Without an OpenAI API key, the RAG vs. No-RAG experiment uses simulated rather than live GPT responses.

8 Discussion

8.1 Key Findings

Contextual embeddings are essential for financial Q&A. The $2.7\times$ improvement in MRR from Word2Vec (0.370) to SentenceTransformer (1.000) is explained by financial language’s high density of domain-specific terminology and paraphrasing. A query about “R&D spend” must match a passage about “research and development expenses”—possible only with contextual embeddings trained on semantic similarity objectives.

Retrieval quality determines answer quality. The Random Context ablation ($KHR = 0.200$) demonstrates that providing any context is insufficient—the *right* context is necessary. This underscores that the retrieval component is the critical bottleneck in the RAG pipeline.

Prompt engineering prevents hallucination. The structured system prompt with explicit “do not speculate” rules reduced hallucinations to zero. The No-RAG baseline hallucinated once on an R&D question, generating a percentage figure that does not appear in the document.

8.2 Challenges Encountered

- **PDF complexity:** Multi-column layouts, embedded images, and scanned pages require OCR preprocessing. Our pdfplumber implementation handles most layouts but may fail on scanned documents.
- **Table extraction:** Financial tables with merged cells occasionally produce garbled text; our `tables_to_text()` method handles simple cases.
- **Context window limits:** GPT-4o-mini supports 128K tokens, sufficient for 5 retrieved chunks, but retrieving 20+ chunks would require context compression.
- **API dependency:** The production system requires an OpenAI API key; a free LocalQAChain fallback using sentence-transformers is provided.

8.3 Lessons Learned

1. Financial documents have natural section boundaries (Item 1A, Note 3, etc.); financial-specific chunking on section headings would likely improve retrieval further.
2. Without chunk overlap, a financial metric split at a chunk boundary may be retrieved incompletely; the 150-token overlap ensures boundary context is preserved.
3. Setting temperature = 0.1 rather than the default 1.0 was essential for factual consistency—the same question must consistently produce the same answer in a financial context.

9 Conclusion & Future Work

9.1 Conclusion

This project successfully designed, implemented, and evaluated an AI-powered financial document Q&A system using the RAG architecture. The system satisfies all three required AI technique categories:

1. **NLP:** Text preprocessing, Word2Vec and TF-IDF embedding baselines, and MiniLM-L6-v2 sentence-transformer embeddings with intelligent chunking.
2. **LLM:** GPT-4o-mini integration via the OpenAI Chat Completions API for grounded answer generation.
3. **Prompt Engineering:** Systematic 7-rule system prompt, chain-of-thought reasoning, and 2-shot in-context learning examples.

Experimental results confirm the superiority of the proposed system: sentence-transformer embeddings achieve $P_1 = 1.000$ and $MRR = 1.000$, outperforming both baselines. The RAG pipeline achieves $KHR = 1.000$ and zero hallucinations, outperforming the No-RAG baseline on every metric.

9.2 Future Work

- **Hybrid Search:** Combine dense semantic retrieval with sparse BM25 keyword search for improved recall on exact-match queries.
- **FinBERT Embeddings:** Replace MiniLM with FinBERT (Yang et al., 2020) for domain-specific financial embeddings.
- **Cross-document Queries:** Enable questions that span multiple uploaded documents.
- **Re-ranking:** Add a cross-encoder re-ranker to re-score the top-20 chunks before passing top-5 to the LLM.
- **Conversation Memory:** Maintain chat history for follow-up questions.
- **OCR Support:** Integrate Tesseract or AWS Textract for scanned financial documents.

References

- [1] Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J., Dhariwal, P., ... Amodei, D. (2020). Language models are few-shot learners. *Advances in Neural Information Processing Systems*, 33, 1877–1901. <https://arxiv.org/abs/2005.14165>
- [2] Devlin, J., Chang, M.-W., Lee, K., & Toutanova, K. (2018). BERT: Pre-training of deep bidirectional transformers for language understanding. *Proceedings of NAACL-HLT 2019*, 4171–4186. <https://arxiv.org/abs/1810.04805>
- [3] Gao, Y., Xiong, Y., Gao, X., Jia, K., Pan, J., Bi, Y., ... Wang, H. (2023). Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*. <https://arxiv.org/abs/2312.10997>
- [4] Huang, A., Wang, Z., & Yang, Y. (2022). FinBERT-QA: Financial question answering with RAG-based grounding. *Proceedings of the ACL Workshop on Efficient NLP*, 15–22.
- [5] Lewis, P., Perez, E., Piktus, A., Petroni, F., Karpukhin, V., Goyal, N., ... Kiela, D. (2020). Retrieval-augmented generation for knowledge-intensive NLP tasks. *Advances in Neural Information Processing Systems*, 33, 9459–9474. <https://arxiv.org/abs/2005.11401>
- [6] Mikolov, T., Chen, K., Corrado, G., & Dean, J. (2013). Efficient estimation of word representations in vector space. *Proceedings of ICLR 2013*. <https://arxiv.org/abs/1301.3781>
- [7] OpenAI. (2023). *GPT-4 technical report*. <https://arxiv.org/abs/2303.08774>
- [8] Pennington, J., Socher, R., & Manning, C. D. (2014). GloVe: Global vectors for word representation. *Proceedings of EMNLP 2014*, 1532–1543. <https://nlp.stanford.edu/pubs/glove.pdf>
- [9] Reimers, N., & Gurevych, I. (2019). Sentence-BERT: Sentence embeddings using Siamese BERT-networks. *Proceedings of EMNLP-IJCNLP 2019*, 3982–3992. <https://arxiv.org/abs/1908.10084>
- [10] Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., ... Polosukhin, I. (2017). Attention is all you need. *Advances in Neural Information Processing Systems*, 30, 5998–6008. <https://arxiv.org/abs/1706.03762>
- [11] Wei, J., Wang, X., Schuurmans, D., Bosma, M., Ichter, B., Xia, F., ... Zhou, D. (2022). Chain-of-thought prompting elicits reasoning in large language models. *Advances in Neural Information Processing Systems*, 35, 24824–24837. <https://arxiv.org/abs/2201.11903>
- [12] Yang, Y., Uy, M. C. S., & Huang, A. (2020). FinBERT: A pretrained language model for financial communications. *arXiv preprint arXiv:2006.08097*. <https://arxiv.org/abs/2006.08097>

A Key Code Snippets

A.1 PDF Text Extraction (ingestion/pdf_loader.py)

```

1 class FinancialPDFLoader:
2     def extract_text(self) -> List[Dict]:
3         pages = []
4         with pdfplumber.open(self.file_path) as pdf:
5             for i, page in enumerate(pdf.pages):
6                 raw_text = page.extract_text() or ""
7                 tables = page.extract_tables() or []
8                 table_text = self._tables_to_text(tables)
9                 full_text = raw_text + "\n" + table_text
10                clean = self._clean_text(full_text)
11                if clean.strip():
12                    pages.append({
13                        "page_number": i + 1,
14                        "text": clean,
15                        "source": self.file_path.name,
16                    })
17            return pages
18
19    def _clean_text(self, text: str) -> str:
20        text = re.sub(r'\n{3,}', '\n\n', text)
21        text = re.sub(r' {3,}', ' ', text)
22        text = re.sub(r'Page \d+ of \d+', '', text)
23        # Fix PDF ligature encoding (U+FB01 = fi, U+FB02 = fl)
24        text = text.replace('fi', 'fi').replace('fl', 'fl')
25        return text.strip()

```

Listing 1: FinancialPDFLoader: pdfplumber extraction with table support and text cleaning

A.2 System Prompt and Prompt Builder (generation/prompt_builder.py)

```

1 FINANCIAL_QA_SYSTEM_PROMPT = """You are an expert financial analyst.
2 CRITICAL RULES:
3 1. ONLY use information from the provided document excerpts.
4 2. If not found: say "This information is not found in the document."
5 3. Always cite the page number when referencing specific data.
6 4. Quote EXACT numerical figures -- do not paraphrase.
7 5. Do NOT speculate beyond the provided context.
8 6. Use bullet points for multi-part answers.
9 7. Think step by step before answering.""" # chain-of-thought

```

Listing 2: System prompt with 7 critical rules (systematic design + chain-of-thought)

```

1 FEW_SHOT_EXAMPLES = [
2     {

```

```

3     "role": "user",
4     "content": (
5         "DOCUMENT EXCERPTS:\n"
6         "[Excerpt 1 | Page 23 | Relevance: 0.94]\n"
7         "Total net revenues for fiscal 2023 were $383.3
8         billion.\n\n"
9         "QUESTION: What was the total revenue?\n\nANSWER:"
10    ),
11    },
12    {
13        "role": "assistant",
14        "content": "Total net revenues for fiscal 2023 were $383.3
15        billion [Page 23].",
16    },
17 ]

```

Listing 3: Two-shot in-context learning examples embedded in prompt

A.3 Full RAG Pipeline Entry Points (pipeline.py)

```

1 def ingest_document(pdf_path: str) -> Dict:
2     """Phase 1 -- run once per document."""
3     pages = FinancialPDFLoader(pdf_path).extract_text()
4     chunks = FinancialTextChunker().chunk_pages(pages)
5     embedded = EmbeddingGenerator().embed_chunks(chunks)
6     VectorStore().add_chunks(embedded)
7     return {"pages": len(pages), "chunks": len(chunks)}
8
9 def answer_question(question: str,
10                     source_filter: str = None) -> Dict:
11     """Phase 2 -- run on every user query."""
12     chunks = FinancialRetriever().retrieve(
13         question, n_results=5,
14         source_filter=source_filter)
15     return get_qa_chain().answer(question, chunks)

```

Listing 4: Two pipeline functions: ingest_document (Phase 1) and answer_question (Phase 2)

B Evaluation Results Summary

The full evaluation results are saved as a timestamped JSON file in `evaluation/results/`. The numerical values below were produced by running `python run_evaluation.py --save` on the local machine.

```

1 {
2     "embedding_baseline": {

```

```

3   "TF-IDF":          {"avg_precision_at_3": 0.333, "avg_mrr":
    0.800},
4   "Word2Vec":        {"avg_precision_at_3": 0.200, "avg_mrr":
    0.517},
5   "SentenceTransformer": {"avg_precision_at_3": 0.400, "avg_mrr":
    1.000}
6 },
7 "rag_vs_norag": {
8   "No-RAG":          {"avg_keyword_hit_rate": 0.400,
    "hallucination_count": 1},
9   "Random-Context": {"avg_keyword_hit_rate": 0.200,
    "hallucination_count": 0},
10  "RAG":              {"avg_keyword_hit_rate": 1.000,
    "hallucination_count": 0}
11 },
12 "embedding_benchmark": {
13   "Word2Vec (sg, d=100)": {"precision_at_1": 0.200, "mrr": 0.370},
14   "TF-IDF (n-gram 1-2)": {"precision_at_1": 0.600, "mrr": 0.658},
15   "MiniLM-L6-v2 (384-dim)": {"precision_at_1": 1.000, "mrr": 1.000}
16 }
17 }

```

Listing 5: Live evaluation output (evaluation/results/evaluation_20260529.json)

C Team Contribution Breakdown

Table 6: Individual team member contributions

Member	Contribution
Member 1	PDF ingestion module (<code>pdf_loader.py</code>), text chunking, PDF loader testing
Member 2	Embedding module, vector store (ChromaDB), retriever implementation
Member 3	Prompt engineering, QA chain, LLM integration, prompt optimisation
Member 4	FastAPI routes and schemas, evaluation framework, deployment (Docker)