Software Requirements Specification for Software Engineering: subtitle describing software

Team 18, Team Magic
Allen Tong
Amos Edeaghe
Jacob Brodersen
Joshua Engel
Nehan Munir

October 20, 2026

Contents

1 Introduction **1**
- 1.1 Purpose . . . 2
- 1.2 Scope . . . 2
- 1.3 Stakeholders . . . 2
- 1.4 Definitions and Acronyms . . . 3
- 1.5 Characteristics of Intended Reader . . . 3

2 System Overview **3**
- 2.1 Problem Statement . . . 3
- 2.2 Product Vision . . . 4
- 2.3 System Context . . . 4
- 2.4 User Characteristics . . . 5
- 2.5 System Constraints . . . 5

3 Stakeholder Requirements **6**

4 User Personas **6**
- 4.1 Persona 1 . . . 6
- 4.2 Persona 2 . . . 7

5 Use Cases **7**
- 5.1 UC1: Example Use Case . . . 7

6 Functional Requirements **8**
- 6.1 Formal Model . . . 8
  - 6.1.1 Game Configuration . . . 8
  - 6.1.2 Round State . . . 9
  - 6.1.3 Task Evaluation . . . 10
  - 6.1.4 Timed Scoring . . . 10
  - 6.1.5 Formal Properties . . . 11
- 6.2 Requirements . . . 11

7 Data Requirements **12**
- 7.1 Major Data Entities . . . 12
- 7.2 Data Dictionary . . . 12
- 7.3 Privacy and Data Retention . . . 12

8 Non-Functional Requirements **12**

9 AI and Machine Learning Requirements **18**
- 9.1 Model Inputs . . . 18
- 9.2 Model Outputs . . . 18

9.3 Evaluation Metrics 18
9.4 Known Limitations 18

10 Requirements Traceability Matrices **18**

11 Rationale **19**
11.1 Nonfunctional Requirements 19

12 Likely Changes **20**

13 Unlikely Changes **20**

14 Appendices **21**
14.1 Appendix A: Additional Materials 21
14.2 Appendix B: Development Plan 21
14.3 Appendix C: Values of Auxiliary Constants 21
14.4 Appendix D: Generative AI Disclosure 21
14.5 Appendix E: Reflection 21

Revision History

Date	Version	Notes
Date 1	1.0	Notes
Date 2	1.1	Notes

[All capstone SRS documents should have a reflection appendix. —TPLT]

[This SRS template is based on the IEEE template, with input from co-pilot and S. Smith. It will get you started. You should not modify the section headings, without first discussing the change with the course instructor. Modification means you are not following the template, which loses some of the advantage of a template, especially standardization. —TPLT]

[Feel free to change the appearance of the report by modifying the LaTeX commands. —TPLT]

[This template document assumes that a single program is being documented. If you are documenting a family of models, you should start with a commonality analysis. —TPLT]

[The SRS is not generally written, or read, sequentially. The SRS is a reference document. It is generally read in an ad hoc order, as the need arises. —TPLT]

[Guiding principles for the SRS document:

- Do not repeat the same information at the same abstraction level. If information is repeated, the repetition should be at a different abstraction level.

—TPLT]

[The template description comments should be disabled before submitting this document for grading. —TPLT]

[You can borrow any wording from the text given in the template. It is part of the template, and not considered an instance of academic integrity. Of course, you need to cite the source of the template. —TPLT]

[When the documentation is done, it should be possible to trace back to the source of every piece of information. Some information will come from external sources, like terminology. —TPLT]

[An SRS document should have the following qualities: unambiguous, consistent, complete, validatable, abstract and traceable. —TPLT]

[The overall goal of the SRS is that someone can learn, understand and verify the captured domain knowledge. They should not have to trust the authors of the SRS on any statements. They should be able to independently verify/derive every statement made. —TPLT]

1 Introduction

[Explain what system is being specified. State purpose, users, and project goals. —TPLT]

[Introduce the name of your software as Software Engineering. Using Software Engineering as a command lets you change the name if necessary and have the change propagate to all documents. —TPLT]

[Include a reference to the template this work is based on. **?** justifies the SRS structure and **?** provides the broader life-cycle context that underlines modern requirements engineering practice. —TPLT]

1.1 Purpose

[State the purpose of the system. —TPLT]

[The purpose should be in the context of the project itself, not in the context of this course. Although the "purpose" of the document is to get a grade, you should not mention this. Instead, "fake it" as if this is a real project. —TPLT]

Software Engineering is intended to solve ... [What problem does your program solve? The description here should be in the problem space, not the solution space. —TPLT]

1.2 Scope

[Briefly describe:

- Problem being solved
- Intended users
- Major functionality
- Expected benefits
- Clarifying the scope often means saying what the software doesn't do

—TPLT]

[The scope section is relevant for understanding the boundaries of the system. It is also relevant for later determining typical values of inputs. The scope should make it clear what inputs are reasonable to expect. This is a distinction between scope and context (context is a later section). Scope affects the inputs while context affects how the software will be used. —TPLT]

TODO

1.3 Stakeholders

- Customer
- End Users
- Project Sponsor
- Development Team
- Administrators

1.4 Definitions and Acronyms

[This section provides the meaning of the different words and phrases used in the domain of the problem. —TPLT]

Term	Definition
TODO	TODO

Table 1: Definitions and Acronyms

1.5 Characteristics of Intended Reader

[This section summarizes the skills and knowledge of the readers of the SRS. It does NOT have the same purpose as the "User Characteristics" section (Section 2.4). The intended readers are the people that will read, review and maintain the SRS. They are the people that will conceivably design the software that is intended to meet the requirements. The user, on the other hand, is the person that uses the software that is built. They may never read this SRS document. Of course, the same person could be a "user" and an "intended reader." —TPLT]

[The intended reader characteristics should be written as unambiguously and as specifically as possible. Rather than say, the user should have an understanding of physics, say what kind of physics and at what level. For instance, is high school physics adequate, or should the reader have had a graduate course on advanced quantum mechanics? —TPLT]

2 System Overview

This section provides general information about the system. It identifies the problem, the vision, and the interfaces between the system and its environment. This section also describes user characteristics and lists the system constraints.

2.1 Problem Statement

Magic cubes provide an opportunity to explore numerical patterns and mathematical relationships in 3-dimensions. However, understanding these structures can become challenging due to limited sources as well as having to use static 2D images to understand a 3D pattern.

The goal of this project is to create a recreational mathematics game that allows those interested in these magic cubes as well as non standard number bases such as base 8 to further their understanding. This is planned to be a web-based game in which users will be able to complete certain challenges on a 3d representation of an 8x8 magic cube using base 8 mathematics to find patterns associated with a magic cube. This will include adding values to certain sections of the cube to complete patterns of magic cubes moving through 8 stages of difficulty while continuing to learn about these mathematical structures.

2.2 Product Vision

The vision for Magic-8 is to provide an accessible and engaging recreational mathematics application to allow interested users to further their understanding of non base 10 number systems as well as mathematical patterns found in objects such as magic cubes. The system will allow for simple interaction with the magic cube to allow users to see its many different views as well as help educate them in the patterns they will be using throughout the challenges.

This will be able to operate on supported desktop and laptop web browsers and will provide some account-based storage to track the users performance and rank them on a leaderboard. The system is planned to focus on maintainable and modular system design to potentially allow for different number bases in the future as well as ease of use for the users of the application.

2.3 System Context

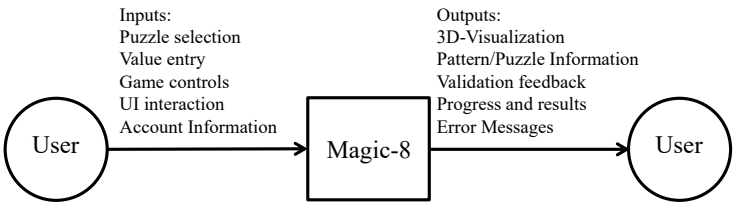


Figure 1: System Context

- User Responsibilities:
  - Provide the information required for supported account operations.
  - Select puzzles or activities and provide numerical inputs through the interface.
  - Use the available controls to manipulate the cube, select cells, and edit cell values.
  - Review validation messages and feedback provided by the application.

- Software Engineering Responsibilities:
  - Validate user inputs and identify invalid or unsupported values.
  - Process supported cube interactions and maintain the current puzzle state.
  - Present the cube and associated numerical information in the user interface.
  - Provide feedback about input validation and the outcomes of supported operations.
  - Communicate with the online service to authenticate users and save or retrieve designated user data.
  - Inform users when account or storage operations fail or cannot be completed.
- Web Browser Responsibilities:
  - Execute the delivered application and provide the environment in which its interface is displayed.
  - Render the two-dimensional interface and three-dimensional cube visualization.
  - Relay user interactions to the application.

Magic-8 is intended for recreational and educational exploration. This means it will not be operating in a highly safety or mission-critical enviornment. The application provides a simple way to interact with slighlty more obscure mathematical ideas rather than any critical operations.

2.4 User Characteristics

The intended users are individuals who are interested in recreational mathematics, numerical puzzles and structures, and non standard number bases. Users may range from beginners who may have just started learning base 8 and never encountered magic cubes or vice versa, to experienced mathematical enthusiasts interested in trying a new challenge.

Users are expected to have basic computer skills, including the ability to navigate a web browser, use pointer-based controls, and enter numerical values. No programming knowledge is required for use. Only basic mathematic understanding of addition and subtraction is expected as the application can help to teach the subjects it covers.

2.5 System Constraints

Magic-8 shall be designed to run within desktop and laptop web browsers without requiring an installation. The functionality will initially be developed in python as well as supported python libraries such as pygame. It will then be translated into webassembly code for execution in browser. This means that all python code must be translatable with the chosen tool into webassembly including anything used for the user interface of the application.

The system shall also support online account functionality, requiring network communication with the selected service for remote data operations. The specific service, supported web browsers, and rendering technologies are yet to be established. This will happen as implementation decisions are finalized.

3 Stakeholder Requirements

[Technology-independent requirements. These come from statements made by the stakeholders. You will find these through interviews and surveys. They are often expressed in natural language. They are not necessarily testable, but they should be verifiable. —TPLT]

[The stakeholder requirements are numbered so that you can have traceability to other parts of your document. —TPLT]

SR1 TODO

SR2 TODO

SR3 TODO

[You should give your SRs meaningful labels, so that you can refer to them in other parts of the SRS. The label names should be meaningful mnemonics, not numbers. —TPLT]

4 User Personas

[Create 2-5 realistic personas. Personas are fictional characters that represent the different user types that might use your software. They are used to help understand the users' needs, experiences, behaviors and goals. They are not real people, but they should be based on real data collected from user research. —TPLT]

4.1 Persona 1

- Name:
- Description:
- Goals:
- Frustrations:
- Technical Ability:

4.2 Persona 2

- Name:
- Description:
- Goals:
- Frustrations:
- Technical Ability:

5 Use Cases

[Use cases are a way to describe the interactions between users and the system. They are typically written in natural language and describe the steps that a user takes to achieve a specific goal. Use cases can be used to identify functional requirements and to create test cases. —TPLT] [Typically 8-15 substantial use cases. —TPLT]

5.1 UC1: Example Use Case

Primary Actor

TODO

Preconditions

- TODO

Main Success Scenario

1. TODO
2. TODO
3. TODO

Alternative Flows

- TODO

Postconditions

- TODO

6 Functional Requirements

6.1 Formal Model

This formal model describes the configuration of a game round, the evaluation of tasks, and the calculation of the users score. It defines the conditions under which a task is considered complete and the properties that the scoring system must maintain. The model supports the functional requirements concerning task execution, answer evaluation, and score calculation (FR7–FR50).

6.1.1 Game Configuration

Let the set of tasks in a game round be

$$\mathcal{T} = \{T_1, T_2, \ldots, T_8\}.$$

Each task T_i has an associated target condition and a basic score value. Let:

$$B_i = B(T_i), \qquad B_i \in \mathbb{N}_0.$$

Where B_i is the basic score awarded for correctly completing task T_i. The target conditions are defined by the game configuration and are evaluated against the current puzzle state.

The octal target values used by the game include

$$S_1 = 1001_8, \qquad S_2 = 2002_8, \qquad S_3 = 4004_8.$$

These values are interpreted as octal numbers. For example,

$$1001_8 = 513_{10}, \qquad 2002_8 = 1026_{10}, \qquad 4004_8 = 2052_{10}.$$

These values are used by the application to define their target conditions. For instance,

$$\theta_i(C) = \begin{cases} 1, & \text{if } L_i(C) = s_i, \\ 0, & \text{otherwise.} \end{cases}$$

where $L_i(C)$ is the sum of relevant cells, and

$$\theta_i(C) = \begin{cases} 1, & \text{if condition met} \\ 0, & \text{otherwise.} \end{cases}$$

is the target condition.

6.1.2 Round State

A game round is represented by the state

$$R = (C, i, A, P),$$

where:

- **Puzzle Configuration (C):** The current state of the magic cube, represented by a three-dimensional array of cell values:

  $$C \in V^{n \times n \times n},$$

  where n is the dimension of the cube and V is the set of permitted cell values, including any designated empty value used for unfilled cells. Each element $C_{x,y,z}$ represents the value of the cell at position (x, y, z), for $1 \leq x, y, z \leq n$.

- **Current Task Index (i):** The index identifying the task currently being attempted:

  $$i \in \{1, 2, \ldots, 8\}.$$

  The value of i determines which task's completion conditions are evaluated against the current configuration C.

- **Attempt Set (A):** The set of task attempts recorded during the round:

  $$A \subseteq \{(j, C_j, t_j, q_j) \mid j \in \{1, \ldots, 8\}\},$$

  where j identifies the task, C_j is the cube configuration submitted for evaluation, t_j is the elapsed time associated with the attempt, and $q_j \in \{0, 1\}$ indicates whether the attempt was unsuccessful (0) or successful (1). Each recorded attempt therefore contains sufficient information to identify the task, the evaluated configuration, its elapsed time, and its result.

- **Accumulated Score (P):** The total score awarded to the player during the round:

  $$P \in \mathbb{N}_0, \qquad P = \sum_{j=1}^{8} W_j,$$

  where W_j is the score awarded for task T_j, and $\mathbb{N}_0$ denotes the non-negative integers. A task contributes to P only when it has been completed successfully and its score has not already been awarded.

The round state must remain consistent after every accepted state transition. In particular, the accumulated score P must agree with the recorded task rewards, and unsuccessful attempts must not increase the score.

The current task index satisfies

$$1 \leq i \leq 8.$$

For each task T_i, let $E_i(C)$ be the evaluation function that returns true when the puzzle configuration C satisfies the task's required conditions and false otherwise:

$$E_i(C) = \begin{cases} 1, & \text{if task } T_i \text{ is satisfied,} \\ 0, & \text{otherwise.} \end{cases}$$

An attempt is considered successful only when the corresponding evaluation function returns 1. Changes to the puzzle state must be evaluated against the requirements of the current task.

6.1.3 Task Evaluation

Let a_i represent an attempt to complete task T_i. The result of evaluating the attempt is

$$\text{Result}(a_i) = E_i(C).$$

A successful attempt satisfies the task's target condition. An unsuccessful attempt does not satisfy that condition and must not be treated as a completed task.

The task completion indicator is defined as

$$Q_i = \begin{cases} 1, & \text{if task } T_i \text{ has been completed correctly,} \\ 0, & \text{otherwise.} \end{cases}$$

This acts as a persistent tracker of completion even after the next task begins changing $E_i(C)$.

For a round containing eight tasks, the number of completed tasks is

$$N_{\text{completed}} = \sum_{i=1}^{8} Q_i.$$

Consequently,

$$0 \leq N_{\text{completed}} \leq 8.$$

A task can contribute to the completed-task count only after its correct completion has been established by the evaluation function.

6.1.4 Timed Scoring

Let B_i be the basic score for task T_i, and let t_i be the elapsed time, in seconds, associated with its successful completion. For $t_i > 0$, the timed score is calculated as

$$\text{TimedScore}_i = \text{round}\left(\frac{B_i \cdot 1350}{t_i}\right).$$

Here, round denotes rounding to the nearest integer. The scoring rule rewards correct completion while taking the time required to complete the task into account.

The score awarded for task T_i is defined as

$$W_i = \begin{cases} \text{TimedScore}_i, & \text{if } Q_i = 1 \text{ and the score has not been awarded,} \\ 0, & \text{otherwise.} \end{cases}$$

The total score for a round is therefore

$$P = \sum_{i=1}^{8} W_i.$$

This definition ensures that the total score is the sum of the individual task scores and that an unsuccessful attempt does not contribute points. A completed task must not be awarded points more than once within the same round.

6.1.5 Formal Properties

The following properties describe expected behaviour of the task evaluation and scoring system.

Theorem 1: Correctness of Task Completion. For any task T_i, the task is considered successfully completed only if its evaluation function returns true:

$$Q_i = 1 \implies E_i(C) = 1.$$

Justification. By definition, task completion depends on satisfying the task's required conditions. An attempt that fails evaluation cannot be recorded as a successful completion.

Theorem 2: No Score for an Unsuccessful Attempt. For any task T_i,

$$Q_i = 0 \implies W_i = 0.$$

6.2 Requirements

[Functional requirements describe what the system should do. They are typically expressed as a set of conditions or capabilities that the system must have. These requirements are usually derived from the stakeholder requirements and use cases. —TPLT]

[Use SHALL statements. Requirements must be atomic, testable, and traceable. —TPLT]

FR1: The system shall ...

FR2: The system shall ...

FR3: The system shall ...

[The requirements are given labels so that they can be referenced in other parts of the SRS. The label names should be meaningful mnemonics, not numbers. —TPLT]

7 Data Requirements

[The Data Requirements section describes what information the system must manage. It includes the major data entities, their attributes, and the relationships between them. It also includes a data dictionary that defines the meaning of each attribute. —TPLT]

7.1 Major Data Entities

[What information must exist for the system to accomplish its goals? —TPLT]
[For each entity, provide a short explanation. —TPLT]

- User
- Song
- Session
- Report

7.2 Data Dictionary

[For each entity, define all important attributes. —TPLT]

Attribute	Type	Description
user_id	UUID	Unique identifier
email	String	User email address

Table 2: Data Dictionary

7.3 Privacy and Data Retention

[Discuss storage, retention, deletion, privacy controls, consent, encryption, and compliance requirements. —TPLT]
TODO

8 Non-Functional Requirements

NFR1: **Cube Manipulation Performance**

The system shall update the visible cube orientation within 100 milliseconds of receiving a supported manipulation input.

Rationale: Delayed manipulation feedback can make the three-dimensional cube feel unresponsive and make it difficult for users to understand the relationship between their input and the resulting orientation.

Fit Criterion: Under the defined reference test environment, the visible cube orientation updates within 100 milliseconds for at least 95% of measured supported rotation inputs.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR2: **Cell-Value Editing Performance**

The system shall visibly reflect an accepted cell-value edit within 100 milliseconds of the user submitting the edit.

Rationale: Prompt feedback helps users understand whether their changes have been accepted and reduces uncertainty when solving a puzzle.

Fit Criterion: Under the defined reference test environment, at least 95% of accepted cell-value edits are visibly reflected within 100 milliseconds.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR3: **Puzzle Opening Usability**

A first-time user shall be able to open a puzzle without external assistance or prior training.

Rationale: Users should be able to begin solving a puzzle without needing to consult instructions or receive help from another person.

Fit Criterion: At least 80% of participants in a usability evaluation shall successfully open a puzzle without external assistance or prior training.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR4: **Cube Manipulation Usability**

A first-time user shall be able to manipulate the three-dimensional cube using the supported rotation controls without external assistance.

Rationale: The cube is the primary visual representation of the puzzle. Users need to understand how to change its orientation to inspect and interact with its cells.

Fit Criterion: At least 80% of participants in a usability evaluation shall successfully perform each defined cube-rotation task without external assistance.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR5: **Cell Selection Usability**

A first-time user shall be able to select an individual puzzle cell using the supported selection controls without external assistance.

Rationale: Users must be able to identify the cell they intend to inspect or edit. Unclear selection behaviour may cause unintended changes to the puzzle.

Fit Criterion: At least 80% of participants in a usability evaluation shall correctly select the requested cell in each defined cell-selection task without external assistance.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR6: **Cell-Value Editing Usability**

A first-time user shall be able to enter and submit a valid value for a selected puzzle cell without external assistance.

Rationale: Editing cell values is a core interaction in solving the puzzle. The editing process should be understandable without requiring users to learn a complex sequence of actions.

Fit Criterion: At least 80% of participants in a usability evaluation shall successfully enter and submit a valid value for a selected cell without external assistance.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR7: **Separation of System Components**

The system shall organize mathematical logic, user-interface logic, three-dimensional visualization logic, and online storage interactions into identifiable components with documented responsibilities.

Rationale: Separating these responsibilities reduces the risk that changes to one part of the system will unintentionally affect unrelated functionality.

Fit Criterion: A code inspection shall identify separate components responsible for each of the four specified areas, with documented responsibilities for each component.

Stakeholder Requirements: STR??.

NFR8: **Independent Testing of Mathematical Logic**

The system shall allow its core mathematical operations to be tested independently of the user interface and three-dimensional visualization.

Rationale: Independent testing makes it easier to identify mathematical errors without requiring the complete application to be executed for every test.

Fit Criterion: The automated test suite for core mathematical operations shall execute without launching the user interface or rendering the three-dimensional cube.

Stakeholder Requirements: STR??.

NFR9: **Browser Compatibility**

The system shall operate in every desktop and laptop web browser included in its defined support list.

Rationale: Users should be able to access the game through supported browsers without requiring a specific browser outside the stated compatibility requirements.

Fit Criterion: The defined core functional test suite shall pass on every browser and browser version included in the system's documented support list.

Stakeholder Requirements: STR??.

NFR10: **Browser-Based Deployment**

The system shall allow users to access and operate the game through a supported web browser without requiring installation of Python or a standalone desktop application.

Rationale: Browser-based access reduces setup effort and allows users to run the game on supported desktop and laptop devices without installing a separate application.

Fit Criterion: On a clean reference device, a tester shall be able to launch and use the game through a supported browser without installing Python or a standalone desktop application.

Stakeholder Requirements: STR??.

NFR11: **Puzzle-State Integrity**

The system shall maintain a valid in-memory puzzle state following supported cube manipulations, cell selections, and accepted cell-value edits.

Rationale: The puzzle state must remain consistent throughout interaction so that users do not encounter unintended changes or false puzzle representations.

Fit Criterion: Automated tests shall verify that the puzzle state satisfies the defined state-validity rules after every state update in the test suite.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR12: **Invalid Input Handling**

The system shall reject invalid cell-value inputs without terminating the application or leaving the puzzle state invalid.

Rationale: Users may enter unsupported values or make mistakes while editing cells. Invalid inputs should not corrupt the puzzle or interrupt continued use of the game.

Fit Criterion: Automated tests shall submit every defined category of invalid cell-value input and verify that the input is rejected, the puzzle state remains valid, and the application continues operating.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR13: **Online Operation Failure Handling**

When an online storage operation fails, the system shall inform the user that the operation was unsuccessful.

Rationale: Users need accurate feedback about whether their data has been stored or retrieved successfully. Misleading feedback may cause users to believe that their progress or puzzle data has been saved when it has not.

Fit Criterion: Tests that simulate each defined online storage failure shall verify that the system displays an appropriate failure indication.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR14: **Network Communication Security**

All network communication involving account credentials or user data shall use HTTPS with valid TLS.

Rationale: Encrypting network communication helps protect credentials and user data against interception or unauthorized modification during transmission.

Fit Criterion: Network inspection shall confirm that all requests involving account credentials or user data use HTTPS with valid TLS, and that the system does not transmit such information through unencrypted HTTP requests.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR15: **User Data Isolation**

The system shall prevent an authenticated user from accessing another user's private stored data through its supported interfaces and operations.

Rationale: Puzzle data, saved progress, and other private information associated with an account should remain accessible only to authorized users.

Fit Criterion: Authorization tests shall verify that an authenticated test account cannot retrieve, modify, or delete private data belonging to another test account through any supported operation.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR16: **Authentication Secret Protection**

Application-controlled persistent storage shall not store authentication secrets in plaintext.

Rationale: Storing authentication secrets in plaintext may expose user accounts if stored data is accessed without authorization.

Fit Criterion: Inspection of application-controlled persistent storage shall find no authentication secrets stored in plaintext.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR17: **Personal Data Minimization**

The system shall collect and retain only the personal information necessary to provide its implemented functionality.

Rationale: Limiting the collection and retention of personal information reduces privacy risks and the amount of data that must be protected.

Fit Criterion: A review of the system's data fields, collection operations, and persistent storage shall confirm that every collected or retained personal information field has a documented functional purpose.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR18: **Keyboard Accessibility**

All essential puzzle controls shall be operable using a keyboard without requiring pointer interaction.

Rationale: Keyboard operation supports users who cannot use a mouse or other pointer-based input device and provides an alternative way to interact with essential puzzle functionality.

Fit Criterion: A keyboard-only test shall verify that users can access and operate every essential puzzle control, including puzzle navigation, cell selection, and cell-value editing, without pointer interaction.

Traces: FR??.

Stakeholder Requirements: STR??.

NFR19: **Visual Contrast**

Essential interface text and controls shall meet a minimum contrast ratio of 3:1 against their adjacent background.

Rationale: Adequate contrast helps users distinguish interface elements and read essential information.

Fit Criterion: An automated or manual contrast assessment shall confirm that every essential interface text element and control meets the specified minimum contrast ratio of 3:1 against its adjacent background.

Traces: FR??.

Stakeholder Requirements: STR??.

9 AI and Machine Learning Requirements

[Refer to Dr. Mosser's guest lecture on AI requirements. —TPLT]
[Include only when applicable. —TPLT]

9.1 Model Inputs

TODO

9.2 Model Outputs

TODO

9.3 Evaluation Metrics

[Accuracy, Precision, Recall, F1, BLEU, WER, etc. —TPLT]
TODO

9.4 Known Limitations

[Explicitly document expected failure modes. —TPLT]
TODO

10 Requirements Traceability Matrices

[The Requirements Traceability Matrix (RTM) is a table that shows the relationship between different types of requirements. It is used to ensure that all requirements are traceable and that no requirements are missed. The typical flow is: Stakeholder Need -¿ Use Case -¿ Requirement —TPLT]
[There is also a traceability matrix between functional and nonfunctional requirements. The purpose of some FRs is to satisfy NFRs. Therefore, it is important to show the relationship between the two. —TPLT]
[Further traceability to test cases and modules will be given in other documents. —TPLT]

Stakeholder Req	Use Case	Functional Req
SR1	UC1	FR1

Table 3: Traceability Between Stakeholder Requirements, Use Cases, and Functional Requirements

Functional Req	Nonfunctional Req
FR1	NFR??

Table 4: Traceability Between Functional and Nonfunctional Requirements

11 Rationale

[Provide a rationale for the decisions made in the documentation. Rationale should be provided for scope decisions, functional requirements, nonfunctioanl requirements, data requirements, and AI requirements. You don't need a rationale for everything, ust the major decisions that are not obvious. You should have traceability to the entities in the document that you are referencing. —TPLT]

11.1 Nonfunctional Requirements

- **Performance (NFR1, NFR2):**

  Cube manipulation and cell-value editing are two of the most frequent interactions in the magic cube game. These operations need to provide prompt feedback so that users can understand the effects of their actions without unnecessary delays.

- **Usability (NFR3, NFR4, NFR5, NFR6):**

  The usability requirements focus on the primary tasks that users must perform to interact with the puzzle successfully. These tasks represent the essential interaction workflow. Requiring at least 80% of usability evaluation participants to complete these tasks without external assistance provides a measurable baseline for whether the interface is understandable to its intended users or not.

- **Maintainability (NFR7, NFR8):**

  Separating mathematical operations, user-interface behaviour, 3D visualization, and online storage into identifiable components reduces coupling between unrelated responsibilities. This decision allows individual components to be modified with less risk of affecting other parts of the system.

- **Portability (NFR9, NFR10):**

  The system is intended to be accessed through desktop and laptop web browsers rather than a platform-specific desktop application. Browser-based deployment reduces installation requirements and allows users to access the game through supported environments without installing Python or additional standalone software.

- **Reliability (NFR11, NFR12, NFR13):**

  The correctness of the puzzle state is essential because subsequent calculations, visual updates, and user interactions depend on it. Separately defining requirements for valid state maintenance, invalid input handling, and online failure handling ensures that the system can respond predictably to both expected operations and error conditions.

- **Security and Privacy (NFR14, NFR15, NFR16, NFR17):**

  Because the system may support user accounts and online storage, appropriate measures are needed to protect user information. Encrypted network communication protects data during transmission, while access restrictions prevent users from accessing other accounts' private data.

- **Accessibility (NFR18, NFR19):**

  The system should provide alternative ways for users to interact with and understand the puzzle. Keyboard-operable controls support users who cannot rely on pointer-based interaction, while sufficient visual contrast helps make interface elements distinguishable.

12 Likely Changes

LC1: [Give the likely changes, with traceability to the entity that is likely to change. —TPLT]

(NFR1, NFR2) : If it is found that the 100ms response times are unreasonable can easily be changed to more fitting ones.

(NFR19) : May need to change the given standard for contrast if it is not considered enough.

13 Unlikely Changes

LC2: [Give the unlikely changes. The design can assume that the changes listed will not occur. —TPLT]

(NFR18) : Will not likely be lessening our goal to allow those without the ability to use a mouse to be able to interact with the program.

(NFR9, NFR10) : The web based approach was one of the first comments made by Dr. Rapoport and so unless there is no other option we would like to continue with this method.

14 Appendices

14.1 Appendix A: Additional Materials

TODO

14.2 Appendix B: Development Plan

[This section is optional. It is used to explain the plan for developing the software. In particular, this section gives a list of the order in which the requirements will be implemented. In the context of a course this is where you can indicate which requirements will be implemented as part of the course, and which will be "faked" as future work. This section can be organized as a prioritized list of requirements, or it could show the requirements that will be implemented for "phase 1", "phase 2", etc. —TPLT]

14.3 Appendix C: Values of Auxiliary Constants

[Show the values of the symbolic parameters introduced in the report. —TPLT]

[The definition of the requirements will likely call for SYMBOLIC_CONSTANTS. Their values are defined in this section for easy maintenance. —TPLT]

[The value of FRACTION, for the Maintainability NFR would be given here. —TPLT]

TODO

14.4 Appendix D: Generative AI Disclosure

[Provide full transparency on how generative AI was used in the creation of this document. This includes any text, figures, or tables that were generated by AI. If any skills were created for AI agents to review the documentation, those should be disclosed here. —TPLT]

For sections 2, 8, and 6.1 there was AI used for text generation using a particular format from unformatted text due to my unfamiliarity with LaTeX.

14.5 Appendix E: Reflection

[This isn't part of the SRS, but it is part of the course. —TPLT]

The information in this section will be used to evaluate the team members on the graduate attribute of Lifelong Learning.

1. Some knowledge and skills will the team collectively need to acquire to successfully complete this capstone project are, furthering our understanding of magic cubes and the patterns that are present within them so that we can accurately create the game which Dr. Rapoport has asked us to create. Learning how to do 3D projection onto a 2D plane to allow for us to display a cube using only pygame which is required for our current plan to use a python to WebAssembly translation method. We will need

to learn data storage methods and how to effectively send and retrieve data that may need to be encrypted for privacy.

2. Josh will be taking on the task of learning 3D projection on a 2D plane. The two ways in which he will go about doing this are using a template version of the code for a simple object and studying it to gain further understanding of the concepts as well as watching instructional videos on the topic from online sources such as youtube. He mainly plans to focus on breaking down the code since that will be sure to work with pygame while some videos that are found can be witholding crucial information.

Josh Engel

1. One thing that went well with writing this deliverable is compared to the last deliverable we were more organized on what we wished to complete and when, as well as starting sooner allowing for easier communication throughout the group. I also used the provided materials from earlier years as a guide more than with the last deliverable which helped to identify what exactly I should be doing.

2. The main pain point I found throughout this deliverable was how to make NFRs verifiable. I was unsure as to what would be considered acceptable for fit critereon and so changed formatting and explanations a few seperate times leading to uneeded time spent. Eventualy I came up with a very simple solution which was to reach out and "poll" my aquaintances as well as teammates on what they deemed would be acceptable and proceeded from there.

3. Personally I worked on the Non-functional Requirements as well as the formal model. For the NFRs I based them off earlier conversations we had with our supervisor Dr. Rapoport as well as getting feedback from him for changes after the initial draft. For the formal model I used the functional requirements determined by my peers as well as had a peer review of it to help reach a state the group was happy with.

4. Multiple courses I have taken will be of great help to us throughout this project. A major one of these courses is 4HC3: Human and Computer Interfaces, this will help in designing the applications UI in a human forward fashion which allows for better usability this is especially important for me since I am currently slated to be working on front end development where this is important.

The purpose of reflection questions is to give you a chance to assess your own learning and that of your group as a whole, and to find ways to improve in the future. Reflection is an important part of the learning process. Reflection is also an essential component of a successful software development process.

Reflections are most interesting and useful when they're honest, even if the stories they tell are imperfect. You will be marked based on your depth of thought and analysis, and not based on the content of the reflections themselves. Thus, for full marks we encourage you

to answer openly and honestly and to avoid simply writing "what you think the evaluator wants to hear."

Please answer the following questions. Some questions can be answered on the team level, but where appropriate, each team member should write their own response:

1. What went well while writing this deliverable?

2. What pain points did you experience during this deliverable, and how did you resolve them?

3. How many of your requirements were inspired by speaking to your client(s) or their proxies (e.g. your peers, stakeholders, potential users)?

4. Which of the courses you have taken, or are currently taking, will help your team to be successful with your capstone project.

5. What knowledge and skills will the team collectively need to acquire to successfully complete this capstone project? Examples of possible knowledge to acquire include domain specific knowledge from the domain of your application, or software engineering knowledge, mechatronics knowledge or computer science knowledge. Skills may be related to technology, or writing, or presentation, or team management, etc. You should look to identify at least one item for each team member.

6. For each of the knowledge areas and skills identified in the previous question, what are at least two approaches to acquiring the knowledge or mastering the skill? Of the identified approaches, which will each team member pursue, and why did they make this choice?