




Task correctness

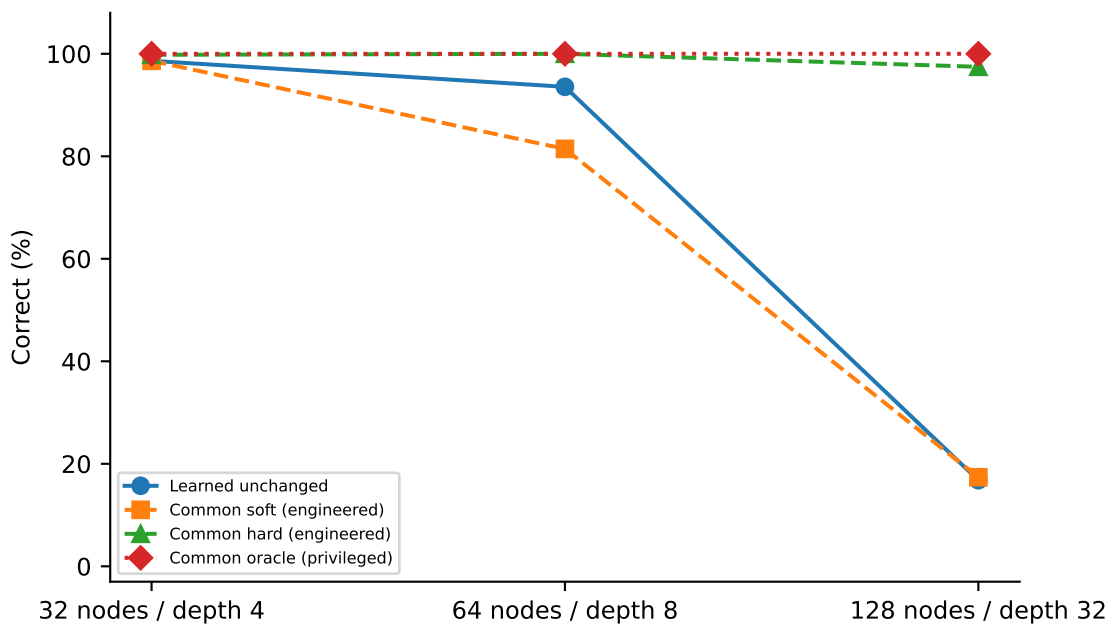


Queried mean full-route correctness

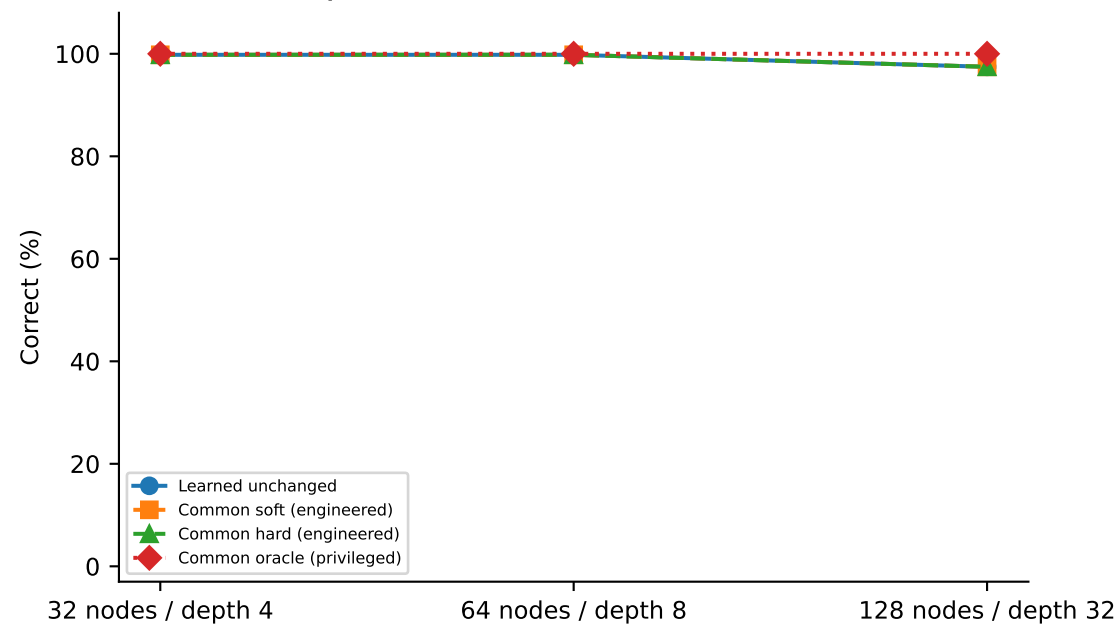

Task conditional on correct full query route

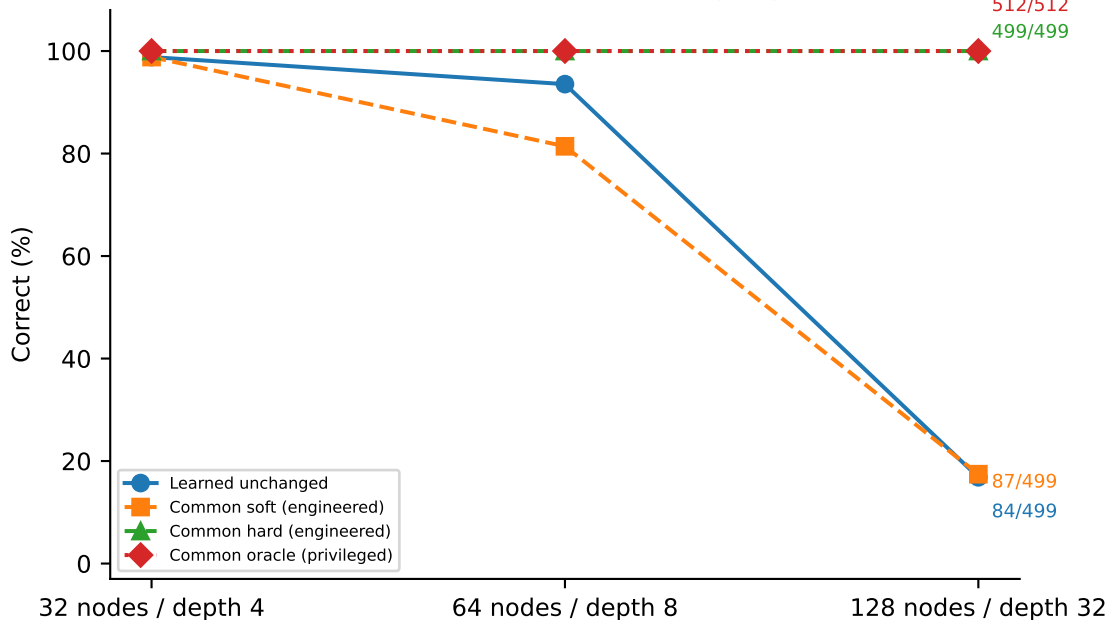

Deep query: individual-head full-route correctness

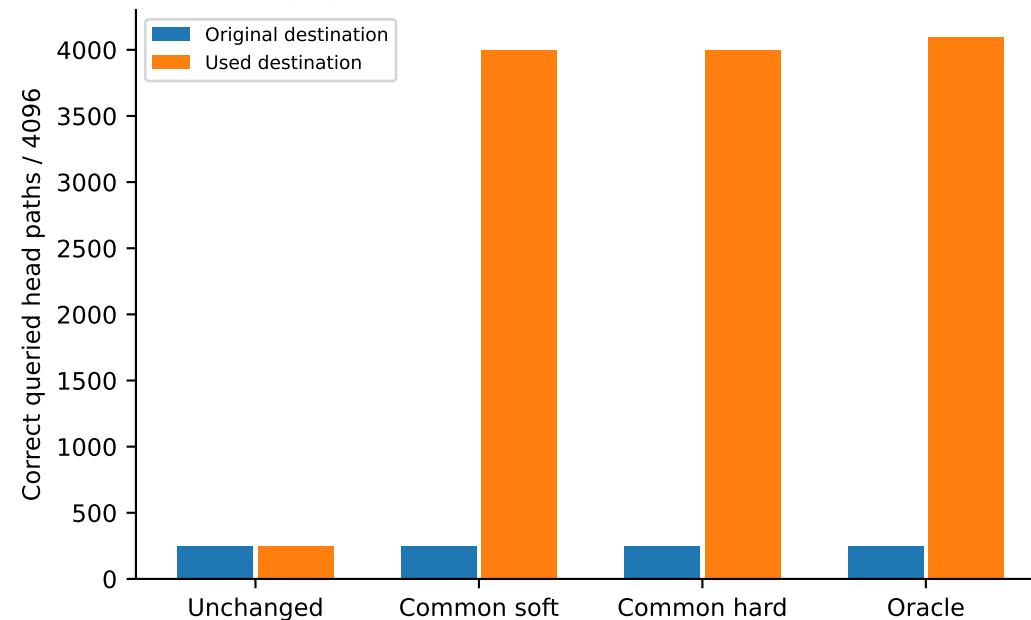

A13: one frozen checkpoint, paired events, zero updates; no seed replication. Nonoracle mean routes are exactly equal across policies.

Common hard is engineered; oracle uses privileged routes. Queried heads share event support (8 heads/event); full all-node suffix counts remain separate in the data.