

Panbench: A Comparative Benchmarking Tool for Dependently-Typed Languages

Anonymous author

Anonymous affiliation

Anonymous author

Anonymous affiliation

Abstract

We benchmark four proof assistants (Agda, Idris 2, Lean 4 and Rocq) through a single test suite. We focus our benchmarks on the basic features that all systems based on a similar foundations (dependent type theory) have in common. We do this by creating an “over language” in which to express all the information we need to be able to output *correct and idiomatic syntax* for each of our targets. Our benchmarks further focus on “basic engineering” of these systems: how do they handle long identifiers, long lines, large records, large data declarations, and so on.

Our benchmarks reveals both flaws and successes in all systems. We give a thorough analysis of the results.

We also detail the design of our extensible system. It is designed so that additional tests and additional system versions can easily be added. A side effect of this work is a better understanding of the common abstract syntactic structures of all four systems.

2012 ACM Subject Classification Mathematics of computing → Mathematical software performance

Keywords and phrases Benchmarking, dependent types, testing

Digital Object Identifier 10.4230/LIPIcs.CVIT.2016.23

1 Introduction

Production-grade implementations of dependently typed programming languages are complicated pieces of software that feature many intricate and potentially expensive algorithms. As such, large amounts of engineering effort has been dedicated to optimizing these components. Unfortunately, engineering time is a finite resource, and this necessarily means that other parts of these systems get comparatively less attention. This often results in easy-to-miss performance problems: we have heard anecdotes from a proof assistant developer that a naïve $O(n^2)$ fresh name generation algorithm used for pretty-printing resulted in 100x slowdowns in some pathological cases.

This suggests that a benchmarking suite that focuses on these simpler components could reveal some (comparatively) easy potential performance gains. Moreover, such a benchmarking suite would also be valuable for developers of new dependently typed languages, as it is much easier to optimize with a performance goal in mind. This is an instance of the classic $m \times n$ language tooling problem: constructing a suite of m benchmarks for n languages directly requires a quadratic amount of work up front, and adding either a new test case or a new language to the suite requires an additional linear amount of effort.

Like most $m \times n$ tooling problems, the solution is to introduce a mediating tool. In our case, we ought to write all of the benchmarks in an intermediate language, and then translate that intermediate language to the target languages in question. There are existing languages like Dedukti [3] or Informath [1] that attempt to act as an intermediary between popular proof assistants, but these tools typically focus on translating the *content* of proofs, not exact syntactic structure. To fill this gap, we have created the Panbench system, which consists of:



© Anonymous author(s);

licensed under Creative Commons License CC-BY 4.0

42nd Conference on Very Important Topics (CVIT 2016).

Editors: John Q. Open and Joan R. Access; Article No. 23; pp. 23:1–23:17

Leibniz International Proceedings in Informatics



LIPICs Schloss Dagstuhl – Leibniz-Zentrum für Informatik, Dagstuhl Publishing, Germany

1. An extensible embedded Haskell DSL that encodes the concrete syntax of a typical dependently typed language.
2. A series of compilers for that DSL to Agda [2], Idris 2 [4], Lean 4 [6], and Rocq [9].
3. A benchmarking harness that can perform sandboxed builds of multiple versions of Agda, Idris 2, Lean 4, and Rocq.
4. An incremental build system that can produce benchmarking reports as static HTML files or PGF plots¹.

2 Methodology

To perform reliable benchmarking, we need tooling and we need to design a test suite. For reproducibility, we also need to document the actual experimental setup. We will describe the tooling in detail in later sections, for now we focus on the design of the test suite and the experimental setup.

Category	Details	Category	Details
Syntax	Newlines	Datatypes	Parameters
	Parentheses		Indices
Names	Datatype		Constructors
	Data constructor		Params + Indices
	Definition	Records	Fields
	Definition lhs		Parameters
	Definition rhs	Dependency	Record Fields
	Lambda		Datatypes Parameters
	Pi		Definitions chains
	Record constructor		Record chains
	Record field	Nesting	Id chain
Binders	Lambda		Id chain λ
	Implicits		Let
Misc	Postulates		Let addition
Conversion	Addition		Let functions

Figure 1 Our tests

2.1 Designing tests

Let us assume that we possess the following tools:

- a single language of tests,
- a means to translate these tests to each of our four languages,
- a reproducible test harness,
- a stable installation of the four languages.

How would we design actual tests for common features?

As we said before, our aim here is to test “basic engineering”. For example, how does each system handle giant files (e.g.: one million empty lines), large names (thousands of characters long) in each syntactic category, large numbers of fields in records, constructors in

¹ All plots in this paper were produced directly by Panbench.

algebraic types, large numbers of parameters or indices, long dependency chains, and so on. We divide our tests into the following categories:

1. basic syntactic capabilities
2. long names in simple structures
3. large simple structures (data, record)
4. handling of nesting and dependency
5. conversion, postulates

where we vary the “size” of each. Table 1 gives more details of the available tests.

At a higher level, we asked ourselves the question: for each aspect of a dependently typed language (lexical structure, grammatical structure, fundamental features of dependent languages), what could be made to “scale”? The only features of interest remained the ones that were clearly features of all four systems.

Note that we are *not* trying to create “intrinsically interesting” tests, but rather we want them to be *revealing* with respect to the need for basic infrastructure improvements.

For lack of space, we cannot show samples of all the tests, but we show just a few that should be *illustrative* of the rest². The source of all tests can be found in the accompanying material. All tests below are from the snapshot of our “golden” test suite, uniformly run with a size parameter of 5.

■ **Listing 1** Nesting: Id chain (Agda)

```
module IdChain where

f : {a : Set} (x : a) → a
f x = x

test : {a : Set} → a → a
test = f f f f f f
```

■ **Listing 2** Nesting: Let add (Lean)

```
def n : Nat :=
  let x0 := 1
  let x1 := x0 + x0
  let x2 := x1 + x1
  let x3 := x2 + x2
  let x4 := x3 + x3
  x4
```

■ **Listing 3** Binders: Lambda (Idris 2)

```
module Main

const5 : {A : Type} -> {B0, B1, B2, B3, B4, B5 : Type} ->
  A -> B0 -> B1 -> B2 -> B3 -> B4 -> B5 -> A
const5 = \a, b0, b1, b2, b3, b4, b5 => a
```

■ **Listing 4** Dependency: Record Telescope (Rocq)

```
Module RecordTelescope.

Record Telescope (U : Type) (E1 : U -> Type) : Type := Tele
{ a0 : U
; a1 : forall (x0 : E1 a0), U
; a2 : forall (x0 : E1 a0) (x1 : E1 (a1 x0)), U
; a3 : forall (x0 : E1 a0) (x1 : E1 (a1 x0)) (x2 : E1 (a2 x0 x1))
, U
; a4 : forall (x0 : E1 a0) (x1 : E1 (a1 x0)) (x2 : E1 (a2 x0 x1))
(x3 : E1 (a3 x0 x1 x2)), U
; a5 : forall (x0 : E1 a0) (x1 : E1 (a1 x0)) (x2 : E1 (a2 x0 x1))
```

² Very minor edits made to fit the page

```

104      (x3 : El (a3 x0 x1 x2)) (x4 : El (a4 x0 x1 x2 x3)), U
105    }.
106
107 Arguments Tele {U} {El} _ _ _ _ _ .
108
109 End RecordTelescope.
110

```

111 2.2 Experimental setup

112 All tests are run on a dedicated (older) desktop machine running on NixOS 25.11. The
 113 CPU is CPU is a an Intel i7-2600K with 1MB L2 cache, 8MB L3 cache, running at 3.4 Ghz,
 114 equipped with 24 Gigs of DDR3 memory. This box has no SSD drive, but this should only
 115 affect system time.

116 When tests are run, no other (human) activity happens on the machine.

117 All tests are run with a time limit of 60 seconds. We also tried to use memory limits but,
 118 alas, Linux no longer reliably supports these. Otherwise, we ran all four systems in their
 119 default configuration.

120 3 Results

121 Given that our test suite has 32 tests, each of which produces 3 different graphs, we have no
 122 room to display all 96 resulting graphs³. We thus choose results that appear to be the most
 123 “interesting”. Furthermore, other than in Table 2, we will not show the *System Time* as it
 124 correlates very strongly with memory use for our particular test suite.

System	User Time (s)	System Time (s)	Max RSS (MB)
Agda	0.02 (0.002)	0.01 (0.001)	64 (0.1)
Idris 2	0.58 (0.007)	0.10 (0.007)	248 (0.1)
Lean 4	0.14 (0.005)	0.04 (0.005)	307 (0.6)
Rocq	0.05 (0.004)	0.03 (0.003)	95 (0.05)

■ **Figure 2** Start-up time and memory, mean with standard deviation in parentheses.

125 Start-up time and memory use varies wildly: from a super-fast (0.02s) and slim (64 MB)
 126 Agda to a 29 times slower Idris 2 and 4.8 times memory consumer in Lean 4. It is worth
 127 recalling that 0.1 seconds is the “instant” threshold.

128 A file with a header and a million blank lines is, of course, not intrinsically interesting. It
 129 is however very *revealing*: we see (Figure 3) that it takes Lean 4 and Rocq no noticeable
 130 time to deal with that, while already 100K lines causes both Agda and Idris 2 to slow down
 131 and consume significantly more memory (6.3Gigabytes for 10 million lines in Idris 2’s case).
 132 Estimating the run-time for Agda and Idris 2 from the slope of the graphs, we get that both
 133 are linear.

134 What about *long identifiers*? Figure 4 shows what happens when we use increasingly long
 135 names for data types; other “long names”, such as for constructors, field names of records,
 136 etc, show similar behaviour. Unlike for blank lines, all systems show an eventual increase in
 137 time and memory use, with Agda starting earlier than others. What is most interesting is

³ Nor can we have appendices!

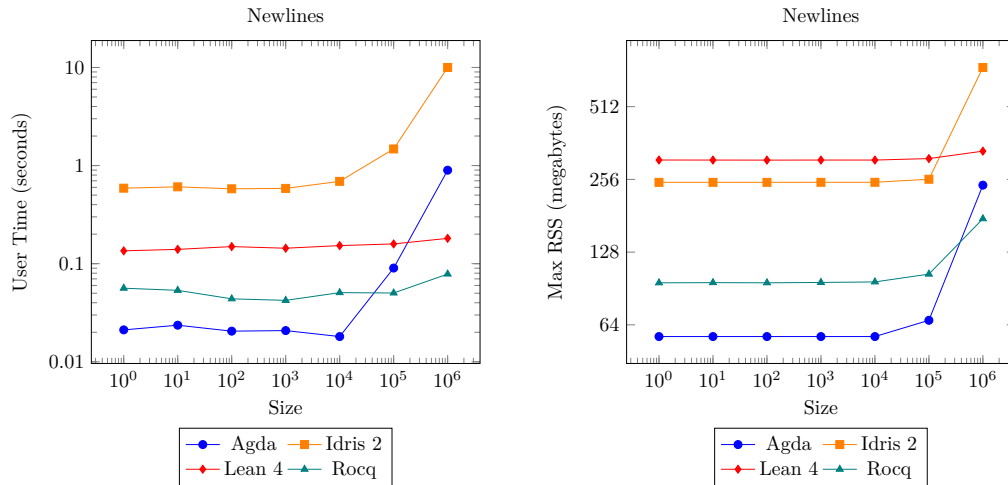


Figure 3 Blank lines

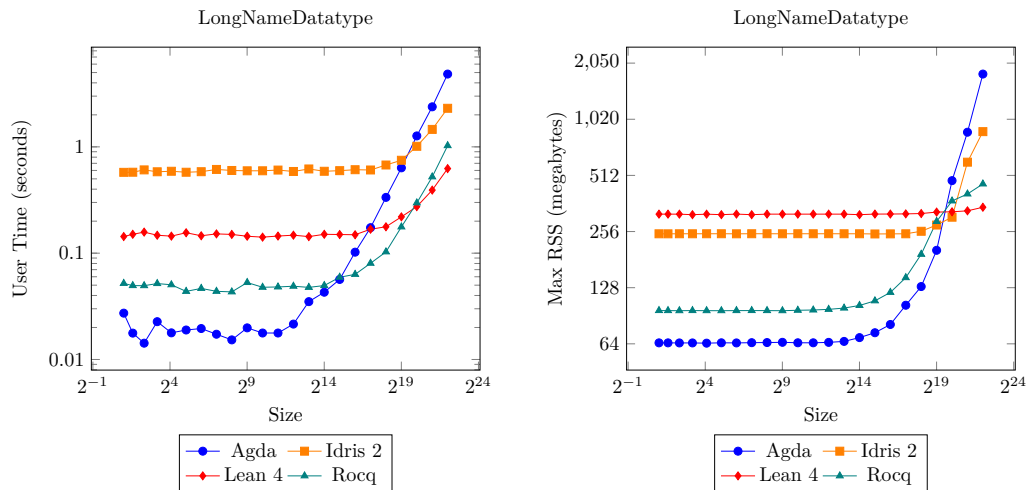


Figure 4 Long names (datatypes)

138 that Lean 4 barely takes any more memory, even for extremely long (4 million characters)
 139 identifiers. Agda's time here too indicates it is linear in the number of characters.

140 Figure 5 tests simple data types (enumerations) with short constructor names. What is
 141 remarkable here is Idris 2: even at 2^{11} constructors, it takes no appreciable time or memory
 142 beyond start-up.

143 Figure 6, a test for a single lambda term that uses its first variable but has n other
 144 (unused) variables also declared (see Listing 3. This seems to be a “torture” test where
 145 systems perform very well until they hit a wall and suddenly time out. It appears that the
 146 underlying problem is using an enormous amount of memory.

147 Figure 7 is a test for “very dependent records”, i.e. a record where every later field
 148 depends on all previous ones, as shown in Listing 4. Of course, the code size itself is quadratic
 149 in the number of such fields.

150 Figure 8, corresponding to Listing 1, nested calls to an identity function, shows even
 151 more extreme behaviour: basically instantaneous until memory explosion and time out. This

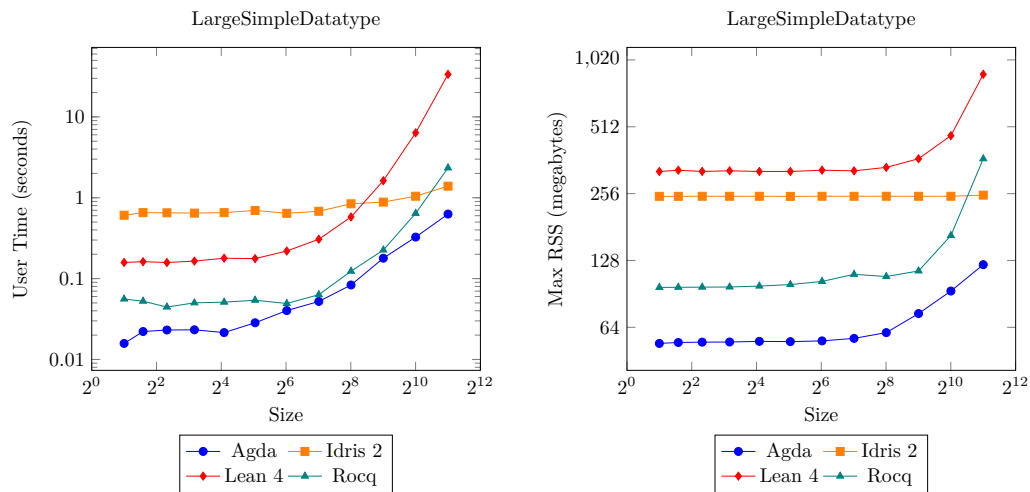


Figure 5 Enumerations

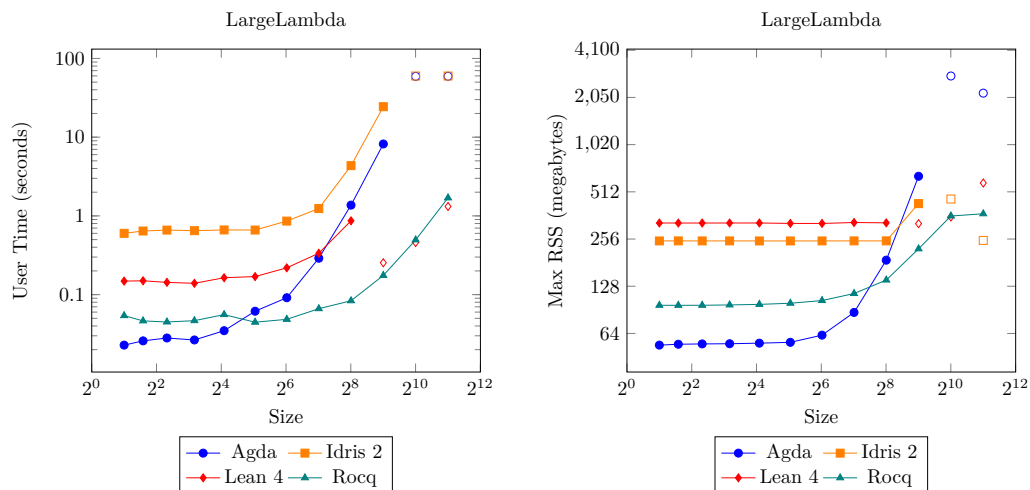


Figure 6 Lambda term with many variables

is well-known to be a problem for type systems based on Hindley-Milner inference, but it is less clear that it ought to be a weakness for bidirectional typing as well. Closer sampling (not shown) does not change this picture.

Figure 9, corresponding to Listing 2, nested lets doing very simple arithmetic. The contrast is remarkable: Agda and Idris 2 time out already at size 2^5 , Lean 4 takes an increasing amount of time, while Rocq takes no time nor any memory! Note the enormous amount of memory taken by Agda when it times out.

Listing 5 Conversion: Addition (Idris)

```
conv : 5 + 5 + 5 + 5 + 5 + 0 = 25
conv = Refl
```

Figure 10, corresponding to Listing 5, does simple natural number arithmetic and ensures the correct result is obtained. Here the roles are inverted: Agda, Idris 2, and Lean 4 take no time while Rocq takes an increasing amount of time until timeout.

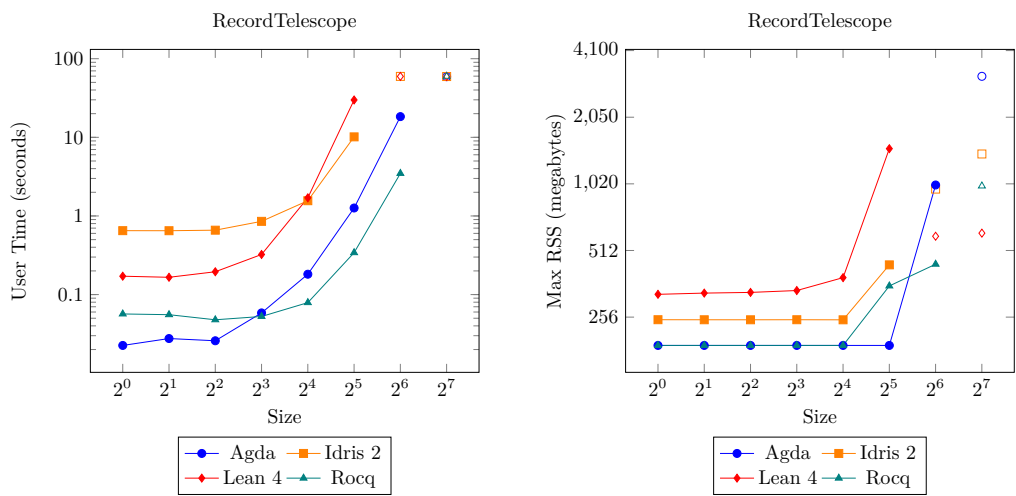


Figure 7 Record with increasingly dependent fields


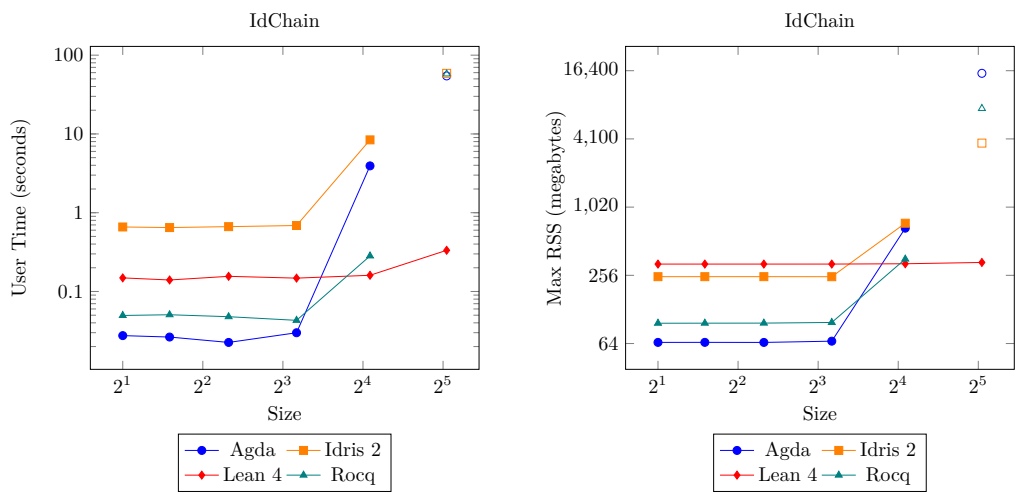



Figure 8 Chain of calls to identity function

4 Discussion

The previous section analyzed the results themselves. Here we speculate on why the results may be as they are. We comment on some particular results first, and then on what we find for each system.

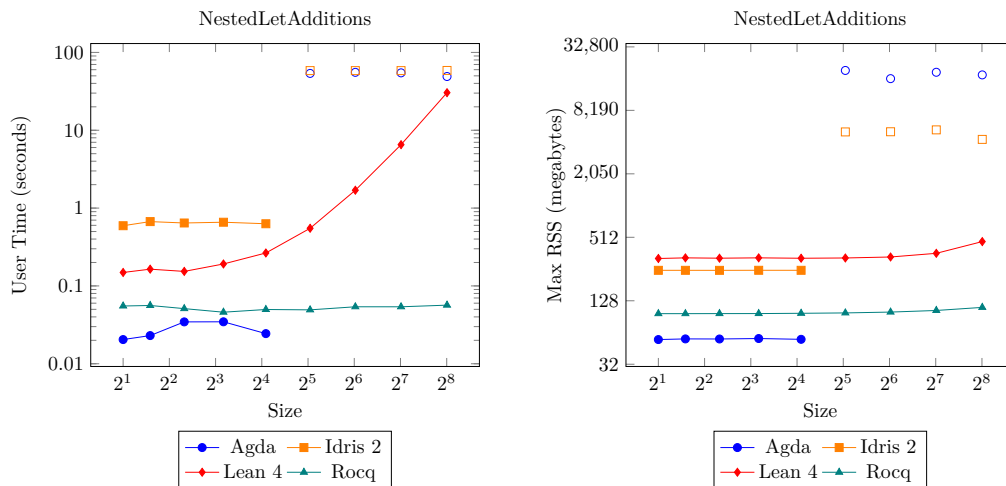

■ **Figure 9** Nested let bindings, simple addition on rhs

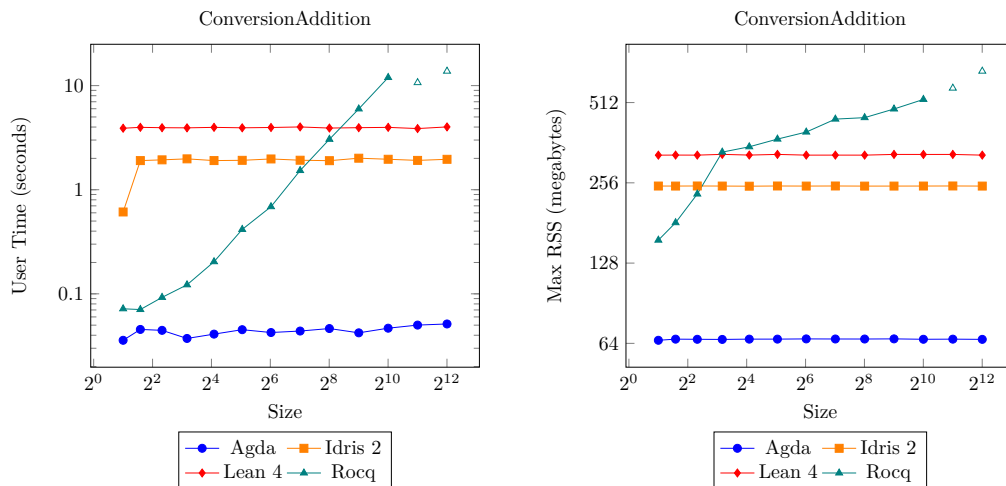

■ **Figure 10** Conversion for Natural Number Addition

167 4.1 General

168 4.2 Agda

169 4.3 Idris 2

170 4.4 Lean 4

171 4.4.0.1 Rocq

172 5 Infrastructure

173 One of the major goals of Panbench is to make performance analysis as low-cost as possible for
 174 language developers. Meeting this goal requires a large amount of supporting infrastructure:
 175 simply generating benchmarks is not very useful if you cannot run them nor analyze their
 176 outcomes. After some discussion, we concluded that any successful language benchmarking
 177 system should meet the following criteria:

- 178 1. It must provide infrastructure for performing sandboxed builds of compilers from source.
179 Asking potential users to set up four different toolchains presents an extremely large
180 barrier to adoption. Moreover, if we rely on user-provided binaries, then we have no hope
181 of obtaining reproducible results, which in turn makes any insights far less actionable.
- 182 2. It must allow for multiple revisions of the same tool to be installed simultaneously. This
183 enables developers to easily look for performance regressions, and quantify the impact of
184 optimizations.
- 185 3. It must allow for multiple copies of the *same* version tool to be installed with different
186 build configurations. This allows developers to look for performance regressions induced
187 by different compiler versions/optimizations.
- 188 4. It must be able to be run locally on a developers machine. Cloud-based tools are often
189 cumbersome to use and debug, which in turn lowers adoption.
- 190 5. It must present a declarative interface for creating benchmarking environments and
191 running benchmarks. Sandboxed builds of tools are somewhat moot if we cannot trust
192 that a benchmark was run with the correct configuration.
- 193 6. It must present performance results in a self-contained format that is easy to understand
194 and share. Performance statistics that require large amounts of post-processing or
195 dedicated tools to view can not be easily shared with developers, which in turn makes
196 the data less actionable.

197 Of these criteria, the first four present the largest engineering challenge, and are tan-
198 tamount to constructing a meta-build system that is able orchestrate *other* build systems.
199 We approached the problem by constructing a bespoke content-addressed system atop of
200 Shake [12], which we discuss in section 5.1. The final two criteria also presented some
201 unforeseen difficulties, which we detail in 5.2.

202 5.1 The Panbench Build System

203 As noted earlier, we strongly believe that any benchmarking system should provide infra-
204 structure for installing multiple versions of reproducibly built software. Initially, we intended
205 to build this infrastructure for Panbench atop of Nix [7]. This is seemingly a perfect fit;
206 after all, Nix was designed to facilitate almost exactly this use-case. However, after further
207 deliberation, we came to the conclusion that Nix did not quite meet our needs for the
208 following reasons:

- 209 1. Nix does not work natively on Windows. Performance problems can be operating system
210 specific, so ruling out an OS that has a large user base that is often overlooked in testing
211 seems unwise⁴.
- 212 2. Nix adds a barrier to adoption. Installing Nix is a somewhat invasive process, especially
213 on MacOS⁵. We believe that it is somewhat unreasonable to ask developers to add users
214 and modify their root directory to run a benchmarking tool, and strongly suspect that
215 this would hamper adoption.

216 With the obvious option exhausted, we opted to create our own Nix-inspired build system
217 based atop Shake [12]. This avoids the aforementioned problems with Nix: Shake works on
218 Windows, and only requires potential users to install a Haskell toolchain.

⁴ Currently, Panbench does not support Windows, but this is an artifact of prioritization, and not a fundamental restriction.

⁵ The situation is even worse on x86-64 Macs, which most Nix installers simply do not support.

The details of content-addressed build systems are a deep topic unto themselves, so we will only describe the key points. Systems like Nix use an *input-addressing* scheme, wherein the results of a build are stored on disk prefixed by a hash of all build inputs. Crucially, this lets the build system know where to store the result of the build before the build is run, which avoids vicious cycles where the result of a build depends on its own hash. However, most input-addressed systems also require that the hash of the inputs *solely* determines the output. On its face, this is a reasonable ask, but taking this idea to its logical conclusion requires one to remove *any* dependency on the outer environment, which in turn forces one to re-package the entirety of the software stack all the way down to `libc`. This is an admirable goal in its own right, but is actually somewhat counterproductive for our use case: there is a very real chance that we might end up benchmarking our sub-par repackaging of some obscure C dependency four layers down the stack.

To avoid this cascading series of dependency issues, Panbench takes a hybrid approach, wherein builds are input-addressed, but are allowed to also depend on the external environment. Additionally, the results of builds are also hashed, and stored out-of-band inside of a Shake database. This hash is used to invalidate downstream results, and also act as a fingerprint to identify if two benchmarks were created from the same binary. This enables a pay-as-you go approach to reproducibility, which we hope will result in a lower adoption cost. Moreover, we can achieve fully reproducible builds by using Nix as a meta-meta build system to compile Panbench: this is how we obtained the results presented in Section 3.

5.2 Running Benchmarks and Generating Reports

As noted in the introduction to this section, we believe that benchmarking tools should present a *declarative* interface for writing not just single benchmarking cases, but entire benchmarking suites and their corresponding environments. Panbench accomplishes this by *also* implementing the benchmark execution framework atop Shake. This lets us easily integrate the process of tool installation with environment setup, but introduces its own set of engineering challenges.

The crux of the problem is that performance tests are extremely sensitive to the current load on the system. This is largely at odds with the goals of a build system, which is to completely saturate all system resources to try to complete a build as fast as possible. This can be avoided via careful use of locks, but we are then faced with another, larger problem. Haskell is a garbage collected language, and running the GC can put a pretty heavy load on the system. Moreover, the GHC runtime system is very well engineered, and is free to run the garbage collector inside of `safe` FFI calls, and waiting for process completion is marked as `safe`.

To work around this, we opt to eschew existing process interaction libraries, and implement the benchmark spawning code in C⁶. This lets us take the rather extreme step of linking against the GHC runtime system so that we can call `rts_pause`, which pauses all other Haskell threads and GC sweeps until `rts_resume` is called.

Initially, we thought that this was the only concern that would arise by tightly integrating the build system with the benchmark executor. However, our initial benchmarks on Linux systems displayed some very strange behaviour, wherein the max resident set size reported by `getrusage` and `wait4` would consistently report a reading of approximately 2 gigabytes halfway through a full benchmarking suite. After some investigating, we discovered the Linux

⁶ This is why Panbench does not currently support Windows.

preserves resource usage statistics across calls to `execve`. Consequentially, this means that we are unable to measure any max RSS that is lower than max RSS usage of Panbench itself. Luckily, our lowest baseline is Agda at 64 megs, and we managed to get the memory usage of Panbench itself down to 10 megs via some careful optimization and GC tuning.

Currently, the statistics that Panbench gathers can then be rendered into standalone HTML files with `vega-lite` plots, or into `TeX`files containing PGF plots. We intend to add more visualization and statistic analysis tools as the need arises.

6 The Design of Panbench

At its core, Panbench is a tool for producing grammatically well-formed concrete syntax across multiple different languages. Crucially, Panbench does *not* require that the syntax produced is well-typed or even well-scoped: if it did, then it would be impossible to benchmark how systems perform when they encounter errors. This seemingly places Panbench in stark contrast with other software tools for working with the meta-theoretic properties of type systems, which are typically concerned only with well-typed terms.

Reed: Cite something

However, the core task of Panbench is not that different from the task of a logical framework [8]: Both exist to manipulate judgements, inference rules, and derivations: Panbench just works with *grammatical* judgements and production rules rather than typing judgments and inference rules. In this sense Panbench is a *grammatical* framework⁷ rather than a logical one.

This similarity let us build Panbench atop well-understood design principles. In particular, a mechanized logical framework typically consists of two layers:

1. A layer for defining judgements à la relations.
2. A logic programming layer for synthesizing derivations.

To use a logical framework, one first encodes a language by laying out all of the judgements. Then, one needs to prove an adequacy theorem on the side that shows that their encoding of the judgements actually aligns with the language. However, if one wanted to mechanize this adequacy proof, then a staged third layer that consists of a more traditional proof assistant would be required.

If we take this skeleton design and transpose it to work with grammatical constructs rather than logical ones, we will also obtain three layers:

1. A layer for defining grammars as relations.
2. A logic programming layer for synthesizing derivations.
3. A staged functional programming layer for proving “adequacy” results.

In this case, an adequacy result for a given language \mathcal{L} is a constructive proof that all grammatical derivations written within the framework can be expressed within the concrete syntax of a language \mathcal{L} . However, the computational content of such a proof essentially amounts to a compiler written in the functional programming layer. Given that this compiler outputs *concrete syntax*, it is implemented as a pretty-printer.

⁷ Not to be confused with *the* Grammatical Framework [13], which aims to be a more natural-language focused meta-framework for implementing and translating between grammars.

6.1 Implementing The Grammatical Framework

Implementing a bespoke hybrid of a logic and functional programming language is no small feat, and also requires prospective users to learn yet another single-purpose tool. Luckily, there already exists a popular, industrial-grade hybrid logic/functional programming language in wide use: GHC Haskell.

At first glance, Haskell does not contain a logic programming language. However, if we enable enough GHC extensions, the typeclass system can be made *just* rich enough to encode a simply-typed logical framework. The key insight is that we can encode each production rule using multi-parameter type classes with a single method. Moreover, we can encode our constructive adequacy proofs for a given set of production rules as instances that translate each of the productions in the abstract grammar to productions in the syntax of an actual language.

As a concrete example, consider the grammar of the following simple imperative language.

```

314  $\langle expr \rangle ::= x \mid n \mid \langle expr \rangle '+' \langle expr \rangle \mid \langle expr \rangle '*' \langle expr \rangle$ 
315
316  $\langle stmt \rangle ::= \langle var \rangle '=' \langle expr \rangle \mid \text{'while'} \langle expr \rangle \text{'do'} \langle stmt \rangle \mid \langle stmt \rangle ';' \langle stmt \rangle$ 

```

We can then encode this grammar with the following set of multi-parameter typeclasses:

■ **Listing 6** An example tagless encoding.

```

319 class Var expr where
320   var :: String → expr
321
322
323 class Lit expr where
324   lit :: Int → expr
325
326 class Add expr where
327   add :: expr → expr → expr
328
329 class Mul expr where
330   mul :: expr → expr → expr
331
332 class Assign expr stmt where
333   assign :: String → expr → stmt
334
335 class While expr stmt where
336   while :: expr → stmt → stmt
337
338 class AndThen stmt where
339   andThen :: stmt → stmt → stmt
340

```

This style of language encoding is typically known as the untyped variant of *finally tagless* [5]. However, our encoding is a slight refinement where we restrict ourselves to a single class per production rule. Other tagless encodings often use a class per syntactic category. This more fine-grained approach allows us to encode grammatical constructs that are only supported by a subset of our target grammars; see section 6.2 for examples.

Unfortunately, the encoding above has some serious ergonomic issues. In particular, expressions like `assign "x" (lit 4)` will result in an unsolved metavariable for `expr`, as there may be multiple choices of `expr` to use when solving the `Assign ?expr stmt` constraint. Luckily, we can resolve ambiguities of this form through judicious use of functional dependencies [10], as demonstrated below.

■ **Listing 7** A tagless encoding with functional dependencies.

```

351 class Assign expr stmt | stmt → expr where
352   assign :: String → expr → stmt
353
354
355 class While expr stmt | stmt → expr where
356   while :: expr → stmt → stmt
357
```

6.2 Designing The Language

Now that we've fleshed out how we are going to encode our grammatical framework into our host language, it's time to design our idealized abstract grammar. All of our target languages roughly agree on a subset of the grammar of non-binding terms: the main sources of divergence are binding forms and top-level definitions⁸. This is ultimately unsurprising: dependent type theories are fundamentally theories of binding and substitution, so we would expect some variation in how our target languages present the core of their underlying theories.

This presents an interesting language design problem. Our idealized grammar will need to find “syntactic abstractions” common between our four target languages. Additionally, we would also like for our solution to be (reasonably) extensible. Finding the core set of grammatical primitives to accomplish this task is surprisingly tricky, and requires a close analysis of the fine structure of binding.

6.2.1 Binding Forms

As users of dependently typed languages are well aware, a binding form carries much more information than just a variable name and a type. Moreover, this extra information can have a large impact on typechecking performance, as is the case with implicit/visible arguments. To further complicate matters, languages often offer multiple syntactic options for writing the same binding form, as is evidenced by the prevalence of multi-binders like $(x\ y\ z : A) \rightarrow B$. Though such binding forms are often equivalent to their single-binder counterparts as *abstract* syntax, they may have different performance characteristics, so we cannot simply lower them to a uniform single-binding representation. To account for these variations, we have designed a sub-language dedicated solely to binding forms. This language classifies the various binding features along three separate axes: binding arity, binding annotations, and binding modifiers.

Binding arities and annotations are relatively self-explanatory, and classify the number of names bound, along with the type of annotation allowed. Our target languages all have their binding arities falling into one of three classes: n -ary, unary, or nullary. We can similarly characterise annotations into three categories: required, optional, or forbidden.

This language of binders is encoded in the implementation as a single class `Binder` that is parameterised by higher-kinded types `arity :: Type -> Type` and `ann :: Type -> Type`, and provide standardized types for all three binding arities and annotations.

■ **Listing 8** The basic binding constructs in Panbench.

```

390 class Binder arity nm ann tm cell | cell → nm tm where
391   binder :: arity nm → ann tm → cell
392
393
```

⁸ As we shall see in section 6.2.2, the syntactical divergence of top-level definitions is essentially about binders as well.

JC: maybe a linguistic analogy would be useful? SVO vs SOV requires us to notice the syntactic categories subject, object verb that are common to all, and that explicit renderings merely differ in the order. Similarly for singular and plural as modifiers.

```

394 -- | No annotation or arity.
395 data None nm = None
396
397 -- | A single annotation or singular arity.
398 newtype Single a = Single { unSingle :: a }
399
400 -- | Multi-binders.
401 type Multi = []
402
403 -- | Infix operator for an annotated binder with a single name.
404 (..) :: (Binder Single nm Single tm cell) => nm → tm → cell
405 nm .. tp = binder (Single nm) (Single tp)
406
407 -- | Infix operator for an annotated binder.
408 (..*) :: (Binder arity nm Single tm cell) => arity nm → tm → cell
409 nms ..* tp = binder nms (Single tp)
410

```

Production rules that involve binding forms are encoded as classes that are parametric over a notion of a binding cell, as demonstrated below.

■ **Listing 9** The Panbench class for Π -types.

```

413
414 class Pi cell tm | tm → cell where
415   pi :: [cell] → tm → tm
416

```

Decoupling the grammar of binding forms from the grammar of binders themselves allows us to be somewhat polymorphic over the language of binding forms when writing generators. This in turn means that we can potentially re-use generators when extending Panbench with new target grammars that may support only a subset of the binding features present in our four target grammars.

Binding modifiers, on the other hand, require a bit more explanation. A binding modifier captures features like implicit arguments, which do not change the number of names bound nor their annotations, but rather how those bound names get treated by the rest of the system. Currently, Panbench only supports visibility-related modifiers, but we have designed the system so that it is easy to extend with new modifiers; e.g. quantities in Idris 2 or irrelevance annotations in Agda.

The language of binding modifiers is implemented as the following set of Haskell type-classes.

■ **Listing 10** Typeclasses for binding modifiers.

```

430
431 class Implicit cell where
432   implicit :: cell → cell
433
434 class SemiImplicit cell where
435   semiImplicit :: cell → cell
436

```

This is a case where the granular tagless encoding shines. Both Lean 4 and Rocq have a form of semi-implicits⁹, whereas Idris 2 and Agda have no such notion. Decomposing the language of binding modifiers into granular pieces lets us write benchmarks that explicitly require support for features like semi-implicits. Had we used a monolithic class that encodes

⁹ We use the term *semi-implicit* argument to refer to an implicit argument that is not eagerly instantiated. In Rocq these are known as non-maximal implicits.

the entire language of modifiers, we would have to resort to runtime errors (or, even worse, dubious attempts at translation).

6.2.2 Top-Level Definitions

The question of top-level definitions is much thornier, and there seems to be less agreement on how they ought to be structured. Luckily, we can re-apply many of the lessons we learned in our treatment of binders; after all, definitions are “just” top-level binding forms! This perspective lets us simplify how we view some more baroque top-level bindings. As a contrived example, consider the following signature for a pair of top-level Agda definitions.

Listing 11 A complicated Agda signature.

```
private instance abstract @irr @mixed foo bar : Nat → _
```

In our language of binders, this definition consists of a 2-ary annotated binding of the names `foo`, `bar` that has had a sequence of binding modifiers applied to it.

Unfortunately, this insight does not offer a complete solution. Notably, our four target grammar differ significantly in how their treatment of type signatures. prioritize dependent pattern matching (e.g. Agda, Idris 2) typically opt to have standalone type signatures: this allow for top-level pattern matches, which in turn makes it much easier to infer motives[11]. Conversely, languages oriented around tactics (e.g. Lean 4, Rocq) typically opt for in-line type signatures and pattern-matching expressions. This appears to be largely independent of Miranda/ML syntax split: Lean 4 borrows large parts of its syntax from Haskell, yet still opts for in-line signatures.

This presents us with a design decision: should our idealized grammar use inline or standalone signatures? As long as we can (easily) translate from one style to the other, we have a genuine decision to make. We have opted for the former as standalone signatures offer variations that languages with inline signatures cannot handle. As a concrete example, consider the following Agda declaration:

Listing 12 A definition with mismatched names.

```
id : (A : Type) → A → A
id B x = x
```

In particular, note that we have bound the first argument to a different name. Translating this to a corresponding Rocq declaration then forces us to choose to use either the name from the signature or the term. Conversely, using in-line signatures does not lead us to having to make an unforced choice when translating to a separate signature, as we can simply duplicate the name in both the signature and term.

However, inline signatures are not completely without fault, and cause some edge cases with binding modifiers. As an example, consider the following two variants of the identity function in Agda.

Listing 13 Two variants of the identity function.

```
id : {A : Type} → A → A
id x = x

id' : {A : Type} → A → A
id' {A} x = x
```


Both definitions mark the A argument as an implicit, but the second definition *also* binds it in the declaration. When we pass to inline type signatures, we lose this extra layer of distinction. To account for this, we were forced to refine the visibility modifier system to distinguish between “bound” and “unbound” modifiers. This extra distinction has not proved to be too onerous in practice, and we still believe that inline signatures are the correct choice for our application.

We have encoded this decision in our idealized grammar by introducing a notion of a “left-hand-side” of a definition, which consists of a collection of names to be defined, and a scope to define them under. This means that we view definitions like Listing 13 not as functions $\text{id} : (A : \text{Type}) \rightarrow A \rightarrow A$ but rather as *bindings* $A : \text{Type}, x : A \vdash \text{id} : A$ in non-empty contexts. This shift in perspective has the added benefit of making the interface to other forms of parameterised definitions entirely uniform; for instance, a parameterised record is simply just a record with a non-empty left-hand side.

In Panbench, definitions and their corresponding left-hand sides are encoded via the following set of typeclasses.

■ Listing 14 Definitions and left-hand sides.

```
class Definition lhs tm defn | defn → lhs tm where
  (.=) :: lhs → tm → defn

class DataDefinition lhs ctor defn | defn → lhs ctor where
  data_ :: lhs → [ctor] → defn

class RecordDefinition lhs nm fld defn | defn → lhs nm fld where
  record_ :: lhs → name → [fld] → defn
```

JC: should
have a closing
sentence

7 Conclusion

References

- 1 February 2026. URL: <https://github.com/GrammaticalFramework/informath>.
- 2 Agda Developers. Agda. URL: <https://agda.readthedocs.io/>.
- 3 Ali Assaf, Guillaume Burel, Raphaël Cauderlier, David Delahaye, Gilles Dowek, Catherine Dubois, Frédéric Gilbert, Pierre Halmagrand, Olivier Hermant, and Ronan Saillard. Dedukti: a logical framework based on the $\lambda\pi$ -calculus modulo theory. (arXiv:2311.07185), November 2023. arXiv:2311.07185 [cs]. URL: <http://arxiv.org/abs/2311.07185>, doi:10.48550/arXiv.2311.07185.
- 4 Edwin Brady. Idris 2: Quantitative Type Theory in Practice. pages 32460–33960, 2021. doi:10.4230/LIPICS.ECOOP.2021.9.
- 5 Jacques Carette, Oleg Kiselyov, and Chung-Chieh Shan. Finally tagless, partially evaluated: Tagless staged interpreters for simpler typed languages. *Journal of Functional Programming*, 19(5):509–543, 2009. doi:10.1017/S0956796809007205.
- 6 Leonardo de Moura and Sebastian Ullrich. The lean 4 theorem prover and programming language. In *Automated Deduction – CADE 28: 28th International Conference on Automated Deduction, Virtual Event, July 12–15, 2021, Proceedings*, page 625–635, Berlin, Heidelberg, 2021. Springer-Verlag. doi:10.1007/978-3-030-79876-5_37.
- 7 Eelco Dolstra and The Nix contributors. Nix. URL: <https://github.com/NixOS/nix>.
- 8 Robert Harper, Furio Honsell, and Gordon Plotkin. A framework for defining logics. *Journal of the ACM*, 40(1):143–184, January 1993. doi:10.1145/138027.138060.
- 9 Hugo Herbelin, Pierre-Marie Pédro, coqbot, Gaëtan Gilbert, Maxime Dénès, letouzey, Emilio Jesús Gallego Arias, Matthieu Sozeau, Théo Zimmermann, Enrico Tassi, Jean-Christophe

- 535 Filliatre, Pierre Roux, Guillaume Melquiond, Arnaud Spiwack, Jason Gross, barras, Pierre
536 Boutillier, Vincent Laporte, Jim Fehrle, Stéphane Glondou, Yves Bertot, Jasper Hugunin,
537 Clément Pit-Claudel, Ali Caglayan, forestjulien, Pierre Courtieu, Frédéric Besson, Pierre
538 Rousselin, MSoegtropIMC, and Yann Leray. Rocq, February 2026. doi:10.5281/zenodo.
539 1003420.
- 540 **10** Mark P. Jones. Type classes with functional dependencies. In Gert Smolka, editor, *Programming*
541 *Languages and Systems*, page 230–244, Berlin, Heidelberg, 2000. Springer. doi:10.1007/
542 3-540-46425-5_15.
- 543 **11** Conor McBride and James Mckinna. The view from the left. *Journal of Functional Programming*,
544 14(1):69–111, January 2004. doi:10.1017/S0956796803004829.
- 545 **12** Neil Mitchell. Shake before building: replacing make with haskell. *SIGPLAN Not.*, 47(9):55–66,
546 2012. doi:10.1145/2398856.2364538.
- 547 **13** Aarne Ranta. *Grammatical framework: programming with multilingual grammars*. CSLI
548 studies in computational linguistics. CSLI Publications, Center for the Study of Language and
549 Information, Stanford, Calif, 2011.