

A Computational Reconstruction of Homotopy Type Theory for Finite Types

Abstract

Homotopy type theory (HoTT) relates some aspects of topology, algebra, logic, and type theory, in a unique novel way that promises a new and foundational perspective on mathematics and computation. The heart of HoTT is the *univalence axiom*, which informally states that isomorphic structures can be identified. One of the major open problems in HoTT is a computational interpretation of this axiom. We propose that, at least for the special case of finite types, reversible computation via type isomorphisms *is* the computational interpretation of univalence.

1. Introduction

Homotopy type theory (HoTT) [?] has a convoluted treatment of functions. It starts with a class of arbitrary functions, singles out a smaller class of “equivalences” via extensional methods, and then asserts via the *univalence axiom* that the class of functions just singled out is equivalent to paths. Why not start with functions that are, by construction, equivalences?

The idea that computation should be based on “equivalences” is an old one and is motivated by physical considerations. Because physics requires various conservation principles (including conservation of information) and because computation is fundamentally a physical process, every computation is fundamentally an equivalence that preserves information. This idea fits well with the HoTT philosophy that emphasizes equalities, isomorphisms, equivalences, and their computational content.

In more detail, a computational world in which the laws of physics are embraced and resources are carefully maintained (e.g., quantum computing [?]), programs must be reversible. Although this is apparently a limiting idea, it turns out that conventional computation can be viewed as a special case of such resource-preserving reversible programs. This thesis has been explored for many years from different perspectives [??????] and more recently in the context of type isomorphisms [?].

This paper explores the basic ingredients of HoTT from the perspective that computation is all about type isomorphisms. Because the issues involved are quite subtle, the paper is an executable Agda 2.4.0 file with the global `without-K` option enabled. The main body of the paper reconstructs the main features of HoTT for the limited universe of finite types consisting of the empty type, the unit type, and sums and products of types. Sec. 5 outlines directions for extending the result to richer types.

2. Condensed Background on HoTT

Informally, and as a first approximation, one may think of HoTT as a variation on Martin-Löf type theory in which all equalities are given *computational content*. We explain the basic ideas below.

2.1 Paths

Formally, Martin-Löf type theory, is based on the principle that every proposition, i.e., every statement that is susceptible to proof, can be viewed as a type¹. Indeed, if a proposition P is true, the corresponding type is inhabited and it is possible to provide evidence or proof for P using one of the elements of the type P . If, however, a proposition P is false, the corresponding type is empty and it is impossible to provide a proof for P . The type theory is rich enough to express the standard logical propositions denoting conjunction, disjunction, implication, and existential and universal quantifications. In addition, it is clear that the question of whether two elements of a type are equal is a proposition, and hence that this proposition must correspond to a type. We encode this type in Agda as follows,

```
data _≡_ {ℓ} {A : Set ℓ} : (a b : A) → Set ℓ where
  refl : (a : A) → (a ≡ a)
```

where we make the evidence explicit. In Agda, one may write proofs of such propositions as shown in the two examples below:

```
i0 : 3 ≡ 3          i1 : (1 + 2) ≡ (3 * 1)
i0 = refl 3         i1 = refl 3
```


More generally, given two values m and n of type \mathbb{N} , it is possible to construct an element `refl` k of the type $m \equiv n$ if and only if m , n , and k are all “equal.” As shown in example `i1`, this notion of *propositional equality* is not just syntactic equality but generalizes to *definitional equality*, i.e., to equality that can be established by normalizing the values to their normal forms. This is also known as “up to $\beta\eta$ ”.

An important question from the HoTT perspective is the following: given two elements p and q of some type $x \equiv y$ with $x, y : A$, what can we say about the elements of type $p \equiv q$. Or, in more familiar terms, given two proofs of some proposition P , are these two proofs themselves “equal.” In some situations, the only interesting property of proofs is their existence. This therefore suggests that the exact sequence of logical steps in the proof is irrelevant, and ultimately that all proofs of the same proposition are equivalent. This is however neither necessary nor desirable. A twist that dates back to a paper by ? is that proofs actually possess a structure of great combinatorial complexity. [Surely proof theory predates this by decades? Lukasiewicz and Gentzen? —JC] HoTT builds on this idea by interpreting types as topological spaces or weak ∞ -groupoids, and interpreting identities between elements of a type


¹ but the converse is not part of the principle. This is frequently misunderstood.

$x \equiv y$ as *paths* from the point x to the point y . If x and y are themselves paths, the elements of $x \equiv y$ become paths between paths (2-paths), or homotopies in topological language. To be explicit, we will often refer to types as *spaces* which consist of *points*, paths, 2-paths, etc. and write \equiv_A for the type of paths in space A .

[We know that once we have polymorphism, we have no interpretations in Set anymore – should perhaps put more warnings in the next paragraph? —JC] As a simple example, we are used to thinking of (simple) types as sets of values. So we typically view the type `Bool` as the figure on the left. In HoTT we should instead think about it as the figure on the right where there is a (trivial) path `refl b` from each point b to itself:



In this particular case, it makes no difference, but in general we may have a much more complicated path structure. The classical such example is the topological *circle* which is a space consisting of a point `base` and a *non trivial* path `loop` from `base` to itself. As stated, this does not amount to much. However, because paths carry additional structure (explained below), that space has the following non-trivial structure:

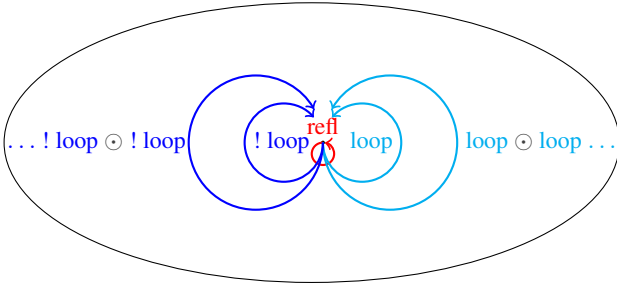

The additional structure of types is formalized as follows. Let x , y , and z be elements of some space A :

- For every path $p : x \equiv_A y$, there exists a path $! p : y \equiv_A x$;
- For every pair of paths $p : x \equiv_A y$ and $q : y \equiv_A z$, there exists a path $p \odot q : x \equiv_A z$;
- Subject to the following conditions:
 - $p \odot \text{refl } y \equiv_{(x \equiv_A y)} p$;
 - $p \equiv_{(x \equiv_A y)} \text{refl } x \odot p$
 - $! p \odot p \equiv_{(y \equiv_A y)} \text{refl } y$
 - $p \odot ! p \equiv_{(x \equiv_A x)} \text{refl } x$
 - $! (! p) \equiv_{(x \equiv_A y)} p$
 - $p \odot (q \odot r) \equiv_{(x \equiv_A z)} (p \odot q) \odot r$
- This structure repeats one level up and so on ad infinitum.

A space that satisfies the properties above for n levels is called an n -groupoid.

2.2 Univalence

[Do you mean Set or U for the universe? In HoTT the latter is standard, while Set is really a weird Agda-ism —JC] In addition to paths between the points within a space like `Bool`, it is also possible to consider paths between the space `Bool` and itself by considering `Bool` as a “point” in the universe `Set` of types. As usual, we have the trivial path which is given by the constructor `refl`:

```
p : Bool ≡ Bool
p = refl Bool
```

There are, however, other (non trivial) paths between `Bool` and itself and they are justified by the *univalence axiom*. As an example, the remainder of this section justifies that there is a path between `Bool` and itself corresponding to the boolean negation function.

We begin by formalizing the equivalence of functions \sim . Intuitively, two functions are equivalent if their results are propositionally equal for all inputs. A function $f : A \rightarrow B$ is called an *equivalence* if there are functions g and h with whom its composition is the identity. Finally two spaces A and B are equivalent, $A \simeq B$, if there is an equivalence between them:

```
_~_ : ∀ {ℓ ℓ'} → {A : Set ℓ} {P : A → Set ℓ'} →
      (f g : (x : A) → P x) → Set (ℓ ⊔ ℓ')
_~_ {ℓ} {ℓ'} {A} {P} f g = (x : A) → f x ≡ g x

record isequiv {ℓ ℓ'} {A : Set ℓ} {B : Set ℓ'} (f : A → B)
  : Set (ℓ ⊔ ℓ') where
  constructor mkisequiv
  field
    g : B → A
    α : (f ∘ g) ~ id
    h : B → A
    β : (h ∘ f) ~ id
```

```
_≅_ : ∀ {ℓ ℓ'} (A : Set ℓ) (B : Set ℓ') → Set (ℓ ⊔ ℓ')
A ≅ B = Σ (A → B) isequiv
```

We can now formally state the univalence axiom:

```
postulate univalence : {A B : Set} → (A ≡ B) ≅ (A ≅ B)
```

For our purposes, the important consequence of the univalence axiom is that equivalence of spaces implies the existence of a path between the spaces. In other words, in order to assert the existence of a path `notpath` between `Bool` and itself, we need to prove that the boolean negation function is an equivalence between the space `Bool` and itself. This is easy to show:

```
not2~id : (not ∘ not) ~ id
not2~id false = refl false
not2~id true  = refl true

notequiv : Bool ≅ Bool
notequiv = (not ,
  record {
    g = not ; α = not2~id ; h = not ; β = not2~id })

notpath : Bool ≡ Bool
notpath with univalence
... | (_, eq) = isequiv.g eq notequiv
```

Although the code asserting the existence of a non trivial path between `Bool` and itself “compiles,” it is no longer executable as it relies on an Agda postulate. In the next section, we analyze this situation from the perspective of reversible programming languages based on type isomorphisms [???].

3. Computing with Type Isomorphisms

The main syntactic vehicle for the technical developments in this paper is a simple language called Π whose only computations are isomorphisms between finite types [?]. After reviewing the motivation for this language and its relevance to HoTT, we present its syntax and semantics.

3.1 Reversibility

The relevance of reversibility to HoTT is based on the following analysis. The conventional HoTT approach starts with two, a pri-

$identl_+ :$	$0 + \tau \leftrightarrow \tau$	$: identr_+$			
$swap_+ :$	$\tau_1 + \tau_2 \leftrightarrow \tau_2 + \tau_1$	$: swap_+$			
$assocl_+ :$	$\tau_1 + (\tau_2 + \tau_3) \leftrightarrow (\tau_1 + \tau_2) + \tau_3$	$: assocr_+$			
$identl_* :$	$1 * \tau \leftrightarrow \tau$	$: identr_*$			
$swap_* :$	$\tau_1 * \tau_2 \leftrightarrow \tau_2 * \tau_1$	$: swap_*$			
$assocl_* :$	$\tau_1 * (\tau_2 * \tau_3) \leftrightarrow (\tau_1 * \tau_2) * \tau_3$	$: assocr_*$			
$dist_0 :$	$0 * \tau \leftrightarrow 0$	$: factor_0$			
$dist :$	$(\tau_1 + \tau_2) * \tau_3 \leftrightarrow (\tau_1 * \tau_3) + (\tau_2 * \tau_3)$	$: factor$			

	$\vdash id : \tau \leftrightarrow \tau$		$\vdash c_1 : \tau_1 \leftrightarrow \tau_2 \quad \vdash c_2 : \tau_2 \leftrightarrow \tau_3$
			$\vdash c_1 \circ c_2 : \tau_1 \leftrightarrow \tau_3$
			$\vdash c_1 : \tau_1 \leftrightarrow \tau_2 \quad \vdash c_2 : \tau_3 \leftrightarrow \tau_4$
			$\vdash c_1 \oplus c_2 : \tau_1 + \tau_3 \leftrightarrow \tau_2 + \tau_4$
			$\vdash c_1 : \tau_1 \leftrightarrow \tau_2 \quad \vdash c_2 : \tau_3 \leftrightarrow \tau_4$
			$\vdash c_1 \otimes c_2 : \tau_1 * \tau_3 \leftrightarrow \tau_2 * \tau_4$

Figure 1. Π -combinators [?]

ori, different notions: functions and paths, and then postulates an equivalence between a particular class of functions and paths. As illustrated above, some functions like `not` correspond to paths. Most functions, however, are evidently unrelated to paths. In particular, any function of type $A \rightarrow B$ that does not have an inverse of type $B \rightarrow A$ cannot have any direct correspondence to paths as all paths have inverses. An interesting question then poses itself: since reversible computational models — in which all functions have inverses — are known to be universal computational models, what would happen if we considered a variant of HoTT based exclusively on reversible functions? Presumably in such a variant, all functions — being reversible — would potentially correspond to paths and the distinction between the two notions would vanish making the univalence postulate unnecessary. This is the precise technical idea we investigate in detail in the remainder of the paper.

3.2 Syntax and Semantics of Π

The Π family of languages is based on type isomorphisms. In the variant we consider, the set of types τ includes the empty type 0 , the unit type 1 , and conventional sum and product types. The values classified by these types are the conventional ones: $()$ of type 1 , $\text{inl } v$ and $\text{inr } v$ for injections into sum types, and (v_1, v_2) for product types:

(Types)	$\tau ::= 0 \mid 1 \mid \tau_1 + \tau_2 \mid \tau_1 * \tau_2$
(Values)	$v ::= () \mid \text{inl } v \mid \text{inr } v \mid (v_1, v_2)$
(Combinator types)	$\tau_1 \leftrightarrow \tau_2$
(Combinators)	$c ::= [\text{see Fig. 1}]$

The interesting syntactic category of Π is that of *combinators* which are witnesses for type isomorphisms $\tau_1 \leftrightarrow \tau_2$. They consist of base combinators (on the left side of Fig. 1) and compositions (on the right side of the same figure). Each line of the figure on the left introduces a pair of dual constants² that witness the type isomorphism in the middle. This set of isomorphisms is known to be complete [??] and the language is universal for hardware combinational circuits [?].³

From the perspective of category theory, the language Π models what is called a *symmetric bimonoidal category* or a *commutative rig category*. These are categories with two binary operations and satisfying the axioms of a commutative rig (i.e., a commutative ring without negative elements also known as a commutative semiring) up to coherent isomorphisms. And indeed the types of the Π -combinators are precisely the commutative semiring axioms. A formal way of saying this is that Π is the *categorification* [?] of the natural numbers. A simple (slightly degenerate) example of such categories is the category of finite sets and permutations in which we interpret every Π -type as a finite set, interpret the values

as elements in these finite sets, and interpret the combinators as permutations.

$identl_+ \triangleright (\text{inr } v)$	$= v$
$identr_+ \triangleright v$	$= \text{inr } v$
$swap_+ \triangleright (\text{inl } v)$	$= \text{inr } v$
$swap_+ \triangleright (\text{inr } v)$	$= \text{inl } v$
$assocl_+ \triangleright (\text{inl } v)$	$= \text{inl } (\text{inl } v)$
$assocl_+ \triangleright (\text{inr } (\text{inl } v))$	$= \text{inl } (\text{inr } v)$
$assocl_+ \triangleright (\text{inr } (\text{inr } v))$	$= \text{inr } v$
$assocr_+ \triangleright (\text{inl } (\text{inl } v))$	$= \text{inl } v$
$assocr_+ \triangleright (\text{inl } (\text{inr } v))$	$= \text{inr } (\text{inl } v)$
$assocr_+ \triangleright (\text{inr } v)$	$= \text{inr } (\text{inr } v)$
$identl_* \triangleright ((), v)$	$= v$
$identr_* \triangleright v$	$= ((), v)$
$swap_* \triangleright (v_1, v_2)$	$= (v_2, v_1)$
$assocl_* \triangleright (v_1, (v_2, v_3))$	$= ((v_1, v_2), v_3)$
$assocr_* \triangleright ((v_1, v_2), v_3)$	$= (v_1, (v_2, v_3))$
$dist \triangleright (\text{inl } v_1, v_3)$	$= \text{inl } (v_1, v_3)$
$dist \triangleright (\text{inr } v_2, v_3)$	$= \text{inr } (v_2, v_3)$
$factor \triangleright (\text{inl } (v_1, v_3))$	$= (\text{inl } v_1, v_3)$
$factor \triangleright (\text{inr } (v_2, v_3))$	$= (\text{inr } v_2, v_3)$
$id \triangleright v$	$= v$
$(c_1 \circ c_2) \triangleright v$	$= c_2 \triangleright (c_1 \triangleright v)$
$(c_1 \oplus c_2) \triangleright (\text{inl } v)$	$= \text{inl } (c_1 \triangleright v)$
$(c_1 \oplus c_2) \triangleright (\text{inr } v)$	$= \text{inr } (c_2 \triangleright v)$
$(c_1 \otimes c_2) \triangleright (v_1, v_2)$	$= (c_1 \triangleright v_1, c_2 \triangleright v_2)$

Figure 2. Operational Semantics

In the remainder of this paper, we will be more interested in a model based on groupoids. But first, we give an operational semantics for Π . Operationally, the semantics consists of a pair of mutually recursive evaluators that take a combinator and a value and propagate the value in the “forward” \triangleright direction or in the “backwards” \triangleleft direction. We show the complete forward evaluator in Fig. 2; the backwards evaluator differs in trivial ways.

3.3 Groupoid Model

Instead of modeling the types of Π using sets and the combinators using permutations we use a semantics that identifies Π -combinators with *paths*. More precisely, we model the universe of Π -types as a space \mathcal{U} whose points are the individual Π -types (which are themselves spaces t containing points). We then postulate that there is path between the spaces t_1 and t_2 if there is a Π -combinator $c : t_1 \leftrightarrow t_2$. Our postulate is similar in spirit to the univalence axiom but, unlike the latter, it has a simple computational interpretation. A path directly corresponds to a type isomorphism with a clear operational semantics as presented in the previous section. As we will explain in more detail below, this approach replaces the datatype \equiv modeling propositional equality with the datatype \leftrightarrow modeling type isomorphisms. With this switch, the Π -combinators of Fig. 1 become *syntax* for the paths in the space \mathcal{U} .

² where $swap_+$ and $swap_*$ are self-dual.

³ If recursive types and a trace operator are added, the language becomes Turing complete [??]. We will not be concerned with this extension in the main body of this paper but it will be briefly discussed in the conclusion. [but don't we need trace for the Int construction? —JC]

Put differently, instead of having exactly one constructor `refl` for paths with all other paths discovered by proofs (see Secs. 2.5–2.12 of the HoTT book [?]) or postulated by the univalence axiom, we have an *inductive definition* that completely specifies all the paths in the space U .

We begin with the datatype definition of the universe U of finite types which are constructed using `ZERO`, `ONE`, `PLUS`, and `TIMES`. Each of these finite types will correspond to a set of points with paths connecting some of the points. The underlying set of points is computed by $\llbracket _ \rrbracket$ as follows: `ZERO` maps to the empty set \perp , `ONE` maps to the singleton set \top , `PLUS` maps to the disjoint union \uplus , and `TIMES` maps to the cartesian product \times .

```
data U : Set where
  ZERO    : U
  ONE     : U
  PLUS    : U → U → U
  TIMES   : U → U → U

[ ] : U → Set
[ ZERO ]      =  $\perp$ 
[ ONE ]       =  $\top$ 
[ PLUS t1 t2 ] =  $\llbracket t_1 \rrbracket \uplus \llbracket t_2 \rrbracket$ 
[ TIMES t1 t2 ] =  $\llbracket t_1 \rrbracket \times \llbracket t_2 \rrbracket$ 
```

We want to identify paths with Π -combinators. There is a small complication however: paths are ultimately defined between points but the Π -combinators of Fig. 1 are defined between spaces. We can bridge this gap using a popular HoTT concept, that of *pointed spaces*. A pointed space $\bullet[t, v]$ is a space $t : U$ with a distinguished value $v : \llbracket t \rrbracket$:

```
record U• : Set where
  constructor •[_,_]
  field
    | _| : U
    • : [ ]
```

Given pointed spaces, it is possible to re-express the Π -combinators as shown in Fig. 3. The new presentation of combinators directly relates points to points and in fact subsumes the operational semantics of Fig. 2. For example `swap1+` is still an operation from the space `PLUS t1 t2` to itself but in addition it specifies that, within that space, it maps the point `inj1 v1` to the point `inj2 v1`. [The operational semantics have 24 rules, while the groupoid model has 26. This is because of the 2 rules with *absurd* in them. How shall they be explained? —JC]

We note that the refinement of the Π -combinators to combinators on pointed spaces is given by an inductive family for *heterogeneous* equality that generalizes the usual inductive family for propositional equality. Put differently, what used to be the only constructor for paths `refl` is now just one of the many constructors (named `id \leftrightarrow` in the figure). Among the new constructors we have \odot that constructs path compositions. By construction, every combinator has an inverse calculated as shown in Fig. 4. These constructions are sufficient to guarantee that the universe U is a groupoid [point to the proof in some accompanying full Agda code? —JC]. Additionally, we have paths that connect values in different but isomorphic spaces like $\bullet[\text{TIMES } t_1 \ t_2, (v_1, v_2)]$ and $\bullet[\text{TIMES } t_2 \ t_1, (v_2, v_1)]$.

The example `notpath` which earlier required the use of the univalence axiom can now be directly defined using `swap1+` and `swap2+`. To see this, note that `Bool` can be viewed as a shorthand for `PLUS ONE ONE` with `true` and `false` as shorthands for `inj1 tt` and `inj2 tt`. With this in mind, the path corresponding to boolean negation consists of two “fibers”, one for each boolean value as shown below:

```
data Path (t1 t2 : U•) : Set where
  path : (c : t1  $\leftrightarrow$  t2) → Path t1 t2

BOOL : U
BOOL = PLUS ONE ONE

TRUE FALSE : [ BOOL ]
TRUE  = inj1 tt
FALSE = inj2 tt

BOOL•F : U•
BOOL•F = •[ BOOL, FALSE ]

BOOL•T : U•
BOOL•T = •[ BOOL, TRUE ]

NOT•T : BOOL•T  $\leftrightarrow$  BOOL•F
NOT•T = swap1+

NOT•F : BOOL•F  $\leftrightarrow$  BOOL•T
NOT•F = swap2+

notpath•T : Path BOOL•T BOOL•F
notpath•T = path NOT•T

notpath•F : Path BOOL•F BOOL•T
notpath•F = path NOT•F
```

In other words, a path between spaces is really a collection of paths connecting the various points. Note however that we never need to “collect” these paths using a universal quantification.

[Shouldn’t we also show that `Bool` contains exactly 2 things, and that `TRUE` and `FALSE` are “different”? —JC] [The other thing is, whereas not used to be a path between `Bool` and `Bool`, we no longer have that. Shouldn’t we show that, somehow, `BOOL` and `BOOL•F` ‘union’ `BOOL•T` are somehow “equivalent”? And there there is a coherent `notpath` built the same way? Especially since I am sure it is quite easy to build incoherent sets of paths! —JC]

4. Computing with Paths

The previous section presented a language Π whose computations are all the possible isomorphisms between finite types. (Recall that the commutative semiring structure is sound and complete for isomorphisms between finite types [??].) Instead of working with arbitrary functions, then restricting them to equivalences, and then postulating that these equivalences give rise to paths, the approach based on Π starts directly with the full set of possible isomorphisms and encodes it as an inductive datatype of paths between pointed spaces. The resulting structure is evidently a 1-groupoid as the isomorphisms are closed under inverses and composition. We now investigate the higher groupoid structure.

4.1 Examples

Given that all paths are between pointed spaces, i.e., are between particular values, it might appear that all paths between the same pointed spaces are extensionally equivalent. Consider first the following simple examples, which are all paths from the pointed space $\bullet[\text{BOOL}, \text{TRUE}]$ to the pointed space $\bullet[\text{BOOL}, \text{FALSE}]$:

```
T $\leftrightarrow$ F : Set
T $\leftrightarrow$ F = Path BOOL•T BOOL•F

p1 p2 p3 p4 p5 : T $\leftrightarrow$ F
p1 = path NOT•T
p2 = path (id $\leftrightarrow$   $\odot$  NOT•T)
p3 = path (NOT•T  $\odot$  NOT•F  $\odot$  NOT•T)
p4 = path (NOT•T  $\odot$  id $\leftrightarrow$ )
```

data $_ \leftrightarrow _ : \mathbf{U} \bullet \rightarrow \mathbf{U} \bullet \rightarrow \text{Set where}$

```

unite+ :  $\forall \{t\ v\} \rightarrow \bullet[\text{PLUS ZERO } t, \text{inj}_2\ v] \leftrightarrow \bullet[t, v]$ 
uniti+ :  $\forall \{t\ v\} \rightarrow \bullet[t, v] \leftrightarrow \bullet[\text{PLUS ZERO } t, \text{inj}_2\ v]$ 
swap1+ :  $\forall \{t_1\ t_2\ v_1\} \rightarrow$ 
   $\bullet[\text{PLUS } t_1\ t_2, \text{inj}_1\ v_1] \leftrightarrow \bullet[\text{PLUS } t_2\ t_1, \text{inj}_2\ v_1]$ 
swap2+ :  $\forall \{t_1\ t_2\ v_2\} \rightarrow$ 
   $\bullet[\text{PLUS } t_1\ t_2, \text{inj}_2\ v_2] \leftrightarrow \bullet[\text{PLUS } t_2\ t_1, \text{inj}_1\ v_2]$ 
assocl1+ :  $\forall \{t_1\ t_2\ t_3\ v_1\} \rightarrow$ 
   $\bullet[\text{PLUS } t_1 (\text{PLUS } t_2\ t_3), \text{inj}_1\ v_1] \leftrightarrow$ 
   $\bullet[\text{PLUS } (\text{PLUS } t_1\ t_2)\ t_3, \text{inj}_1 (\text{inj}_1\ v_1)]$ 
assocl2+ :  $\forall \{t_1\ t_2\ t_3\ v_2\} \rightarrow$ 
   $\bullet[\text{PLUS } t_1 (\text{PLUS } t_2\ t_3), \text{inj}_2 (\text{inj}_1\ v_2)] \leftrightarrow$ 
   $\bullet[\text{PLUS } (\text{PLUS } t_1\ t_2)\ t_3, \text{inj}_2 (\text{inj}_2\ v_2)]$ 
assocl3+ :  $\forall \{t_1\ t_2\ t_3\ v_3\} \rightarrow$ 
   $\bullet[\text{PLUS } t_1 (\text{PLUS } t_2\ t_3), \text{inj}_2 (\text{inj}_2\ v_3)] \leftrightarrow$ 
   $\bullet[\text{PLUS } (\text{PLUS } t_1\ t_2)\ t_3, \text{inj}_2 (\text{inj}_2\ v_3)]$ 
assocr1+ :  $\forall \{t_1\ t_2\ t_3\ v_1\} \rightarrow$ 
   $\bullet[\text{PLUS } (\text{PLUS } t_1\ t_2)\ t_3, \text{inj}_1 (\text{inj}_1\ v_1)] \leftrightarrow$ 
   $\bullet[\text{PLUS } t_1 (\text{PLUS } t_2\ t_3), \text{inj}_1\ v_1]$ 
assocr2+ :  $\forall \{t_1\ t_2\ t_3\ v_2\} \rightarrow$ 
   $\bullet[\text{PLUS } (\text{PLUS } t_1\ t_2)\ t_3, \text{inj}_1 (\text{inj}_2\ v_2)] \leftrightarrow$ 
   $\bullet[\text{PLUS } t_1 (\text{PLUS } t_2\ t_3), \text{inj}_2 (\text{inj}_1\ v_2)]$ 
assocr3+ :  $\forall \{t_1\ t_2\ t_3\ v_3\} \rightarrow$ 
   $\bullet[\text{PLUS } (\text{PLUS } t_1\ t_2)\ t_3, \text{inj}_2 (\text{inj}_2\ v_3)] \leftrightarrow$ 
   $\bullet[\text{PLUS } t_1 (\text{PLUS } t_2\ t_3), \text{inj}_2 (\text{inj}_2\ v_3)]$ 
unite* :  $\forall \{t\ v\} \rightarrow \bullet[\text{TIMES ONE } t, (\text{tt}, v)] \leftrightarrow \bullet[t, v]$ 
uniti* :  $\forall \{t\ v\} \rightarrow \bullet[t, v] \leftrightarrow \bullet[\text{TIMES ONE } t, (\text{tt}, v)]$ 
swap* :  $\forall \{t_1\ t_2\ v_1\ v_2\} \rightarrow$ 
   $\bullet[\text{TIMES } t_1\ t_2, (v_1, v_2)] \leftrightarrow \bullet[\text{TIMES } t_2\ t_1, (v_2, v_1)]$ 
assocl* :  $\forall \{t_1\ t_2\ t_3\ v_1\ v_2\ v_3\} \rightarrow$ 
   $\bullet[\text{TIMES } t_1 (\text{TIMES } t_2\ t_3), (v_1, (v_2, v_3))] \leftrightarrow$ 
   $\bullet[\text{TIMES } (\text{TIMES } t_1\ t_2)\ t_3, ((v_1, v_2), v_3)]$ 

```

```

assocr* :  $\forall \{t_1\ t_2\ t_3\ v_1\ v_2\ v_3\} \rightarrow$ 
   $\bullet[\text{TIMES } (\text{TIMES } t_1\ t_2)\ t_3, ((v_1, v_2), v_3)] \leftrightarrow$ 
   $\bullet[\text{TIMES } t_1 (\text{TIMES } t_2\ t_3), (v_1, (v_2, v_3))]$ 
distz :  $\forall \{t\ v\ \text{absurd}\} \rightarrow$ 
   $\bullet[\text{TIMES ZERO } t, (\text{absurd}, v)] \leftrightarrow \bullet[\text{ZERO}, \text{absurd}]$ 
factorz :  $\forall \{t\ v\ \text{absurd}\} \rightarrow$ 
   $\bullet[\text{ZERO}, \text{absurd}] \leftrightarrow \bullet[\text{TIMES ZERO } t, (\text{absurd}, v)]$ 
dist1 :  $\forall \{t_1\ t_2\ t_3\ v_1\ v_3\} \rightarrow$ 
   $\bullet[\text{TIMES } (\text{PLUS } t_1\ t_2)\ t_3, (\text{inj}_1\ v_1, v_3)] \leftrightarrow$ 
   $\bullet[\text{PLUS } (\text{TIMES } t_1\ t_2)\ (\text{TIMES } t_2\ t_3), \text{inj}_1 (v_1, v_3)]$ 
dist2 :  $\forall \{t_1\ t_2\ t_3\ v_2\ v_3\} \rightarrow$ 
   $\bullet[\text{TIMES } (\text{PLUS } t_1\ t_2)\ t_3, (\text{inj}_2\ v_2, v_3)] \leftrightarrow$ 
   $\bullet[\text{PLUS } (\text{TIMES } t_1\ t_2)\ (\text{TIMES } t_2\ t_3), \text{inj}_2 (v_2, v_3)]$ 
factor1 :  $\forall \{t_1\ t_2\ t_3\ v_1\ v_3\} \rightarrow$ 
   $\bullet[\text{PLUS } (\text{TIMES } t_1\ t_2)\ (\text{TIMES } t_2\ t_3), \text{inj}_1 (v_1, v_3)] \leftrightarrow$ 
   $\bullet[\text{TIMES } (\text{PLUS } t_1\ t_2)\ t_3, (\text{inj}_1\ v_1, v_3)]$ 
factor2 :  $\forall \{t_1\ t_2\ t_3\ v_2\ v_3\} \rightarrow$ 
   $\bullet[\text{PLUS } (\text{TIMES } t_1\ t_2)\ (\text{TIMES } t_2\ t_3), \text{inj}_2 (v_2, v_3)] \leftrightarrow$ 
   $\bullet[\text{TIMES } (\text{PLUS } t_1\ t_2)\ t_3, (\text{inj}_2\ v_2, v_3)]$ 
id $\leftrightarrow$  :  $\forall \{t\ v\} \rightarrow \bullet[t, v] \leftrightarrow \bullet[t, v]$ 
 $\circledast$  :  $\forall \{t_1\ t_2\ t_3\ v_1\ v_2\ v_3\} \rightarrow (\bullet[t_1, v_1] \leftrightarrow \bullet[t_2, v_2]) \rightarrow$ 
   $(\bullet[t_2, v_2] \leftrightarrow \bullet[t_3, v_3]) \rightarrow (\bullet[t_1, v_1] \leftrightarrow \bullet[t_3, v_3])$ 
 $\oplus 1$  :  $\forall \{t_1\ t_2\ t_3\ t_4\ v_1\ v_2\ v_3\ v_4\} \rightarrow$ 
   $(\bullet[t_1, v_1] \leftrightarrow \bullet[t_3, v_3]) \rightarrow (\bullet[t_2, v_2] \leftrightarrow \bullet[t_4, v_4]) \rightarrow$ 
   $(\bullet[\text{PLUS } t_1\ t_2, \text{inj}_1\ v_1] \leftrightarrow \bullet[\text{PLUS } t_3\ t_4, \text{inj}_1\ v_3]) \rightarrow$ 
 $\oplus 2$  :  $\forall \{t_1\ t_2\ t_3\ t_4\ v_1\ v_2\ v_3\ v_4\} \rightarrow$ 
   $(\bullet[t_1, v_1] \leftrightarrow \bullet[t_3, v_3]) \rightarrow (\bullet[t_2, v_2] \leftrightarrow \bullet[t_4, v_4]) \rightarrow$ 
   $(\bullet[\text{PLUS } t_1\ t_2, \text{inj}_2\ v_2] \leftrightarrow \bullet[\text{PLUS } t_3\ t_4, \text{inj}_2\ v_4]) \rightarrow$ 
 $\otimes$  :  $\forall \{t_1\ t_2\ t_3\ t_4\ v_1\ v_2\ v_3\ v_4\} \rightarrow$ 
   $(\bullet[t_1, v_1] \leftrightarrow \bullet[t_3, v_3]) \rightarrow (\bullet[t_2, v_2] \leftrightarrow \bullet[t_4, v_4]) \rightarrow$ 
   $(\bullet[\text{TIMES } t_1\ t_2, (v_1, v_2)] \leftrightarrow \bullet[\text{TIMES } t_3\ t_4, (v_3, v_4)])$ 

```

Figure 3. Pointed version of Π -combinators or inductive definition of paths

$! : \{t_1\ t_2 : \mathbf{U} \bullet\} \rightarrow (t_1 \leftrightarrow t_2) \rightarrow (t_2 \leftrightarrow t_1)$			
$! \text{ unite}_+$	$= \text{uniti}_+$	$! \text{ assocr}_+$	$= \text{assocl}_+$
$! \text{ uniti}_+$	$= \text{unite}_+$	$! \text{ assocl}_+$	$= \text{assocr}_+$
$! \text{ swap1}_+$	$= \text{swap2}_+$	$! \text{ distz}$	$= \text{factorz}$
$! \text{ swap2}_+$	$= \text{swap1}_+$	$! \text{ factorz}$	$= \text{distz}$
$! \text{ assocl1}_+$	$= \text{assocr1}_+$	$! \text{ dist1}$	$= \text{factor1}$
$! \text{ assocl2}_+$	$= \text{assocr2}_+$	$! \text{ dist2}$	$= \text{factor2}$
$! \text{ assocl3}_+$	$= \text{assocr3}_+$	$! \text{ factor1}$	$= \text{dist1}$
$! \text{ assocr1}_+$	$= \text{assocl1}_+$	$! \text{ factor2}$	$= \text{dist2}$
$! \text{ assocr2}_+$	$= \text{assocl2}_+$	$! \text{ id} \leftrightarrow$	$= \text{id} \leftrightarrow$
$! \text{ assocr3}_+$	$= \text{assocl3}_+$	$! (c_1 \circledast c_2)$	$= ! c_2 \circledast ! c_1$
$! \text{ unite}_*$	$= \text{uniti}_*$	$! (c_1 \oplus 1\ c_2)$	$= ! c_1 \oplus 1\ ! c_2$
$! \text{ uniti}_*$	$= \text{unite}_*$	$! (c_1 \oplus 2\ c_2)$	$= ! c_1 \oplus 2\ ! c_2$
$! \text{ swap}_*$	$= \text{swap}_*$	$! (c_1 \otimes c_2)$	$= ! c_1 \otimes ! c_2$

Figure 4. Pointed Combinators (or paths) inverses

$p_5 = \text{path } (\text{uniti}_* \circledast \text{swap}_* \circledast (\text{NOT} \bullet \text{T} \text{ id} \leftrightarrow) \circledast$
 $\text{swap}_* \circledast \text{unite}_*)$

All the paths start at **TRUE** and end at **FALSE** but follow different intermediate steps along the way. Thinking extensionally, the paths are equivalent. But they are also equivalent if we look at their internal structure using a few simple groupoid identities. In particular, paths p_2 and p_4 sequentially compose the boolean negation with the trivial path, and hence by the groupoid laws are equivalent to

p_1 . Similarly, the first two steps in path p_3 sequentially compose a combinator with its inverse which is equivalent to the trivial path by the groupoid laws. For path p_5 , the groupoid laws are not sufficient to prove its equivalence with any of the other paths but one can argue, as shown below, that it is also equivalent to the others.

Ultimately, the question of whether path p_5 should be considered equivalent to the others should be based on whether there is a “smooth deformation” between the paths. This question can be addressed from a purely categorical approach thanks to the various *coherence theorems* connecting the categorical wiring diagrams to special cases of homotopies called isotopies. (See Selinger’s paper [?] for an excellent survey and the papers by Joyal and Street [??] for the original development.) We will not pursue this in detail except for a short discussion in the next section.

But first, we address the important question of whether all paths from a given pointed space to another should be considered equivalent. We answer this question negatively using the following two examples:

$\text{BOOL}^2 : \mathbf{U}$
 $\text{BOOL}^2 = \text{TIMES BOOL BOOL}$

$\text{NOT} \bullet \text{T2 CNOT} \bullet \text{TT} :$
 $\bullet[\text{BOOL}^2, (\text{TRUE}, \text{TRUE})] \leftrightarrow \bullet[\text{BOOL}^2, (\text{TRUE}, \text{FALSE})]$

$\text{NOT} \bullet \text{T2} = \text{id} \leftrightarrow \otimes \text{NOT} \bullet \text{T}$

$\text{CNOT} \bullet \text{TT} =$
 $\text{dist1} \circledast$


```
((id ↔ ⊗ NOT•T) ⊕ 1 (id ↔ {v = (tt, TRUE)})) ⊙
factor1
```

The path **NOT•T2'** just negates the second component of the pair. The path **CNOT•TT** is the conditional-not reversible gate which only negates the second component of the pair if the first component is **TRUE**. Although the two paths have the same endpoints, they should not be considered equivalent. The simple reason is that the paths can be given different more general types, i.e., they connect different families of endpoints:

```
NOT•T2' : ∀ {v} →
  •[BOOL2, (v, TRUE)] ↔ •[BOOL2, (v, FALSE)]
NOT•T2' = id ↔ ⊗ NOT•T

CNOT•TT' : ∀ {v} →
  •[BOOL2, (inj1 v, TRUE)] ↔ •[BOOL2, (inj1 v, FALSE)]
CNOT•TT' =
  dist1 ⊙
  ((id ↔ ⊗ NOT•T) ⊕ 1 (id ↔ {v = (tt, TRUE)})) ⊙
  factor1
```

Indeed it is possible to use **NOT•T2'** with the value v bound to **FALSE** but this is not possible for the other path. We should therefore be careful not to introduce 2-paths between arbitrary paths just because they agree on some endpoints.


4.2 Isotopies

Returning to idea of “smooth deformations” of paths, we first quote one of the coherence theorems (originally due to Joyal and Street).


Theorem 1. *A well-formed equation between morphisms in the language of monoidal categories follows from the axioms of monoidal categories if and only if it holds, up to planar isotopy, in the graphical language.*

Translating to our setting, the theorem says the following. In the special case of diagrams involving just one monoid (say **ZERO** and **PLUS** types only) and no uses of swapping combinators, the two combinators represented by the diagrams are equivalent if the diagrams can be transformed to each other by moving wires and boxes around without crossing, cutting, or gluing any wires and without detaching them from the plane. Using similar theorems, it is possible, under certain assumptions, to prove that path **p₅** is equivalent to the other paths.

Looking at the various coherence theorems for special cases of monoidal categories, we note an interesting subtlety that should be further investigated in detail: in our presentation of Π , we have assumed that **swap*** is its self-inverse. But thinking of the categorical wiring diagrams more geometrically suggests that two wires crossing each other requires a third dimension. In other words, a possible diagram for **swap*** would be:



where it is explicit which path is crossing over which during the swap operation. Technically we have moved from a symmetric monoidal category to a *braided* one. From this idea, it follows that a sequence of two swaps might represent one of the following two diagrams:



In 3 dimensions, the first diagram creates a “knot” but the second reduces to trivial identity paths. In the context of symmetric monoidal categories, i.e., in the context of our original presentation of Π , the diagrams are forced to be 2 dimensional: the distinction between them vanishes and they become equivalent.

4.3 Π Lifted and with Groupoid Axioms

To summarize, there is a spectrum of possibilities to be explored for when paths should be considered equivalent. The minimum requirement is that paths that can be related using the groupoid laws should be considered equivalent and hence should be related by a 2-path. In the sequel, we will adopt this conservative approach and leave further investigations to future work.

Formally, we lift the entire Π language to compute with paths instead of with points. The lifted version of Π will have all the combinators of Fig. 3 as well as additional combinators witnessing the groupoid laws. The groupoid combinators will allow us to relate paths like **p₁** and **p₂** and the combinators from Fig. 3 will allow us to compute with sums and products of paths up to the commutative semiring isomorphisms. What is pleasant about this design is that 2-paths inherit a similar structure to 1-paths, and hence the entire scheme can be repeated over and over lifting Π to higher and higher levels to capture the concept of weak ∞ -groupoids.

We now present the detailed construction of the next level of Π .

```
data 1U : Set where
  1ZERO  : 1U
  1ONE   : 1U
  1PLUS  : 1U → 1U → 1U
  1TIMES : 1U → 1U → 1U
  PATH   : U• → U• → 1U
```

```
1[ ] : 1U → Set
1[ 1ZERO ] = ⊥
1[ 1ONE ]   = ⊤
1[ 1PLUS t1 t2 ] = 1[ t1 ] ⊔ 1[ t2 ]
1[ 1TIMES t1 t2 ] = 1[ t1 ] × 1[ t2 ]
1[ PATH t1 t2 ] = Path t1 t2
```

The new universe **1U** is a universe whose spaces are path spaces. The space **1ZERO** is the empty set of paths. The space **1ONE** is the space of paths containing one path that is the identity for path products. Sums and products of paths are representing using disjoint union and cartesian products. In addition, all paths from Fig. 3 are reified as values in **1U**.

As before, we define pointed spaces (now of paths instead of points) and introduce Π combinators on these pointed path spaces. In addition to the commutative semiring combinators, there are also combinators that witness the groupoid equivalences. (See Fig. 5.)

```
record 1U• : Set where
  constructor 1•[_,_]
  field
    1|_ : 1U
    1• : 1[ 1|_ ]
```

To verify that the universe **U•** with \leftrightarrow as 1-paths and \Leftrightarrow as 2-paths is indeed a groupoid, we have developed a small library inspired by Thorsten Altenkirch’s definition of groupoids (see <http://github.com/txa/OmegaCats>) and copumpkin’s definition of category (see <http://github.com/copumpkin/categories>). The proof is shown below:

```
G : 1Groupoid
G = record
  { set = U•
```



```

;  $\sim = \leftrightarrow$ 
;  $\sim = \lambda \{t_1\} \{t_2\} c_0 c_1 \rightarrow$ 
;  $1 \bullet [\text{PATH } t_1 t_2, \text{path } c_0] \Leftrightarrow 1 \bullet [\text{PATH } t_1 t_2, \text{path } c_1]$ 
;  $\text{id} = \text{id} \leftrightarrow$ 
;  $\circ = \lambda c_0 c_1 \rightarrow c_1 \odot c_0$ 
;  $-1 = !$ 
;  $\text{lneutr} = \lambda \_ \rightarrow \text{ridl}$ 
;  $\text{rneutr} = \lambda \_ \rightarrow \text{lidl}$ 
;  $\text{assoc} = \lambda \_ \_ \rightarrow \text{assocl}$ 
;  $\text{equiv} = \text{record} \{ \text{refl} = \text{id} \leftrightarrow$ 
;  $\text{sym} = \lambda c \rightarrow ! ! c$ 
;  $\text{trans} = \lambda c_0 c_1 \rightarrow c_0 \odot c_1 \}$ 
;  $\text{linv} = \lambda \{t_1\} \{t_2\} c \rightarrow \text{linv } c$ 
;  $\text{rinv} = \lambda \{t_1\} \{t_2\} c \rightarrow \text{rinv } c$ 
;  $\text{o-resp} \sim = \lambda f \leftrightarrow h g \leftrightarrow i \rightarrow \text{resp} \odot g \leftrightarrow i f \leftrightarrow h$ 
}

```

The proof refers to two simple functions **linv** and **rinv** with the following types:

```

linv : {t1 t2 : U} → (c : t1 ↔ t2) →
  1 • [PATH t1 t1, path (c ◦ ! c)] ↔ 1 • [PATH t1 t1, path id ↔]
rinv : {t1 t2 : U} → (c : t1 ↔ t2) →
  1 • [PATH t2 t2, path (! c ◦ c)] ↔ 1 • [PATH t2 t2, path id ↔]
[TODO: show a few cases?]

```

5. The Int Construction

[TODO: transition]

In the context of monoidal categories, it is known that a notion of higher-order functions emerges from having an additional degree of *symmetry*. In particular, both the **Int** construction of Joyal, Street, and Verity [?] and the closely related \mathcal{G} construction of linear logic [?] construct higher-order *linear* functions by considering a new category built on top of a given base traced monoidal category. The objects of the new category are of the form $\boxed{\tau_1 \mid \tau_2}$ where τ_1 and τ_2 are objects in the base category. Intuitively, this object represents the *difference* $\tau_1 - \tau_2$ with the component τ_1 viewed as conventional type whose elements represent values flowing, as usual, from producers to consumers, and the component τ_2 viewed as a *negative type* whose elements represent demands for values or equivalently values flowing backwards. Under this interpretation, and as we explain below, a function is nothing but an object that converts a demand for an argument into the production of a result.

We begin our formal development by extending Π — at any level — with a new universe of types \mathbb{T} that consists of composite types $\boxed{\tau_1 \mid \tau_2}$:

$$(Id \text{ types}) \quad \mathbb{T} ::= \boxed{\tau_1 \mid \tau_2}$$

In anticipation of future developments, we will refer to the original types τ as 0-dimensional (0d) types and to the new types \mathbb{T} as 1-dimensional (1d) types. It turns out that the 1d level is a “lifted” instance of Π with its own notions of empty, unit, sum, and product types, and its corresponding notion of isomorphisms on these 1d types.

Our next step is to define lifted versions of the 0d types:

$$\begin{aligned}
0 &\triangleq \boxed{0 \mid 0} \\
1 &\triangleq \boxed{1 \mid 0} \\
\tau_1 \tau_2 \boxplus \tau_3 \tau_4 &\triangleq \boxed{\tau_1 + \tau_3 \mid \tau_2 + \tau_4} \\
\tau_1 \tau_2 \boxtimes \tau_3 \tau_4 &\triangleq \boxed{(\tau_1 * \tau_3) + (\tau_2 * \tau_4) \mid (\tau_1 * \tau_4) + (\tau_2 * \tau_3)}
\end{aligned}$$

Building on the idea that Π is a categorification of the natural numbers and following a long tradition that relates type isomorphisms and arithmetic identities [?], one is tempted to think that the **Int** construction (as its name suggests) produces a categorification of

the integers. Based on this hypothesis, the definitions above can be intuitively understood as arithmetic identities. The same arithmetic intuition explains the lifting of isomorphisms to 1d types:

$$\boxed{\tau_1 \mid \tau_2} \Leftrightarrow \boxed{\tau_3 \mid \tau_4} \triangleq (\tau_1 + \tau_4) \leftrightarrow (\tau_2 + \tau_3)$$

In other words, an isomorphism between 1d types is really an isomorphism between “re-arranged” 0d types where the negative input τ_2 is viewed as an output and the negative output τ_4 is viewed as an input. Using these ideas, it is now a fairly standard exercise to define the lifted versions of most of the combinators in Table 1.⁴ There are however a few interesting cases whose appreciation is essential for the remainder of the paper.

Easy Lifting. Many of the 0d combinators lift easily to the 1d level. For example:

$$\begin{aligned}
id &: \mathbb{T} \Leftrightarrow \mathbb{T} \\
&: \boxed{\tau_1 \mid \tau_2} \Leftrightarrow \boxed{\tau_1 \mid \tau_2} \\
&\triangleq (\tau_1 + \tau_2) \leftrightarrow (\tau_2 + \tau_1) \\
id &= \text{swap}_+ \\
identl_+ &: 0 \boxplus \mathbb{T} \Leftrightarrow \mathbb{T} \\
&= \text{assocr}_+ \circ (id \boxplus \text{swap}_+) \circ \text{assocl}_+
\end{aligned}$$

Composition using trace.

$$\begin{aligned}
(\circ) &: (\mathbb{T}_1 \Leftrightarrow \mathbb{T}_2) \rightarrow (\mathbb{T}_2 \Leftrightarrow \mathbb{T}_3) \rightarrow (\mathbb{T}_1 \Leftrightarrow \mathbb{T}_3) \\
f \circ g &= \text{trace} (\text{assoc}_1 \circ (f \boxplus id) \circ \text{assoc}_2 \circ (g \boxplus id) \circ \text{assoc}_3)
\end{aligned}$$

New combinators curry and uncurry for higher-order functions.

$$\begin{aligned}
\boxplus (\boxed{\tau_1 \mid \tau_2}) &\triangleq \boxed{\tau_2 \mid \tau_1} \\
\boxed{\tau_1 \mid \tau_2} \multimap \boxed{\tau_3 \mid \tau_4} &\triangleq \boxplus (\boxed{\tau_1 \mid \tau_2}) \boxplus \boxed{\tau_3 \mid \tau_4} \\
&\triangleq \boxed{\tau_2 + \tau_3 \mid \tau_1 + \tau_4}
\end{aligned}$$

$$\begin{aligned}
flip &: (\mathbb{T}_1 \Leftrightarrow \mathbb{T}_2) \rightarrow (\boxplus \mathbb{T}_2 \Leftrightarrow \boxplus \mathbb{T}_1) \\
flip f &= \text{swap}_+ \circ f \circ \text{swap}_+
\end{aligned}$$

$$\begin{aligned}
curry &: ((\mathbb{T}_1 \boxplus \mathbb{T}_2) \Leftrightarrow \mathbb{T}_3) \rightarrow (\mathbb{T}_1 \Leftrightarrow (\mathbb{T}_2 \multimap \mathbb{T}_3)) \\
curry f &= \text{assocl}_+ \circ f \circ \text{assocr}_+
\end{aligned}$$

$$\begin{aligned}
uncurry &: (\mathbb{T}_1 \Leftrightarrow (\mathbb{T}_2 \multimap \mathbb{T}_3)) \rightarrow ((\mathbb{T}_1 \boxplus \mathbb{T}_2) \Leftrightarrow \mathbb{T}_3) \\
uncurry f &= \text{assocr}_+ \circ f \circ \text{assocl}_+
\end{aligned}$$

The “phony” multiplication that is not a functor. The definition for the product of 1d types used above is:

$$\boxed{\tau_1 \mid \tau_2} \boxtimes \boxed{\tau_3 \mid \tau_4} \triangleq \boxed{(\tau_1 * \tau_3) + (\tau_2 * \tau_4) \mid (\tau_1 * \tau_4) + (\tau_2 * \tau_3)}$$

That definition is “obvious” in some sense as it matches the usual understanding of types as modeling arithmetic identities. Using this definition, it is possible to lift all the 0d combinators involving products *except* the functor:

$$(\otimes) : (\mathbb{T}_1 \Leftrightarrow \mathbb{T}_2) \rightarrow (\mathbb{T}_3 \Leftrightarrow \mathbb{T}_4) \rightarrow ((\mathbb{T}_1 \boxtimes \mathbb{T}_3) \Leftrightarrow (\mathbb{T}_2 \boxtimes \mathbb{T}_4))$$

After a few failed attempts, we suspected that this definition of multiplication is not functorial which would mean that the **Int** construction only provides a limited notion of higher-order functions at the cost of losing the multiplicative structure at higher-levels. This observation is less well-known that it should be. Further investigation reveals that this observation is intimately related to a well-known problem in algebraic topology and homotopy theory that was identified thirty years ago as the “phony” multiplication [?]

⁴ See Krishnaswami’s [?] excellent blog post implementing this construction in OCaml.

in a special class categories related to ours. This problem was recently solved [?] using a technique whose fundamental ingredients are to add more dimensions and then take homotopy colimits. It remains to investigate whether this idea can be integrated with our development to get higher-order functions while retaining the multiplicative structure.

6. Conclusion

2-paths are functions on paths; the int construction reifies these functions/2-paths as 1-paths

- Add eta/epsilon and trace to Int category

- Talk about trace and recursive types

- talk about h.o. functions, negative types, int construction, ring completion paper

- canonicity for 2d type theory; licata harper

- triangle; pentagon rules; eckmann-hilton