





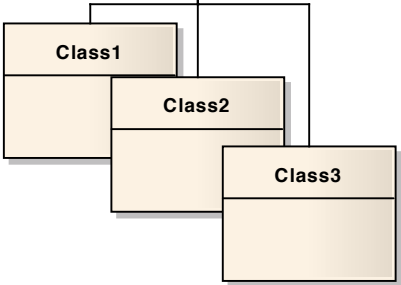


```
accept(Visitor visitor) {  
    visitor.handle_<this.class>(this)  
}
```



@visits decorator generates dummy visit\_<class>() methods

Implementation of the structural visitor overrides visit\_<class>() methods as needed using calls to accept() method on Visitable.

«flow»

«flow»