An Audited, Budget-Disclosed Benchmark of Classical Teachers and Learned Students on a Simulated Arm

Hao-Ting Ho
Department of Electrical Engineering, Tunghai University
Taichung, Taiwan
haoting.ho@outlook.com

***Abstract*—Learned-versus-classical comparisons rarely give the classical side comparable tuning, a disclosed budget, and rules fixed before testing. We propose an audited protocol for simulated arm control: tuned classical baselines, budgets disclosed on three axes (episodes, wall-clock, label source), rules time-stamped before testing, a sanity gate (a learner must first learn a known-learnable correction), and a test-evaluation log. Across 8 tracking, juggling and whip settings, no learned method cleared the pre-specified +10 percentage-point (pp) bar over the strongest classical baseline, and only whip was measured to leave room. In 3 settings the residual reinforcement-learning (RL) learner did not learn; in two of them (juggling and idealised whip), with a gate-passing exploration scale, it degraded its base (its classical start) by 17.6–23.8 pp. On realistic whip, a once-only set, TEST-C (n=500), shows that the true physical parameters add +17.6 pp [12.6, 22.6]. Robust plan selection scores candidate swings under several plausible parameter sets; it was built for the learned side and then given to the classical side. On a second such set, TEST-D (gap +18.0 pp), it alone recovers 0.59 [0.36, 0.82] of the gap with a classical ensemble, and 0.90 [0.68, 1.16] when combined with estimators trained on simulator labels and true-plant oracle plans. The learned side leads by +5.6 pp [0.6, 10.6]; 10 pp cannot be excluded. One simulator, mostly one task.**

***Index Terms*—robot manipulation, classical versus learned control, imitation learning, residual reinforcement learning, evaluation protocol, whip**

I. Introduction

Claims that a learned controller beats a classical one steer which methods researchers pursue and which ones practitioners deploy, so the comparison behind such a claim has to hold up. It is often weaker than it looks, and our own first experiment shows how. A residual policy, trained with proximal policy optimisation (PPO), beat the untuned computed-torque controller, the classical *teacher* whose actions students imitate, on a 2-DoF tracking task by 16.7% in root-mean-square tracking error (RMSE) without disturbances. (A residual policy is a learned correction added to the classical controller's command.) After a two-parameter gain retune of the teacher, the advantage disappeared: the learned side was 7.1% worse, with a 95% confidence interval (CI) of $[-13.8, +0.3]\%$ (setting S1 in Table IV). The gap was a tuning gap, not a learning gap. Method and seed-set names used below are collected in Table III.

This paper asks a narrower question than "does learning win": *what extra ingredient does a learned student need to beat its classical teacher?* Candidate ingredients are more information (privileged state), better optimisation (reinforcement learning, RL, on top of the teacher), a richer model class (generative students), and more data. To answer under one set of rules, we built a benchmark with an explicit protocol and report every deviation from it. We study planar arms in one simulator on tracking, juggling and whip, a task in which the arm flings a chain so that its tip reaches a distant target. Among the three tasks compared under the full protocol, whip is the only one with measured *headroom*, meaning room above the strongest classical pipeline: an oracle that knows the true parameters of the *plant* (the physical arm and chain being controlled) and the chain state scores far higher. All claims are scoped to this protocol and to this simulator.

In short, under this protocol no learned method cleared a pre-specified bar over the strongest classical baseline, and on whip much of the gain came from a decision rule, *robust plan selection* (scoring candidate swings under several plausible plant parameters instead of trusting one estimate), that the classical side can use as well.

We make four contributions, K1–K4, and their evidence differs. K1 rests on the protocol's own audit: an access log of test evaluations and a check, from version-control history, that each rule was committed before its result. K2 rests on the seed sets listed per setting in Table II. Only whip (S7) uses once-only *locked* test sets (TEST-B, TEST-C, TEST-D). The other settings use the reused test set (TEST) of n=50 older test seeds, the reused holdout set (HOLD), or fresh seeds. K3 rests on the locked sets TEST-C and TEST-D, and K4 on fresh but unlocked seeds.

- **K1 An audited protocol** (Section III). Classical tooling is extended on the same footing as the learner's, and budgets are reported on three axes (episodes, wall-clock time, source of training labels) with over-runs disclosed. Rules are pre-specified in time-stamped, version-controlled written records (*hypothesis cards*, each fixing a hypothesis, its metric and its decision rule). A *sanity gate* checks that a learner can learn a deliberately injected, known-learnable correction before its failure on the real task is interpreted, and an access log records test evaluations. The gate passed only marginally (+10.2 pp against a +10 pp threshold). Its first lesson was that a default

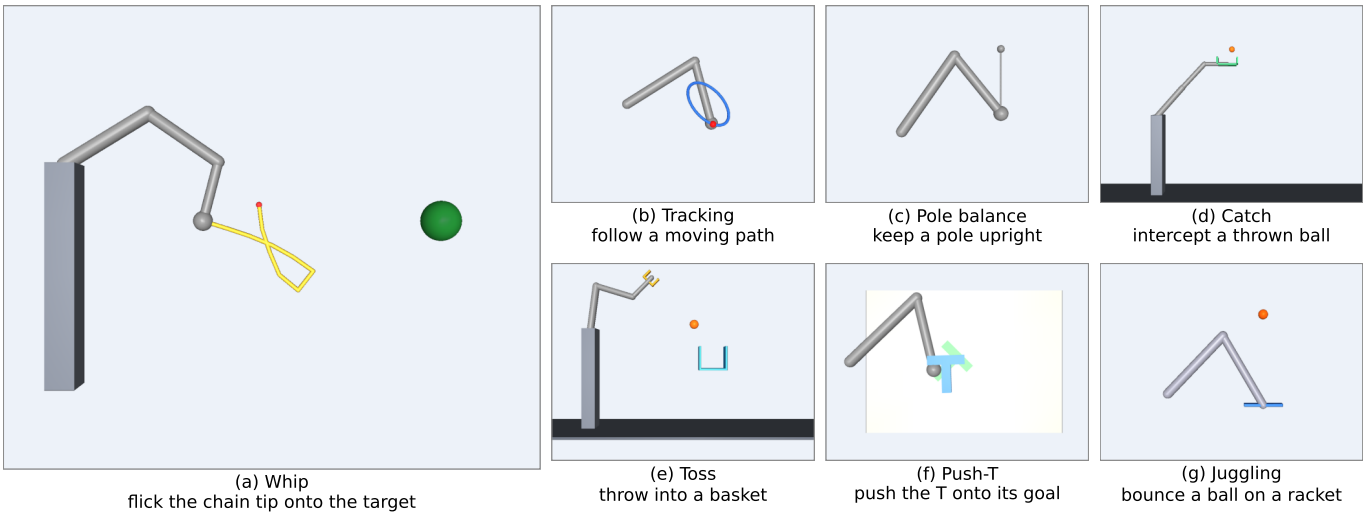


Fig. 1. The seven tasks use planar MuJoCo arms (two links by default, two links plus a racket wrist joint for juggling, three links for whip). Each panel is a MuJoCo render under nominal parameters, taken from a classical teacher's rollout on a calibration seed. Whip (a), the main test bed, must flick a passive chain so that its tip hits the target. Script: `figures/make_task_renders.py`.

exploration scale left PPO unable to learn a learnable correction.

K2 **A cross-setting result with one whip qualification** (Section V-A): in 8 tracking, juggling and whip settings no learned method cleared the pre-specified +10 pp bar over the strongest classical baseline. On whip, a learned estimator is ahead of the upgraded classical one by +5.6 pp [0.6, 10.6] when both use robust plan selection. An advantage of 10 pp or more cannot be excluded.

K3 **A headroom decomposition on realistic whip** (Section V-B): a ladder in which each step (rung) gives the classical pipeline one more piece of privileged information. On TEST-C, true parameters add +17.6 pp [12.6, 22.6] over fitted ones. On the second locked set TEST-D (gap +18.0 pp), robust plan selection alone recovers about 60% of the gap (0.59 [0.36, 0.82]) with a classical ensemble, C-ens, and 0.90 [0.68, 1.16] with learned estimators. C-ens draws parameter samples from a Gaussian (Laplace) approximation around the fitted parameters.

K4 **A multimodal-teacher result** (Section V-C): a multimodal teacher gives several different plans for the same situation. Replacing it by a canonical teacher that gives one consistent plan raised every student's success by 17.5–33.5 pp, while the best generative student (flow-matching or diffusion models that sample actions from a learned distribution) added only +5.0 pp [−0.3, 10.2] over a multilayer-perceptron (MLP) student.

Two fragilities, the RL learner failing to learn in 3 of the 8 settings and a classical comparator on whip built after the learned result was seen, are stated in Section VII.

The gap we address is that comparisons of classical and learned control rarely combine four things. These are a classical side tuned and extended as far as the learner, a manipulator whose simulated physics is independent of the controllers' own model, rules fixed and audited before testing, and a decomposition of where the remaining headroom lies. To our knowledge no prior work combines all four (the literature search ended in October 2026; Section II). We fill the gap with an extended classical ladder, the audited protocol, and a headroom ladder on whip. Section III describes the protocol, Section IV the setup, and Section V the results for K2–K4; Sections VI and VII interpret them and state their limits. Every number in the text is traced to a stored result file, a note in an experiment's README file or a constant in the code (`numbers_check.md` in the accompanying repository, https://github.com/Jadiouo/controller-ladder; an in-browser version of all seven tasks runs at https://jadiouo.github.io/controller-ladder/). The appendices give the deviations, budgets and the remaining experiments.

II. Related Work

Classical versus learned comparisons. OSCAR [1] compares a learned-dynamics operational-space controller with operational-space, inverse-kinematics and joint-space baselines on a Franka Panda. Every policy is trained with PPO, so the classical controller is an action space rather than an independent opponent. The Real Robot Challenge [2] found classical methods ahead in its 2020 phase and RL ahead in 2021. Aljalbout et al. [3] study 13 control spaces with over 250 RL agents, RL only. The closest work in spirit is Kunapuli et al. [4]: for quadrotor tracking, the gap between an RL tracker and a geometric controller is much smaller than previously published once objective, tuning data and feedforward are equalised; they use no imitation learner. Samuel and Verma [5] compare proportional-integral-derivative control (PID), a linear-quadratic regulator (LQR), model-predictive control (MPC), soft actor-critic (SAC) and a student distilled from MPC by behaviour cloning (BC) with DAgger (interactive relabelling of

the student's own states). The arm is a hybrid rigid-pneumatic one, the simulator is the controllers' own model, and the RL baseline stalls. The student does not beat the teacher (92.4 versus 95.0% at $N{=}2$ on identical goals) and is no more robust to a mass and inertia mismatch. We differ in using a manipulator whose simulated physics is independent of the controllers' own model, pre-specified rules with a deviation table, and a headroom decomposition (Section V-B).

Distilling MPC into networks. Several works distil a model-predictive controller into a network. Nubert et al. [6] approximate a robust MPC law with a network on a robot manipulator, and Tagliabue and How [7] learn robust multirotor policies from MPC with tube-guided augmentation. Marquez Julbe et al. [8] use diffusion to imitate multi-modal MPC actions on a 7-DoF arm in a kinematic simulation. There the student has a higher success rate but a larger end-of-run error than the MPC, and no model-error test is run. Our settings S3 and S8 (Table II) put generative students against an exact or privileged teacher with the same budget accounting as the other methods.

Residual learning and generative policies. Residual policy learning [9], [10] adds a learned correction to a hand-designed controller; ResiP [11] refines a frozen Diffusion Policy with RL. Its appendix reports that an MLP base loses success under exploration noise, converges to similar performance on the easier task and collapses on the harder one. Our exploration-scale lesson (Section III) is consistent with that sensitivity. Pan et al. [12] argue that generative control policies owe their advantage to iterative computation with supervised intermediate steps rather than to multi-modality, and that a two-step regression policy (MIP) essentially matches flow policies. One-step flow variants [13], [14] report large speed-ups (author-reported). Our K4 result is consistent with this direction but underpowered (Section V-C).

III. An Audited Protocol (K1)

The protocol has six parts: extended classical tooling, budgets disclosed on three axes, pre-specified rules, disjoint seed sets with roles, a sanity gate and an access log. Each exists because a specific comparison in our own history would otherwise have been misread. Appendix A lists where we deviated from it. Fig. 2 shows how the parts fit together.

The classical side is extended on the same footing as the learner's, not frozen at the textbook controller. It has a ladder of tuned variants (Section IV). These are retuned gains, integral action, robust tuning with the covariance-matrix-adaptation evolution strategy (CMA-ES), online system identification (fitting the plant's parameters from a short probe movement) and, for whip, an extended model class with 13 parameters. We call this tooling *extended on the same footing* as the learner's, not equal on every axis. The classical side receives the generative parameter distribution (the distribution from which the simulator draws each episode's parameters) as bounds and priors, and the learner receives it as simulated training data with labels.

Budgets are reported on three axes, and over-runs are disclosed rather than hidden. Every method reports episodes, wall-clock and label source, and the declared cap is $2\times$ the classical episode budget. The learned side exceeded the cap in 4 of the 8 spikes (a spike is one short, self-contained experiment with its own README file and result tables), by up to 9–$17\times$ in the estimator duel. Per-spike ratios, including the one study where classical tuning used the larger budget, are in Appendix B. We report these ratios instead of equalising them.

Rules are fixed in writing before the test and every result is tagged by how well that can be shown. Hypotheses, metrics and decision rules are written in time-stamped, version-controlled hypothesis cards (no external registry). A *win* requires a paired bootstrap CI that excludes 0 and a gain of at least 10% (tracking) or +10 pp (success rate); the +10 pp bar is our own choice and is not derived from a noise floor. Multiple tests inside one hypothesis family use Holm correction (a step-down adjustment for multiple tests). CIs and p-values are not corrected across spikes.

Git order shows the rule committed before the result for 11 spikes, among them the two locked-set runs of Section V-B, but not for all. For ten spikes it cannot be shown, because rule and result share a commit or the rule lived in a task prompt (Table V in Appendix A). No case was found in which git shows a rule committed after its result. One early demonstration was not pre-specified, and one pilot's rule was amended after results (disclosed in Appendix A). We therefore tag each result as pre-specified in git (**PRE-git**: the rule is in a commit earlier than the result), pre-specified only in the experiment's README file (**PRE-README**), or post hoc (**POST**). Because "no win at +10 pp" is not "matched", we add post hoc two one-sided tests (TOST) from the 90% CI at ± 10 and ± 5 pp. Only rows whose whole 90% CI lies inside the margin are called equivalent.

Seed sets are disjoint and each has one main role (Table I). Tuning and selection use the calibration set (CAL). The holdout set (HOLD) selected the best classical baseline in two spikes and was then reused, so it is optimistic for the classical side. The locked sets TEST-B, TEST-C and TEST-D were each evaluated once, and the fresh confirmation seeds (NEW) were used for replication.

A learner's null is interpreted only after the learner passes a sanity gate. Before that, it must learn a known-learnable correction: a constant torque bias injected after a probe. A pass means +10 pp over its initialisation with a CI above 0. (A residual policy is initialised at zero, so its initialisation is the classical controller it corrects.) A learner counts as having *learned* only if its CAL-selected checkpoint beats initialisation by at least 5 pp. The first gate passed marginally: with the exploration log-std (the log of the Gaussian policy's action standard deviation) -1.5 and 3M steps, PPO gained +10.2 pp [4.8, 15.6] on HOLD ($n{=}500$), best of 8 gate runs, 0.2 pp above the threshold, judged on $n{=}500$ instead of the pre-specified $n{=}200$. The rule for sizing the bias (the smallest bias that cuts the uncorrected base controller's success to $\leq$40%) was not met, and SAC did not pass. The gate taught a lesson. The default exploration scale (log-std -3.5, 0.36 Nm of action

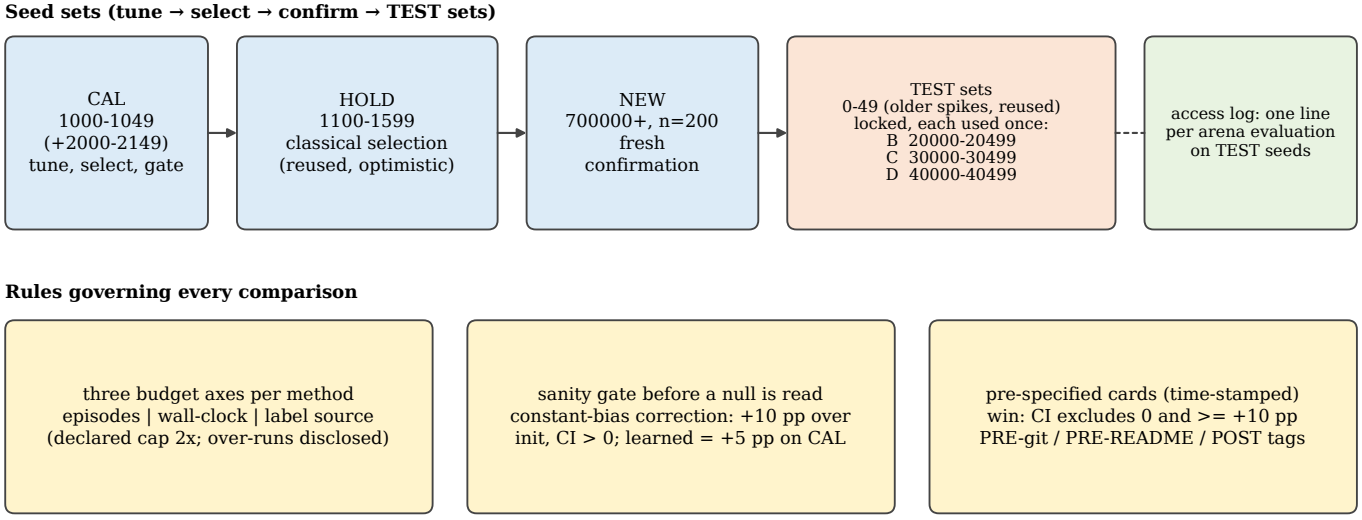


Fig. 2. Every comparison follows one protocol that keeps tuning, selection and testing on separate seeds. Top: seed-set roles (Table I): calibration (CAL), holdout (HOLD), older and locked test sets, and fresh confirmation seeds (NEW). Bottom: the three rules that govern every comparison. The access log records evaluations on TEST seeds that ran through the shared evaluation code.

TABLE I

SEED SETS. EACH SEED SET HAS ONE MAIN ROLE; HOLD AND TEST WERE REUSED, WHILE THE LOCKED SETS (TEST-B, TEST-C, TEST-D) WERE EACH USED ONCE, FOR THE EVALUATION NAMED IN THE LAST COLUMN. CAL IS THE CALIBRATION SET USED FOR TUNING AND SELECTION, HOLD THE HOLDOUT SET, TEST THE OLDER TEST SEEDS, AND NEW THE FRESH CONFIRMATION SEEDS.

Set	Seeds	n	Role
CAL	1000–1049; 2000–2149 (spikes 13a–15c)	50 (200)	tuning, selection
HOLD	1100–1599	500	classical selection; reused
TEST	0–49	50	older spikes; reused for juggling
TEST-B	20000–20499	500	locked, realistic whip (Sec. V-A)
TEST-C	30000–30499	500	locked, ladder (card v8)
TEST-D	40000–40499	500	locked, plan selection (card v9)
NEW	700000+	200	fresh confirmation

noise) gave -3.0 pp [-8.5, +2.5] and learned nothing, while -2.0 gave +7.8 pp [3.0, 12.8]. Later gates are single-seed shots (Appendix B), so every RL null below reads "not learned under this recipe", never "cannot learn".

An access log makes the use of the test seeds auditable. Every evaluation on TEST seeds that runs through the shared evaluation code appends a line to a log, which has 111 lines. The log covers those evaluations only: the TEST evaluations of the first five spikes ran outside it, so the line count is not the number of locked-set accesses and must not be quoted alone (breakdown in Appendix A). The three locked sets of Table I were each accessed once.

IV. EXPERIMENTAL SETUP

Arm and simulator. All experiments run in MuJoCo with planar serial arms. The default arm has two links (0.5 and 0.4 m, 1.0 and 0.8 kg); juggling adds a racket as a third, wrist joint; the whip uses a three-link arm (0.40, 0.35 and 0.25 m; 1.0, 0.8 and 0.5 kg; 0.2 kg tip payload). A task, a robot, a controller and a list of perturbations plug into one environment interface. Controllers see only the nominal model; perturbations change the true plant (the list of perturbations is in Appendix C). Control runs at 5 ms.

Seven tasks and where each is used. The task set is figure tracking (a tool-tip glyph), pole balancing, Push-T, ball juggling, ball catching, ball tossing into a basket, and whip (Fig. 1). Learned-versus-classical comparisons with a full protocol cover tracking, juggling and whip (settings S1–S8, Table IV). Pole balancing was run only on the classical ladder. Catching, tossing and Push-T have classical pilots (5–20 demo seeds) and, in Appendix E, residual-PPO mini-comparisons that add breadth but not evidence for K2.

Whip. The arm flings a chain of ten capsules (0.10 m, 0.015 kg each, hinged at the tip). The *chain tip* must pass within 0.08 m of a target 1.15–1.70 m from the shoulder, outside the arm's 1.0 m reach, within 2.5 s. The chain state is not observed. "Realistic conditions" add encoder noise (1e-3 rad, 1e-2 rad/s), actuator noise $U(0.01, 0.02)$ Nm, Coulomb friction 2e-3 Nm $\times$ $U(0.5, 1.5)$ and per-link mass factors $\exp U(-0.3, 0.3)$. These magnitudes are our choice, set before the results, and are not derived from hardware. Success is the primary metric.

Classical ladder. For tracking the ladder runs proportional-integral-derivative control (PID), computed torque (CTC) with a linear-quadratic regulator (LQR), written CTC+LQR, iterative LQR (iLQR), iLQR in a model-predictive-control loop (iLQR-MPC) and model-predictive path-integral control (MPPI). For

TABLE II

THE EIGHT SETTINGS: THREE TASKS, EACH PAIRING LEARNED METHODS WITH ITS OWN STRONGEST CLASSICAL BASELINE, THE COMPARATOR OF TABLE IV. ON S7 IT CHANGED FROM R0 TO C-ENS DURING THE STUDY (SECTION V-B). THE LAST COLUMN LISTS THE SPIKES (EXPERIMENTS) BEHIND EACH SETTING. TABLE III DEFINES EVERY NAME.

	Task and condition	Strongest classical	Learned methods	Evidence sets	Spikes
S1	tracking, no weakness (W0) or friction (W3), 2-link	C1: gains retuned by CMA-ES	residual PPO (5 seeds)	TEST	02, 03a
S2	tracking + sensor noise + 30 ms delay	C1-new (retuned for noise and delay)	residual PPO	TEST	04
S3	tracking, clean nominal plant	CTC+LQR teacher (exact)	BC, MIP, flow-1, flow-10, DDIM-10 students	HOLD, fresh seeds	15b
S4	juggling, one known error (pilot)	one-parameter retuned mirror-law teacher	residual PPO	TEST	03b
S5	juggling, wide unknown error	T-robust (CMA-ES over the error distribution)	residual PPO, SAC, PPO with oracle observation	TEST, HOLD, fresh	06, 07, 15b
S6	whip, idealised (noise-free, in model class)	T-adapt (online identification)	L-est, residual PPO, PPO with oracle observation	TEST, HOLD, fresh	09b, 15b
S7	whip, realistic conditions	R0 (T-adapt3-full), later C-ens	L-est, L-dec4, ensembles (B), residual PPO, SAC	TEST-B/C/D, HOLD, NEW	10b, 13a–15e
S8	whip, privileged-teacher distillation	T-adapt3-full	students on multimodal and canonical teacher data	NEW	11a, 12a

tuning, C0 is the untuned teacher, C1 retunes the proportional and derivative gains Kp/Kd, or the LQR cost weights Q/R, with CMA-ES on the calibration seeds CAL, and C2 adds an integral term. For juggling and whip we use T-nom (nominal), T-robust (CMA-ES over the perturbation distribution) and T-adapt (online system identification from a short probe). For realistic whip we add T-adapt3 with an extended model class (length scale, ten chain-link masses, damping, Coulomb friction; 13 parameters). The suffix "-full" marks this complete 13-parameter model class, and its fitted-parameter pipeline T-adapt3-full is the baseline called R0 below. On whip the plan comes from CMA-ES keyframes (a handful of arm poses between which the swing is interpolated) tracked by computed torque.

Learned methods. Imitation students are a multilayer perceptron (MLP) trained by behaviour cloning (BC), MIP (two-step regression), flow matching with 1 or 10 steps, and a denoising-diffusion-implicit-model diffusion policy with ten steps (DDIM-10). Where stated, BC demonstrations are recorded with injected noise (DART) or relabelled iteratively (DAgger). Residual RL is PPO (SAC in sensitivity runs) on top of the strongest classical controller, with a residual capped at 12 Nm in juggling and whip; the network and training recipe are in Appendix B. Learned estimators map a short probe to the plant parameters. L-est is an MLP on the probe's tracking residuals (12,000 probe-only training episodes, simulator labels; in the tables L-est-full, trained with per-link chain-mass labels). L-dec4 is a gated recurrent unit (GRU) on the raw probe time series, trained with four times the data and three training seeds. Its decision-weighted loss weights each parameter error by how much it shifts the planned swing, and that weighting was computed from 1,600 oracle plans made with the true simulated parameters of training episodes, so L-dec4 uses true-plant information beyond the simulator parameter labels. Its 13,120 episode-equivalents (a probe-only episode counts as 0.24 of a full episode) are $48{,}000 \times 0.24 + 1{,}600$. Ensembles average the estimated parameters of the three frozen L-dec4 networks. B is this learned ensemble used with robust plan selection (Section V-B), and L-ens is the same ensemble without it. C-ens is the classical counterpart of B: robust plan selection over parameter samples drawn from a Laplace (Gaussian) approximation around the classical fit.

Exploration scale. The one residual-PPO parameter we found to matter most is the exploration log-std (Section III); the rest of the recipe is in Appendix B.

Reproducibility. Each result table is regenerated by a script from stored per-episode data, with the exception of runs that depend on untracked intermediate files; locked-set runs (TEST-B, TEST-C, TEST-D) were once-only and must not be repeated. All training seeds are at least 500,000 so that no training episode overlaps an evaluation set.

Headroom ladder. On whip we measure what each source of error costs with a fixed-order ladder on the same pipeline. R0 is the fitted-parameter pipeline. R1 gives it the true plant parameters, R2 adds the true chain state, R4 is an oracle planner with no probe time, and R5 is the oracle with the canonical (single, consistent) plan of Section V-C. Paired differences between rungs give the size of each block. We also run the reverse order (true chain state first). R3, an oracle that starts from rest and waits 0.6 s, was run on HOLD and NEW only (Appendix C), not on the locked sets.

Statistics. Paired percentile bootstrap, 95% CI, per comparison, with 10^4 to $2{\times}10^4$ resamples depending on the script. "Recovered fraction" is $(\mathrm{X} - \mathrm{R0})/(\mathrm{R1} - \mathrm{R0})$ with the same resample in numerator and denominator. Holm correction applies within a hypothesis family: three hypotheses for the TEST-C card and four for the TEST-D card, both on one-sided bootstrap p-values at family $\alpha = 0.05$.

TABLE III

NOTATION AND METHOD NAMES. ALL NAMES REFER TO THE WHIP, TRACKING OR JUGGLING SETTINGS OF TABLE II; THE SOURCES ARE THE SETUP TEXT AND THE PER-EXPERIMENT README FILES.

Name	Meaning
K1–K4	The four contributions: the audited protocol, the cross-setting result, the headroom decomposition on realistic whip, and the multimodal-teacher result.
S1–S8	The eight settings of Table II: tracking (S1–S3), juggling (S4–S5), whip (S6–S8).
W0, W1, W2, W3	Plant conditions of the tracking task: W0 no weakness, W1 a reduced torque cap, W2 an actuator delay, W3 unmodelled friction.
R0–R5	Rungs of the whip headroom ladder: R0: the fitted-parameter classical pipeline (T-adapt3-full); R1: R0 with the true plant parameters; R2: R1 plus the true chain state; R3: an oracle that starts from rest and waits 0.6 s; R4: an oracle planner with no probe time; R5: the oracle with the canonical plan.
T-nom, T-robust, T-adapt, T-adapt3-full	Classical controllers of increasing tooling: nominal model; CMA-ES tuned over the perturbation distribution; online system identification from a short probe; the same with an extended 13-parameter model class ("-full" marks this complete class). T-oracle is the planner given the true parameters.
Mirror law	The juggling teacher's control law: it sets the racket's height and vertical velocity from the filtered, estimated ball state, like a mirror returning the ball.
C0, C1, C1-new, C2	Classical tracking controllers: untuned teacher; gains retuned with CMA-ES; C1 retuned for sensor noise and delay; C2 adds an integral term.
L-est, L-est-full, L-est-eff	Learned parameter estimator (MLP on probe residuals). "-full": trained with per-link chain-mass labels; "-eff": no per-link labels, four outputs.
L-dec4, L-ens, B	L-dec4: GRU estimator with a decision-weighted loss, trained on four times the data. L-ens: average of three frozen L-dec4 networks. B: L-ens used with robust plan selection (worst-case aggregate).
C-ens	Classical counterpart of B: robust plan selection (hit-fraction aggregate) over parameter samples from a Gaussian (Laplace) approximation around the classical fit.
θ, $\hat{\theta}$	True plant parameters and their estimates.
Rrev1, C-MAP	Rrev1: reverse-order rung, the true chain state given first (without the true parameters). C-MAP: classical maximum-a-posteriori fit with multi-start.
Spike	One short, self-contained experiment with its own README file and result tables.
Recovered fraction	$(\mathrm{X}-\mathrm{R0})/(\mathrm{R1}-\mathrm{R0})$: the share of the parameter gap that method X closes.
Headroom	Room above the strongest classical pipeline, measured by an oracle.
TOST, Holm	TOST: two one-sided tests for equivalence within a margin, read from the 90% CI. Holm: step-down correction for multiple tests.
PRE-git, PRE-README, POST	Rule committed before the result in git; rule only in the experiment's README; post hoc.
Robust plan selection	Scoring each candidate swing under several plausible parameter sets and choosing by an aggregate score instead of trusting one parameter estimate. B uses the worst-case aggregate; C-ens uses the hit-fraction aggregate (the share of parameter sets in which the predicted miss is below 0.06 m, a margin inside the 0.08 m success radius).
D-canon, D-multi	Student training data from the canonical teacher (one consistent plan per situation) and from the multimodal teacher.
CAL, HOLD, TEST	Calibration seeds (tuning and selection); holdout seeds (reused); older test seeds (reused).
TEST-B, -C, -D, NEW	Locked test sets, each evaluated once (realistic whip, headroom ladder, plan selection); fresh confirmation seeds.
Hypothesis card (v8, v9)	A time-stamped, version-controlled record of hypotheses, metrics and decision rules, written before the run; H13–H16 number its hypotheses.

V. RESULTS

A. No learned method cleared the +10 pp bar against its strongest classical baseline

No learned method cleared the bar in any setting. Out of 8 enumerated settings, none has a learned method with a CI above 0 and a gain of at least +10 pp (or 10% RMSE) over the strongest classical baseline. Table IV and Fig. 3 give the learned-minus-classical contrast per setting. The positive exceptions compare against weaker baselines. These are the untuned tracking teacher (+16.7% RMSE), the untuned juggling teacher (+292% in median hits, the median over episodes of the number of successful racket hits; a one-parameter retune also reaches 100 hits), and the weaker T-adapt of the juggling study (+9.3 pp [2.7, 17.3]), each beaten by residual PPO.

Tracking (S1–S3) has little headroom by construction. With a retuned computed-torque controller there is no decisive difference from residual PPO on four cells, clean and disturbed, with and without friction (S1: none of the four 90% CIs decides at $\pm 10\%$). With noise and a 30 ms delay the retuned classical controller is better by 21.7% clean and 2.6% disturbed (S2). All five imitation students match the teacher on HOLD with reference trajectories from fresh seeds (S3). They are 0.5% to 6.2% worse in RMSE with CIs inside $\pm 10\%$, and the teacher is exact on the clean nominal plant.

In juggling and idealised whip (S5, S6), residual PPO degrades its base. With the gate-chosen exploration scale it loses 23.8 pp [20.7, 26.9] and 17.6 pp [14.9, 20.3] on HOLD, and 23.0 pp and 18.7 pp on fresh seeds. The idealised whip base is at 96.8%, so a +5 pp learner effect is impossible there. For S5 the gate is easy, so it tests the training code rather than the learner's sensitivity.

In realistic whip (S7), neither learned estimators (+0.9 pp $[-3.5, 5.4]$ on TEST-B) nor PPO (-2.1 pp $[-5.2, +1.1]$) beat the strongest classical baseline at that time. Eleven PPO and 2 SAC configurations and a 12M-step run all stayed within -3 to +2 pp of initialisation. Privileged-teacher distillation (S8) leaves all students 12–45 pp below T-adapt3-full.

Three of the 8 settings (S5, S6, S7 PPO) had a learner that did not learn, so they cannot show that classical is better. The

TABLE IV

LEARNED MINUS STRONGEST CLASSICAL, PER SETTING. NO LEARNED METHOD CLEARED THE +10 PP (OR 10% RMSE) BAR; ONLY THE COMPARISON WITH THE WEAKER R0 DOES (†). SUCCESS SETTINGS IN PERCENTAGE POINTS; TRACKING IN RELATIVE RMSE CHANGE (POSITIVE = LEARNED BETTER). S5 AND S6 PPO ROWS USE THE EXPLORATION SCALE CHOSEN BY A SINGLE-SEED GATE (3 TRAINING SEEDS EACH). TEST (n=50) WAS REUSED FOR JUGGLING BY THREE SPIKES. NAMES ARE IN TABLE III; BUDGET RATIOS IN APPENDIX B; THE PILOT S4 IS COVERED IN APPENDIX A. GENERATED BY FIGURES/MAKE_FIGS.PY.

Set.	Learned vs. classical	n	Seeds	Δ [95% CI]	Learner
S5	PPO vs T-robust	500	HOLD	−23.8 [−26.9, −20.7]	degrades
S6	PPO vs T-adapt	500	HOLD	−17.6 [−20.3, −14.9]	degrades
S6	L-est vs T-adapt	50	TEST	−15.3 [−22.0, −8.7]	estimator
S7	PPO vs R0	500	HOLD	−2.1 [−5.2, +1.1]	not learned
S7	L-est-full vs R0	500	TEST-B	+0.9 [−3.5, +5.4]	estimator
S7	L-dec4 vs R0 (H14)	500	TEST-C	+6.1 [+1.5, +10.7]	estimator
S7	B vs C-ens (H16a)	500	TEST-D	+5.6 [+0.6, +10.6]	estimator + selection
S7	B vs R0 (weaker baseline)†	500	TEST-D	+16.2 [+11.0, +21.4]	estimator + selection
S8	MIP D-canon vs T-adapt3-full	200	NEW	−12.0 [−19.8, −4.0]	BC student
Tracking, relative RMSE change in % (positive = learned better)					
S1	PPO vs C1 (W0 clean)	50	TEST	−7.1 [−13.8, +0.3]	RL, 5 seeds
S2	PPO vs C1-new (noise+delay, clean)	50	TEST	−21.7 [−25.7, −17.9]	RL, 5 seeds
S2	PPO vs C1-new (noise+delay, disturbed)	50	TEST	−2.6 [−4.5, −0.7]	RL, 5 seeds
S3	BC student vs teacher	500	HOLD	−0.8 [−1.0, −0.6]	imitation
S3	flow-1 student vs teacher	500	HOLD	−0.5 [−0.7, −0.4]	imitation
S3	DDIM-10 student vs teacher	500	HOLD	−6.2 [−6.7, −5.7]	imitation

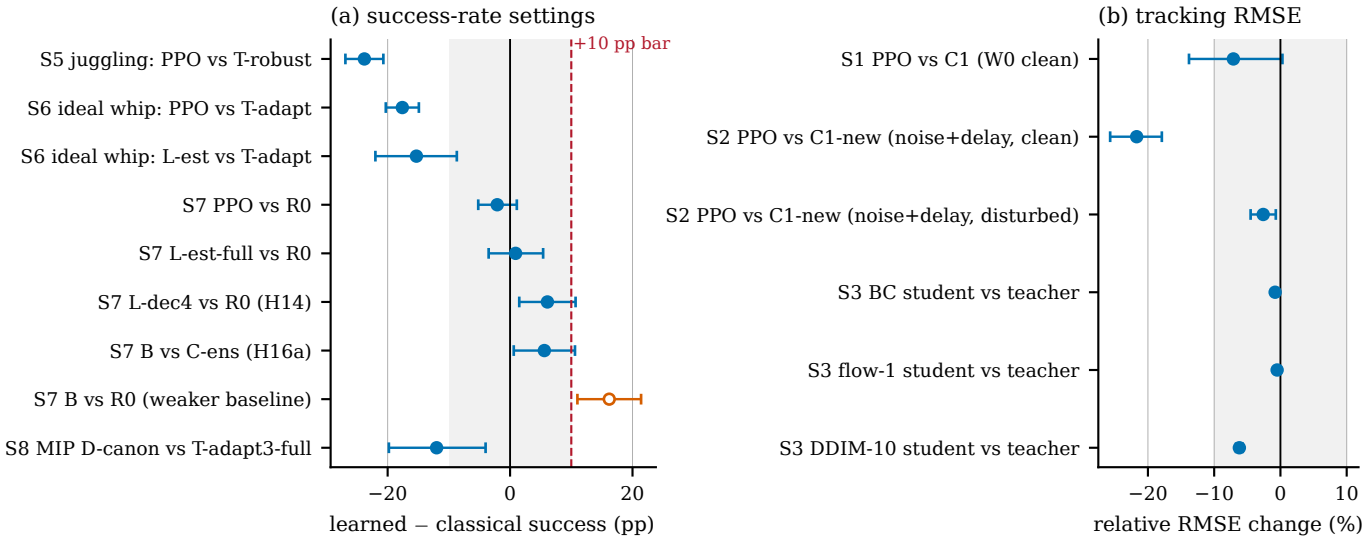


Fig. 3. No learned method clears the +10 pp bar against its strongest classical baseline; the single hollow point does, but only against the weaker baseline R0 (the fitted-parameter classical pipeline on whip). Learned minus classical across settings. Left: success-rate settings, grey band ±10 pp, dashed line at the +10 pp bar. Right: tracking settings in relative RMSE. Bars are 95% bootstrap CIs; the equivalence (TOST) calls in the text use 90% CIs, for example [2.2, 9.9] for H14 (L-dec4 vs R0). Evidence sets differ across rows (Table IV).

post hoc TOST rows show equivalence at ±10 pp only for some rows (for example S3, S7 estimators and S7 PPO) and clearly worse learners for others. S1 is undecidable, and no row has the learner clearly better by more than 10 pp (Appendix A). Where we write "no detectable difference at the +10 pp bar" we do not claim equivalence.

Realistic whip is the setting where headroom is largest, so its history is worth stating in one place. On the locked TEST-B set (n=500, one evaluation) R0 (T-adapt3-full), the strongest classical baseline at that time, scored 65.6% [61.4, 69.8] and the oracle 89.2%. The total headroom was +23.6 pp [18.8, 28.4]. The learned estimator with per-link labels (L-est-full) differed from R0 by +0.9 pp [−3.5, 5.4], and a version without per-link mass labels (L-est-eff) by −1.2 pp [−5.8, 3.5]. The pre-specified hypothesis that a learned estimator beats R0 by 10 pp was not supported. Residual PPO on that set was 0.0 pp [−4.0, 4.0], but it used the default exploration scale that the gate showed to be unlearnable, so we use the later 3-seed run (−2.1 pp) instead. These results motivated the ladder of Section V-B.

Whip is the exception that carries the qualification of K2. Against R0 alone, the learned ensemble B clears the bar on the locked TEST-D set: B−R0 is +16.2 pp [11.0, 21.4]. But a classical ensemble, C-ens, also beats R0 by +10.6 pp [5.8, 15.4], and the learned side's lead over C-ens has a CI that reaches 10 pp (Section V-B). C-ens exists because an earlier, unlocked study had shown B ahead of R0. The pre-specified hypothesis card (v9) was written after C-ens was frozen and before TEST-D. A learned advantage of 10 pp or more therefore cannot be excluded, and we do not write that no learned method cleared the bar without this qualification.

B. On realistic whip, parameters are the largest rung and robust plan selection recovers about 60% of that gap

On the locked set TEST-C, the true-parameter step is the largest single rung of the headroom ladder. Fig. 4 shows the ladder (n=500, hypothesis card v8 committed before the run). The fitted-parameter pipeline R0 reaches 65.6% [61.4, 69.6]; true parameters (R1) reach 83.2% [79.8, 86.4]; adding the true chain state (R2) gives 88.6%; the oracle R4 reaches 93.0% [90.6, 95.2]. The parameter step R1−R0 is +17.6 pp [12.6, 22.6] (hypothesis H13 supported, Holm $p = 0.00015$). The probe cost R4−R2 is +4.4 pp [0.8, 7.8]: small but not zero. The pre-specified bound (upper end below +5 pp) failed (H13b not supported). The chain-state step is R2−R1 +5.4 pp [1.6, 9.4], and the total headroom R4−R0 is +27.4 pp [22.6, 32.2]. In the reverse order the chain state first adds +4.8 pp [−0.8, 10.6] and the parameters then add +18.2 pp [13.4, 23.0], so the parameter step is about +18 pp in both orders. The same step appeared on the reused HOLD (+16.8 pp [12.0, 21.6]) and fresh NEW seeds (+13.0 pp [4.5, 21.5]; Appendix C). Parameter estimation is therefore the *largest single rung* of this ladder, not *the* cause: rung sizes depend on order and are not additive.

A learned estimator recovers only part of the parameter gap on TEST-C. The pre-specified estimator duel (H14) compares L-dec4 with R0. L-dec4−R0 is +6.1 pp with a 90% CI of [2.2, 9.9], inside ±10 pp, but the Holm-adjusted p is 0.094, so equivalence is *not confirmed* after Holm (the unadjusted TOST passes by 0.1 pp). The estimator recovers 0.34 [0.10, 0.53] of the R0-to-R1 gap, L-est-full 0.10 [−0.18, 0.31], and a classical MAP fit with multi-start −0.14 [−0.56, 0.16] (descriptive). On the reused HOLD the same duel had given +1.1 pp [−3.3, 5.7], a 7% recovered fraction (4% on NEW) with a CI that crosses 0; the locked number supersedes it. Parameter error falls a lot (log-damping RMS 0.693 to 0.323) while success moves far less, so precision rather than direction of the error is the issue. Success is also noisy in the estimated parameters $\hat{\theta}$: re-running identical models with float-rounding changes moved HOLD success by up to 3.6 pp.

Robust plan selection recovers about 60% of the parameter gap on the locked set TEST-D with the classical ensemble, and either side can use it. Both selection rules start from 8 candidate swings (whip plans) planned for the fitted parameters, plus 3 more, one proposed by each ensemble member. They simulate every candidate under four plausible parameter sets (the central estimate and three ensemble members). They then

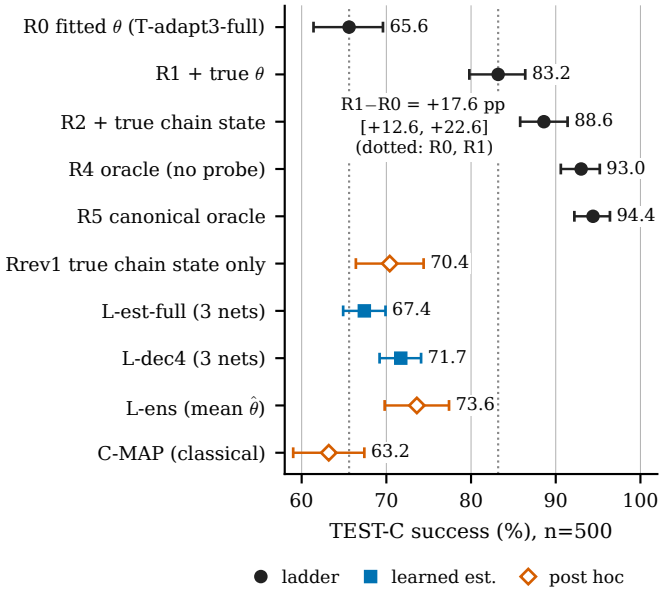


Fig. 4. Parameter estimation is the largest single rung of the headroom ladder on realistic whip (locked TEST-C), and learned estimators recover only part of it. Rungs: R0 fitted parameters, R1 true parameters, R2 adds the true chain state, R4 oracle planner with no probe time, R5 canonical oracle, Rrev1 true chain state only; θ denotes the plant parameters and $\hat{\theta}$ their estimates. Orange open markers are post hoc, descriptive rows. Dotted lines mark R0 and R1. Learned estimators sit between R0 and R1; the classical maximum-a-posteriori (MAP) fit with multi-start sits below R0.

choose by an aggregate score, either the worst case or the hit fraction, meaning the share of those parameter sets in which the predicted miss is below 0.06 m (a margin inside the 0.08 m success radius). B draws its ensemble members from three frozen learned estimators. C-ens draws them from a Laplace posterior around the classical fit, so it applies the same rule on the classical side.

Fig. 5 shows TEST-D (n=500, hypothesis card v9 committed before the run). R0 reaches 66.4% [62.2, 70.6], R1 84.4% [81.2, 87.6] (an R1−R0 gap of +18.0 pp), C-ens 77.0% [73.2, 80.6] and B 82.6% [79.2, 85.8]. The card's hypothesis H15, that C-ens beats R0, holds: C-ens−R0 is +10.6 pp [5.8, 15.4]. H15b, that B beats R0, holds: B−R0 is +16.2 pp [11.0, 21.4]. The share of the R1−R0 gap recovered is 0.59 [0.36, 0.82] for C-ens and 0.90 [0.68, 1.16] for B. H16a, that B beats C-ens, holds under Holm: B−C-ens is +5.6 pp [0.6, 10.6] (Holm $p = 0.032$). H16b, that the B advantage is below 10 pp, is *not supported*, because the card's rule requires the 95% CI upper end below +10 pp and it is 10.6. The card is internally inconsistent here. Its rule uses the two-sided 95% CI, while its Holm step uses a one-sided p that corresponds to the 90% CI (upper end 9.8, $p = 0.043$). We apply the rule text, so a learned advantage of 10 pp or more is not excluded.

A control shows that the gap lies in choosing among candidates rather than in the candidate pool: the best of the executed candidates would have succeeded in 99.8% of episodes for both runs. The reproduction checks, the agreement of the base candidate with R0 and the winner's-curse effect (optimism

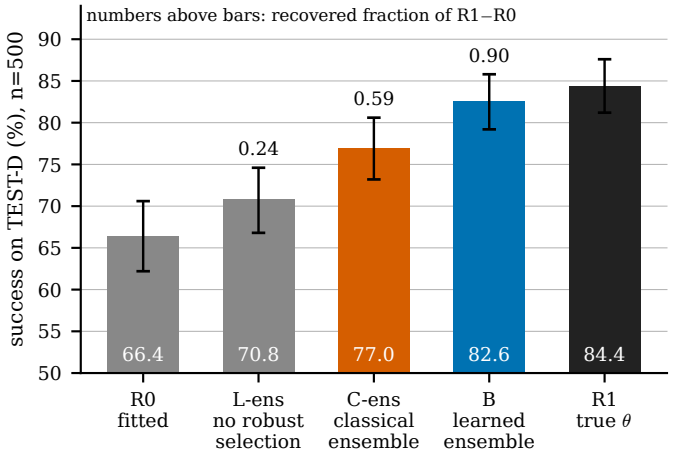


Fig. 5. Robust plan selection recovers about 60% of the parameter gap on the locked set TEST-D: 0.59 of the R1−R0 gap with the classical ensemble C-ens and 0.90 with the learned ensemble B. Bars: success with 95% CI; numbers above the bars: recovered fraction of the R1−R0 gap. R0 uses fitted parameters and R1 the true parameters. C-ens is the classical ensemble with robust plan selection, B the learned ensemble with robust plan selection, and L-ens the same frozen learned estimators as B without robust selection. The y axis starts at 50%.

from picking the best of many variants) in the selection of B and C-ens are in Appendix C.

Without robust selection the learned estimators add little on TEST-D. The learned ensemble without robust selection (L-ens) gives only +4.4 pp [−1.4, 10.0] on TEST-D (recovered 0.24); on TEST-C the same ensemble gave +8.0 pp [2.6, 13.6] (descriptive). The two locked sets differ by several points for the same frozen networks, which fits the noise floor above. Costs differ in the other direction. The classical ensemble needs about 63.3 s of CPU per episode against 20.4 s for B, and the learned side paid 13,120 training episode-equivalents with simulator labels and true-plant oracle plans. Post hoc and descriptive results, not in any verdict, are a 9-network learned ensemble (84.4% on TEST-D, recovered 1.00 [0.77, 1.29]), the reverse-order ladder, L-ens and C-MAP (a classical maximum-a-posteriori fit with multi-start).

The classical ensemble C-ens recovers 0.59 [0.36, 0.82] of the R1−R0 gap without better parameters, and we read this as robust plan selection mattering more than a better point estimate. That reading is an interpretation of the 0.59 fraction, not a test. Averaging the model score over four nearby plants may simply reduce variance in a success rate that is close to chaotic in $\hat{\theta}$, and we did not test this alternative.

C. A multimodal teacher: canonicalising it helps more than a richer student

Canonicalising the teacher helps students more than a richer student does. When the whip teacher is the standard multimodal CMA-ES planner, re-planning the same situation varies by 0.96 rad RMS, as much as plans for different situations (0.92 rad). A canonical teacher built by continuation (each plan warm-started from a neighbouring target's plan) varies by 0.27 rad within a scenario against 0.73 rad between scenarios. Replacing the multimodal teacher by the canonical one raised every student's success by 17.5–33.5 pp on NEW seeds (BC only, one data size, n=200; Fig. 6 in Appendix D). The best generative student exceeded the MLP by +5.0 pp [−0.3, 10.2] on the multimodal teacher's data: below the +10 pp bar, not an equivalence result, and the best student was identified post hoc. Neither result has locked-set confirmation, and the canonical teacher also changes plan smoothness, so the gain combines multimodality removal with plan regularity.

VI. Discussion

Our data suggest that a control-level learner needs two things to add value over a strong classical controller, and that it never had both, while a learned estimator added some value at the planning level. By control-level learner we mean PPO, SAC or an imitation student that outputs the control action. The first condition is headroom the classical toolbox cannot reach. Among the three tasks compared under the full protocol it was measured only on realistic whip (an oracle gap of +27.4 pp on TEST-C), while tracking ties and no juggling cell gained 10 pp from classical re-tuning in a small diagnostic. The second is a control-level learner that, having passed the sanity gate (the constant-bias test), also learns the real correction. PPO and SAC did not on whip or juggling, and with the gate-chosen exploration scale PPO degraded S5 and S6 by 23.8 and 17.6 pp. So the first condition held only on whip, and there the second failed. We did not find a control-level learner that beats the strongest classical controller, and we have not shown that control-level learning is unattainable.

The ingredient that did help acts before control, in planning. Robust plan selection, which scores candidate swings across several plausible plants, recovers 0.59 [0.36, 0.82] of the parameter gap with a classical ensemble and 0.90 [0.68, 1.16] with learned estimators. It is a *decision rule over a set of plausible plants* that either side can use. The learned estimators, trained with simulator labels and true-plant oracle plans, keep a lead over C-ens that may reach 10 pp or more, so a learned estimator can add value even though a control-level learner did not. Our reading is an inference rather than a test (Section V-B).

One piece of counter-evidence argues against reading K2 as "classical is at least as good". Under actuator noise four times larger, the classical T-adapt3-full lost 12.5 pp while the learned estimator did not: the paired difference is −16.5 pp [−28.5, −5.0] on HOLD (n=200, frozen methods, no re-tuning at the higher noise; Appendix C). This is weak evidence, but together with the locked-set advantage of H16a it argues against a blanket reading of K2.

Section VII lists three features that could make the headline contrast cleaner than it is (a non-neutral prior, selection among 20 or 22 variants, near-chaotic success); the locked TEST-D set controls only the selection effect.

The null does not say that learning is worse. Three of eight settings had a learner that did not learn; the RL recipe was one family; 6 of the 8 settings (S1–S6) have little or no headroom; and the +10 pp bar is ours. The comparison is also not equal on every axis: the learned estimators used 9–17× the classical

episodes, with simulator labels and true-plant oracle plans, whereas the classical ensemble costs about three times the CPU time per episode at test time.

For benchmark design, our results suggest four practices. Report the sanity gate and an oracle with every learned-versus-classical table, because a null from a learner that cannot learn a trivial correction is uninformative. Tag each result as pre-specified or post hoc; log locked-set accesses; and state which classical baseline is meant when the baseline changes during the study. Our own change of the strongest classical baseline on whip (R0 to C-ens) moved the learned advantage from +16.2 pp (B−R0) to the smaller B−C-ens contrast.

VII. Limitations

1) **RL did not learn where it matters.** On realistic whip, 13 tuned PPO and SAC configurations and a 12M-step run stayed within -3 to +2 pp of initialisation; the first gate passed marginally and later gates are single-seed. Our null is "not learned under this recipe", not "cannot learn".
2) **HOLD reuse.** HOLD selected the best classical baseline and was then reused, so classical numbers are optimistic there (R0 69.2% on HOLD against 65.6–66.4% on the three locked sets).
3) **Our own realism.** Noise, friction and mass magnitudes were set by us, not derived from hardware.
4) **One simulator, one dominant task.** All results are MuJoCo and the mechanistic claims (K3, K4) rest on whip alone; there is no second engine or hardware.
5) **Budgets, multiplicity and the order of the classical upgrade.** Budget ratios were unequal (up to 9–17×); Holm applies within a hypothesis only; the classical ensemble was added after the learned result was seen, and the learned advantage over it does not exclude 10 pp. The ensemble uses the generative parameter distribution as a prior, which is not neutral (the learned estimators see it as training data); both selection rules were picked on CAL among 20 or 22 variants; and success is near-chaotic in the estimated parameters, so differences of a few points sit within replicate noise (the multi-start classical family was degenerate in 439 of 500 HOLD episodes).
6) **Numerical warnings.** The TEST-D run logged 125,555 MuJoCo "simulation unstable" warnings. A re-run on 100 HOLD episodes attributes 92–98% of them to planner model rollouts and none to the executed plant (0 of 100 executed episodes diverged), but the check is n=100 on HOLD only.

Appendix A gives the full text of these items and the forking paths.

VIII. Conclusion

Under a fair, pre-specified and budget-disclosed protocol, with extended classical tooling, no learned method cleared the +10 pp bar over the strongest classical baseline in 8 tracking, juggling and whip settings. Of the tasks compared under the full protocol, only realistic whip has measured headroom. There, the largest rung of the headroom ladder is parameter estimation (+17.6 pp on TEST-C). On the second locked set, TEST-D (gap +18.0 pp), robust plan selection recovers about 60% of the gap with the classical side alone (0.59) and 0.90 with the learned side. Robust plan selection is a decision rule that scores candidate swings under several plausible plants and that either side can use. The learned side keeps a lead of +5.6 pp [0.6, 10.6], and a 10 pp advantage is not excluded.

On a multimodal whip teacher, replacing it by a canonical one raised every student's success by 17.5–33.5 pp, more than the best generative student added over an MLP (+5.0 pp [-0.3, 10.2]); this result has no locked-set confirmation. The protocol is reusable. Any other group can apply its sanity gate, its seed-set roles, its pre-specified cards and its access log to check whether a reported learned advantage survives an equally tuned classical baseline, though we have applied it only here. The evidence is one simulator and mostly one task. The next experiments we consider most informative are a control-level learner that demonstrably closes part of the oracle gap, a second task with headroom in a second simulator, and equal-effort classical tuning for the estimator duel.

Acknowledgment

Use of AI tools. The research question, the choice of tasks, every direction change and every decision recorded in the hypothesis cards were made by the author. Most of the code, the execution of the experiments, the statistical analysis and the drafting of this text were carried out by AI agents (Anthropic's Claude models, used through Claude Code) working under the author's direction; internal reviews of the drafts were also simulated with AI agents. The author checked the results reported here and takes full responsibility for the content.

References

[1] J. Wong, V. Makoviychuk, A. Anandkumar, and Y. Zhu, "OSCAR: Data-driven operational space control for adaptive and robust robot manipulation," arXiv:2110.00704, 2021.

[2] S. Bauer, F. Widmaier, M. Wüthrich *et al.*, "Real robot challenge: A robotics competition in the cloud," arXiv:2109.10957, 2021.

[3] E. Aljalbout, F. Frank, M. Karl, and P. van der Smagt, "On the role of the action space in robot manipulation learning and sim-to-real transfer," arXiv:2312.03673, 2023.

[4] P. Kunapuli, J. Welde, D. Jayaraman, and V. Kumar, "Leveling the playing field: Carefully comparing classical and learned controllers for quadrotor trajectory tracking," arXiv:2506.17832, 2025, robotics: Science and Systems (RSS).

[5] A. R. G. Samuel and P. Verma, "Coupled state-space modelling, control, and policy distillation for hybrid rigid-pneumatic manipulators," arXiv:2609.29424, 2026.

[6] J. Nubert, J. Köhler, V. Berenz, F. Allgöwer, and S. Trimpe, "Safe and fast tracking on a robot manipulator: Robust MPC and neural network control," arXiv:1912.10360, 2019.

[7] A. Tagliabue and J. P. How, "Efficient deep learning of robust policies from MPC using imitation and tube-guided data augmentation," arXiv:2306.00286, 2023.

[8] P. Marquez Julbe, J. Nubert, H. Hose, S. Trimpe, and K. J. Kuchenbecker, "Diffusion-based approximate MPC: Fast and consistent imitation of multi-modal action distributions," arXiv:2504.04603, 2025.

[9] T. Silver, K. Allen, J. Tenenbaum, and L. Kaelbling, "Residual policy learning," arXiv:1812.06298, 2018.

[10] T. Johannink, S. Bahl, A. Nair, J. Luo, A. Kumar, M. Loskyll, J. Aparicio Ojea, E. Solowjow, and S. Levine, "Residual reinforcement learning for robot control," arXiv:1812.03201, 2018.
[11] L. Ankile, A. Simeonov, I. Shenfeld, M. Torne, and P. Agrawal, "From imitation to refinement – residual RL for precise assembly," arXiv:2407.16677, 2024.
[12] C. Pan, G. Anantharaman, N.-C. Huang, C. Jin, D. Pfrommer, C. Yuan, F. Permenter, G. Qu, N. Boffi, G. Shi, and M. Simchowitz, "Much ado about noising: Dispelling the myths of generative robotic control," arXiv:2512.01809, 2025, iCLR 2026.
[13] S. Li, L. Sun, and Y. Chen, "One-step flow policy: Self-distillation for fast visuomotor policies," arXiv:2603.12480, 2026.
[14] S. Wu *et al.*, "CoLA-Flow policy: Temporally coherent imitation learning via continuous latent action flow matching for robotic manipulation," arXiv:2601.23087, 2026.

APPENDIX A
DEVIATIONS AND AUDIT

Audit details

This subsection collects the audit of pre-specification, the order in which the classical upgrade was built, the access-log scope and the post hoc equivalence summary. Git order (rule committed before result) was verified for six early spikes, for the headline rules of three more, and for the two locked-set runs of Section V-B. For ten spikes (01, 02, 03a, 04, 11a, 13b, 15b–15d, 16a) it cannot be shown, because rule and result share a commit or the rule lived in a task prompt (Table V). Table V gives, for each spike, whether git shows the rule committed before the result. Timestamps are local commit times on one author clock; the repository has no external timestamping. "YES" means the rule text is in a commit strictly earlier than the first commit containing the result; "UNPROVABLE" means both arrive in one commit or the rule lived in a task prompt. No case was found in which git shows a rule committed after its result. (learn_demo had no pre-specified rule.)

TABLE V
GIT ORDER OF RULE AND RESULT PER SPIKE. GIT SHOWS THE RULE COMMITTED BEFORE THE RESULT FOR 11 SPIKES AND CANNOT SHOW IT FOR TEN; LEARN_DEMO WAS NOT PRE-SPECIFIED (SPIKE04'S RULE WAS AMENDED AFTER RESULTS; DISCLOSED).

Spike	Rule and note	Order
01, 02, 03a	Cards v1/v2, same snapshot commit as results; W1/W2 (torque-cap and actuator-delay) strengths set after a teacher-only look at TEST (spike02)	UNPROVABLE
03b, 05, 06, 07, 09b, 10b	Cards v2–v7.1 committed 1–4 h before results. Deviations: PPO recipe pre-lesson (03b); retroactive log entry (05); checkpoint selection added after round 1 (06); PPO not fixed before TEST (07); plant step changed after CAL tuning and the dose curve (success across actuator-noise levels) run after locked TEST-B (10b)	YES
04	H7 written in the result commit and amended after seeing the delay break the old C1	UNPROVABLE, amended
11a, 13b	Rule in a task prompt or README of the result commit	UNPROVABLE
12a, 13a, 14a	Headline rule in the decision log earlier; details in the result commit. 13a: gate bias fell back to 6 Nm and the gate was judged on n=500 instead of 200	YES for headline
15a (TEST-C)	Cards v8 and v8.1 committed on their own about 2 h before the run; v8.1 re-trained L-dec4, predictions identical to the stored ones	YES
15b, 15c, 15d	Rules in README section 0 only; X1 (15b; the S6 PPO recipe re-run on the weaker T-nom base) and the 9-network extension (15c) added after results and labelled post hoc	UNPROVABLE
15e (TEST-D)	Card v9 committed on its own 1 h 22 min before the run; the code was uncommitted at run time, and the gated step was finished by the coordinating AI agent with unchanged code	YES (card)
16a	Rule in README section 0, same commit as results; code uncommitted at run start	UNPROVABLE
learn_demo	Not pre-specified; hyper-parameters chosen after one TEST look; stale, superseded by S3 re-run	not pre-specified

The v9 card is internally inconsistent for H16b. The card's H16b rule is "$B-$C-ens, 95% CI upper end below +10 pp". Its Holm step uses a one-sided bootstrap p for H_0: difference ≥ 10, which corresponds to the 90% CI. On TEST-D the 95% upper end is 10.6 (rule fails), the 90% CI is [1.4, 9.8], and the one-sided p is 0.0432, which would pass at $\alpha = 0.05$ alone. We treat the rule text as binding, so H16b is not supported, and never write that the advantage is below 10 pp. The card's pre-written sentence for this outcome, applied on Holm-surviving verdicts, reads that the learned advantage may be ≥ 10 pp and that the paper rewrites K2 accordingly; Section V-A does so.

The classical upgrade was built after the learned result was seen. The classical ensemble C-ens was built *after* the learned ensemble B had beaten R0 on HOLD (a first commit at 18:07 on the day of the study). It was frozen in a second commit at 20:31, and its selection was written to a file before HOLD and new-seed collection. The v9 card was written at 20:32, after C-ens was frozen and before TEST-D. B$-$C-ens is therefore a pre-specified locked contrast, but the classical comparator was built with the learned result in view. The rule was developed first for the learned side and then given to the classical side. C-ens was chosen on CAL among 20 ensemble variants (B among 22) and uses the generative parameter distribution as a prior (a disclosed, non-neutral choice). No Laplace-width sensitivity run was made. The multi-start classical family was degenerate (439 of 500 HOLD episodes without a distinct second solution). On the pre-locked sets the contrast was B$-$C-ens +7.0 pp [2.6, 11.4] (HOLD) and +4.0 pp [-3.0, 11.0] (new seeds), verdict UNCERTAIN by the README rule.

The access log has 111 lines. Of these, 47 come from the demo-student script and 56 from one evaluation run on MJX (the GPU-accelerated JAX version of MuJoCo). There is one line each for juggling spikes 05, 06, 07 (05 and 06 retroactively), whip spike 09b, TEST-C and TEST-D, and two for spike 10b (TEST-B and TEST). The log is written only by the shared evaluation function (`evaluate`). The TEST evaluations of spikes 01, 02, 03a, 03b and 04 ran outside it; spikes 15b–15d and 16a added no lines because guards block the locked sets. TEST (seeds 0–49) was reused across several spikes, on the same task for juggling (05, 06, 07).

The post hoc TOST summary classifies the rows as follows. Equivalent within ± 10 (whole 90% CI inside): S2 disturbed, S3 (all five students), S4 restitution (pilot), S5 oracle-PPO (legacy: run with the default exploration scale that the gate later showed to be unlearnable; not re-run), S7 L-est-full, L-est-eff, PPO (13a) and the out-of-distribution (OOD) variants. Within ± 5 as well: S2 disturbed, S3 BC, MIP and flow, S5 oracle-PPO, S7 L-est-full and PPO. Not decidable: S1 (all four cells), S6 oracle-PPO (legacy), S8 best D-canon student. Learned clearly worse (90% CI below -10): S2 clean, S4 mass and sensing (pilot), S5 PPO (-23.8) and SAC, S6 PPO (-17.6) and L-est, S8 D-multi students. Learned clearly better beyond ± 10: none.

Limitations in full

1) **RL did not learn in the settings that matter most.** On realistic whip, 11 PPO and 2 SAC configurations tuned on CAL, three seeds of 3M steps and a 12M-step run all stayed within -3 to +2 pp of initialisation. In idealised whip all six PPO runs were flagged not learned. In juggling the residual stayed at 0.15–0.18 Nm of a 12 Nm cap and 4 of 6 runs chose the first checkpoint. The gate passed marginally, only after raising the exploration scale, among 8 gate runs. The S5 and S6 re-runs degrade the base by 23.8 and 17.6 pp, but each gate is a single-seed shot and the S5 gate is easy. The S6 budget is 3.2× classical, the recipe was not swept on the real condition, and the gate failed for residual PPO whose critic also sees privileged state (asymmetric critic). The null is "not learned under about 3–12M steps, one recipe per setting and about 13 tuned configurations on whip".
2) **HOLD reuse.** HOLD was used to choose the strongest classical baseline in spikes 09b and 10b (on 300 of the 500 seeds) and then as the main evaluation set in spikes 13a, 13b and 14a. R0 is 69.2% on HOLD against 65.6, 65.6 and 66.4% on TEST-B, TEST-C and TEST-D. The multimodal-teacher result, the group split (which parameter group's error costs most), the fragility sweep and the 9-network extension have no locked-set confirmation.
3) **Realistic conditions are our own choice.** The friction value is an estimate.
4) **One simulator.** No second engine, no hardware.
5) **Concentration on whip.** Five of the eight settings are tracking or juggling, where headroom is small or absent.
6) **Unequal tuning knobs.** The classical side tuned 5–13 parameters with 750–9,050 episodes and received the generative distribution as bounds and priors; the learned side used 10^4–10^5 episodes, simulator labels and true-plant oracle plans. In the estimator duel the classical side tried only three strengthened variants.
7) **Forking paths.** W1/W2 strengths were set after seeing TEST (spike02), and hyper-parameters were chosen after one TEST look (learn_demo). The RL recipe was repaired after round 1 (spike06), and PPO was not fixed before TEST (spike07). The plant step was changed after CAL tuning and the dose curve run after the locked TEST-B (spike10b). Spikes 13b and 14a contain post hoc analyses. There is no correction across spikes, so positive exceptions are exploratory.
8) **Pipeline noise.** Re-running identical estimator models with float-rounding changes moved HOLD success by up to 3.6 pp per model, comparable to several reported differences.
9) **Power and equivalence.** Most pre-specified tests had CI half-widths of 4–9 pp (TEST $n{=}50$ comparisons up to about 15 pp). "No side wins at the 10 pp bar" is not an equivalence test. Differences of +1 to +5 pp (for example the three-model ensemble, +4.8 pp [-0.8, 10.4]) cannot be excluded.
10) **Fairness of the robust-plan-selection duel.** See the C-ens paragraph above; the learned side used 13,120 training episode-equivalents with simulator labels and true-plant oracle plans, and both sides are frozen by the v9 card.
11) **Pre-specified versus post hoc.** Besides the earlier spikes marked YES in Table V, only cards v8, v8.1 and v9 were committed on their own before their runs. The rules of spikes 15b, 15c and 15d are README-only. The 9-network extension (B9, a learned ensemble of nine networks), the reverse-order ladder, S6-X1 (S6 PPO on the weak T-nom base) and L-ens/C-MAP are post hoc or descriptive.
12) **Numerical warnings.** The check of the 125,555 warnings (4,621 on HOLD) was a re-run on 100 HOLD episodes; the full HOLD and TEST-D check was not repeated. No executed episode record contained a non-finite outcome.
13) **Order of the classical upgrade.** See above.

APPENDIX B
BUDGETS AND THE RL GATE

This section gives the budget of every spike and every RL gate behind the statements of Section III. The learned side exceeded the cap in 4 of the 8 spikes. It used 2.3× in the juggling PPO run, about 7× in the whip PPO sweep, 9–17× in the estimator duel and 3.2× in the idealised-whip re-run. In the other direction the classical tuning used about 7.7× the simulation steps of one RL policy in the first tracking study. Table VII lists every RL gate, which is why every RL null reads "not learned under this recipe".

The residual PPO recipe is as follows. The residual policy has two tanh layers of 256 units and a zero-initialised output, so the learner starts exactly at its base controller. Its input includes lagged arm positions and velocities, and it is trained for 2.5M to 3M steps (12M in one probe) with learning rate 10^{-4}. Seven equally spaced checkpoints are evaluated on CAL and the best is chosen, with initialisation excluded; the learned verdict then uses disjoint seeds. The exploration log-std was the one parameter we found to matter most (Section III).

TABLE VI

THE LEARNED SIDE EXCEEDED THE 2× CAP IN 4 OF THE 8 SPIKES, UP TO 9–17× IN THE ESTIMATOR DUEL. BUDGET BY SPIKE (EPISODES, STEPS, WALL-CLOCK WHERE REPORTED). COUNTING CONVENTIONS DIFFER BETWEEN STEPS, EPISODES AND PROBE-EQUIVALENTS; THE SPIKE09B CLASSICAL DESIGN COST (ABOUT 1,300 EPISODES) IS AN ESTIMATE.

Spike	Classical side / learned side	Ratio
03a (tracking)	classical tuning 6.4M–9.0M steps; RL 2M steps per policy	classical about 7.7× (C1+C2, one weakness)
06 (juggling)	classical 118.2M steps; RL 121.0M	1.02×
07 (juggling)	PPO and oracle about 144M steps (107.6M without out-of-memory reruns); SAC 27M	2.3× (1.7×)
10b (whip)	classical 11,300 episodes (2× cap 22,600); learned methods each inside the cap	within cap
13a (whip RL)	about 160k episodes vs 22.6k classical	about 7×
14a (estimator duel)	learned about 13,120 episode-equivalents vs classical about 1,500	9–17×
15b (S6 re-run)	33k episodes vs 10,350 classical	3.2×
16a (catch / toss / Push-T)	classical tuning 16,200 / 10,200 / 2,100 episodes; PPO 16,227 / 10,222 / 2,114	about 1×

TABLE VII

GATES PASSED ONLY MARGINALLY OR AS SINGLE-SEED SHOTS, AND THE DEFAULT EXPLORATION SCALE FAILED. ALL RL GATES AND CHECKPOINT DECISIONS (SINGLE SEED OR BEST-OF-N FLAGGED). DIFFERENCES ARE PAIRED LEARNED MINUS INITIALISATION (GATES) OR MINUS BASE (REAL CONDITIONS), IN PP.

Gate or run	What is single-seed or best-of	Result
13a gate, log-std -3.5 (default)	gate set n=200	-3.0 [-8.5, +2.5]
13a gate, log-std -2.0	HOLD n=500	+7.8 [3.0, 12.8]
13a gate, log-std -1.5, 3M steps	best of 8 runs, CAL-selected	+10.2 [4.8, 15.6]
13a gate, SAC	single seed	+1.8 [-3.4, 7.0]
13a real condition	11 PPO + 2 SAC configs, one seed each; confirmation 3 seeds	HOLD -2.1 [-5.2, 1.1]; NEW -1.3 [-6.5, 3.8]; 12M steps -0.6 [-4.6, 3.4]
15b S6 gate (bias 6 Nm)	one seed, one shot	+15.4 [10.2, 20.6]
15b S5 gate (bias 1 Nm)	one seed, one shot; easy gate	+63.2 [58.8, 67.4]
15b S6-X1 (weak base, post hoc)	CAL picks looked like +5.0, +11.5, +5.0 and vanished on disjoint seeds	HOLD -5.0 [-8.7, -1.5]; fresh -3.3 [-8.7, +2.0]
15c asymmetric critic	two seeds, one extra attempt allowed; failed	+7.2 [2.0, 12.4]; +1.2 [-4.0, 6.4]

APPENDIX C
REPLICATION ON REUSED AND FRESH SEEDS, AND SENSITIVITY

This section shows that the parameter step replicates on other seed sets, how sensitive the contrast is to noise, and which checks were run on the TEST-D contrast. The perturbations used across tasks are as follows. Tracking uses payload error, torque cap, delay, Coulomb friction, sensor noise and torque pulses; ball tasks use drag, mass, release delay and observation noise or delay; whip uses chain mass, damping and length. S5 (juggling) draws restitution, ball mass and sensing delay per episode from a wide distribution that the controller does not know.

Controls for the TEST-D contrast were run before and on the locked set. Before the TEST-D run, a reproduction check on HOLD gave B 86.6% and C-ens 79.6% with 100% per-episode agreement with the earlier pipeline. On TEST-D the base candidate of the classical-ensemble run reproduced the independent R0 episode outcome in 100% of episodes, and C-ens changed the R0 base pick in 80% of episodes. The best of the executed candidates would have succeeded in 99.8% of episodes for both runs, so the gap lies in choosing among candidates rather than in the candidate pool. The method choices were frozen from CAL picks among 22 variants (B) and 20 variants (C-ens). Their CAL scores (91.5% and 81.0%) are optimistic against the HOLD values (86.6% and 79.6%), a winner's-curse effect (selection bias from picking the best of many variants) that the locked set is meant to remove.

TABLE VIII

THE PARAMETER STEP R1$-$R0 REPLICATES ON HOLD AND NEW, BUT THE SMALLER RUNGS DO NOT. HEADROOM LADDER ON HOLD (n=500) AND NEW (n=200): SUCCESS % [95% CI]. R0 IS THE FITTED-PARAMETER PIPELINE, R1 ADDS TRUE PARAMETERS θ, R2 THE TRUE CHAIN STATE, R3 AND R4 ORACLE PLANNERS, R5 THE CANONICAL ORACLE.

Rung	HOLD	NEW
R0 fitted	69.2 [65.2, 73.2]	69.0 [62.5, 75.5]
R1 true θ	86.0 [83.0, 89.0]	82.0 [76.5, 87.0]
R2 + chain state	89.0 [86.2, 91.6]	89.5 [85.0, 93.5]
R3 oracle at rest, waits 0.6 s	88.2 [85.4, 91.0]	85.5 [80.5, 90.5]
R4 oracle	90.8 [88.2, 93.2]	87.5 [82.5, 92.0]
R5 canonical oracle	92.0 [89.6, 94.2]	92.5 [88.5, 96.0]
L-est-full (3 nets)	64.7 [62.1, 67.3]	66.7 [62.5, 70.8]
R1$-$R0	+16.8 [12.0, 21.6]	+13.0 [4.5, 21.5]
R2$-$R1	+3.0 [-1.0, 7.0]	+7.5 [1.0, 14.0]
R4$-$R2	+1.8 [-1.6, 5.4]	-2.0 [-8.0, 4.0]

On TEST-B the total headroom (T-oracle minus the strongest classical baseline) is +23.6 pp [18.8, 28.4]. The R2$-$R1 step is significant on NEW but not on HOLD, and the R4$-$R2 sign flips, so these blocks are not replicated as real. The earlier suggestion that the oracle gap was mostly probe time and chain state was a winner's-curse artefact and is superseded. A post hoc group split on HOLD (wrong damping 18.4 pp, per-link masses 16.2, length 7.4, friction 4.6 when only that group is wrong) is non-additive and not used for claims.

Under sensor noise the ordering is not distinguishable (T-adapt3-full -10.0 pp [-19.5, -1.0] at $\times$2, L-est-full +0.5 [-8.5, 9.5]). The paired difference of the two drops at actuator noise $\times$4 is -16.5 pp [-28.5, -5.0].

The dose curve and out-of-distribution (OOD) runs probe the estimators under different noise levels. On HOLD (n=200 per level; run after the locked TEST-B), success of best classical / L-est-full / L-est-eff (no per-link mass labels) / T-oracle is 71.0 / 64.3 / 67.5 / 92.0 at $\times$0.5, 69.5 / 61.2 / 61.2 / 89.5 at $\times$1 and 53.0 / 60.3 / 56.8 / 91.0 at $\times$2. The paired L-est-full minus classical is -6.7 [-13.5, 0.2], -8.3 [-16.2, -0.3] and +7.3 [-0.0, 14.7]: a single point at the strongest condition. For estimators trained or tuned at $\times$0.5 and $\times$2 noise and evaluated at $\times$1 (the OOD variants), L-est-OOD minus T-adapt3-OOD is +5.9 pp [1.1, 10.8] on TEST-B, but the classical OOD variant was tuned with fewer episodes (350). Classical was not re-tuned at $\times$2.

On the reused sets the estimator duel is not decisive. L-dec4$-$R0 is +1.1 pp [-3.3, 5.7] on HOLD and +0.5 pp [-6.7, 7.8] on NEW (recovered 0.07 and 0.04). The post hoc three-model ensemble gives +4.8 pp [-0.8, 10.4] and +3.5 pp [-5.0, 12.0]. Adding independent Gaussian noise of the learned estimator's size to the true parameters gives 65.0% (noise $\times$1) and 74.0% ($\times$0.5) against 86.0% for the true

TABLE IX

AT ×4 ACTUATOR NOISE THE CLASSICAL T-ADAPT3-FULL DROPS WHILE THE LEARNED ESTIMATOR L-EST-FULL DOES NOT (T-ORACLE KNOWS THE TRUE PARAMETERS). ACTUATOR-NOISE SWEEP, HOLD SEEDS 1100–1299 (n=200), PAIRED DROP RELATIVE TO THE ×1 NOISE LEVEL (PP [95% CI]). METHODS FROZEN, NOT RE-TUNED PER LEVEL.

Method	×2	×4	×8
T-adapt3-full	+0.5 [−7.5, 8.5]	−12.5 [−21.5, −3.5]	−14.5 [−24.0, −5.0]
L-est-full	+7.0 [−1.5, 15.5]	+4.0 [−5.0, 13.0]	−0.5 [−10.0, 9.0]
T-oracle	+0.5 [−3.0, 4.0]	−3.5 [−7.0, 0.0]	−1.0 [−4.0, 1.5]

parameters, a post hoc diagnostic that the planner needs errors well below the learned error. Classical strengthening (MAP prior, multi-start, K-step resets that re-initialise the model state every K steps in the fit) did not improve the pipeline.

APPENDIX D
MULTIMODAL TEACHER (K4) AND PRIVILEGED DISTILLATION

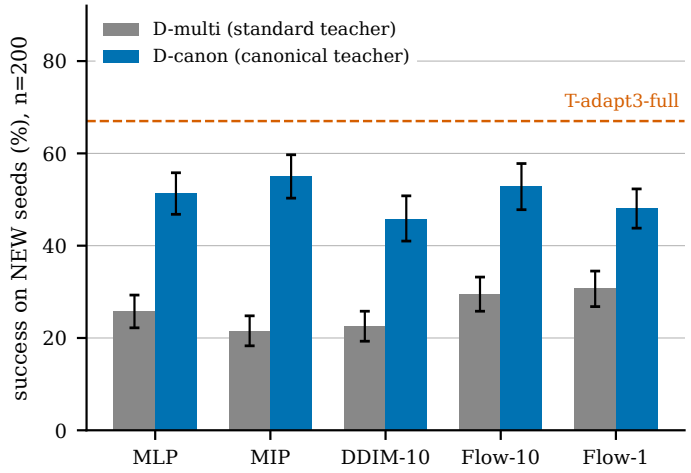


Fig. 6. Canonical-teacher data raises the success of every student over multimodal-teacher data. Five students trained on data from the standard multimodal teacher (D-multi) or the canonical teacher (D-canon), NEW seeds (n=200), mean over three training seeds, 95% CI. The dashed line is T-adapt3-full on the same seeds.

Canonicalising the teacher raised each student by: MLP 25.7 pp [19.8, 31.5], MIP 33.5 pp [28.0, 38.8], DDIM-10 23.3 pp [17.7, 29.0], flow-10 23.3 pp [17.3, 29.2], flow-1 17.5 pp [11.7, 23.5]. On D-multi, the differences from the MLP are flow-1 +5.0 [−0.3, 10.2], flow-10 +3.8 [−1.0, 8.7], diffusion −3.2 [−7.7, 1.3] and MIP −4.2 [−8.8, 0.5]. The canonical oracle teacher reaches 96.0% [93.0, 98.5] and T-adapt3-full 67.0% [60.5, 73.5]. The best D-canon student (MIP, 55.0%) is −12.0 pp [−19.8, −4.0] below T-adapt3-full (best student chosen on the same final episodes, which is optimistic for the learned side), and all D-multi students are 36.3–45.5 pp below. In the earlier privileged-teacher study (NEW n=200), the canonical oracle reached 92.5%, T-adapt3-full 60.0% and the students 58.0–59.5%. Seed-to-seed spread was 5–15 pp. The data are NEW only, behaviour cloning only (no DAgger) and one data scale (400 scenarios).

APPENDIX E
BREADTH: OTHER TASKS AND CLASSICAL PILOTS

Residual PPO on catch, toss and Push-T is a breadth check. Table X gives the mini-comparisons (rules in a spike README, order not provable from git; breadth only). Catch and Push-T ties are at the ceiling, where a +10 pp win is arithmetically impossible, and toss is uninterpretable because its gate failed four times (best +1.3 pp). Local and remote runs of 30 episodes had identical outcomes, lengths and joint trajectories; the only difference was 7.8e-16 in a Push-T summary statistic.

TABLE X

RESIDUAL PPO TIES THE CLASSICAL CONTROLLER ON CATCH AND PUSH-T AT THE CEILING, AND TOSS HAS NO VERDICT. RESIDUAL PPO ON THE CAL-TUNED STRONGEST CLASSICAL, LEARNED MINUS CLASSICAL (PP [95% CI]).

Task	Gate (pp)	Classical HOLD / NEW	HOLD (n=500)	NEW (n=200)	Verdict
Catch	+54.0 [48.3, 59.7]	0.992 / 1.000	−0.5 [−1.1, 0.1]	−0.7 [−1.8, 0.0]	tie (ceiling)
Push-T	+61.3 (1 seed)	0.990 / 0.995	+0.4 [−0.4, 1.2]	−1.5 [−3.5, 0.0]	tie (ceiling)
Toss	failed 4 times	0.680 / 0.685	+0.6 [−1.2, 2.4]	−1.0 [−3.0, 1.0]	no verdict

The classical pilots (demo seeds) have no learned comparison. On the tracking ladder ($n{=}5$) the RMSE is 0.0074 (PID), 0.0061 (CTC+LQR), 0.0056 (iLQR), 0.0056 (iLQR-MPC) and 0.0073 (MPPI) rad. Catching succeeds 19 of 20 without error but 6 of 20 with 10 ms ball-position delay. Whip with a chain 10% shorter succeeds 12 of 20. Push-T succeeds 19 of 20 with 20 ms sensor delay and 0 of 20 with 30 ms. These pilots motivated choosing whip and are not paper claims. A PPO trained on MJX reproduced the CPU PPO within CI with 4.7e6 steps/s on 4096 environments; this engineering result is not used for K1–K4.