Counterfactual simulation on a budget: why whether judgments collapse onto how judgments in crowded scenes

Jadon Zhu jadonjzhu@gmail.com https://github.com/JadonJZhu/budgeted-sim

The question

Lu, Bechlivanidis and Gerstenberg (CogSci 2026) found that the CSM's whether predictions drift away from people as billiard scenes get crowded, while its how predictions stay accurate. In crowded scenes people's whether and how ratings become nearly the same, even in videos built so that the true answers differ. The paper reads this as people giving up costly simulation for a contact-tracing shortcut, but does not model the shortcut. Adding noise does not explain it: noise pulls predictions toward 50, and people are confidently wrong in the other direction. In the 9-ball whether-only video (Figure 1), people's mean flipped whether rating is 20 while the CSM says 96, and the CSM stays between 95 and 100 at every noise level from 0 to 45 degrees.

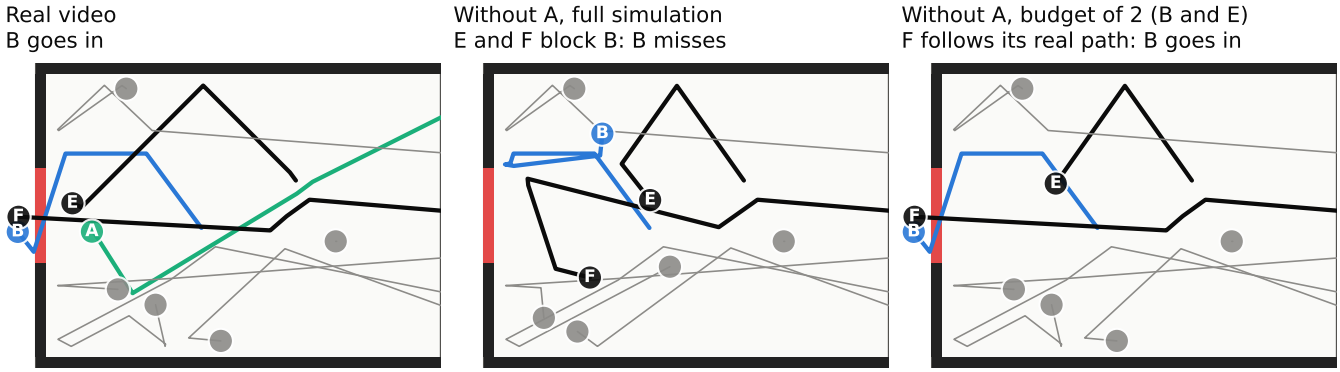


Figure 1: The 9-ball whether-only video. A sends E and F away and never touches B. Without A, a full simulation sends E and F into B and B misses. Re-simulating only B and E, with F on the path A really sent it on, leaves B's way clear, which matches people's answer.

The budget model

We propose that when people imagine the scene without A, they re-simulate only k balls, B first, and let every other ball move along the path it really took. Replayed balls still push the balls being re-simulated, but are never pushed off their own paths. With $k = 1$, B's imagined path can change only if A reached B through a chain of contacts, so the whether answer becomes the how answer without any separate shortcut. With every ball in the budget, the model is the CSM. This fits Balaban and Ullman (2025), who found that people can update only about one moving object at a time in imagination. Lu et al. cite that result as a reason simulation should fail; the budget makes it part of the model. The other balls in the budget are chosen by a rule that uses only what the video shows. We tested three: the balls A touched, the balls that touched B, and the balls that came closest to B's path.

Results on the existing data

We wrote our own simulator from the settings in the paper and code (the repository has no licence, so we did not reuse its code). It matches the original's noise-free whether outcome and how answer in all 20 videos. At $\theta = 1.9$ it correlates with mean whether ratings at $r = .670$ over 20 seeds (range .664 to .679); the original code run the same way gives .674 (range .667 to .682).

Every model maps its prediction to the rating scale with a fitted line and is scored on each video after fitting the other 19 (Table 1). The budget model fits best, with $k = 2$ filled by B and the first ball A hit; that setting won in all 20 folds, against budgets of 1 or 3 and against the full CSM. Its error does not grow with the number of balls (Figure 2; slope -0.8 points per ball, 95% interval -2.2 to 0.6).

Table 1: Leave-one-video-out fit to mean flipped whether ratings (RMSE in rating points).

Model	RMSE	r
Budget, $k = 2$ (ours)	18.2	.80
Crowding noise (θ grows with balls)	22.5	.67
How only	24.3	.59
Full CSM	25.1	.55

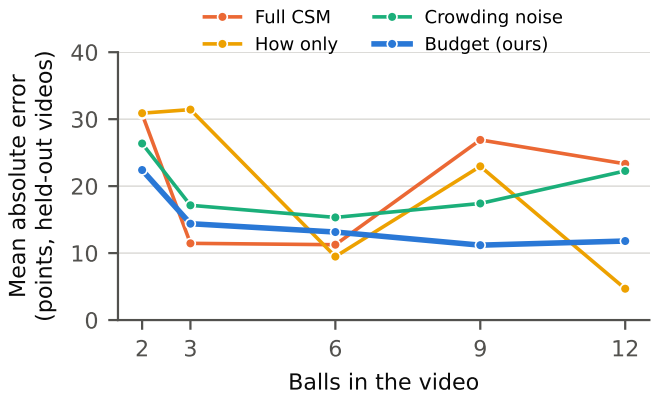


Figure 2: Error on held-out videos by number of balls.

The advantage is not decisive. Resampling participants 1,000 times, the budget model beats the CSM in 96% of resamples (95% interval of the RMSE gap -10.8 to $+0.6$), crowding noise in 81% and how only in 87%. We fixed a 95% interval excluding zero as the bar before fitting, and the result does not clear it: with 20 videos, the existing data cannot separate these models. Fitting each participant separately, the budget model fits 34% of people best (how only 28%, crowding noise 28%, CSM 10%), with best budgets of 1 ball for 13 people, 2 for 25 and 3 for 12. For cause ratings, the authors' proposed certainty-weighted combination of whether and how predicts better with the budget model's whether answers than with the CSM's (held-out RMSE 16.7 vs. 18.3).

A test that separates the models

We generated 500,000 random scenes in the style of the originals (3 to 9 balls), kept the 37,167 that pass the original videos' constraints (B goes in, 7 to 13 seconds, every collision on screen, no two collisions close in time and place), and selected test scenes by fixed rules, so none was picked by hand. A scene qualifies when two models differ by at least 40 rating points at *every* setting the existing data cannot rule out (budgets of 1 to 3 balls, and every noise level whose fit is inside the 95% bootstrap interval of the best). 40 points is over three times the widest 95% measurement range of a video's mean rating in the original data (± 12).

Kind of scene	n	Budget	Full CSM	Crowding	How only
Clear the way: A removes a ball that would have blocked B	8	25	73	60	50
Budget vs. crowding noise	8	25	73	74	61
Hit but no difference: A hits B, B would have gone in anyway	8	25	16	21	66
Budget of 1 vs. 2, and 2 vs. 3 (half each direction)	8	25 or 83	45	52	66
Original videos as anchors	4	54	62	41	45

Mean predicted rating (flipped whether, 0 to 100) of each model at its best fit to the existing data.

In simulated studies of 50 participants (per-person spread taken from the original ratings), the generating model won all 200 studies and its budget size was recovered in all 200, for every model and for $k = 1$, 2 and 3. Within each kind of scene, no crude cue (A's closest approach to B, number of collisions or balls, A passing near B's path) correlates with the size of the model disagreement above $|r| = .3$. Across kinds, A's closest approach to B does track the budget-vs.-CSM gap ($r = -.66$), so we suggest adding a proximity rule as one more rival in the analysis. The 36 scenes (about 27 minutes), rendered videos, every model's prediction at every setting and a pre-registration-style plan with these pass and fail lines are in the repository. We would be glad to share anything else, or to switch to the lab's simulator if its repository gains a licence.

References

Balaban, H., & Ullman, T. D. (2025). The capacity limits of moving objects in the imagination. *Nature Communications*.

Gerstenberg, T., Goodman, N. D., Lagnado, D. A., & Tenenbaum, J. B. (2021). A counterfactual simulation model of causal judgments for physical events. *Psychological Review*.

Lu, X., Bechlivanidis, C., & Gerstenberg, T. (2026). Causal judgments in complex situations. *CogSci 2026*. Materials: `https://github.com/cicl-stanford/complex_causation_cogsci2026`.