

# WEB SYSTEMS DESIGN – PROJECT 5



**VISTULA**  
UNIVERSITY

**Name:** Amjad Massaoud

**Student ID:** 78706

**Course:** Web Systems Design

**Semester:** 6th semester 57DPH

**Date:** 30.08.2026

**GitHub:** <https://github.com/Jadtales/uni-projects>

|                                                       |    |
|-------------------------------------------------------|----|
| Step 1 - Verify system baseline .....                 | 3  |
| Step 2 - Introduce API versioning .....               | 3  |
| Step 3 - Standardize HTTP status codes .....          | 4  |
| Step 4 – Introduce consistent error handling .....    | 5  |
| Step 5 — Handle validation errors properly .....      | 5  |
| Step 6 — Handle missing resources .....               | 6  |
| Step 7 — Ensure cache still works after changes ..... | 6  |
| Step 8 — Test full API flow .....                     | 6  |
| Step 9 — Update documentation .....                   | 9  |
| Step 10 — Commit changes .....                        | 10 |



HTTP status codes ..... 11

Validation errors ..... 12

Why consistency in API design matters ..... 12




## Step 1 - Verify system baseline

---

I verified that the Docker Compose environment was running correctly. The backend, database, Redis, and Nginx services were checked using `docker compose ps`. The health endpoint was also tested to confirm that the API was available.


```
jad@fedora-2:~/uni-project/project5/backend$ docker compose ps
```

| NAME                  | IMAGE               | SERVICE | STATUS                |
|-----------------------|---------------------|---------|-----------------------|
| wsd-project-backend-1 | wsd-project-backend | backend | Up 17 hours (healthy) |
| wsd-project-db-1      | postgres:16-alpine  | db      | Up 17 hours (healthy) |
| wsd-project-redis-1   | redis:7-alpine      | redis   | Up 17 hours (healthy) |
| wsd-project-web-1     | wsd-project-web     | web     | Up 17 hours (healthy) |



```
curl http://127.0.0.1:8080/api/tasks
```

```
[ ]
```

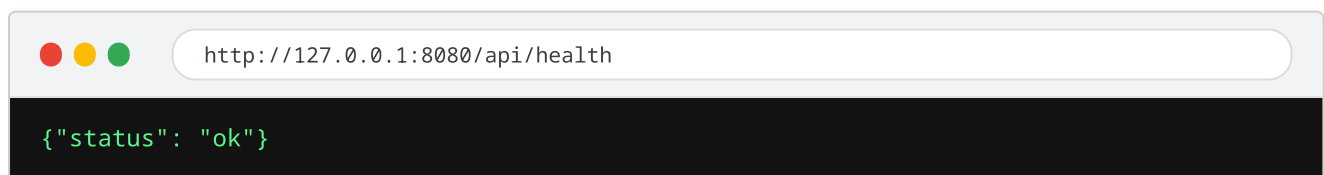

```
curl http://127.0.0.1:8080/api/health
```

```
{"status": "ok"}
```

## Step 2 - Introduce API versioning

---

In this step, I updated the Laravel API routes by adding a versioned route prefix. The task API is now available under **/api/78706/v1/tasks**. This structure makes the API easier to maintain and allows future versions, such as /v2, to be added without breaking existing clients.

```
jad@fedora-2:~/uni-project/project5/backend$ php artisan route:list --path=api
GET|HEAD  api/78706/v1/tasks ..... Api\TaskController@index
POST      api/78706/v1/tasks ..... Api\TaskController@store
GET|HEAD  api/78706/v1/tasks/{id} ..... Api\TaskController@show
PUT       api/78706/v1/tasks/{id} ..... Api\TaskController@update
DELETE    api/78706/v1/tasks/{id} ..... Api\TaskController@destroy
GET|HEAD  api/health .....

Showing [6] routes
```

```
jad@fedora-2:~/uni-project/project5$ curl http://127.0.0.1:8080/api/78706/v1/tasks
[ ]
```

## Step 3 - Standardize HTTP status codes

---

The TaskController was updated to return standard HTTP status codes. GET requests return 200 OK, POST returns 201 Created, PUT returns 200 OK, and DELETE returns 204 No Content.

### TaskController.php

```
1  public function index(): JsonResponse
2  {
3      $tasks = Cache::remember('tasks.index', 60, function () {
4          return Task::all();
5      });
6
7      return response()->json($tasks, 200);
8  }
9
10 public function store(Request $request): JsonResponse
11 {
12     $validated = $request->validate([
13         'title' => 'required|string|max:255',
14         'description' => 'nullable|string',
15         'status' => 'nullable|string',
16         'album_number' => 'required|string',
17     ]);
18
19     $task = Task::create($validated);
20     Cache::forget('tasks.index');
21
22     return response()->json($task, 201);
23 }
```

## Step 4 – Introduce consistent error handling

---

I created a reusable API error helper to provide consistent JSON error responses. The helper returns the status code, error message, and request path in a structured format.

ApiError.php

backend > app > Support > ApiError.php

```
1  <?php
2
3  namespace App\Support;
4
5  use Illuminate\Http\Request;
6  use Illuminate\Http\JsonResponse;
7
8  class ApiError
9  {
10     public static function make(Request $request, int $status, string $message): JsonResponse
11     {
12         return response()->json([
13             'error' => [
14                 'status' => $status,
15                 'message' => $message,
16                 'path' => $request->getRequestUri(),
17             ],
18         ], $status);
19     }
20 }
```

```
jad@fedora-2:~/uni-project/project5/backend$ php -l app/Support/ApiError.php
No syntax errors detected in app/Support/ApiError.php
```

## Step 5 — Handle validation errors properly

---

Laravel validation was tested by sending an empty JSON body to the POST endpoint. Since required fields were missing, the API returned a 422 validation error with a structured JSON response.

```
jad@fedora-2:~/uni-project/project5$ curl -i -X POST
http://127.0.0.1:8080/api/78706/v1/tasks -H "Content-Type: application/json" -H "Accept:
application/json" -d '{}'
```

HTTP/1.1 422 Unprocessable Content  
Server: nginx/1.27.5  
Date: Sun, 30 Aug 2026 14:35:36 GMT  
Content-Type: application/json

```
{"message":"The title field is required. (and 1 more error)","errors":{"title":["The title
field is required."],"album_number":["The album_number field is required."]}}
```

## Step 6 — Handle missing resources

---

Missing resources were handled using `Task::find($id)`. When a task does not exist, the API returns a 404 Not Found response with the standardized error format.

```
jad@fedora-2:~/uni-project/project5$ curl -i -H "Accept: application/json"
http://127.0.0.1:8080/api/78706/v1/tasks/99999
HTTP/1.1 404 Not Found
Server: nginx/1.27.5
Date: Sun, 30 Aug 2026 15:05:12 GMT
Content-Type: application/json

{"error":{"status":404,"message":"Task not found","path":"/api/78706/v1/tasks/99999"}}
```

## Step 7 — Ensure cache still works after changes

---

Redis caching was tested after introducing API versioning and standardized responses. The task list endpoint repopulates the cache after a GET request, and write operations invalidate the cache.

```
jad@fedora-2:~/uni-project/project5$ docker compose exec redis redis-cli -n 1 FLUSHDB
OK
jad@fedora-2:~/uni-project/project5$ docker compose exec redis redis-cli -n 1 DBSIZE
(integer) 0
jad@fedora-2:~/uni-project/project5$ curl http://127.0.0.1:8080/api/78706/v1/tasks
[]
jad@fedora-2:~/uni-project/project5$ docker compose exec redis redis-cli -n 1 DBSIZE
(integer) 1
```

## Step 8 — Test full API flow

---

The full API flow was tested using GET, POST, PUT, and DELETE requests. All operations returned the expected status codes and JSON responses without crashes.

```

jad@fedora-2:~/uni-project/project5$ curl -i -X POST
http://127.0.0.1:8080/api/78706/v1/tasks -H "Content-Type: application/json" -d
'{"title":"Full flow test","description":"Step 8
test","status":"pending","album_number":"78706"}'
HTTP/1.1 201 Created
Content-Type: application/json

{"id":4,"title":"Full flow test","description":"Step 8
test","status":"pending","album_number":"78706","created_at":"2026-08-
30T16:39:14.000000Z","updated_at":"2026-08-30T16:39:14.000000Z"}

jad@fedora-2:~/uni-project/project5$ curl -i -X PUT
http://127.0.0.1:8080/api/78706/v1/tasks/4 -H "Content-Type: application/json" -d
'{"title":"Updated full flow test","status":"done"}'
HTTP/1.1 200 OK
Content-Type: application/json

{"id":4,"title":"Updated full flow test","description":"Step 8
test","status":"done","album_number":"78706","created_at":"2026-08-
30T16:39:14.000000Z","updated_at":"2026-08-30T16:39:20.000000Z"}

jad@fedora-2:~/uni-project/project5$ curl -i -X DELETE
http://127.0.0.1:8080/api/78706/v1/tasks/4
HTTP/1.1 204 No Content

```

## Postman Testing - DELETE Request

WSD Project / Versioned Tasks

DELETE

http://127.0.0.1:8080/api/78706/v1/tasks/5

Body • Raw

Status: 204 No Content • Time: 23 ms

<Empty response body>

## Postman Testing - PUT Request

WSD Project / Versioned Tasks

**PUT** http://127.0.0.1:8080/api/78706/v1/tasks/5

```
{
  "title": "Updated Postman full flow test",
  "description": "Updated Step 8 Postman test",
  "status": "done",
  "album_number": "78706"
}
```

Body • Pretty • JSON Status: 200 OK • Time: 29 ms

```
{
  "id": 5,
  "title": "Updated Postman full flow test",
  "description": "Updated Step 8 Postman test",
  "status": "done",
  "created_at": "2026-08-30T16:39:14.000000Z",
  "updated_at": "2026-08-30T16:42:48.000000Z"
}
```

## Postman Testing - POST Request

WSD Project / Versioned Tasks


**POST** http://127.0.0.1:8080/api/78706/v1/tasks

```
{
  "title": "Postman full flow test",
  "description": "Step 8 Postman test",
  "status": "pending",
  "album_number": "78706"
}
```

Body • Pretty • JSON Status: 201 Created • Time: 21 ms

```
{
  "id": 5,
  "title": "Postman full flow test",
  "description": "Step 8 Postman test",
  "status": "pending",
  "album_number": "78706",
  "updated_at": "2026-08-30T16:41:49.000000Z",
  "created_at": "2026-08-30T16:41:49.000000Z"
}
```

## Postman Testing - GET Versioned Tasks List

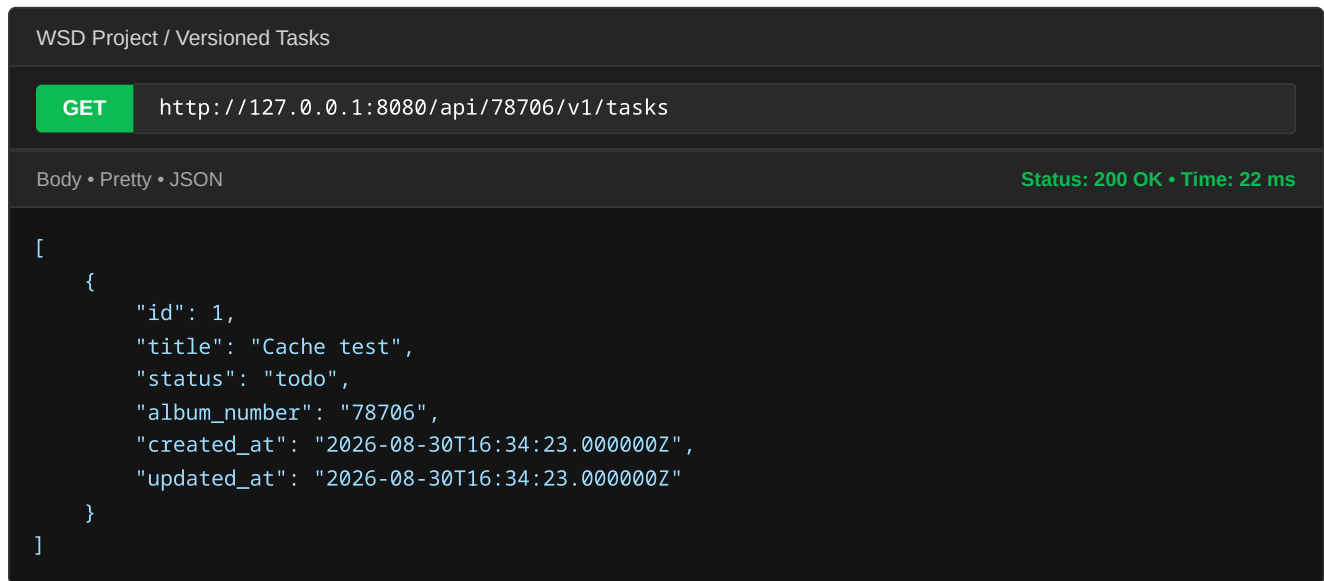

## Step 9 — Update documentation

---

The README file was updated to document the current API version, available endpoints, expected HTTP status codes, error responses, cache behavior, and full API flow test commands.

```
1  # Laboratory 5 API Documentation
2
3  ## API Version
4  Current version: `/api/78706/v1`
5
6  Base endpoint:
7  http://127.0.0.1:8080/api/78706/v1/tasks
8
9  Health endpoint:
10 http://127.0.0.1:8080/api/health
11
12 ## Status Codes
13 - `200 OK` - successful read or update operation
14 - `201 Created` - resource successfully created
15 - `204 No Content` - resource successfully deleted
16 - `404 Not Found` - requested resource does not exist
17 - `422 Unprocessable Content` - validation error
18
19
20
```

## Step 10 — Commit changes

---

After completing the laboratory tasks, I committed, and pushed to the GitHub repository.

```
jad@fedora-2:~/uni-project/project5$ git status
On branch main
Changes to be committed:
  modified: routes/api.php
  modified: app/Http/Controllers/Api/TaskController.php
  new file: app/Support/ApiError.php

jad@fedora-2:~/uni-project/project5$ git commit -m "Project 5: API versioning and
standardization"
[main 9c2ecba] Project 5: API versioning and standardization
3 files changed, 68 insertions(+), 6 deletions(-)

jad@fedora-2:~/uni-project/project5$ git push
To https://github.com/Jadtales/uni-projects.git
e6ae964..9c2ecba main -> main
```

## API versioning

---

API versioning means placing API routes under a versioned URL prefix, such as **/api/78706/v1**. This makes the API easier to maintain because future changes can be introduced in a new version without breaking existing applications that still depend on the old version. In this project, the task endpoints were moved under **/api/78706/v1/tasks**.

## HTTP status codes

---

HTTP status codes are used to clearly describe the result of each API request. In this laboratory, successful GET and PUT requests return **200 OK**, POST returns **201 Created**, DELETE returns **204 No Content**, missing resources return **404 Not Found**, and validation errors return **422 Unprocessable Content**. Using correct status codes makes the API easier to understand, debug, and integrate with frontend applications.

## Validation errors

---

Validation errors occur when the client sends incomplete or invalid data. In this project, fields such as title and album\_number are required when creating a task. If these fields are missing, Laravel returns **422 Unprocessable Content** together with a JSON response explaining which fields are invalid. This prevents invalid data from being saved to the database.

## Why consistency in API design matters

---

Consistency in API design is important because it makes the system predictable and easier to use. When all endpoints follow the same URL structure, response format, error format, and status code rules, frontend developers can integrate with the API more easily. It also improves debugging, maintenance, and future development because every response follows the same pattern.

## Project 5 – Git Repository & Version Control Verification

All project modules, backend controllers, models, database migrations, automated test suites, frontend components, and compiled assignment reports have been committed and synchronized with the remote GitHub repository:

<https://github.com/Jadtales/uni-projects> (branch master).

```
jad@fedora-2:~/uni-project$ git status
On branch master
Your branch is up to date with 'origin/master'.
nothing to commit, working tree clean

jad@fedora-2:~/uni-project$ git log -1 --oneline
96dbd38 (HEAD -> master, origin/master) - projects
```

