
Chapter1. Responsive Type

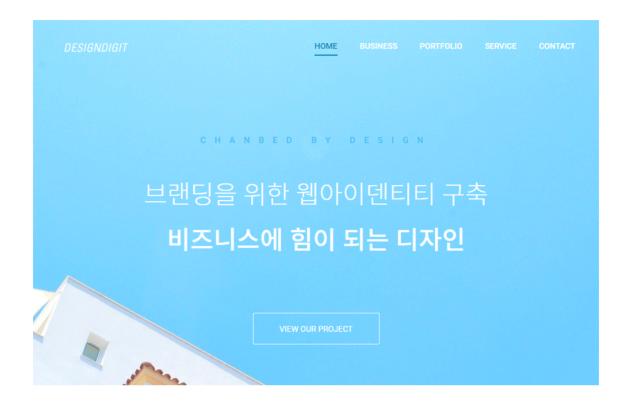

1) 반응형 탭 디자인

part2 responsive tab design/responsive_tab_design.html

```
HTML ::

<h1 class="title">project :: Tab Design</h1>
<div class="container">

<div class="example1">

<a href="" class="tab">

<span></span>

<span></span>

</a>

</div>
<div class="example2">

<a href="" class="tab">

<span></span>

</span>

</div>
<div class="example2">

<a href="" class="tab">

<span></span>

<span></span>

<span></span>

<span></span>
```

```
<span></span>
         </a>
    </div>
    <div class="example3">
         <a href="" class="tab">
             <span> </span>
             <span></span>
         </a>
    </div>
</div>
CSS ::
.example1 {
    margin-top: 35px;
.example1 .tab span {
    display: block;
    position: relative;
    left: 0;
    top: 0;
    margin-bottom: 5px;
    width: 23px;
    height: 2px;
    background-color: #555;
    transition: 0.3s;
}
.example1 .tab span:nth-child(2) {
    margin-left: 5px;
    width: 18px;
}
.example1 .tab span:nth-child(3) {
    margin-bottom: 0;
.example1 .tab.active span:nth-child(1) {
    left: 13px;
    top: 4px;
    width: 10px;
    transform: rotate(30deg);
.example1 .tab.active span:nth-child(3) {
    left: 13px;
```

```
top: -4px;
    width: 10px;
    transform: rotate(-30deg);
}
.example2 {
    margin-top: 135px;
.example2 .tab {
    display: block;
    position: relative;
    width: 30px;
    height: 23px;
.example2 .tab span {
    position: absolute;
    right: 0;
    top: 0;
    height: 2px;
    background-color: #555;
    transition: 0.3s;
.example2 .tab span:nth-child(1) {
    width: 21px;
}
.example2 .tab span:nth-child(2) {
    top: 10px;
    width: 21px;
.example2 .tab span:nth-child(3) {
    top: 20px;
    width: 30px;
}
.example2 .tab.active span:nth-child(1) {
    top: 10px;
    width: 30px;
    transform: rotate(45deg);
.example2 .tab.active span:nth-child(2) {
    display: none;
}
.example2 .tab.active span:nth-child(3) {
    top: 10px;
    width: 30px;
    transform: rotate(-45deg);
```

```
}
.example3 {
    margin-top: 135px;
}
.example3 .tab {
    display: block;
    position: relative;
    width: 29px;
    height: 12px;
}
.example3 .tab span {
    position: absolute;
    width: 100%;
    height: 3px;
    background-color: #262d3f;
    transition: 0.5s;
}
.example3 .tab span:nth-child(1) {
    left: 0;
    top: 0;
.example3 .tab span:nth-child(2) {
    left: 0;
    bottom: 0;
.example3 .tab.active span:nth-child(1) {
    top: 6px;
    background-color: #ccc;
    transform: translateY(-50%) rotate(45deg);
.example3 .tab.active span:nth-child(2) {
    bottom: 6px;
    background-color: #ccc;
    transform: translateY(50%) rotate(-45deg);
}
JavaScript ::
window.addEventListener("load", function(){
    var\ container = document.getElements By Class Name ("container") [0];
    var [example1, example2, example3]=container.children;
    // console.log(example1, example2, example3);
```

```
example1.firstElementChild.addEventListener("click", function(e){
        e.preventDefault();
        e.currentTarget.classList.toggle("active");
});
example2.firstElementChild.addEventListener("click", function(e){
        e.preventDefault();
        e.currentTarget.classList.toggle("active");
});
example3.firstElementChild.addEventListener("click", function(e){
        e.preventDefault();
        e.currentTarget.classList.toggle("active");
});
});
```