



## Welcome

db4o is the native Java, .NET and Mono open source object database.

This tutorial was written to get you started with db4o as quickly as possible. Before you start, please make sure that you have downloaded the latest db4o distribution from the [db4objects website](#).

## Join the db4o Community

Join the [db4o community](#) for help, tips and tricks.

Ask for help in the [db4o forums](#) at any time.

And take a look at additional resources on [the community website](#).

If you want to stay informed, subscribe to our [db4o blogs](#)

## Links

In order to access free developer resources you may want to register on [db4o developer website](#).

Feel free register to the forums <http://www.db4o.com/Users/register.aspx>.

And here are some further links on developer.db4o.com that you may find useful:


[All Downloads](#)

[SVN Repository](#)

[Community Projects](#)

## Download Contents

The db4o Java distribution comes as one zip file, db4o-8.0-java.zip. When you unzip this file, you get the following directory structure:

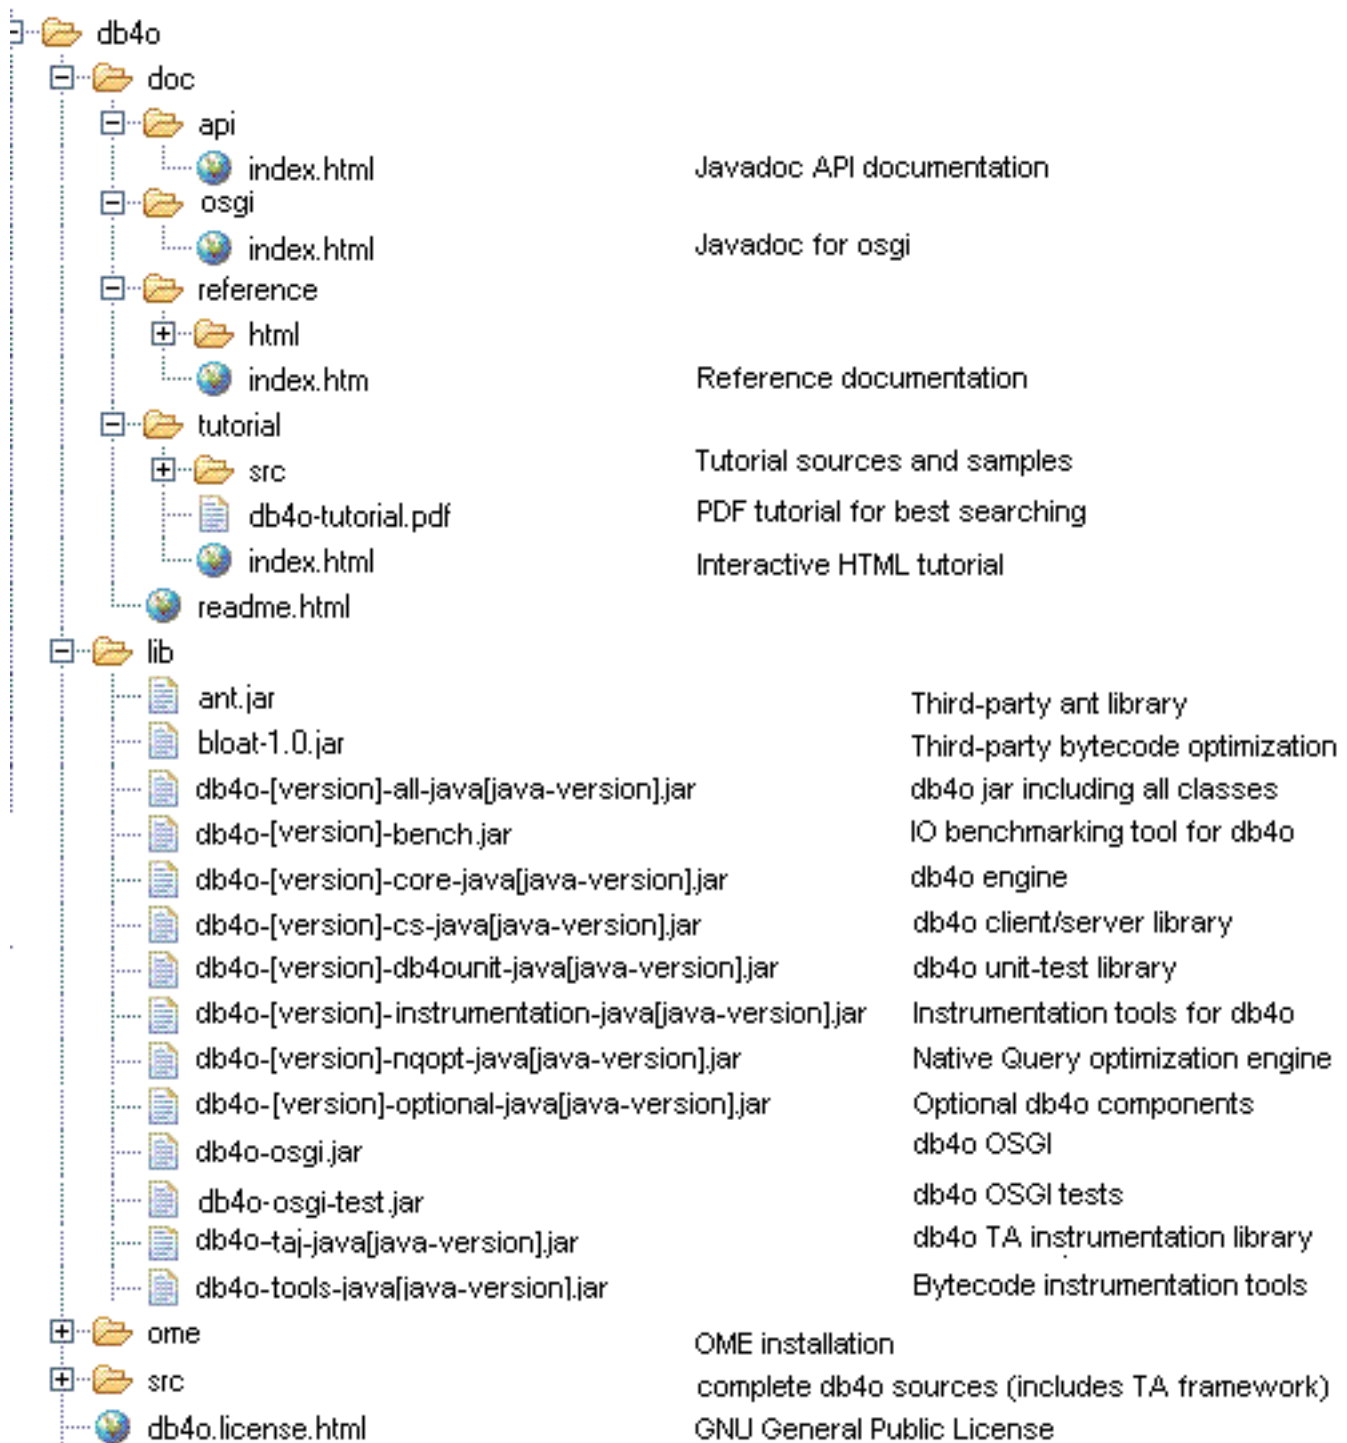

Please take a look at all the supplied documentation formats to choose the one that works best for

you:

**db4o-8.0/doc/api/index.html**

The API documentation for db4o is supplied as JavaDocs HTML files. While you read through this tutorial it may be helpful to look into the API documentation occasionally.

**db4o-8.0/doc/reference/index.html**

The reference documentation is a complete compilation for experienced db4o users.

**db4o-8.0/doc/tutorial/index.html**

This is the interactive HTML tutorial. Examples can be run "live" against a db4o database from within the browser. In order to use the interactive functionality a Java JRE 1.5 or above needs to be installed and integrated into the browser. Java security settings have to allow applets to be run. If you have problems using the interactive functionality, please refer to [Tutorial Troubleshooting](#).

**db4o-8.0/doc/tutorial/db4o-8.0-tutorial.pdf**

The PDF version of the tutorial allows best fulltext search capabilities.

## 1. First Glance

Before diving straight into the first source code samples let's get you familiar with some basics.

### 1.1. The db4o engine

The db4o object database engine consists of one single core jar file. In addition you may want to use client/server library or optional components. You may also get it all in a single jar "db4o-all":

**db4o-8.0-core-java5.jar**

is built for Java JDK 5 and JDK 6

If you intend to use client/server version of db4o you will additionally need the client/server library :

**db4o-8.0-cs-java5.jar**

Some advanced functionality such as cluster support, platform-specific IO adapters, statistic tools etc can be added by including the db4o optional library:

**db4o-8.0-optional-java5.jar**

You can also get all of the above in a single jar:

**db4o-8.0-all-java5.jar**

### 1.2. Installation

If you add one of the above db4o-\*.jar files to your CLASSPATH db4o is installed. For beginners it is recommended to use "db4o-all" library to avoid confusion with the location of certain classes. In case you work with an integrated development environment like [Eclipse](#) you would copy the db4o-\*.jar to the /lib/ folder under your project and add db4o to your project as a library.

### 1.3. Object Manager Enterprise installation

Object Manager Enterprise (OME) is an object browser for db4o databases. OME installation can be found in /ome folder of the distribution. The zip file in this folder contains the Eclipse plugin version of OME.

To install the plugin, you need to have a version of Eclipse >= 3.3 installed. Unzip the file to a folder of your choice. Then open Eclipse, select 'Help' -> 'Software Updates...' -> 'Available Software' from the menu. Choose 'Add Site...' -> 'Local...' and select the unzipped folder. Follow the Eclipse Update Manager instructions for the OME feature from here on.

The actual menu structure may vary over Eclipse versions. (The above applies to Eclipse 3.4 Ganymede.) When in doubt, please refer to the Eclipse documentation on Software Updates. Alternatively, you can install the plugin manually by simply copying the contents of the 'plugins' and 'features' folders from the unzipped folder to the corresponding subfolders in the root folder of your Eclipse installation.

## 1.4. API Overview

Do not forget the API documentation while reading through this tutorial. It provides an organized view of the API, looking from a java package perspective and you may find related functionality to the theme you are currently reading up on.

For starters, the java packages `com.db4o` and `com.db4o.query` are all that you need to worry about.

### **`com.db4o`**

The `com.db4o` java package contains almost all of the functionality you will commonly need when using db4o. Two objects of note are `com.db4o.Db4oEmbedded`, and the `com.db4o.ObjectContainer` interface.

The `com.db4o.Db4o` factory is your starting point. Static methods in this class allow you to open a database file and create an initial configuration. For client/server environment you will need to use `com.db4o.cs.Db4oClientServer` factory class to start a server, or connect to an existing server, but this will be discussed [later](#), start a server, or connect to an existing server. The most important interface, and the one that you will be using 99% of the time is

`com.db4o.ObjectContainer`: This is your db4o database.

- An `ObjectContainer` can either be a database in single-user mode or a client connection to a db4o server.
- Every `ObjectContainer` owns one transaction. All work is transactional. When you open an `ObjectContainer`, you are in a transaction, when you `commit()` or `rollback()`, the next transaction is started immediately.
- Every `ObjectContainer` maintains it's own references to stored and instantiated objects. In doing so, it manages object identities, and is able to achieve a high level of performance.
- `ObjectContainers` are intended to be kept open as long as you work against them. When you close an `ObjectContainer`, all database references to objects in RAM will be discarded.

### **`com.db4o.ext`**

In case you wonder why you only see very few methods in an `ObjectContainer`, here is why: The db4o interface is supplied in two steps in two java packages, `com.db4o` and `com.db4o.ext` for the following reasons:

- It's easier to get started, because the important methods are emphasized.
- It will be easier for other products to copy the basic db4o interface.
- It is an example of how a lightweight version of db4o could look.

Every `com.db4o.ObjectContainer` object is also an `com.db4o.ext.ExtObjectContainer`. You can cast it to `ExtObjectContainer` or you can use the method `getExtObjectContainer()` to get to the advanced features.

### **`com.db4o.config`**

The com.db4o.config java package contains types and classes necessary to configure db4o. The objects and interfaces within are discussed in the [Configuration](#) section.

### **com.db4o.query**

The com.db4o.query java package contains the Predicate class to construct [Native Queries](#). The Native Query interface is the primary db4o querying interface and should be preferred over the Soda Query API.

## 2. First Steps

Let's get started as simple as possible. We are going to demonstrate how to store, retrieve, update and delete instances of a single class that only contains primitive and String members. In our example this will be a Formula One (F1) pilot whose attributes are his name and the F1 points he has already gained this season.

First we create a class to hold our data. It looks like this:

```
package com.db4odoc.f1.chapter1;

public class Pilot {
    private String name;
    private int points;

    public Pilot(String name,int points) {
        this.name=name;
        this.points=points;
    }

    public int getPoints() {
        return points;
    }

    public void addPoints(int points) {
        this.points+=points;
    }

    public String getName() {
        return name;
    }

    public String toString() {
        return name+"/"+points;
    }
}
```



Notice that this class does not contain any db4o-related code.

## 2.1. Opening the database

To access a db4o database file or create a new one, call `Db4oEmbedded.openFile()` and provide `Db4oEmbedded.newConfiguration()` as a configuration template and the path to your database file as the second parameter, to obtain an `ObjectContainer` instance. `ObjectContainer` represents "The Database", and will be your primary interface to db4o. Closing the `ObjectContainer` with the `#close()` method will close the database file and release all resources associated with it.

```
// accessDb4o

ObjectContainer db = Db4oEmbedded.openFile(Db4oEmbedded
    .newConfiguration(), DB4OFILENAME);
try {
    // do something with db4o
} finally {
    db.close();
}
```

`DB4OFILENAME` is just a string value representing any filename. If the file with this name already exists, it will be opened as db4o database, otherwise a new db4o database will be created. For the following examples we will assume that our environment takes care of opening and closing the `ObjectContainer` automatically, and stores the reference in a variable named 'db'.

## 2.2. Storing objects

To store an object, we simply call `#store()` on our database, passing any object as a parameter.

```
// storeFirstPilot

Pilot pilot1 = new Pilot("Michael Schumacher", 100);
db.store(pilot1);
System.out.println("Stored " + pilot1);
```

**OUTPUT:**

Stored Michael Schumacher/100

We'll need a second pilot, too.

```
// storeSecondPilot

Pilot pilot2 = new Pilot("Rubens Barrichello", 99);
db.store(pilot2);
System.out.println("Stored " + pilot2);
```

**OUTPUT:**

Stored Rubens Barrichello/99

## 2.3. Retrieving objects

The easiest way to see the content of our database is to use Object Manager Enterprise, which will be introduced in the [next chapter](#) . For now let's continue with the API overview and learn how to build db4o queries.

db4o supplies several different querying systems, *Query by Example* (QBE), *Native Queries* (NQ) and the *SODA Query API* (SODA). In this first example we will introduce QBE. Once you are familiar with storing objects, we encourage you to use [Native Queries](#) .

When using Query-By-Example, you create a prototypical object for db4o to use as an example of what you wish to retrieve. db4o will retrieve all objects of the given type that contain the same (non-default) field values as the example. The results will be returned as an `ObjectSet` instance. We will use a convenience method `#listResult()` to display the contents of our result `ObjectSet` :

```
public static void listResult(List<?> result){
    System.out.println(result.size());
    for (Object o : result) {
```

```
        System.out.println(o);
    }
}
```

To retrieve all pilots from our database, we provide an 'empty' prototype:

```
// retrieveAllPilotQBE

Pilot proto = new Pilot(null, 0);
ObjectSet result = db.queryByExample(proto);
listResult(result);
```

**OUTPUT:**

```
2
Michael Schumacher/100
Rubens Barrichello/99
```

Note that we specify 0 points, but our results were not constrained to only those Pilots with 0 points; 0 is the default value for int fields.

db4o also supplies a shortcut to retrieve all instances of a class:

```
// retrieveAllPilots

ObjectSet result = db.queryByExample(Pilot.class);
listResult(result);
```

**OUTPUT:**

```
2
Michael Schumacher/100
Rubens Barrichello/99
```

For JDK 5 there also is a generics shortcut, using the query method:

```
List <Pilot> pilots = db.query(Pilot.class);
```

To query for a pilot by name:

```
// retrievePilotByName

Pilot proto = new Pilot("Michael Schumacher", 0);
ObjectSet result = db.queryByExample(proto);
listResult(result);
```

**OUTPUT:**

```
1
Michael Schumacher/100
```

And to query for Pilots with a specific number of points:

```
// retrievePilotByExactPoints

Pilot proto = new Pilot(null, 100);
ObjectSet result = db.queryByExample(proto);
listResult(result);
```

**OUTPUT:**

```
1
Michael Schumacher/100
```

Of course there's much more to db4o queries. They will be covered in more depth in later chapters.

## 2.4. Updating objects

Updating objects is just as easy as storing them. In fact, you use the same `#store()` method to update your objects: just call `#store()` again after modifying any object.

```
// updatePilot

ObjectSet result = db
    .queryByExample(new Pilot("Michael Schumacher", 0));
Pilot found = (Pilot) result.next();
found.addPoints(11);
db.store(found);
System.out.println("Added 11 points for " + found);
retrieveAllPilots(db);
```

### OUTPUT:

```
Added 11 points for Michael Schumacher/111
2
Michael Schumacher/111
Rubens Barrichello/99
```

Notice that we query for the object first. This is an important point. When you call `#store()` to modify a stored object, if the object is not 'known' (having been previously stored or retrieved during the current session), db4o will insert a new object. db4o does this because it does not automatically match up objects to be stored, with objects previously stored. It assumes you are inserting a second object which happens to have the same field values.

To make sure you've updated the pilot, please return to any of the retrieval examples above and run them again.

## 2.5. Deleting objects

Objects are removed from the database using the #delete() method.

```
// deleteFirstPilotByName

ObjectSet result = db
    .queryByExample(new Pilot("Michael Schumacher", 0));
Pilot found = (Pilot) result.next();
db.delete(found);
System.out.println("Deleted " + found);
retrieveAllPilots(db);
```

**OUTPUT:**

```
Deleted Michael Schumacher/111
1
Rubens Barrichello/99
```

Let's delete the other one, too.

```
// deleteSecondPilotByName

ObjectSet result = db
    .queryByExample(new Pilot("Rubens Barrichello", 0));
Pilot found = (Pilot) result.next();
db.delete(found);
System.out.println("Deleted " + found);
retrieveAllPilots(db);
```

**OUTPUT:**

```
Deleted Rubens Barrichello/99
0
```

Please check the deletion with the retrieval examples above.

As with updating objects, the object to be deleted has to be 'known' to db4o. It is not sufficient to provide a prototype object with the same field values.

## 2.6. Conclusion

That was easy, wasn't it? We have stored, retrieved, updated and deleted objects with a few lines of code. Now you are probably interested to see how the database looks like. Let's have a look using db4o graphical tool - Object Manager in the [next chapter](#) .

## 2.7. Full source

```
package com.db4odoc.fl.chapter1;

import java.io.*;

import com.db4o.*;
import com.db4odoc.fl.*;

public class FirstStepsExample extends Util {
    final static String DB4OFILENAME =
        System.getProperty("user.home")
            + "/formula1.db4o";

    public static void main(String[] args) {
        new File(DB4OFILENAME).delete();
        accessDb4o();
        new File(DB4OFILENAME).delete();
        ObjectContainer db = Db4oEmbedded.openFile(Db4oEmbedded
            .newConfiguration(), DB4OFILENAME);
        try {
            storeFirstPilot(db);
            storeSecondPilot(db);
            retrieveAllPilots(db);
            retrievePilotByName(db);
            retrievePilotByExactPoints(db);
            updatePilot(db);
            deleteFirstPilotByName(db);
        }
    }
}
```

```

        deleteSecondPilotByName(db);
    } finally {
        db.close();
    }
}

public static void accessDb4o() {
    ObjectContainer db = Db4oEmbedded.openFile(Db4oEmbedded
        .newConfiguration(), DB4OFILENAME);
    try {
        // do something with db4o
    } finally {
        db.close();
    }
}

public static void storeFirstPilot(ObjectContainer db) {
    Pilot pilot1 = new Pilot("Michael Schumacher", 100);
    db.store(pilot1);
    System.out.println("Stored " + pilot1);
}

public static void storeSecondPilot(ObjectContainer db) {
    Pilot pilot2 = new Pilot("Rubens Barrichello", 99);
    db.store(pilot2);
    System.out.println("Stored " + pilot2);
}

public static void retrieveAllPilotQBE(ObjectContainer db) {
    Pilot proto = new Pilot(null, 0);
    ObjectSet result = db.queryByExample(proto);
    listResult(result);
}

public static void retrieveAllPilots(ObjectContainer db) {
    ObjectSet result = db.queryByExample(Pilot.class);
    listResult(result);
}

public static void retrievePilotByName(ObjectContainer db) {
    Pilot proto = new Pilot("Michael Schumacher", 0);

```



```

        ObjectSet result = db.queryByExample(proto);
        listResult(result);
    }

    public static void retrievePilotByExactPoints(ObjectContainer db)
    {
        Pilot proto = new Pilot(null, 100);
        ObjectSet result = db.queryByExample(proto);
        listResult(result);
    }

    public static void updatePilot(ObjectContainer db) {
        ObjectSet result = db
            .queryByExample(new Pilot("Michael Schumacher", 0));
        Pilot found = (Pilot) result.next();
        found.addPoints(11);
        db.store(found);
        System.out.println("Added 11 points for " + found);
        retrieveAllPilots(db);
    }

    public static void deleteFirstPilotByName(ObjectContainer db) {
        ObjectSet result = db
            .queryByExample(new Pilot("Michael Schumacher", 0));
        Pilot found = (Pilot) result.next();
        db.delete(found);
        System.out.println("Deleted " + found);
        retrieveAllPilots(db);
    }

    public static void deleteSecondPilotByName(ObjectContainer db) {
        ObjectSet result = db
            .queryByExample(new Pilot("Rubens Barrichello", 0));
        Pilot found = (Pilot) result.next();
        db.delete(found);
        System.out.println("Deleted " + found);
        retrieveAllPilots(db);
    }
}


```



### 3. Object Manager Enterprise Overview


If you did not install the Object Manager Enterprise yet, please, return to [FirstGlance](#) chapter and follow the installation instructions there.

Once the Object Manager Enterprise (OME) is installed you can see it in Eclipse by selecting Window->Open Perspective->Other and choosing "OME". Typically, OME window should look similar to this:

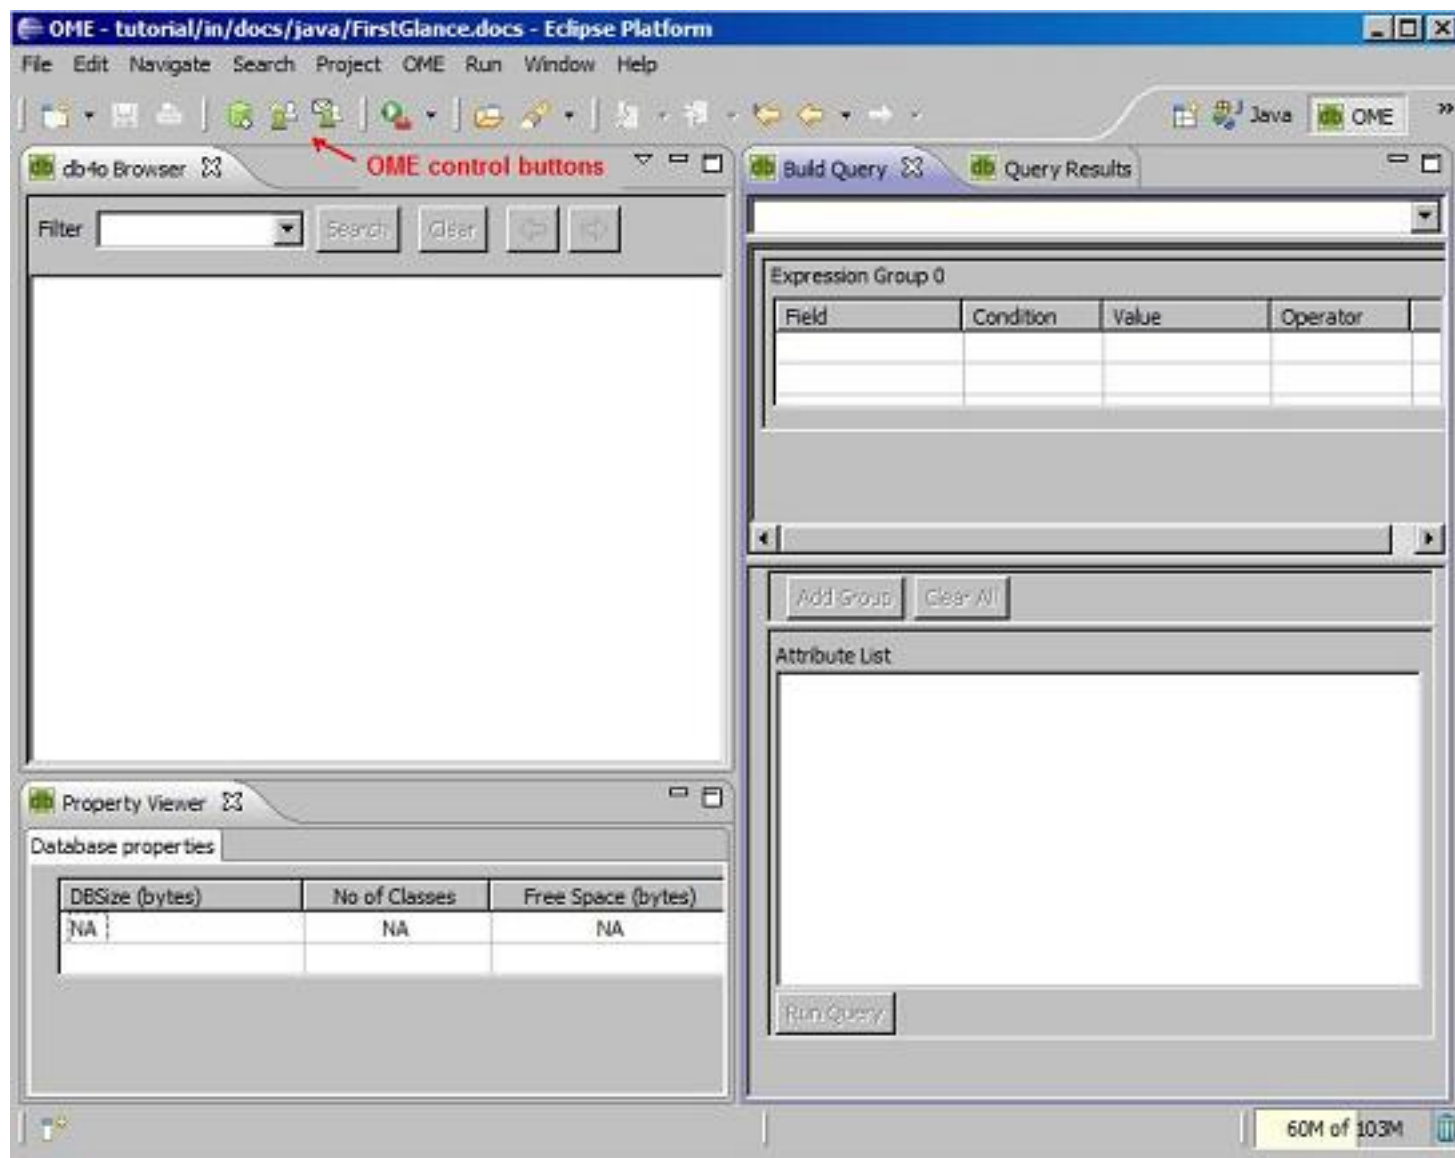

In the OME perspective you can see:

- OME menu:

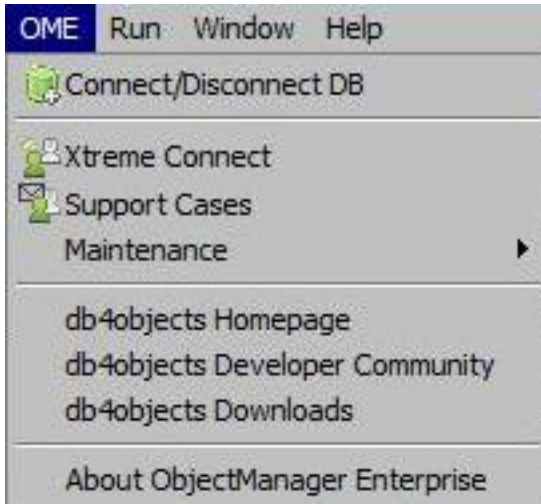

- OME toolbar buttons to access the frequently used functionality fast
- Db4o Browser: window displaying the contents of the open db4o database
- Property Viewer: window displaying the properties of the open database or the properties of the selected database class
- Build Query: windows allowing to build a query using drag&drop functionality
- Query Results: window to browse the results of the query execution

### 3.1. Browsing the database

In the [previous chapter](#) we've learned how to create a new database and store objects in it. Let's create a new database and store some objects in it now:

```
// deleteDatabase

new File(DB4OFILENAME).delete();
```

**OUTPUT:**

```
// storePilots

ObjectContainer db=Db4oEmbedded.openFile(Db4oEmbedded
    .newConfiguration(), DB4OFILENAME);
try {
```

```
Pilot pilot1=new Pilot("Michael Schumacher",100);
db.store(pilot1);
System.out.println("Stored "+pilot1);
Pilot pilot2=new Pilot("Rubens Barrichello",99);
db.store(pilot2);
System.out.println("Stored "+pilot2);
}
finally {
    db.close();
}
```

#### OUTPUT:


```
Stored Michael Schumacher/100
Stored Rubens Barrichello/99
```

Now we can see the resultant database in the Object Manager. Please select OME->Connect/Disconnect DB (or use a shortcut button from the toolbar menu) and browse to ome.db4o file in your user folder. (normally it is c:/Documents and Settings/[user name] on Windows XP/2000, c:/Users/[user name] on Windows Vista and /home/[user\_name] on \*nix systems). Once you've connected you will see a screen similar to this:

The db4o Browser window shows that there is 1 class in the database (Pilot), which contains 2 fields: name and points. In the Property Viewer you can see more information about the class fields. You can also change "Is indexed" field and add the index to the database by pressing "Save Index" button. The filter panel on the top of the view allows easier navigation through the database with lots of different classes. You can use wildcard searches and benefit from the search history to make the selection faster.

### 3.2. Querying

It is easy to retrieve all of the Pilot instances from the database: just right-click the Pilot class in db4o Browser and select "View All Objects". The list of the Pilot objects will be shown in the Query Result view:

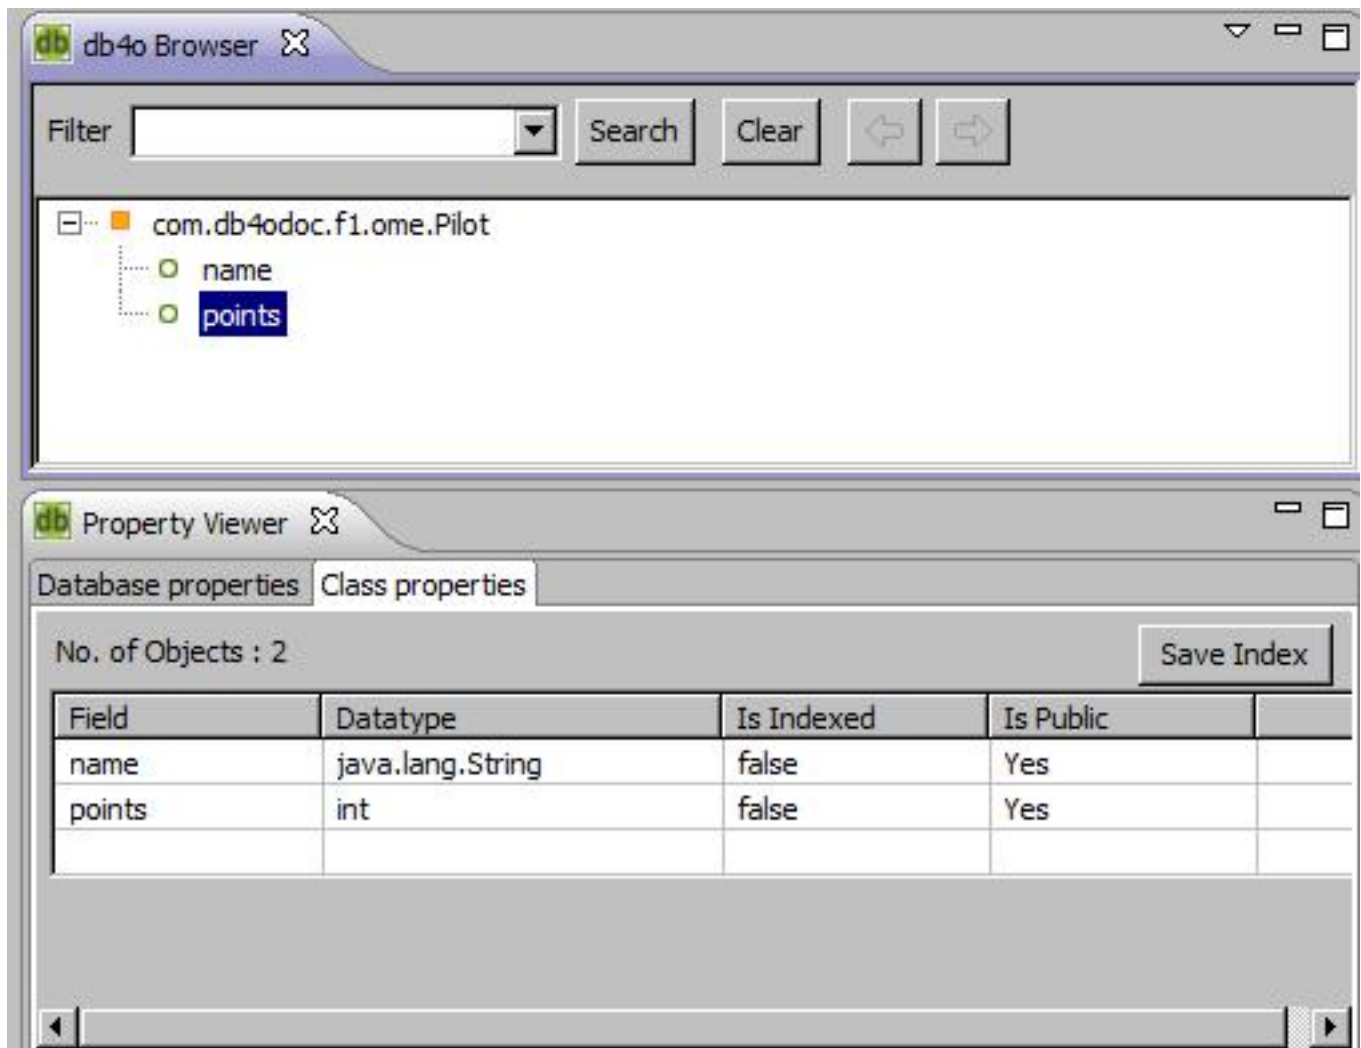

You can see object details in the detailed view below. Try to change any values and use Save button to persist the changes to the database. You can also use Delete button to delete objects from the database. For the objects containing field objects you will be prompted to use cascade on delete.

db Build Query Query Results

com.db4odoc.f1.ome.Pilot

Row Id	name	points
1	Michael Schumacher	100
2	Rubens Barrichello	99

Save Delete Refresh << < 1 of 1 > >>

Object 2

Field	Value
com.db4odoc.f1.ome.Pilot	(G) com.db4odoc.f1.ome.Pilot
name	Rubens Barrichello
points	99

Save

More complex queries can be done using Build Query view:

db4o Browser Build Query Query Results

Filter Search Clear

com.db4odoc.f1.ome.Pilot

- name
- points

Property Viewer

Database properties Class properties

No. of Objects : 2

Field	Datatype	Is Indexed
name	java.lang.String	false
points	int	false

Expression Group 0

Field	Condition	Value	Operator

Add Group Clear All


Attribute List

Run Query

Drag "points" field from the db4oBrowser view into the Build Query view, set condition "Greater Than", put a value "99" and run the query. You can return to the Built Query tab and modify the query later on again. For example: add "AND" operator, drag "name" field and set the value to "Michael Schumacher". Re-run the query.



When the new query is created, the previous query is stored and can be selected from the history drop-down:

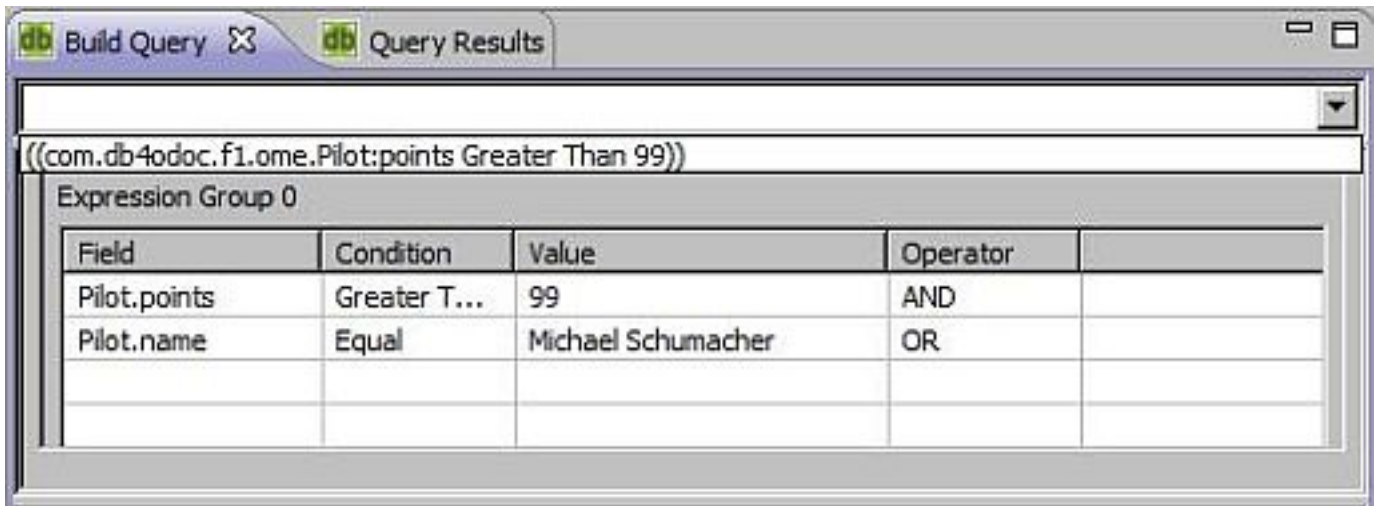

More sophisticated queries can be build by joining grouped constraints using "Add Group" button. When you are done working with the database in OME, you can close the connection by using OME->Connect/Disconnect DB menu command or by using the equivalent button on the toolbar.

In the [next chapter](#) we will explore more about db4o querying capabilities. You can continue using OME while going through the rest of this tutorial. If you are using the interactive version you will find the database in formula1.db4o file in your user folder. (normally it is c:/Documents and Settings/[user name] on Windows XP/2000, c:/Users/[user name] on Windows Vista and /home/[user\_name] on \*nix systems). Please, remember to disconnect OME before running any of the tutorial examples, as only one active connection is allowed to the database file.

## 4. Querying

db4o supplies three querying systems, Query-By-Example (QBE) Native Queries (NQ), and the SODA API. In the previous chapter, you were briefly introduced to *Query By Example*(QBE).

Query-By-Example (QBE) is appropriate as a quick start for users who are still acclimating to storing and retrieving objects with db4o.

Native Queries (NQ) are the main db4o query interface, recommended for general use.

SODA is the underlying internal API. It is provided for backward compatibility and it can be useful for dynamic generation of queries, where NQ are too strongly typed.

## 4.1. Query by Example (QBE)

When using *Query By Example* (QBE) you provide db4o with a template object. db4o will return all of the objects which match all non-default field values. This is done via reflecting all of the fields and building a query expression where all non-default-value fields are combined with AND expressions. Here's an example from the previous chapter:

```
// retrievePilotByName

Pilot proto = new Pilot("Michael Schumacher", 0);
ObjectSet result = db.queryByExample(proto);
listResult(result);
```

Querying this way has some obvious limitations:

- db4o must reflect all members of your example object.
- You cannot perform advanced query expressions. (AND, OR, NOT, etc.)
- You cannot constrain on values like 0 (integers), "" (empty strings), or nulls (reference types) because they would be interpreted as unconstrained.
- You need to be able to create objects without initialized fields. That means you can not initialize fields where they are declared. You can not enforce contracts that objects of a class are only allowed in a well-defined initialized state.
- You need a constructor to create objects without initialized fields.

To get around all of these constraints, db4o provides the Native Query (NQ) system.

## 4.2. Native Queries

Wouldn't it be nice to pose queries in the programming language that you are using? Wouldn't it be nice if all your query code was 100% typesafe, 100% compile-time checked and 100% refactorable? Wouldn't it be nice if the full power of object-orientation could be used by calling methods from within queries? Enter Native Queries.

Native queries are the main db4o query interface and they are the recommended way to query databases from your application. Because native queries simply use the semantics of your programming language, they are perfectly standardized and a safe choice for the future.

Native Queries are available for all platforms supported by db4o.

### 4.2.1. Concept

The concept of native queries is taken from the following two papers:

- [Cook/Rosenberger, Native Queries for Persistent Objects, A Design White Paper](#)
- [Cook/Rai, Safe Query Objects: Statically Typed Objects as Remotely Executable Queries](#)

### 4.2.2. Principle

Native Queries provide the ability to run one or more lines of code against all instances of a class. Native query expressions should return true to mark specific instances as part of the result set. db4o will attempt to optimize native query expressions and run them against indexes and without instantiating actual objects, where this is possible.

### 4.2.3. Simple Example

Let's look at how a simple native query will look like in some of the programming languages and dialects that db4o supports:

#### C# .NET

```
ICollection<Pilot> pilots = db.Query<Pilot>(delegate(Pilot pilot) {  
    return pilot.Points == 100;  
});
```

#### Java JDK 5

```
List <Pilot> pilots = db.query(new Predicate<Pilot>() {  
    public boolean match(Pilot pilot) {  
        return pilot.getPoints() == 100;  
    }  
});
```

Public Class PilotHundredPoints

Inherits Predicate

Public Function Match (pilot As Pilot) as Boolean

    If pilot.Points = 100 Then

        Return True

    Else

        Return False

End Function

End Class

A side note on the above syntax:

For all dialects without support for generics, Native Queries work by convention. A class that extends the `com.db4o.Predicate` class is expected to have a boolean `#match()` method with one parameter to describe the class extent:

```
boolean match(Pilot candidate);
```

When using native queries, don't forget that modern integrated development environments (IDEs) can do all the typing work around the native query expression for you, if you use templates and auto-completion.

Here is how to configure a Native Query template with Eclipse 3.1:

From the menu, choose Window + Preferences + Java + Editor + Templates + New

As the name type "nq". Make sure that "java" is selected as the context on the right. Paste the following into the pattern field:

```
List <${extent}> list = db.query(new Predicate <${extent}> () {
    public boolean match(${extent} candidate){
        return true;
    }
});
```

Now you can create a native query with three keys: n + q + Control-Space.  
Similar features are available in most modern IDEs.

#### 4.2.4. Advanced Example

For complex queries, the native syntax is very precise and quick to write. Let's compare to a SODA query that finds all pilots with a given name or a score within a given range:

```
// storePilots

db.store(new Pilot("Michael Schumacher",100));
db.store(new Pilot("Rubens Barrichello",99));
```

```
// retrieveComplexSODA

Query query=db.query();
query.constrain(Pilot.class);
Query pointQuery=query.descend("points");
query.descend("name").constrain("Rubens Barrichello")
    .or(pointQuery.constrain(99).greater()
        .and(pointQuery.constrain(199).smaller()));
ObjectSet result=query.execute();
listResult(result);
```

**OUTPUT:**

2

Michael Schumacher/100

Rubens Barrichello/99

Here is how the same query will look like with native query syntax, fully accessible to autocompletion, refactoring and other IDE features, fully checked at compile time:

## C# .NET 2.0

```
ILIST <Pilot> result = db.Query<Pilot> (delegate(Pilot pilot) {  
    return pilot.Points > 99  
        && pilot.Points < 199  
        || pilot.Name == "Rubens Barrichello";  
});
```

## Java JDK 5

```
List <Pilot> result = db.query(new Predicate<Pilot>() {  
    public boolean match(Pilot pilot) {  
        return pilot.getPoints() > 99  
            && pilot.getPoints() < 199  
            || pilot.getName().equals("Rubens Barrichello");  
    }  
});
```

### 4.2.5. Arbitrary Code

Basically that's all there is to know about native queries to be able to use them efficiently. In principle you can run arbitrary code as native queries, you just have to be very careful with side effects - especially those that might affect persistent objects.

Let's run an example that involves some more of the language features available.

```
// retrieveArbitraryCodeNQ
```

```

final int[] points={1,100};
List<Pilot> result=db.query(new Predicate<Pilot>() {
    public boolean match(Pilot pilot) {
        for (int point : points) {
            if (pilot.getPoints() == point) {
                return true;
            }
        }
        return pilot.getName().startsWith("Rubens");
    }
});
listResult(result);

```

#### OUTPUT:

```

2
Michael Schumacher/100
Rubens Barrichello/99

```

#### 4.2.6. Native Query Performance

One drawback of native queries has to be pointed out: Under the hood db4o tries to analyze native queries to convert them to SODA. This is not possible for all queries. For some queries it is very difficult to analyze the flowgraph. In this case db4o will have to instantiate some of the persistent objects to actually run the native query code. db4o will try to analyze parts of native query expressions to keep object instantiation to the minimum.

The development of the native query optimization processor will be an ongoing process in a close dialog with the db4o community. Feel free to contribute your results and your needs by providing feedback to our [db4o forums](#)(Forums are accessible through [free db4o membership](#) ).

The current state of the query optimization process is detailed in the chapter on [Native Query Optimization](#)

With the current implementation, all above examples will run optimized, except for the "Arbitrary Code" example - we are working on it.

#### 4.2.7. Full source



```

package com.db4odoc.fl.chapter1;

import com.db4o.Db4oEmbedded;
import com.db4o.ObjectContainer;
import com.db4o.ObjectSet;
import com.db4o.query.Predicate;
import com.db4o.query.Query;
import com.db4odoc.fl.Util;

import java.util.List;

public class NQExample extends Util {

    final static String DB4OFILENAME =
System.getProperty("user.home") + "/formula1.db4o";

    public static void main(String[] args) {
        ObjectContainer db=Db4oEmbedded.openFile(Db4oEmbedded
            .newConfiguration(), DB4OFILENAME);
        try {
            storePilots(db);
            retrieveComplexSODA(db);
            retrieveComplexNQ(db);
            retrieveArbitraryCodeNQ(db);
            clearDatabase(db);
        }
        finally {
            db.close();
        }
    }

    public static void storePilots(ObjectContainer db) {
        db.store(new Pilot("Michael Schumacher",100));
        db.store(new Pilot("Rubens Barrichello",99));
    }

    public static void retrieveComplexSODA(ObjectContainer db) {
        Query query=db.query();
        query.constrain(Pilot.class);
    }

```

```

        Query pointQuery=query.descend("points");
        query.descend("name").constrain("Rubens Barrichello")
            .or(pointQuery.constrain(99).greater()
                .and(pointQuery.constrain(199).smaller()));
        ObjectSet result=query.execute();
        listResult(result);
    }

    public static void retrieveComplexNQ(ObjectContainer db) {
        List<Pilot> result=db.query(new Predicate<Pilot>() {
            public boolean match(Pilot pilot) {
                return pilot.getPoints()>99
                    && pilot.getPoints()<199
                    || pilot.getName().equals("Rubens Barrichello");
            }
        });
        listResult(result);
    }

    public static void retrieveArbitraryCodeNQ(ObjectContainer db) {
        final int[] points={1,100};
        List<Pilot> result=db.query(new Predicate<Pilot>() {
            public boolean match(Pilot pilot) {
                for (int point : points) {
                    if (pilot.getPoints() == point) {
                        return true;
                    }
                }
                return pilot.getName().startsWith("Rubens");
            }
        });
        listResult(result);
    }

    public static void clearDatabase(ObjectContainer db) {
        ObjectSet result=db.queryByExample(Pilot.class);
        while(result.hasNext()) {
            db.delete(result.next());
        }
    }
}

```



### 4.3. SODA Query API

The SODA query API is db4o's low level querying API, allowing direct access to nodes of query graphs. Since SODA uses strings to identify fields, it is neither perfectly typesafe nor compile-time checked and it also is quite verbose to write.

For most applications [Native Queries](#) will be the better querying interface.

However there can be applications where dynamic generation of queries is required, that's why SODA is explained here.

#### 4.3.1. Simple queries

Let's see how our familiar QBE queries are expressed with SODA. A new Query object is created through the `#query()` method of the ObjectContainer and we can add Constraint instances to it. To find all Pilot instances, we constrain the query with the Pilot class object.

```
// retrieveAllPilots


Query query=db.query();
query.constrain(Pilot.class);
ObjectSet result=query.execute();
listResult(result);
```

#### OUTPUT:

```
2
Michael Schumacher/100
Rubens Barrichello/99
```

Basically, we are exchanging our 'real' prototype for a meta description of the objects we'd like to hunt down: a **query graph** made up of query nodes and constraints. A query node is a placeholder for a candidate object, a constraint decides whether to add or exclude candidates from the result.

Our first simple graph looks like this.



We're just asking any candidate object (here: any object in the database) to be of type Pilot to aggregate our result.

To retrieve a pilot by name, we have to further constrain the candidate pilots by descending to their name field and constraining this with the respective candidate String.


```
// retrievePilotByName

Query query=db.query();
query.constrain(Pilot.class);
query.descend("name").constrain("Michael Schumacher");
ObjectSet result=query.execute();
listResult(result);
```

#### OUTPUT:

```
1
Michael Schumacher/100
```

What does `#descend` mean here? Well, just as we did in our 'real' prototypes, we can attach constraints to child members of our candidates.

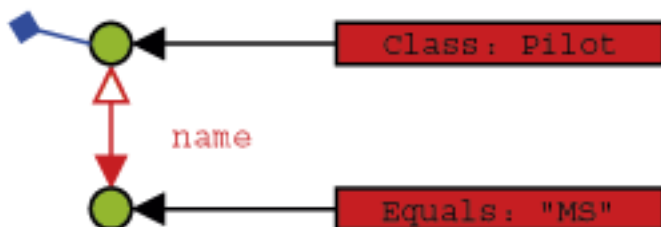

So a candidate needs to be of type Pilot and have a member named 'name' that is equal to the given String to be accepted for the result.

Note that the class constraint is not required: If we left it out, we would query for all objects that contain a 'name' member with the given value. In most cases this will not be the desired behavior, though.

Finding a pilot by exact points is analogous. We just have to cross the Java primitive/object divide.

```
// retrievePilotByExactPoints

Query query=db.query();
query.constrain(Pilot.class);
query.descend("points").constrain(100);
ObjectSet result=query.execute();
listResult(result);
```

#### OUTPUT:

```
1
Michael Schumacher/100
```

### 4.3.2. Advanced queries

Now there are occasions when we don't want to query for exact field values, but rather for value ranges, objects not containing given member values, etc. This functionality is provided by the Constraint API.

First, let's negate a query to find all pilots who are not Michael Schumacher:

```
// retrieveByNegation

Query query=db.query();
query.constrain(Pilot.class);
query.descend("name").constrain("Michael Schumacher").not();
ObjectSet result=query.execute();
listResult(result);
```

**OUTPUT:**

1  
Rubens Barrichello/99

Where there is negation, the other boolean operators can't be too far.

```
// retrieveByConjunction

Query query=db.query();
query.constrain(Pilot.class);
Constraint constr=query.descend("name")
    .constrain("Michael Schumacher");
query.descend("points")
    .constrain(99).and(constr);
ObjectSet result=query.execute();
listResult(result);
```

**OUTPUT:**

0

```
// retrieveByDisjunction

Query query=db.query();
query.constrain(Pilot.class);
Constraint constr=query.descend("name")
    .constrain("Michael Schumacher");
query.descend("points")
    .constrain(99).or(constr);
ObjectSet result=query.execute();
listResult(result);
```

**OUTPUT:**

```
2
Michael Schumacher/100
Rubens Barrichello/99
```

We can also constrain to a comparison with a given value.

```
// retrieveByComparison

Query query=db.query();
query.constrain(Pilot.class);
query.descend("points")
    .constrain(99).greater();
ObjectSet result=query.execute();
listResult(result);
```

**OUTPUT:**

```
1
Michael Schumacher/100
```

The query API also allows to query for field default values.

```
// retrieveByDefaultFieldValue

Pilot somebody=new Pilot("Somebody else",0);
db.store(somebody);
Query query=db.query();
query.constrain(Pilot.class);
query.descend("points").constrain(0);
ObjectSet result=query.execute();
listResult(result);
db.delete(somebody);
```



**OUTPUT:**

```
1  
Somebody else/0
```

It is also possible to have db4o sort the results.

```
// retrieveSorted  
  
Query query=db.query();  
query.constrain(Pilot.class);  
query.descend("name").orderAscending();  
ObjectSet result=query.execute();  
listResult(result);  
query.descend("name").orderDescending();  
result=query.execute();  
listResult(result);
```

**OUTPUT:**

```
2  
Michael Schumacher/100  
Rubens Barrichello/99  
2  
Rubens Barrichello/99  
Michael Schumacher/100
```

All these techniques can be combined arbitrarily, of course. Please try it out. There still may be cases left where the predefined query API constraints may not be sufficient - don't worry, you can always let db4o run any arbitrary code that you provide in an Evaluation. Evaluations will be discussed in a [later chapter](#).

To prepare for the next chapter, let's clear the database.

```
// clearDatabase

ObjectSet result=db.queryByExample(Pilot.class);
while(result.hasNext()) {
    db.delete(result.next());
}
```

#### OUTPUT:

#### 4.3.3. Conclusion

Now you have been provided with the following alternative approaches to query db4o databases: Query-By-Example, net LINQ, Native Queries, SODA.

Which one is the best to use? Some hints:

- Native queries are targeted to be the primary interface for db4o, so they should be preferred.
- With the current state of the db4o query optimizer there may be queries that will execute faster in SODA style, so it can be used to tune applications. SODA can also be more convenient for constructing dynamic queries at runtime.
- Query-By-Example is nice for simple one-liners, but restricted in functionality. If you like this approach, use it as long as it suits your application's needs.

Of course you can mix these strategies as needed.

We have finished our walkthrough and seen the various ways db4o provides to pose queries. But our domain model is not complex at all, consisting of one class only. Let's have a look at the way db4o handles object associations in the [next chapter](#).

#### 4.3.4. Full source

```
package com.db4odoc.fl.chapter1;

import com.db4o.*;
import com.db4o.query.Constraint;
import com.db4o.query.Query;
```

```

import com.db4odoc.fl.*;

public class QueryExample extends Util {

    final static String DB4OFILENAME =
System.getProperty("user.home") + "/formula1.db4o";

    public static void main(String[] args) {
        ObjectContainer db=Db4oEmbedded.openFile(Db4oEmbedded
            .newConfiguration(), DB4OFILENAME);
        try {
            storeFirstPilot(db);
            storeSecondPilot(db);
            retrieveAllPilots(db);
            retrievePilotByName(db);
            retrievePilotByExactPoints(db);
            retrieveByNegation(db);
            retrieveByConjunction(db);
            retrieveByDisjunction(db);
            retrieveByComparison(db);
            retrieveByDefaultFieldValue(db);
            retrieveSorted(db);
            clearDatabase(db);
        }
        finally {
            db.close();
        }
    }

    public static void storeFirstPilot(ObjectContainer db) {
        Pilot pilot1=new Pilot("Michael Schumacher",100);
        db.store(pilot1);
        System.out.println("Stored "+pilot1);
    }

    public static void storeSecondPilot(ObjectContainer db) {
        Pilot pilot2=new Pilot("Rubens Barrichello",99);
        db.store(pilot2);
        System.out.println("Stored "+pilot2);
    }
}

```

```

public static void retrieveAllPilots(ObjectContainer db) {
    Query query=db.query();
    query.constrain(Pilot.class);
    ObjectSet result=query.execute();
    listResult(result);
}

public static void retrievePilotByName(ObjectContainer db) {
    Query query=db.query();
    query.constrain(Pilot.class);
    query.descend("name").constrain("Michael Schumacher");
    ObjectSet result=query.execute();
    listResult(result);
}

public static void retrievePilotByExactPoints(
    ObjectContainer db) {
    Query query=db.query();
    query.constrain(Pilot.class);
    query.descend("points").constrain(100);
    ObjectSet result=query.execute();
    listResult(result);
}

public static void retrieveByNegation(ObjectContainer db) {
    Query query=db.query();
    query.constrain(Pilot.class);
    query.descend("name").constrain("Michael Schumacher").not();
    ObjectSet result=query.execute();
    listResult(result);
}

public static void retrieveByConjunction(ObjectContainer db) {
    Query query=db.query();
    query.constrain(Pilot.class);
    Constraint constr=query.descend("name")
        .constrain("Michael Schumacher");
    query.descend("points")
        .constrain(99).and(constr);
    ObjectSet result=query.execute();
}

```

```

        listResult(result);
    }

    public static void retrieveByDisjunction(ObjectContainer db) {
        Query query=db.query();
        query.constrain(Pilot.class);
        Constraint constr=query.descend("name")
            .constrain("Michael Schumacher");
        query.descend("points")
            .constrain(99).or(constr);
        ObjectSet result=query.execute();
        listResult(result);
    }

    public static void retrieveByComparison(ObjectContainer db) {
        Query query=db.query();
        query.constrain(Pilot.class);
        query.descend("points")
            .constrain(99).greater();
        ObjectSet result=query.execute();
        listResult(result);
    }

    public static void retrieveByDefaultFieldValue(
        ObjectContainer db) {
        Pilot somebody=new Pilot("Somebody else",0);
        db.store(somebody);
        Query query=db.query();
        query.constrain(Pilot.class);
        query.descend("points").constrain(0);
        ObjectSet result=query.execute();
        listResult(result);
        db.delete(somebody);
    }

    public static void retrieveSorted(ObjectContainer db) {
        Query query=db.query();
        query.constrain(Pilot.class);
        query.descend("name").orderAscending();
        ObjectSet result=query.execute();
        listResult(result);
    }

```

```
        query.descend("name").orderDescending();
        result=query.execute();
        listResult(result);
    }

    public static void clearDatabase(ObjectContainer db) {
        ObjectSet result=db.queryByExample(Pilot.class);
        while(result.hasNext()) {
            db.delete(result.next());
        }
    }
}
```

## 5. Structured objects

It's time to extend our business domain with another class and see how db4o handles object interrelations. Let's give our pilot a vehicle.

```
package com.db4odoc.fl.chapter2;

public class Car {
    private String model;
    private Pilot pilot;

    public Car(String model) {
        this.model=model;
        this.pilot=null;
    }

    public Pilot getPilot() {
        return pilot;
    }

    public void setPilot(Pilot pilot) {
        this.pilot = pilot;
    }

    public String getModel() {
        return model;
    }

    public String toString() {
        return model+"["+pilot+"]";
    }
}
```

### 5.1. Storing structured objects

To store a car with its pilot, we just call `#store()` on our top level object, the car. The pilot will be

stored implicitly.

```
// storeFirstCar

Car car1 = new Car("Ferrari");
Pilot pilot1 = new Pilot("Michael Schumacher", 100);
car1.setPilot(pilot1);
db.store(car1);
```

Of course, we need some competition here. This time we explicitly store the pilot before entering the car - this makes no difference.

```
// storeSecondCar

Pilot pilot2 = new Pilot("Rubens Barrichello", 99);
db.store(pilot2);
Car car2 = new Car("BMW");
car2.setPilot(pilot2);
db.store(car2);
```

## 5.2. Retrieving structured objects

### 5.2.1. QBE

To retrieve all cars, we simply provide a 'blank' prototype.

```
// retrieveAllCarsQBE

Car proto = new Car(null);
ObjectSet result = db.queryByExample(proto);
listResult(result);
```



**OUTPUT:**

```
2
Ferrari[Michael Schumacher/100]
BMW[Rubens Barrichello/99]
```

We can also query for all pilots, of course.

```
// retrieveAllPilotsQBE

Pilot proto = new Pilot(null, 0);
ObjectSet result = db.queryByExample(proto);
listResult(result);
```

**OUTPUT:**

```
2
Michael Schumacher/100
Rubens Barrichello/99
```

Now let's initialize our prototype to specify all cars driven by Rubens Barrichello.

```
// retrieveCarByPilotQBE

Pilot pilotproto = new Pilot("Rubens Barrichello", 0);
Car carproto = new Car(null);
carproto.setPilot(pilotproto);
ObjectSet result = db.queryByExample(carproto);
listResult(result);
```

**OUTPUT:**

```
1
```

```
BMW[Rubens Barrichello/99]
```

What about retrieving a pilot by car? We simply don't need that - if we already know the car, we can simply access the pilot field directly.

### 5.2.2. Native Queries

Using native queries with constraints on deep structured objects is straightforward, you can do it just like you would in plain other code.

Let's constrain our query to only those cars driven by a Pilot with a specific name:

```
// retrieveCarsByPilotNameNative

final String pilotName = "Rubens Barrichello";
List<Car> results = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return car.getPilot().getName().equals(pilotName);
    }
});
listResult(results);
```

#### OUTPUT:

```
1
BMW[Rubens Barrichello/99]
```

### 5.2.3. SODA Query API

In order to use SODA for querying for a car given its pilot's name we have to descend two levels into our query.

```
// retrieveCarByPilotNameQuery

Query query = db.query();
query.constrain(Car.class);
query.descend("pilot").descend("name").constrain("Rubens
Barrichello");
ObjectSet result = query.execute();
listResult(result);
```

**OUTPUT:**

```
1
BMW[Rubens Barrichello/99]
```

We can also constrain the pilot field with a prototype to achieve the same result.

```
// retrieveCarByPilotProtoQuery

Query query = db.query();
query.constrain(Car.class);
Pilot proto = new Pilot("Rubens Barrichello", 0);
query.descend("pilot").constrain(proto);
ObjectSet result = query.execute();
listResult(result);
```

**OUTPUT:**

```
1
BMW[Rubens Barrichello/99]
```

We have seen that descending into a query provides us with another query. Starting out from a query root we can descend in multiple directions. In practice this is the same as ascending from one child to


a parent and descending to another child. We can conclude that queries turn one-directional references in our objects into true relations. Here is an example that queries for "a Pilot that is being referenced by a Car, where the Car model is 'Ferrari'":

```
// retrievePilotByCarModelQuery

Query carquery = db.query();
carquery.constrain(Car.class);
carquery.descend("model").constrain("Ferrari");
Query pilotquery = carquery.descend("pilot");
ObjectSet result = pilotquery.execute();
listResult(result);
```

#### OUTPUT:

```
1
Michael Schumacher/100
```

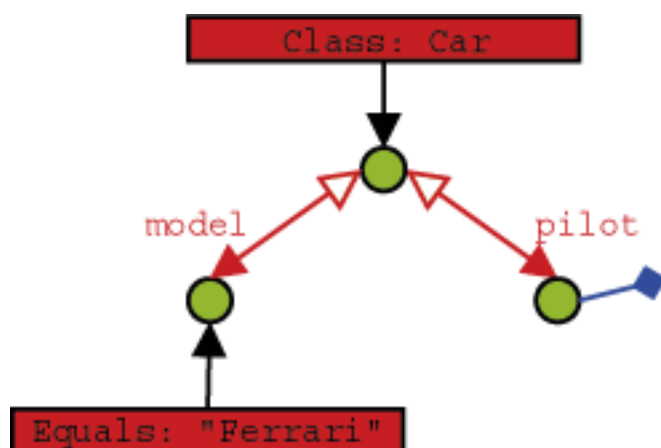

### 5.3. Updating structured objects

To update structured objects in db4o, we simply call `#store()` on them again.

```
// updateCar
```

```

List<Car> result = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return car.getModel().equals("Ferrari");
    }
});
Car found = (Car) result.get(0);
found.setPilot(new Pilot("Somebody else", 0));
db.store(found);
result = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return car.getModel().equals("Ferrari");
    }
});
listResult(result);

```

#### OUTPUT:

```

1
Ferrari[Somebody else/0]

```

Let's modify the pilot, too.

```

// updatePilotSingleSession

List<Car> result = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return car.getModel().equals("Ferrari");
    }
});
Car found = result.get(0);
found.getPilot().addPoints(1);
db.store(found);
result = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return car.getModel().equals("Ferrari");
    }
});

```

```
});  
listResult(result);
```

#### OUTPUT:

```
1  
Ferrari[Somebody else/1]
```

Nice and easy, isn't it? But wait, there's something evil lurking right behind the corner. Let's see what happens if we split this task in two separate db4o sessions: In the first we modify our pilot and update his car:

```
// updatePilotSeparateSessionsPart1  
  
List<Car> result = db.query(new Predicate<Car>() {  
    public boolean match(Car car) {  
        return car.getModel().equals("Ferrari");  
    }  
});  
Car found = result.get(0);  
found.getPilot().addPoints(1);  
db.store(found);
```

And in the second, we'll double-check our modification:

```
// updatePilotSeparateSessionsPart2  
  
List<Car> result = db.query(new Predicate<Car>() {  
    public boolean match(Car car) {  
        return car.getModel().equals("Ferrari");  
    }  
});  
listResult(result);
```

**OUTPUT:**

```
1
Ferrari[Somebody else/0]
```

Looks like we're in trouble: Why did the Pilot's points not change? What's happening here and what can we do to fix it?

### 5.3.1. Update depth

Imagine a complex object with many members that have many members themselves. When updating this object, db4o would have to update all its children, grandchildren, etc. This poses a severe performance penalty and will not be necessary in most cases - sometimes, however, it will.

So, in our previous update example, we were modifying the Pilot child of a Car object. When we saved the change, we told db4o to save our Car object and assumed that the modified Pilot would be updated. But we were modifying and saving in the same manner as we were in the first update sample, so why did it work before? The first time we made the modification, db4o never actually had to retrieve the modified Pilot it returned the same one that was still in memory that we modified, but it never actually updated the database. The fact that we saw the modified value was, in fact, a bug. Restarting the application would show that the value was unchanged.

To be able to handle this dilemma as flexible as possible, db4o introduces the concept of update depth to control how deep an object's member tree will be traversed on update. The default update depth for all objects is 1, meaning that only primitive and String members will be updated, but changes in object members will not be reflected.

db4o provides means to control update depth with very fine granularity. For our current problem we'll advise db4o to update the full graph for Car objects by setting `#cascadeOnUpdate()` for this class accordingly.

```
// updatePilotSeparateSessionsImprovedPart1

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().objectClass(Car.class).cascadeOnUpdate(true);
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);
List<Car> result = db.query(new Predicate<Car>() {
```

```

        public boolean match(Car car) {
            return car.getModel().equals("Ferrari");
        }
    });
    if (result.size() > 0) {
        Car found = result.get(0);
        found.getPilot().addPoints(1);
        db.store(found);
    }
    db.close();

```

```

// updatePilotSeparateSessionsImprovedPart2

ObjectContainer db = Db4oEmbedded.openFile(Db4oEmbedded
        .newConfiguration(), DB4OFILENAME);

List<Car> result = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return car.getModel().equals("Ferrari");
    }
});
Car car = result.get(0);
listResult(result);
db.close();

```

## OUTPUT:

```

1
Ferrari[Somebody else/1]

```

This looks much better.

Note that container configuration must be passed when the container is opened.

We'll cover update depth as well as other issues with complex object graphs and the respective db4o



configuration options in more detail in a later chapter.

## 5.4. Deleting structured objects

As we have already seen, we call `#delete()` on objects to get rid of them.

```
// deleteFlat

List<Car> result = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return car.getModel().equals("Ferrari");
    }
});
Car found = result.get(0);
db.delete(found);
result = db.queryByExample(new Car(null));
listResult(result);
```

### OUTPUT:

```
1
BMW[Rubens Barrichello/99]
```

Fine, the car is gone. What about the pilots?

```
// retrieveAllPilotsQBE

Pilot proto = new Pilot(null, 0);
ObjectSet result = db.queryByExample(proto);
listResult(result);
```

### OUTPUT:

```
3
Michael Schumacher/100
```

```
Rubens Barrichello/99
```

```
Somebody else/1
```

Ok, this is no real surprise - we don't expect a pilot to vanish when his car is disposed of in real life, too. But what if we want an object's children to be thrown away on deletion, too?

#### 5.4.1. Recursive deletion

You may already suspect that the problem of recursive deletion (and perhaps its solution, too) is quite similar to our little update problem, and you're right. Let's configure db4o to delete a car's pilot, too, when the car is deleted.

```
// deleteDeep

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().objectClass(Car.class).cascadeOnDelete(true);
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);
List<Car> result = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return car.getModel().equals("BMW");
    }
});
if (result.size() > 0) {
    Car found = result.get(0);
    db.delete(found);
}
result = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return true;
    }
});
listResult(result);
db.close();
```

**OUTPUT:**

0

Again: Note that configuration should be passed to the call opening ObjectContainer.

Let's have a look at our pilots again.

```
// retrieveAllPilots

Pilot proto = new Pilot(null, 0);
ObjectSet result = db.queryByExample(proto);
listResult(result);
```

#### OUTPUT:

```
2
Michael Schumacher/100
Somebody else/1
```

### 5.4.2. Recursive deletion revisited

But wait - what happens if the children of a removed object are still referenced by other objects?

```
// deleteDeepRevisited

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().objectClass(Car.class).cascadeOnDelete(true);
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);
ObjectSet<Pilot> result = db.query(new Predicate<Pilot>() {
    public boolean match(Pilot pilot) {
        return pilot.getName().equals("Michael Schumacher");
    }
});
if (!result.hasNext()) {
    System.out.println("Pilot not found!");
    db.close();
    return;
}
```

```

Pilot pilot = (Pilot) result.next();
Car car1 = new Car("Ferrari");
Car car2 = new Car("BMW");
car1.setPilot(pilot);
car2.setPilot(pilot);
db.store(car1);
db.store(car2);
db.delete(car2);
List<Car> cars = db.query(new Predicate<Car>() {
    public boolean match(Car car) {
        return true;
    }
});
listResult(cars);
db.close();

```

#### OUTPUT:

```

1
Ferrari[Michael Schumacher/100]

```

```

// retrieveAllPilots

Pilot proto = new Pilot(null, 0);
ObjectSet result = db.queryByExample(proto);
listResult(result);

```

#### OUTPUT:

```

1
Somebody else/1

```

Houston, we have a problem - and there's no simple solution at hand. Currently db4o does **not** check whether objects to be deleted are referenced anywhere else, so please be very careful when using this feature.

Let's clear our database for the next chapter.

```
// deleteAll

ObjectSet result=db.queryByExample(new Object());
while(result.hasNext()) {
    db.delete(result.next());
}
```

## 5.5. Conclusion

So much for object associations: We can hook into a root object and climb down its reference graph to specify queries. But what about multi-valued objects like arrays and collections? We will cover this in the [next chapter](#) .

## 5.6. Full source

```
package com.db4odoc.fl.chapter2;

import com.db4o.Db4oEmbedded;
import com.db4o.ObjectContainer;
import com.db4o.ObjectSet;
import com.db4o.config.EmbeddedConfiguration;
import com.db4o.query.Predicate;
import com.db4o.query.Query;
import com.db4odoc.fl.Util;

import java.io.File;
import java.util.List;

public class StructuredExample extends Util {

    final static String DB4OFILENAME =
System.getProperty("user.home") + "/formula1.db4o";
```

```

public static void main(String[] args) {
    new File(DB4OFILENAME).delete();
    ObjectContainer db = Db4oEmbedded.openFile(Db4oEmbedded
        .newConfiguration(), DB4OFILENAME);
    storeFirstCar(db);
    storeSecondCar(db);
    retrieveAllCarsQBE(db);
    retrieveAllPilotsQBE(db);
    retrieveCarByPilotQBE(db);
    retrieveCarByPilotNameQuery(db);
    retrieveCarByPilotProtoQuery(db);
    retrievePilotByCarModelQuery(db);
    updateCar(db);
    updatePilotSingleSession(db);
    updatePilotSeparateSessionsPart1(db);
    db.close();
    db = Db4oEmbedded.openFile(Db4oEmbedded
        .newConfiguration(), DB4OFILENAME);
    updatePilotSeparateSessionsPart2(db);
    db.close();
    updatePilotSeparateSessionsImprovedPart1();
    updatePilotSeparateSessionsImprovedPart2();
    db = Db4oEmbedded.openFile(Db4oEmbedded
        .newConfiguration(), DB4OFILENAME);

    deleteFlat(db);
    db.close();
    deleteDeep();
    deleteDeepRevisited();
}

public static void storeFirstCar(ObjectContainer db) {
    Car car1 = new Car("Ferrari");
    Pilot pilot1 = new Pilot("Michael Schumacher", 100);
    car1.setPilot(pilot1);
    db.store(car1);
}

public static void storeSecondCar(ObjectContainer db) {
    Pilot pilot2 = new Pilot("Rubens Barrichello", 99);
    db.store(pilot2);
}

```

```

        Car car2 = new Car("BMW");
        car2.setPilot(pilot2);
        db.store(car2);
    }

    public static void retrieveAllCarsQBE(ObjectContainer db) {
        Car proto = new Car(null);
        ObjectSet result = db.queryByExample(proto);
        listResult(result);
    }

    public static void retrieveAllPilotsQBE(ObjectContainer db) {
        Pilot proto = new Pilot(null, 0);
        ObjectSet result = db.queryByExample(proto);
        listResult(result);
    }

    public static void retrieveAllPilots(ObjectContainer db) {
        ObjectSet result = db.queryByExample(Pilot.class);
        listResult(result);
    }

    public static void retrieveCarByPilotQBE(ObjectContainer db) {
        Pilot pilotproto = new Pilot("Rubens Barrichello", 0);
        Car carproto = new Car(null);
        carproto.setPilot(pilotproto);
        ObjectSet result = db.queryByExample(carproto);
        listResult(result);
    }

    public static void retrieveCarByPilotNameQuery(ObjectContainer
db) {
        Query query = db.query();
        query.constrain(Car.class);
        query.descend("pilot").descend("name").constrain("Rubens
Barrichello");
        ObjectSet result = query.execute();
        listResult(result);
    }

    public static void retrieveCarByPilotProtoQuery(ObjectContainer

```

```

db) {
    Query query = db.query();
    query.constrain(Car.class);
    Pilot proto = new Pilot("Rubens Barrichello", 0);
    query.descend("pilot").constrain(proto);
    ObjectSet result = query.execute();
    listResult(result);
}

public static void retrievePilotByCarModelQuery(ObjectContainer
db) {
    Query carquery = db.query();
    carquery.constrain(Car.class);
    carquery.descend("model").constrain("Ferrari");
    Query pilotquery = carquery.descend("pilot");
    ObjectSet result = pilotquery.execute();
    listResult(result);
}

public static void retrieveAllPilotsNative(ObjectContainer db) {
    List<Pilot> results = db.query(new Predicate<Pilot>() {
        public boolean match(Pilot pilot) {
            return true;
        }
    });
    listResult(results);
}

public static void retrieveAllCars(ObjectContainer db) {
    ObjectSet results = db.queryByExample(Car.class);
    listResult(results);
}

public static void retrieveCarsByPilotNameNative(ObjectContainer
db) {
    final String pilotName = "Rubens Barrichello";
    List<Car> results = db.query(new Predicate<Car>() {
        public boolean match(Car car) {
            return car.getPilot().getName().equals(pilotName);
        }
    });
}

```



```

        listResult(results);
    }

    public static void updateCar(ObjectContainer db) {
        List<Car> result = db.query(new Predicate<Car>() {
            public boolean match(Car car) {
                return car.getModel().equals("Ferrari");
            }
        });
        Car found = (Car) result.get(0);
        found.setPilot(new Pilot("Somebody else", 0));
        db.store(found);
        result = db.query(new Predicate<Car>() {
            public boolean match(Car car) {
                return car.getModel().equals("Ferrari");
            }
        });
        listResult(result);
    }

    public static void updatePilotSingleSession(ObjectContainer db) {
        List<Car> result = db.query(new Predicate<Car>() {
            public boolean match(Car car) {
                return car.getModel().equals("Ferrari");
            }
        });
        Car found = result.get(0);
        found.getPilot().addPoints(1);
        db.store(found);
        result = db.query(new Predicate<Car>() {
            public boolean match(Car car) {
                return car.getModel().equals("Ferrari");
            }
        });
        listResult(result);
    }

    public static void
updatePilotSeparateSessionsPart1(ObjectContainer db) {
        List<Car> result = db.query(new Predicate<Car>() {
            public boolean match(Car car) {

```

```

        return car.getModel().equals("Ferrari");
    }
});
Car found = result.get(0);
found.getPilot().addPoints(1);
db.store(found);
}

public static void
updatePilotSeparateSessionsPart2(ObjectContainer db) {
    List<Car> result = db.query(new Predicate<Car>() {
        public boolean match(Car car) {
            return car.getModel().equals("Ferrari");
        }
    });
    listResult(result);
}

public static void updatePilotSeparateSessionsImprovedPart1() {
    EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();
    config.common().objectClass(Car.class).cascadeOnUpdate(true);
    ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);
    List<Car> result = db.query(new Predicate<Car>() {
        public boolean match(Car car) {
            return car.getModel().equals("Ferrari");
        }
    });
    if (result.size() > 0) {
        Car found = result.get(0);
        found.getPilot().addPoints(1);
        db.store(found);
    }
    db.close();
}

public static void updatePilotSeparateSessionsImprovedPart2() {
    ObjectContainer db = Db4oEmbedded.openFile(Db4oEmbedded
        .newConfiguration(), DB4OFILENAME);

```

```

        List<Car> result = db.query(new Predicate<Car>() {
            public boolean match(Car car) {
                return car.getModel().equals("Ferrari");
            }
        });
        Car car = result.get(0);
        listResult(result);
        db.close();
    }

    public static void deleteFlat(ObjectContainer db) {
        List<Car> result = db.query(new Predicate<Car>() {
            public boolean match(Car car) {
                return car.getModel().equals("Ferrari");
            }
        });
        Car found = result.get(0);
        db.delete(found);
        result = db.queryByExample(new Car(null));
        listResult(result);
    }

    public static void deleteDeep() {
        EmbeddedConfiguration config =
        Db4oEmbedded.newConfiguration();

        config.common().objectClass(Car.class).cascadeOnDelete(true);
        ObjectContainer db = Db4oEmbedded.openFile(config,
        DB4OFILENAME);

        List<Car> result = db.query(new Predicate<Car>() {
            public boolean match(Car car) {
                return car.getModel().equals("BMW");
            }
        });
        if (result.size() > 0) {
            Car found = result.get(0);
            db.delete(found);
        }
        result = db.query(new Predicate<Car>() {
            public boolean match(Car car) {
                return true;
            }
        });
    }

```

```

        });
        listResult(result);
        db.close();
    }

    public static void deleteDeepRevisited() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();
        config.common().objectClass(Car.class).cascadeOnDelete(true);
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);
        ObjectSet<Pilot> result = db.query(new Predicate<Pilot>() {
            public boolean match(Pilot pilot) {
                return pilot.getName().equals("Michael Schumacher");
            }
        });
        if (!result.hasNext()) {
            System.out.println("Pilot not found!");
            db.close();
            return;
        }
        Pilot pilot = (Pilot) result.next();
        Car car1 = new Car("Ferrari");
        Car car2 = new Car("BMW");
        car1.setPilot(pilot);
        car2.setPilot(pilot);
        db.store(car1);
        db.store(car2);
        db.delete(car2);
        List<Car> cars = db.query(new Predicate<Car>() {
            public boolean match(Car car) {
                return true;
            }
        });
        listResult(cars);
        db.close();
    }
}

```



## 6. Collections and Arrays

We will slowly move towards real-time data processing now by installing sensors to our car and collecting their output.

```
package com.db4odoc.fl.chapter4;

import java.util.*;

public class SensorReadout {
    private double[] values;
    private Date time;
    private Car car;

    public SensorReadout(double[] values, Date time, Car car) {
        this.values=values;
        this.time=time;
        this.car=car;
    }

    public Car getCar() {
        return car;
    }

    public Date getTime() {
        return time;
    }

    public int getNumValues() {
        return values.length;
    }

    public double[] getValues(){
        return values;
    }

    public double getValue(int idx) {
        return values[idx];
    }
}
```

```

    }

    public String toString() {
        StringBuffer str=new StringBuffer();
        str.append(car.toString())
            .append(" : ")
            .append(time.getTime())
            .append(" : ");
        for(int idx=0;idx<values.length;idx++) {
            if(idx>0) {
                str.append(',');
            }
            str.append(values[idx]);
        }
        return str.toString();
    }
}

```

A car may produce its current sensor readout when requested and keep a list of readouts collected during a race.

```

package com.db4odoc.fl.chapter4;

import java.util.*;

public class Car {
    private String model;
    private Pilot pilot;
    private List history;

    public Car(String model) {
        this(model,new ArrayList());
    }

    public Car(String model,List history) {
        this.model=model;
        this.pilot=null;
    }
}

```

```

        this.history=history;
    }

    public Pilot getPilot() {
        return pilot;
    }

    public void setPilot(Pilot pilot) {
        this.pilot=pilot;
    }

    public String getModel() {
        return model;
    }

    public List getHistory() {
        return history;
    }

    public void snapshot() {
        history.add(new SensorReadout(poll(),new Date(),this));
    }

    protected double[] poll() {
        int factor=history.size()+1;
        return new double[]{0.1d*factor,0.2d*factor,0.3d*factor};
    }

    public String toString() {
        return model+"["+pilot+"]/"+history.size();
    }
}

```

We will constrain ourselves to rather static data at the moment and add flexibility during the next chapters.

## 6.1. Storing

This should be familiar by now.



```
// storeFirstCar

Car car1 = new Car("Ferrari");
Pilot pilot1 = new Pilot("Michael Schumacher", 100);
car1.setPilot(pilot1);
db.store(car1);
```

The second car will take two snapshots immediately at startup.

```
// storeSecondCar

Pilot pilot2 = new Pilot("Rubens Barrichello", 99);
Car car2 = new Car("BMW");
car2.setPilot(pilot2);
car2.snapshot();
car2.snapshot();
db.store(car2);
```

## 6.2. Retrieving

### 6.2.1. QBE

First let us verify that we indeed have taken snapshots.

```
// retrieveAllSensorReadout

SensorReadout proto = new SensorReadout(null, null, null);
ObjectSet results = db.queryByExample(proto);
listResult(results);
```

---

**OUTPUT:**

```
2
BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.1,0.2,0.3
BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.2,0.4,0.6
```

As a prototype for an array, we provide an array of the same type, containing only the values we expect the result to contain.

```
// retrieveSensorReadoutQBE

SensorReadout proto = new SensorReadout(new double[] { 0.3, 0.1 },
    null, null);
ObjectSet results = db.queryByExample(proto);
listResult(results);
```

**OUTPUT:**

```
1
BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.1,0.2,0.3
```

Note that the actual position of the given elements in the prototype array is irrelevant.

To retrieve a car by its stored sensor readouts, we install a history containing the sought-after values.

```
// retrieveCarQBE

SensorReadout protoreadout = new SensorReadout(
    new double[] { 0.6, 0.2 }, null, null);
List protohistory = new ArrayList();
protohistory.add(protoreadout);
Car protocar = new Car(null, protohistory);
ObjectSet result = db.queryByExample(protocar);
listResult(result);
```

**OUTPUT:**

```
1
BMW[Rubens Barrichello/99]/2
```

We can also query for the collections themselves, since they are first class objects.

```
// retrieveCollections

ObjectSet result = db.queryByExample(new ArrayList());
listResult(result);
```

**OUTPUT:**

```
2
[]
[BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.1,0.2,0.3,
BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.2,0.4,0.6]
```

This doesn't work with arrays, though.

```
// retrieveArrays

ObjectSet result = db.queryByExample(new double[] { 0.6, 0.4 });
listResult(result);
```

**OUTPUT:**

```
0
```

## 6.2.2. Native Queries

If we want to use Native Queries to find SensorReadouts with matching values, we simply write this as if we would check every single instance:

```
// retrieveSensorReadoutNative

List<SensorReadout> results = db.query(new Predicate<SensorReadout>()
{
    public boolean match(SensorReadout candidate) {
        return Arrays.binarySearch(candidate.getValues(), 0.3) >= 0
            && Arrays.binarySearch(candidate.getValues(), 1.0) >=
0;
    }
});
listResult(results);
```

**OUTPUT:**

0

And here's how we find Cars with matching readout values:

```
// retrieveCarNative

List<Car> results = db.query(new Predicate<Car>() {
    public boolean match(Car candidate) {
        List history = candidate.getHistory();
        for (Object aHistory : history) {
            SensorReadout readout = (SensorReadout) aHistory;
            if (Arrays.binarySearch(readout.getValues(), 0.6) >= 0
                || Arrays.binarySearch(readout.getValues(), 0.2)
>= 0)
                return true;
        }
    }
});
```

```
        return false;
    }
});
listResult(results);
```

#### OUTPUT:

```
1
BMW[Rubens Barrichello/99]/2
```

### 6.2.3. Query API

Handling of arrays and collections is analogous to the previous example. First, lets retrieve only the SensorReadouts with specific values:

```
// retrieveSensorReadoutQuery

Query query = db.query();
query.constrain(SensorReadout.class);
Query valuequery = query.descend("values");
valuequery.constrain(0.3);
valuequery.constrain(0.1);
ObjectSet result = query.execute();
listResult(result);
```

#### OUTPUT:

```
1
BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.1,0.2,0.3
```

Then let's get some Cars with matching Readout values:

```
// retrieveCarQuery
```

```

Query query = db.query();
query.constrain(Car.class);
Query historyquery = query.descend("history");
historyquery.constrain(SensorReadout.class);
Query valuequery = historyquery.descend("values");
valuequery.constrain(0.3);
valuequery.constrain(0.1);
ObjectSet result = query.execute();
listResult(result);

```

#### OUTPUT:

```

1
BMW[Rubens Barrichello/99]/2

```

### 6.3. Updating and deleting

This should be familiar, we just have to remember to take care of the update depth.

```

// updateCar

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().objectClass(Car.class).cascadeOnUpdate(true);
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);
List<Car> results = db.query(new Predicate<Car>() {
    public boolean match(Car candidate) {
        return true;
    }
});
if (results.size() > 0) {
    Car car = results.get(0);
    car.snapshot();
    db.store(car);
    retrieveAllSensorReadoutNative(db);
}
db.close();

```

## OUTPUT:

```
3
BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.1,0.2,0.3
BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.2,0.4,0.6
Ferrari[Michael Schumacher/100]/1 : 1320208042378 : 0.1,0.2,0.3
```

There's nothing special about deleting arrays and collections, too.

Deleting an object from a collection is an update, too, of course.

```
// updateCollection

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().objectClass(Car.class).cascadeOnUpdate(true);
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);
ObjectSet<Car> results = db.query(new Predicate<Car>() {
    public boolean match(Car candidate) {
        return true;
    }
});
if (results.hasNext()) {
    Car car = (Car) results.next();
    car.getHistory().remove(0);
    db.store(car.getHistory());
    results = db.query(new Predicate<Car>() {
        public boolean match(Car candidate) {
            return true;
        }
    });
    while (results.hasNext()) {
        car = results.next();
        for (int idx = 0; idx < car.getHistory().size(); idx++) {
            System.out.println(car.getHistory().get(idx));
        }
    }
}
```

```
db.close();
```

#### OUTPUT:

```
BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.1,0.2,0.3
```

```
BMW[Rubens Barrichello/99]/2 : 1320208042019 : 0.2,0.4,0.6
```

(This example also shows that with db4o it is quite easy to access object internals we were never meant to see. Please keep this always in mind and be careful.)

We will delete all cars from the database again to prepare for the next chapter.

```
// deleteAll

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().objectClass(Car.class).cascadeOnDelete(true);
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);

ObjectSet<Car> cars = db.query(new Predicate<Car>() {
    public boolean match(Car candidate) {
        return true;
    }
});
while (cars.hasNext()) {
    db.delete(cars.next());
}
ObjectSet<SensorReadout> readouts = db
    .query(new Predicate<SensorReadout>() {
        public boolean match(SensorReadout candidate) {
            return true;
        }
    });
while (readouts.hasNext()) {
    db.delete(readouts.next());
}
db.close();
```



## 6.4. Conclusion

Ok, collections are just objects. But why did we have to specify the concrete ArrayList type all the way? Was that necessary? How does db4o handle inheritance? We will cover that in the [next chapter](#).

## 6.5. Full source

```
package com.db4odoc.fl.chapter4;

import com.db4o.Db4oEmbedded;
import com.db4o.ObjectContainer;
import com.db4o.ObjectSet;
import com.db4o.config.EmbeddedConfiguration;
import com.db4o.query.Predicate;
import com.db4o.query.Query;
import com.db4odoc.fl.Util;

import java.io.File;
import java.util.ArrayList;
import java.util.Arrays;
import java.util.List;

public class CollectionsExample extends Util {
    final static String DB4OFILENAME =
System.getProperty("user.home") + "/formula1.db4o";

    public static void main(String[] args) {
        new File(DB4OFILENAME).delete();
        ObjectContainer db = Db4oEmbedded.openFile(Db4oEmbedded
            .newConfiguration(), DB4OFILENAME);
        try {
            storeFirstCar(db);
            storeSecondCar(db);
            retrieveAllSensorReadout(db);
            retrieveSensorReadoutQBE(db);
            retrieveCarQBE(db);
            retrieveCollections(db);
            retrieveArrays(db);
        }
    }
}
```

```

        retrieveAllSensorReadoutNative(db);
        retrieveSensorReadoutNative(db);
        retrieveCarNative(db);
        retrieveSensorReadoutQuery(db);
        retrieveCarQuery(db);
        db.close();
        updateCar();
        updateCollection();

        deleteAll();
    } finally {
        db.close();
    }
}

public static void storeFirstCar(ObjectContainer db) {
    Car car1 = new Car("Ferrari");
    Pilot pilot1 = new Pilot("Michael Schumacher", 100);
    car1.setPilot(pilot1);
    db.store(car1);
}

public static void storeSecondCar(ObjectContainer db) {
    Pilot pilot2 = new Pilot("Rubens Barrichello", 99);
    Car car2 = new Car("BMW");
    car2.setPilot(pilot2);
    car2.snapshot();
    car2.snapshot();
    db.store(car2);
}

public static void retrieveAllSensorReadout(ObjectContainer db) {
    SensorReadout proto = new SensorReadout(null, null, null);
    ObjectSet results = db.queryByExample(proto);
    listResult(results);
}

public static void retrieveAllSensorReadoutNative(ObjectContainer
db) {
    List<SensorReadout> results = db.query(new
Predicate<SensorReadout>() {

```

```

        public boolean match(SensorReadout candidate) {
            return true;
        }
    });
    listResult(results);
}

public static void retrieveSensorReadoutQBE(ObjectContainer db) {
    SensorReadout proto = new SensorReadout(new double[] { 0.3,
0.1 },
        null, null);
    ObjectSet results = db.queryByExample(proto);
    listResult(results);
}

public static void retrieveSensorReadoutNative(ObjectContainer
db) {
    List<SensorReadout> results = db.query(new
Predicate<SensorReadout>() {
        public boolean match(SensorReadout candidate) {
            return Arrays.binarySearch(candidate.getValues(),
0.3) >= 0
                && Arrays.binarySearch(candidate.getValues(),
1.0) >= 0;
        }
    });
    listResult(results);
}

public static void retrieveCarQBE(ObjectContainer db) {
    SensorReadout protoreadout = new SensorReadout(
        new double[] { 0.6, 0.2 }, null, null);
    List protohistory = new ArrayList();
    protohistory.add(protoreadout);
    Car protocar = new Car(null, protohistory);
    ObjectSet result = db.queryByExample(protocar);
    listResult(result);
}

public static void retrieveCarNative(ObjectContainer db) {
    List<Car> results = db.query(new Predicate<Car>() {

```

```

        public boolean match(Car candidate) {
            List history = candidate.getHistory();
            for (Object aHistory : history) {
                SensorReadout readout = (SensorReadout) aHistory;
                if (Arrays.binarySearch(readout.getValues(), 0.6)
>= 0
                                ||
Arrays.binarySearch(readout.getValues(), 0.2) >= 0)
                    return true;
            }
            return false;
        }
    });
    listResult(results);
}

public static void retrieveCollections(ObjectContainer db) {
    ObjectSet result = db.queryByExample(new ArrayList());
    listResult(result);
}

public static void retrieveArrays(ObjectContainer db) {
    ObjectSet result = db.queryByExample(new double[] { 0.6, 0.4
});
    listResult(result);
}

public static void retrieveSensorReadoutQuery(ObjectContainer db)
{
    Query query = db.query();
    query.constrain(SensorReadout.class);
    Query valuequery = query.descend("values");
    valuequery.constrain(0.3);
    valuequery.constrain(0.1);
    ObjectSet result = query.execute();
    listResult(result);
}

public static void retrieveCarQuery(ObjectContainer db) {
    Query query = db.query();
    query.constrain(Car.class);

```

```

        Query historyquery = query.descend("history");
        historyquery.constrain(SensorReadout.class);
        Query valuequery = historyquery.descend("values");
        valuequery.constrain(0.3);
        valuequery.constrain(0.1);
        ObjectSet result = query.execute();
        listResult(result);
    }

    public static void updateCar() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();

        config.common().objectClass(Car.class).cascadeOnUpdate(true);
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);

        List<Car> results = db.query(new Predicate<Car>() {
            public boolean match(Car candidate) {
                return true;
            }
        });

        if (results.size() > 0) {
            Car car = results.get(0);
            car.snapshot();
            db.store(car);
            retrieveAllSensorReadoutNative(db);
        }
        db.close();
    }

    public static void updateCollection() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();

        config.common().objectClass(Car.class).cascadeOnUpdate(true);
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);

        ObjectSet<Car> results = db.query(new Predicate<Car>() {
            public boolean match(Car candidate) {
                return true;
            }
        });

        if (results.hasNext()) {

```

```

        Car car = (Car) results.next();
        car.getHistory().remove(0);
        db.store(car.getHistory());
        results = db.query(new Predicate<Car>() {
            public boolean match(Car candidate) {
                return true;
            }
        });
        while (results.hasNext()) {
            car = results.next();
            for (int idx = 0; idx < car.getHistory().size();
idx++) {
                System.out.println(car.getHistory().get(idx));
            }
        }
        db.close();
    }

    public static void deleteAll() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();
        config.common().objectClass(Car.class).cascadeOnDelete(true);
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);

        ObjectSet<Car> cars = db.query(new Predicate<Car>() {
            public boolean match(Car candidate) {
                return true;
            }
        });
        while (cars.hasNext()) {
            db.delete(cars.next());
        }
        ObjectSet<SensorReadout> readouts = db
            .query(new Predicate<SensorReadout>() {
                public boolean match(SensorReadout candidate) {
                    return true;
                }
            });
        while (readouts.hasNext()) {

```

```
        db.delete(readouts.next());  
    }  
    db.close();  
}  
}
```

## 7. Inheritance

So far we have always been working with the concrete (i.e. most specific type of an object. What about subclassing and interfaces?

To explore this, we will differentiate between different kinds of sensors.

```
package com.db4odoc.fl.chapter5;

import java.util.*;

public class SensorReadout {
    private Date time;
    private Car car;
    private String description;

    protected SensorReadout(Date time, Car car, String description) {
        this.time=time;
        this.car=car;
        this.description=description;
    }

    public Car getCar() {
        return car;
    }

    public Date getTime() {
        return time;
    }

    public String getDescription() {
        return description;
    }

    public String toString() {
        return car+" : "+time+" : "+description;
    }
}
```



```

package com.db4odoc.fl.chapter5;

import java.util.*;

public class TemperatureSensorReadout extends SensorReadout {
    private double temperature;

    public TemperatureSensorReadout(
        Date time, Car car,
        String description, double temperature) {
        super(time, car, description);
        this.temperature = temperature;
    }

    public double getTemperature() {
        return temperature;
    }

    public String toString() {
        return super.toString() + " temp : " + temperature;
    }
}

```

```

package com.db4odoc.fl.chapter5;

import java.util.*;

public class PressureSensorReadout extends SensorReadout {
    private double pressure;

    public PressureSensorReadout(
        Date time, Car car,
        String description, double pressure) {

```

```

        super(time,car,description);
        this.pressure=pressure;
    }

    public double getPressure() {
        return pressure;
    }

    public String toString() {
        return super.toString()+" pressure : "+pressure;
    }
}

```

Our car's snapshot mechanism is changed accordingly.

```

package com.db4odoc.fl.chapter5;

import java.util.*;

public class Car {
    private String model;
    private Pilot pilot;
    private List history;

    public Car(String model) {
        this.model=model;
        this.pilot=null;
        this.history=new ArrayList();
    }

    public Pilot getPilot() {
        return pilot;
    }

    public void setPilot(Pilot pilot) {
        this.pilot=pilot;
    }
}

```

```

public String getModel() {
    return model;
}

public SensorReadout[] getHistory() {
    return (SensorReadout[])history.toArray(new
SensorReadout[history.size()]);
}

public void snapshot() {
    history.add(new TemperatureSensorReadout(
        new Date(),this,"oil",pollOilTemperature()));
    history.add(new TemperatureSensorReadout(
        new Date(),this,"water",pollWaterTemperature()));
    history.add(new PressureSensorReadout(
        new Date(),this,"oil",pollOilPressure()));
}

protected double pollOilTemperature() {
    return 0.1*history.size();
}

protected double pollWaterTemperature() {
    return 0.2*history.size();
}

protected double pollOilPressure() {
    return 0.3*history.size();
}

public String toString() {
    return model+"["+pilot+"]/"+history.size();
}
}

```

## 7.1. Storing

Our setup code has not changed at all, just the internal workings of a snapshot.

```
// storeFirstCar

Car car1=new Car("Ferrari");
Pilot pilot1=new Pilot("Michael Schumacher",100);
car1.setPilot(pilot1);
db.store(car1);
```

```
// storeSecondCar

Pilot pilot2=new Pilot("Rubens Barrichello",99);
Car car2=new Car("BMW");
car2.setPilot(pilot2);
car2.snapshot();
car2.snapshot();
db.store(car2);
```

## 7.2. Retrieving

db4o will provide us with all objects of the given type. To collect all instances of a given class, no matter whether they are subclass members or direct instances, we just provide a corresponding prototype.

```
// retrieveTemperatureReadoutsQBE

SensorReadout proto=
    new TemperatureSensorReadout(null,null,null,0.0);
ObjectSet result=db.queryByExample(proto);
listResult(result);
```

**OUTPUT:**

4

```
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.0
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.2
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.30000000000000004
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.8
```

```
// retrieveAllSensorReadoutsQBE

SensorReadout proto=new SensorReadout(null,null,null);
ObjectSet result=db.queryByExample(proto);
listResult(result);
```

## OUTPUT:

6

```
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.0
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.2
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 0.6
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.30000000000000004
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.8
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 1.5
```

This is one more situation where QBE might not be applicable: What if the given type is an interface or an abstract class? Well, there's a little trick to keep in mind: Class objects receive special handling with QBE.

```
// retrieveAllSensorReadoutsQBEAlternative

ObjectSet result=db.queryByExample(SensorReadout.class);
listResult(result);
```

#### OUTPUT:

```
6
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.0
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.2
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 0.6
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.30000000000000004
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.8
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 1.5
```

And of course there's our SODA API:

```
// retrieveAllSensorReadoutsQuery

Query query=db.query();
query.constrain(SensorReadout.class);
ObjectSet result=query.execute();
listResult(result);
```

#### OUTPUT:

```
6
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
```

```
temp : 0.0
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.2
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 0.6
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.30000000000000004
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.8
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 1.5
```

### 7.3. Updating and deleting

is just the same for all objects, no matter where they are situated in the inheritance tree.

Just like we retrieved all objects from the database above, we can delete all stored objects to prepare for the next chapter.

```
// deleteAll

ObjectSet result=db.queryByExample(new Object());
while(result.hasNext()) {
    db.delete(result.next());
}
```

### 7.4. Conclusion

Now we have covered all basic OO features and the way they are handled by db4o. We will complete the first part of our db4o walkthrough in the [next chapter](#) by looking at deep object graphs, including recursive structures.

### 7.5. Full source

```

package com.db4odoc.fl.chapter5;

import java.io.*;

import com.db4o.*;
import com.db4o.query.*;
import com.db4odoc.fl.*;

public class InheritanceExample extends Util {

    final static String DB4OFILENAME =
System.getProperty("user.home") + "/formula1.db4o";

    public static void main(String[] args) {
        new File(DB4OFILENAME).delete();
        ObjectContainer db=Db4oEmbedded.openFile(Db4oEmbedded
            .newConfiguration(), DB4OFILENAME);
        try {
            storeFirstCar(db);
            storeSecondCar(db);
            retrieveTemperatureReadoutsQBE(db);
            retrieveAllSensorReadoutsQBE(db);
            retrieveAllSensorReadoutsQBEAlternative(db);
            retrieveAllSensorReadoutsQuery(db);
            retrieveAllObjectsQBE(db);
        }
        finally {
            db.close();
        }
    }

    public static void storeFirstCar(ObjectContainer db) {
        Car car1=new Car("Ferrari");
        Pilot pilot1=new Pilot("Michael Schumacher",100);
        car1.setPilot(pilot1);
        db.store(car1);
    }
}

```



```

public static void storeSecondCar(ObjectContainer db) {
    Pilot pilot2=new Pilot("Rubens Barrichello",99);
    Car car2=new Car("BMW");
    car2.setPilot(pilot2);
    car2.snapshot();
    car2.snapshot();
    db.store(car2);
}

public static void retrieveAllSensorReadoutsQBE(
    ObjectContainer db) {
    SensorReadout proto=new SensorReadout(null,null,null);
    ObjectSet result=db.queryByExample(proto);
    listResult(result);
}

public static void retrieveTemperatureReadoutsQBE(
    ObjectContainer db) {
    SensorReadout proto=
        new TemperatureSensorReadout(null,null,null,0.0);
    ObjectSet result=db.queryByExample(proto);
    listResult(result);
}

public static void retrieveAllSensorReadoutsQBEAlternative(
    ObjectContainer db) {
    ObjectSet result=db.queryByExample(SensorReadout.class);
    listResult(result);
}

public static void retrieveAllSensorReadoutsQuery(
    ObjectContainer db) {
    Query query=db.query();
    query.constrain(SensorReadout.class);
    ObjectSet result=query.execute();
    listResult(result);
}

public static void retrieveAllObjectsQBE(ObjectContainer db) {
    ObjectSet result=db.queryByExample(new Object());
    listResult(result);
}

```

}

}

## 8. Deep graphs

We have already seen how db4o handles object associations, but our running example is still quite flat and simple, compared to real-world domain models. In particular we haven't seen how db4o behaves in the presence of recursive structures. We will emulate such a structure by replacing our history list with a linked list implicitly provided by the `SensorReadout` class.

```
package com.db4odoc.fl.chapter6;

import java.util.*;

public class SensorReadout {
    private Date time;
    private Car car;
    private String description;
    private SensorReadout next;

    protected SensorReadout(Date time, Car car, String description) {
        this.time=time;
        this.car=car;
        this.description=description;
        this.next=null;
    }

    public Car getCar() {
        return car;
    }

    public Date getTime() {
        return time;
    }

    public String getDescription() {
        return description;
    }

    public SensorReadout getNext() {
        return next;
    }
}
```

```

    }

    public void append(SensorReadout readout) {
        if(next==null) {
            next=readout;
        }
        else {
            next.append(readout);
        }
    }

    public int countElements() {
        return (next==null ? 1 : next.countElements()+1);
    }

    public String toString() {
        return car+" : "+time+" : "+description;
    }
}

```

Our car only maintains an association to a 'head' sensor readout now.

```

package com.db4odoc.fl.chapter6;

import java.util.*;

public class Car {
    private String model;
    private Pilot pilot;
    private SensorReadout history;

    public Car(String model) {
        this.model=model;
        this.pilot=null;
        this.history=null;
    }
}

```

```

public Pilot getPilot() {
    return pilot;
}

public void setPilot(Pilot pilot) {
    this.pilot=pilot;
}

public String getModel() {
    return model;
}

public SensorReadout getHistory() {
    return history;
}

public void snapshot() {
    appendToHistory(new TemperatureSensorReadout(
        new Date(),this,"oil",pollOilTemperature()));
    appendToHistory(new TemperatureSensorReadout(
        new Date(),this,"water",pollWaterTemperature()));
    appendToHistory(new PressureSensorReadout(
        new Date(),this,"oil",pollOilPressure()));
}

protected double pollOilTemperature() {
    return 0.1*countHistoryElements();
}

protected double pollWaterTemperature() {
    return 0.2*countHistoryElements();
}

protected double pollOilPressure() {
    return 0.3*countHistoryElements();
}

public String toString() {
    return model+"["+pilot+"]/"+countHistoryElements();
}

```

```

private int countHistoryElements() {
    return (history==null ? 0 : history.countElements());
}

private void appendToHistory(SensorReadout readout) {
    if(history==null) {
        history=readout;
    }
    else {
        history.append(readout);
    }
}
}

```

## 8.1. Storing and updating

No surprises here.

```

// storeCar

Pilot pilot = new Pilot("Rubens Barrichello", 99);
Car car = new Car("BMW");
car.setPilot(pilot);
db.store(car);

```

Now we would like to build a sensor readout chain. We already know about the update depth trap, so we configure this first.

```

// takeManySnapshots

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().objectClass(Car.class).cascadeOnUpdate(true);
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);
ObjectSet result = db.queryByExample(Car.class);

```

```

if (result.hasNext()) {
    Car car = (Car) result.next();
    for (int i = 0; i < 5; i++) {
        car.snapshot();
    }
    db.store(car);
}
db.close();

```

## 8.2. Retrieving

Now that we have a sufficiently deep structure, we'll retrieve it from the database and traverse it.

First let's verify that we indeed have taken lots of snapshots.

```

// retrieveAllSnapshots

ObjectSet result = db.queryByExample(SensorReadout.class);
while (result.hasNext()) {
    System.out.println(result.next());
}

```

### OUTPUT:

```

BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.0
BMW[Rubens Barrichello/99]/7 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.2
BMW[Rubens Barrichello/99]/8 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 0.6
BMW[Rubens Barrichello/99]/9 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.30000000000000004
BMW[Rubens Barrichello/99]/10 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.8
BMW[Rubens Barrichello/99]/11 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 1.5
BMW[Rubens Barrichello/99]/12 : Wed Nov 02 04:27:22 GMT 2011 : oil

```

```

temp : 0.600000000000000001
BMW[Rubens Barrichello/99]/13 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 1.400000000000000001
BMW[Rubens Barrichello/99]/14 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 2.4
BMW[Rubens Barrichello/99]/15 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.9
BMW[Rubens Barrichello/99]/15 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 2.0
BMW[Rubens Barrichello/99]/15 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 3.3
BMW[Rubens Barrichello/99]/15 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 1.200000000000000002
BMW[Rubens Barrichello/99]/15 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 2.6
BMW[Rubens Barrichello/99]/15 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 4.2

```

All these readouts belong to one linked list, so we should be able to access them all by just traversing our list structure.

```

// retrieveSnapshotsSequentially

ObjectSet result = db.queryByExample(Car.class);
Car car = (Car) result.next();
SensorReadout readout = car.getHistory();
while (readout != null) {
    System.out.println(readout);
    readout = readout.getNext();
}

```

## OUTPUT:

```

BMW[Rubens Barrichello/99]/5 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.0
BMW[Rubens Barrichello/99]/5 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.2

```



```
BMW[Rubens Barrichello/99]/5 : Wed Nov 02 04:27:22 GMT 2011 : oil  
pressure : 0.6  
BMW[Rubens Barrichello/99]/5 : Wed Nov 02 04:27:22 GMT 2011 : oil  
temp : 0.30000000000000004  
null : null : null temp : 0.0
```

Ouch! What's happening here?

### 8.2.1. Activation depth

Deja vu - this is just the other side of the update depth issue.

db4o cannot track when you are traversing references from objects retrieved from the database. So it would always have to return 'complete' object graphs on retrieval - in the worst case this would boil down to pulling the whole database content into memory for a single query.

This is absolutely undesirable in most situations, so db4o provides a mechanism to give the client fine-grained control over how much he wants to pull out of the database when asking for an object. This mechanism is called *activation depth* and works quite similar to our familiar update depth.

The default activation depth for any object is 5, so our example above runs into nulls after traversing 5 references.

We can dynamically ask objects to activate their member references. This allows us to retrieve each single sensor readout in the list from the database just as needed.

```
// retrieveSnapshotsSequentiallyImproved  
  
ObjectSet result = db.queryByExample(Car.class);  
Car car = (Car) result.next();  
SensorReadout readout = car.getHistory();  
while (readout != null) {  
    db.activate(readout, 1);  
    System.out.println(readout);  
    readout = readout.getNext();  
}
```

## OUTPUT:

```
BMW[Rubens Barrichello/99]/5 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.0
BMW[Rubens Barrichello/99]/5 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.2
BMW[Rubens Barrichello/99]/5 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 0.6
BMW[Rubens Barrichello/99]/5 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.30000000000000004
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.8
BMW[Rubens Barrichello/99]/7 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 1.5
BMW[Rubens Barrichello/99]/8 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.6000000000000001
BMW[Rubens Barrichello/99]/9 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 1.4000000000000001
BMW[Rubens Barrichello/99]/10 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 2.4
BMW[Rubens Barrichello/99]/11 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.9
BMW[Rubens Barrichello/99]/12 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 2.0
BMW[Rubens Barrichello/99]/13 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 3.3
BMW[Rubens Barrichello/99]/14 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 1.2000000000000002
BMW[Rubens Barrichello/99]/15 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 2.6
BMW[Rubens Barrichello/99]/15 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 4.2
```

Note that 'cut' references may also influence the behavior of your objects: in this case the length of the list is calculated dynamically, and therefor constrained by activation depth.

Instead of dynamically activating subgraph elements, you can configure activation depth statically, too. We can tell our SensorReadout class objects to cascade activation automatically, for example.

```
// retrieveSnapshotsSequentiallyCascade

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().objectClass(TemperatureSensorReadout.class).cascadeOn
Activate(
    true);
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);

ObjectSet result = db.queryByExample(Car.class);
if (result.hasNext()) {
    Car car = (Car) result.next();
    SensorReadout readout = car.getHistory();
    while (readout != null) {
        System.out.println(readout);
        readout = readout.getNext();
    }
}
db.close();
```

#### OUTPUT:

```
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.0
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.2
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
pressure : 0.6
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : oil
temp : 0.30000000000000004
BMW[Rubens Barrichello/99]/6 : Wed Nov 02 04:27:22 GMT 2011 : water
temp : 0.8
null : null : null pressure : 0.0
```

You have to be very careful, though. Activation issues are tricky. Db4o provides a wide range of configuration features to control activation depth at a very fine-grained level. You'll find those triggers in `com.db4o.config.Configuration` and the associated `ObjectClass` and `ObjectField` classes.

Don't forget to clean up the database.

```
// deleteAll

ObjectSet result=db.queryByExample(new Object());
while(result.hasNext()) {
    db.delete(result.next());
}
```

### 8.3. Conclusion

Now we should have the tools at hand to work with arbitrarily complex object graphs. But so far we have only been working forward, hoping that the changes we apply to our precious data pool are correct. What if we have to roll back to a previous state due to some failure? In the [next chapter](#) we will introduce the db4o transaction concept.

### 8.4. Full source

```
package com.db4odoc.fl.chapter6;

import com.db4o.Db4oEmbedded;
import com.db4o.ObjectContainer;
import com.db4o.ObjectSet;
import com.db4o.config.EmbeddedConfiguration;
import com.db4odoc.fl.Util;

import java.io.File;

public class DeepExample extends Util {
    final static String DB4OFILENAME =
System.getProperty("user.home") + "/formula1.db4o";

    public static void main(String[] args) {
        new File(DB4OFILENAME).delete();
        ObjectContainer db = Db4oEmbedded.openFile(DB4OFILENAME);
    }
}
```

```

        storeCar(db);
        db.close();
        db = Db4oEmbedded.openFile(DB4OFILENAME);
        db.close();
        takeManySnapshots();
        db = Db4oEmbedded.openFile(DB4OFILENAME);
        retrieveAllSnapshots(db);
        db.close();
        db = Db4oEmbedded.openFile(DB4OFILENAME);
        retrieveSnapshotsSequentially(db);
        retrieveSnapshotsSequentiallyImproved(db);
        db.close();
        retrieveSnapshotsSequentiallyCascade();
    }

    public static void storeCar(ObjectContainer db) {
        Pilot pilot = new Pilot("Rubens Barrichello", 99);
        Car car = new Car("BMW");
        car.setPilot(pilot);
        db.store(car);
    }

    public static void takeManySnapshots() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();

        config.common().objectClass(Car.class).cascadeOnUpdate(true);
        ObjectContainer db = Db4oEmbedded.openFile(config,
Db4OFILENAME);

        ObjectSet result = db.queryByExample(Car.class);
        if (result.hasNext()) {
            Car car = (Car) result.next();
            for (int i = 0; i < 5; i++) {
                car.snapshot();
            }
            db.store(car);
        }
        db.close();
    }

    public static void retrieveAllSnapshots(ObjectContainer db) {
        ObjectSet result = db.queryByExample(SensorReadout.class);

```

```

        while (result.hasNext()) {
            System.out.println(result.next());
        }
    }

    public static void retrieveSnapshotsSequentially(ObjectContainer
db) {
        ObjectSet result = db.queryByExample(Car.class);
        Car car = (Car) result.next();
        SensorReadout readout = car.getHistory();
        while (readout != null) {
            System.out.println(readout);
            readout = readout.getNext();
        }
    }

    public static void retrieveSnapshotsSequentiallyCascade() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();
config.common().objectClass(TemperatureSensorReadout.class).cascadeOn
Activate(
            true);
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);

        ObjectSet result = db.queryByExample(Car.class);
        if (result.hasNext()) {
            Car car = (Car) result.next();
            SensorReadout readout = car.getHistory();
            while (readout != null) {
                System.out.println(readout);
                readout = readout.getNext();
            }
        }
        db.close();
    }

    public static void
retrieveSnapshotsSequentiallyImproved(ObjectContainer db) {
        ObjectSet result = db.queryByExample(Car.class);
        Car car = (Car) result.next();

```

```
SensorReadout readout = car.getHistory();
while (readout != null) {
    db.activate(readout, 1);
    System.out.println(readout);
    readout = readout.getNext();
}
}
```

## 9. Transactions

Probably you have already wondered how db4o handles concurrent access to a single database. Just as any other DBMS, db4o provides a transaction mechanism. Before we take a look at multiple, perhaps even remote, clients accessing a db4o instance in parallel, we will introduce db4o transaction concepts in isolation.

### 9.1. Commit and rollback

You may not have noticed it, but we have already been working with transactions from the first chapter on. By definition, you are always working inside a transaction when interacting with db4o. A transaction is implicitly started when you open a container, and the current transaction is implicitly committed when you close it again. So the following code snippet to store a car is semantically identical to the ones we have seen before; it just makes the commit explicit.

```
// storeCarCommit

Pilot pilot=new Pilot("Rubens Barrichello",99);
Car car=new Car("BMW");
car.setPilot(pilot);
db.store(car);
db.commit();
```

```
// listAllCars

ObjectSet result=db.queryByExample(Car.class);
listResult(result);
```

#### OUTPUT:

```
1
BMW[Rubens Barrichello/99]/0
```



However, we can also rollback the current transaction, resetting the state of our database to the last commit point.

```
// storeCarRollback

Pilot pilot=new Pilot("Michael Schumacher",100);
Car car=new Car("Ferrari");
car.setPilot(pilot);
db.store(car);
db.rollback();
```

```
// listAllCars

ObjectSet result=db.queryByExample(Car.class);
listResult(result);
```

#### OUTPUT:

```
1
BMW[Rubens Barrichello/99]/0
```

## 9.2. Refresh live objects

There's one problem, though: We can roll back our database, but this cannot automatically trigger a rollback for our live objects.

```
// carSnapshotRollback

ObjectSet result=db.queryByExample(new Car("BMW"));
Car car=(Car)result.next();
car.snapshot();
db.store(car);
```

```
db.rollback();  
System.out.println(car);
```

**OUTPUT:**

```
BMW[Rubens Barrichello/99]/3
```

We will have to explicitly refresh our live objects when we suspect they may have participated in a rollback transaction.

```
// carSnapshotRollbackRefresh  
  
ObjectSet result=db.queryByExample(new Car("BMW"));  
Car car=(Car)result.next();  
car.snapshot();  
db.store(car);  
db.rollback();  
db.ext().refresh(car,Integer.MAX_VALUE);  
System.out.println(car);
```

**OUTPUT:**

```
BMW[Rubens Barrichello/99]/0
```

What is this `#ext()` construct good for? Well, it provides some functionality that is in itself stable, but the API may still be subject to change. As soon as we are confident that no more changes will occur, `#ext()` functionality will be transferred to the common `ObjectContainer` API.

Finally, we clean up again.

```
// deleteAll  
  
ObjectSet result=db.queryByExample(new Object());
```

```
while(result.hasNext()) {  
    db.delete(result.next());  
}
```

### 9.3. Conclusion

We have seen how transactions work for a single client. In the [Client/Server chapter](#) we will see how the transaction concept extends to multiple clients, whether they are located within the same VM or on a remote machine.

Let's first revisit Activation again in the [next chapter](#) and take a look at how db4o can take care of our Object lifecycle automatically.

### 9.4. Full source

```
package com.db4odoc.fl.chapter6;  
  
import java.io.*;  
import com.db4o.*;  
import com.db4odoc.fl.*;  
  
public class TransactionExample extends Util {  
  
    final static String DB4OFILENAME =  
System.getProperty("user.home") + "/formula1.db4o";  
  
    public static void main(String[] args) {  
        new File(DB4OFILENAME).delete();  
        ObjectContainer  
db=Db4oEmbedded.openFile(Db4oEmbedded.newConfiguration(),  
DB4OFILENAME);  
        try {  
            storeCarCommit(db);  
            db.close();  
            db=Db4oEmbedded.openFile(Db4oEmbedded.newConfiguration(),  
DB4OFILENAME);
```

```

        listAllCars(db);
        storeCarRollback(db);
        db.close();
        db=Db4oEmbedded.openFile(Db4oEmbedded.newConfiguration(),
DB4OFILENAME);
        listAllCars(db);
        carSnapshotRollback(db);
        carSnapshotRollbackRefresh(db);
    }
    finally {
        db.close();
    }
}

public static void storeCarCommit(ObjectContainer db) {
    Pilot pilot=new Pilot("Rubens Barrichello",99);
    Car car=new Car("BMW");
    car.setPilot(pilot);
    db.store(car);
    db.commit();
}

public static void listAllCars(ObjectContainer db) {
    ObjectSet result=db.queryByExample(Car.class);
    listResult(result);
}

public static void storeCarRollback(ObjectContainer db) {
    Pilot pilot=new Pilot("Michael Schumacher",100);
    Car car=new Car("Ferrari");
    car.setPilot(pilot);
    db.store(car);
    db.rollback();
}

public static void carSnapshotRollback(ObjectContainer db) {
    ObjectSet result=db.queryByExample(new Car("BMW"));
    Car car=(Car)result.next();
    car.snapshot();
    db.store(car);
    db.rollback();
}

```

```
        System.out.println(car);
    }

    public static void carSnapshotRollbackRefresh(ObjectContainer db)
    {
        ObjectSet result=db.queryByExample(new Car("BMW"));
        Car car=(Car)result.next();
        car.snapshot();
        db.store(car);
        db.rollback();
        db.ext().refresh(car,Integer.MAX_VALUE);
        System.out.println(car);
    }
}
```

## 10. Transparent Activation

Let's take a second look at the concept of Activation. We have seen how db4o uses a "depth" concept by default to activate objects to a specific depth when they are returned from a query.

Wouldn't it be a lot nicer, if an application would never have to worry about activating objects and if db4o could handle things transparently for us? This is what Transparent Activation was developed for.

### 10.1. The Activation Problem

We can reuse most of the code from the [Deep Graphs chapter](#) and get it to work with Transparent Activation.

As a first step we should fill up our database with Car, Pilot and SensorReadout objects, so we have some objects to work with.

```
// storeCarAndSnapshots

Pilot pilot = new Pilot("Kimi Raikkonen", 110);
Car car = new Car("Ferrari");
car.setPilot(pilot);
for (int i = 0; i < 5; i++) {
    car.snapshot();
}
db.store(car);
```

If we now rerun the code to traverse all cars and their sensor readings, we are again confronted with the same problem that we had before, we end up with some leaves of our object graph being null.

```
// retrieveSnapshotsSequentially

ObjectSet result = db.queryByExample(Car.class);
Car car = (Car) result.next();
SensorReadout readout = car.getHistory();
while (readout != null) {
```

```
        System.out.println(readout);
        readout = readout.getNext();
    }
}
```

#### OUTPUT:

```
Ferrari[Kimi Raikkonen/110]/5 : Wed Nov 02 04:27:23 GMT 2011 : oil
temp : 0.0
Ferrari[Kimi Raikkonen/110]/5 : Wed Nov 02 04:27:23 GMT 2011 : water
temp : 0.2
Ferrari[Kimi Raikkonen/110]/5 : Wed Nov 02 04:27:23 GMT 2011 : oil
pressure : 0.6
Ferrari[Kimi Raikkonen/110]/5 : Wed Nov 02 04:27:23 GMT 2011 : oil
temp : 0.30000000000000004
null : null : null temp : 0.0
```

## 10.2. Turning On Transparent Activation

Let's configure db4o to run in Transparent Activation mode and let's try again:

```
// retrieveSnapshotsSequentiallyTA

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().add(new TransparentActivationSupport());
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);
ObjectSet result = db.queryByExample(Car.class);
if (result.hasNext()) {
    Car car = (Car) result.next();
    SensorReadout readout = car.getHistory();
    while (readout != null) {
        System.out.println(readout);
        readout = readout.getNext();
    }
}
db.close();
```

## OUTPUT:

```
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
temp : 0.0
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : water
temp : 0.2
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
pressure : 0.6
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
temp : 0.30000000000000004
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : water
temp : 0.8
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
pressure : 1.5
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
temp : 0.60000000000000001
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : water
temp : 1.40000000000000001
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
pressure : 2.4
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
temp : 0.9
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : water
temp : 2.0
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
pressure : 3.3
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
temp : 1.20000000000000002
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : water
temp : 2.6
Ferrari[Kimi Raikkonen/110]/15 : Wed Nov 02 04:27:23 GMT 2011 : oil
pressure : 4.2
```

Wow it worked! Is it really that easy? Principally yes. When db4o is run in Transparent Activation mode there are no surprises with null members that have not yet been read from the database.

## 10.3. Implementing Activatable



When Transparent Activation is turned on, all objects that do not implement the `com.db4o.ta.Activatable` interface will be fully activated when they are used.

Although we won't get any surprises with null objects when we work in this mode, access to the root of a deep graph may load the entire graph into memory and that can take a long time and use a lot of memory.

To prevent immediate activation of a class you can implement the `Activatable` interface. Whenever db4o comes across an `Activatable` object while activating a graph of objects it will stop traversing the graph any deeper. db4o will "know" that it can activate `Activatable` objects on demand, so there is no reason to continue activation until these objects are really needed.

For demonstration purposes we have made all classes used in this example `Activatable` and we have also added all the code required to activate by hand.

Let's take a look at the `Activatable` version of our `Car` class:

```
package com.db4odoc.fl.chapter8;

import java.util.*;

import com.db4o.activation.*;
import com.db4o.ta.*;

public class Car implements Activatable {
    private String model;
    private Pilot pilot;
    private SensorReadout history;
    private transient Activator _activator;

    public Car(String model) {
        this.model=model;
        this.pilot=null;
        this.history=null;
    }

    public Pilot getPilot() {
        activate(ActivationPurpose.READ);
    }
}
```

```

        return pilot;
    }

    public Pilot getPilotWithoutActivation() {
        return pilot;
    }

    public void setPilot(Pilot pilot) {
        this.pilot=pilot;
    }

    public String getModel() {
        activate(ActivationPurpose.READ);
        return model;
    }

    public SensorReadout getHistory() {
        activate(ActivationPurpose.READ);
        return history;
    }

    public void snapshot() {
        activate(ActivationPurpose.WRITE);
        appendToHistory(new TemperatureSensorReadout(
            new Date(),this,"oil",pollOilTemperature()));
        appendToHistory(new TemperatureSensorReadout(
            new Date(),this,"water",pollWaterTemperature()));
        appendToHistory(new PressureSensorReadout(
            new Date(),this,"oil",pollOilPressure()));
    }

    protected double pollOilTemperature() {
        return 0.1*countHistoryElements();
    }

    protected double pollWaterTemperature() {
        return 0.2*countHistoryElements();
    }

    protected double pollOilPressure() {
        return 0.3*countHistoryElements();
    }

```

```

    }

    public String toString() {
        activate(ActivationPurpose.READ);
        return model+"["+pilot+"]/"+countHistoryElements();
    }

    private int countHistoryElements() {
        activate(ActivationPurpose.READ);
        return (history==null ? 0 : history.countElements());
    }

    private void appendToHistory(SensorReadout readout) {
        activate(ActivationPurpose.WRITE);
        if(history==null) {
            history=readout;
        }
        else {
            history.append(readout);
        }
    }

    public void activate(ActivationPurpose purpose) {
        if(_activator != null) {
            _activator.activate(purpose);
        }
    }

    public void bind(Activator activator) {
        if (_activator ==activator) {
            return;
        }
        if (activator != null && _activator != null) {
            throw new IllegalStateException();
        }
        _activator = activator;
    }
}

```

Can you spot the member `_activator`, all the `# activate()` calls and the two methods `# activate()` and `# bind(Activator)` at the end?

An Activatable class should store the Activator that db4o provides to the bind method in a transient variable and call `# activate()` on this Activator before any field is accessed.

If the object is already activated, the method will return immediately. If it is not, activation will happen at this time.

We have added the `#getPilotWithoutActivation()` method to the Car class to be able to demonstrate.

```
// demonstrateTransparentActivation

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().add(new TransparentActivationSupport());
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);

ObjectSet result = db.queryByExample(Car.class);
if (result.hasNext()) {
    Car car = (Car) result.next();

    System.out
        .println("#getPilotWithoutActivation() before the car is
activated");
    System.out.println(car.getPilotWithoutActivation());

    System.out.println("calling #getPilot() activates the car
object");
    System.out.println(car.getPilot());

    System.out
        .println("#getPilotWithoutActivation() after the car is
activated");
    System.out.println(car.getPilotWithoutActivation());
}
db.close();
```

**OUTPUT:**

```
#getPilotWithoutActivation() before the car is activated
null
calling #getPilot() activates the car object
Kimi Raikkonen/110
#getPilotWithoutActivation() after the car is activated
Kimi Raikkonen/110
```

## 10.4. Where Enhancement can help

If all this Activatable code in a persistent class looked like a lot of typing work, do not worry: db4o comes with a tool to add this code automatically to all of your persistent classes. Read more about it in the chapter on [Enhancement](#) .

As a final step we should clean up the database again.

```
// deleteAll

ObjectSet result=db.queryByExample(new Object());
while(result.hasNext()) {
    db.delete(result.next());
}
```

## 10.5. Conclusion

This was just a short introduction to Transparent Activation and what it can do for you. For more detailed information please see the pages on Transparent Activation in our [online reference](#) or in your offline copy of the Reference documentation.

## 10.6. Full source

```
package com.db4odoc.f1.chapter8;
```

```

import java.io.*;

import com.db4o.*;
import com.db4o.config.*;
import com.db4o.ta.*;
import com.db4o.doc.fl.*;

public class TransparentActivationExample extends Util {

    final static String DB4OFILENAME =
System.getProperty("user.home")
        + "/formula1.db4o";

    public static void main(String[] args) throws Exception {
        new File(DB4OFILENAME).delete();
        ObjectContainer db = Db4oEmbedded.openFile(Db4oEmbedded
            .newConfiguration(), DB4OFILENAME);
        try {
            storeCarAndSnapshots(db);
            db.close();
            db =
Db4oEmbedded.openFile(Db4oEmbedded.newConfiguration(),
                DB4OFILENAME);
            retrieveSnapshotsSequentially(db);
            db.close();
            retrieveSnapshotsSequentiallyTA();
            demonstrateTransparentActivation();

        } finally {
            db.close();
        }
    }

    public static void storeCarAndSnapshots(ObjectContainer db) {
        Pilot pilot = new Pilot("Kimi Raikkonen", 110);
        Car car = new Car("Ferrari");
        car.setPilot(pilot);
        for (int i = 0; i < 5; i++) {
            car.snapshot();
        }
        db.store(car);
    }
}

```

```

    }

    public static void retrieveSnapshotsSequentially(ObjectContainer
db) {
        ObjectSet result = db.queryByExample(Car.class);
        Car car = (Car) result.next();
        SensorReadout readout = car.getHistory();
        while (readout != null) {
            System.out.println(readout);
            readout = readout.getNext();
        }
    }

    public static void retrieveSnapshotsSequentiallyTA() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();
        config.common().add(new TransparentActivationSupport());
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);
        ObjectSet result = db.queryByExample(Car.class);
        if (result.hasNext()) {
            Car car = (Car) result.next();
            SensorReadout readout = car.getHistory();
            while (readout != null) {
                System.out.println(readout);
                readout = readout.getNext();
            }
        }
        db.close();
    }

    public static void demonstrateTransparentActivation() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();
        config.common().add(new TransparentActivationSupport());
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);

        ObjectSet result = db.queryByExample(Car.class);
        if (result.hasNext()) {
            Car car = (Car) result.next();

```

```
        System.out
            .println("#getPilotWithoutActivation() before the
car is activated");
        System.out.println(car.getPilotWithoutActivation());

        System.out.println("calling #getPilot() activates the car
object");
        System.out.println(car.getPilot());

        System.out
            .println("#getPilotWithoutActivation() after the
car is activated");
        System.out.println(car.getPilotWithoutActivation());

    }
    db.close();
}

}
```



## 11. Transparent Persistence

The problem of updating deep object structures was briefly outlined in [Structured objects chapter](#) . Update Depth configuration setting gives a user a certain control over the object updating and allows to find a balance between performance and convenient object storage code. However, this balance is far from ideal:

- when update depth is zero, each piece of code should "know" how many levels of objects should be updated; this potentially creates lots of problems when the objects are refactored;
- when update depth is maximum performance can become very poor as many unchanged objects will be stored unnecessary.

The solution to this problem is to let db4o engine decide, which objects were modified and should be stored. This feature was introduced in db4o version 7.1 and was named Transparent Persistence. So how does it work?

1. Database should be configured to use `TransparentPersistenceSupport`.
2. Persistent classes available for Transparent Persistence must implement `Activatable` interface. This interface provides a `#bind()` method to bind an object to the object container's activator.
3. The object is bound to the `ObjectContainer` when it is first stored or instantiated from the database.
4. When an object field is modified in the runtime, `#activate()` method is called to register the object to be stored with the next commit. The difference from [Transparent Activation](#) is in the activation purpose: `ActivationPurpose.WRITE` is used for TP.
5. When the transaction is committed or the database is closed, db4o traverses the list of modified `Activatable` objects and persists them.

Well, that's enough of theory, let's look at an example.

### 11.1. Transparent Persistence Example

We will use `Car` and `SensorReadout` classes from [Deep Graphs chapter](#). These are persistent classes, so if we want to use Transparent Persistence, we should make them "visible" to Transparent Persistence by implementing `Activatable` interface.

```
package com.db4odoc.fl.chapter9;

import java.util.*;

import com.db4o.activation.*;
import com.db4o.ta.*;
```

```

public class Car implements Activatable {
    private String model;
    private SensorReadout history;
    private transient Activator _activator;

    public Car(String model) {
        this.model=model;
        this.history=null;
    }

    public String getModel() {
        activate(ActivationPurpose.READ);
        return model;
    }

    public SensorReadout getHistory() {
        activate(ActivationPurpose.READ);
        return history;
    }

    public void snapshot() {
        activate(ActivationPurpose.WRITE);
        appendToHistory(new TemperatureSensorReadout(
            new Date(),this,"oil",pollOilTemperature()));
        appendToHistory(new TemperatureSensorReadout(
            new Date(),this,"water",pollWaterTemperature()));
    }

    protected double pollOilTemperature() {
        return 0.1*countHistoryElements();
    }

    protected double pollWaterTemperature() {
        return 0.2*countHistoryElements();
    }

    public String toString() {
        activate(ActivationPurpose.READ);
        return model+"/"+countHistoryElements();
    }
}

```

```

private int countHistoryElements() {
    activate(ActivationPurpose.READ);
    return (history==null ? 0 : history.countElements());
}

private void appendToHistory(SensorReadout readout) {
    activate(ActivationPurpose.WRITE);
    if(history==null) {
        history=readout;
    }
    else {
        history.append(readout);
    }
}

public void activate(ActivationPurpose purpose) {
    if(_activator != null) {
        _activator.activate(purpose);
    }
}

public void bind(Activator activator) {
    if (_activator == activator) {
        return;
    }
    if (activator != null && _activator != null) {
        throw new IllegalStateException();
    }
    _activator = activator;
}
}

```

Note, that we've added an *activator* field, *bind* and *activate* methods to implement *Activatable* interface. In addition to that all methods that read or write object fields has got *activate* calls with a corresponding purpose.

Similar modifications should be done to the *SensorReadout* class.

Now we are ready to test how Transparent Persistence work. First we should configure the database to

use TransparentPersistenceSupport before storing objects:

```
// storeCarAndSnapshots

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().add(new TransparentPersistenceSupport());
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);
Car car = new Car("Ferrari");
for (int i = 0; i < 3; i++) {
    car.snapshot();
}
db.store(car);
db.close();
```

Ok, all the objects are stored.

Now, let's retrieve all the stored objects and modify them:

```
// modifySnapshotHistory

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().add(new TransparentPersistenceSupport());
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);

System.out.println("Read all sensors and modify the description:");
ObjectSet result = db.queryByExample(Car.class);
if (result.hasNext()) {
    Car car = (Car) result.next();
    SensorReadout readout = car.getHistory();
    while (readout != null) {
        System.out.println(readout);
        readout.setDescription("Modified: " +
readout.getDescription());
        readout = readout.getNext();
    }
    db.commit();
}
db.close();
```

You can see that we do not have to call *#store* any more - all the objects are stored when *#commit* is called.

Let's test that the modifications actually reached the database:

```
// readSnapshotHistory

EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
config.common().add(new TransparentPersistenceSupport());
ObjectContainer db = Db4oEmbedded.openFile(config, DB4OFILENAME);

System.out.println("Read all modified sensors:");
ObjectSet result = db.queryByExample(Car.class);
if (result.hasNext()) {
    Car car = (Car) result.next();
    SensorReadout readout = car.getHistory();
    while (readout != null) {
        System.out.println(readout);
        readout = readout.getNext();
    }
}
db.close();
```

Yes, it is all as it should be. If you want to see the difference without Transparent Persistence, run the same examples without *TransparentPersistenceSupport* .

## 11.2. Transparent Persistence Enhancement

As we saw [before](#) enhancement tools can simplify the process for Transparent Activation. The same applies to Transparent Persistence. Actually Transparent Persistence enhancement implicitly provides TA for enhanced classes.

For more information please refer to [Enhancement chapter](#) .

## 11.3. Conclusion

Transparent Persistence can considerably simplify the development process at the same time providing considerable performance benefits. For more information on Transparent Persistence please refer to our [online reference](#) or your offline copy of the Reference documentation.

## 11.4. Full source

```

package com.db4odoc.fl.chapter9;

import java.io.*;

import com.db4o.*;
import com.db4o.config.*;
import com.db4o.ta.*;
import com.db4odoc.fl.*;

public class TransparentPersistenceExample extends Util {

    final static String DB4OFILENAME =
System.getProperty("user.home") + "/formula1.db4o";

    public static void main(String[] args) throws Exception {
        new File(DB4OFILENAME).delete();
        storeCarAndSnapshots();
        modifySnapshotHistory();
        readSnapshotHistory();
    }

    public static void storeCarAndSnapshots() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();
        config.common().add(new TransparentPersistenceSupport());
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);

        Car car = new Car("Ferrari");
        for (int i = 0; i < 3; i++) {
            car.snapshot();
        }
        db.store(car);
        db.close();
    }

    public static void modifySnapshotHistory() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();

```

```

        config.common().add(new TransparentPersistenceSupport());
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);

        System.out.println("Read all sensors and modify the
description:");
        ObjectSet result = db.queryByExample(Car.class);
        if (result.hasNext()) {
            Car car = (Car) result.next();
            SensorReadout readout = car.getHistory();
            while (readout != null) {
                System.out.println(readout);
                readout.setDescription("Modified: " +
readout.getDescription());
                readout = readout.getNext();
            }
            db.commit();
        }
        db.close();
    }

    public static void readSnapshotHistory() {
        EmbeddedConfiguration config =
Db4oEmbedded.newConfiguration();
        config.common().add(new TransparentPersistenceSupport());
        ObjectContainer db = Db4oEmbedded.openFile(config,
DB4OFILENAME);

        System.out.println("Read all modified sensors:");
        ObjectSet result = db.queryByExample(Car.class);
        if (result.hasNext()) {
            Car car = (Car) result.next();
            SensorReadout readout = car.getHistory();
            while (readout != null) {
                System.out.println(readout);
                readout = readout.getNext();
            }
        }
        db.close();
    }
}

```

```
}
```

```
package com.db4odoc.fl.chapter9;

import java.util.*;

import com.db4o.activation.*;
import com.db4o.ta.*;

public class Car implements Activatable {
    private String model;
    private SensorReadout history;
    private transient Activator _activator;

    public Car(String model) {
        this.model=model;
        this.history=null;
    }

    public String getModel() {
        activate(ActivationPurpose.READ);
        return model;
    }

    public SensorReadout getHistory() {
        activate(ActivationPurpose.READ);
        return history;
    }

    public void snapshot() {
        activate(ActivationPurpose.WRITE);
        appendToHistory(new TemperatureSensorReadout(
            new Date(),this,"oil",pollOilTemperature()));
        appendToHistory(new TemperatureSensorReadout(
            new Date(),this,"water",pollWaterTemperature()));
    }

    protected double pollOilTemperature() {
```



```

        return 0.1*countHistoryElements();
    }

    protected double pollWaterTemperature() {
        return 0.2*countHistoryElements();
    }

    public String toString() {
        activate(ActivationPurpose.READ);
        return model+"/"+countHistoryElements();
    }

    private int countHistoryElements() {
        activate(ActivationPurpose.READ);
        return (history==null ? 0 : history.countElements());
    }

    private void appendToHistory(SensorReadout readout) {
        activate(ActivationPurpose.WRITE);
        if(history==null) {
            history=readout;
        }
        else {
            history.append(readout);
        }
    }

    public void activate(ActivationPurpose purpose) {
        if(_activator != null) {
            _activator.activate(purpose);
        }
    }

    public void bind(Activator activator) {
        if (_activator == activator) {
            return;
        }
        if (activator != null && _activator != null) {
            throw new IllegalStateException();
        }
        _activator = activator;
    }

```

```
}  
  
}
```

```
package com.db4odoc.fl.chapter9;  
  
import java.util.*;  
  
import com.db4o.activation.*;  
import com.db4o.ta.*;  
  
public class SensorReadout implements Activatable {  
    private Date time;  
    private Car car;  
    private String description;  
    private SensorReadout next;  
    private transient Activator _activator;  
  
    protected SensorReadout(Date time, Car car, String description) {  
        this.time=time;  
        this.car=car;  
        this.description=description;  
        this.next=null;  
    }  
  
    public Car getCar() {  
        activate(ActivationPurpose.READ);  
        return car;  
    }  
  
    public Date getTime() {  
        activate(ActivationPurpose.READ);  
        return time;  
    }  
  
    public String getDescription() {  
        activate(ActivationPurpose.READ);  
        return description;  
    }  
}
```

```

    }

    public void setDescription(String description) {
        activate(ActivationPurpose.WRITE);
        this.description = description;
    }

    public SensorReadout getNext() {
        activate(ActivationPurpose.READ);
        return next;
    }

    public void append(SensorReadout readout) {
        activate(ActivationPurpose.WRITE);
        if(next==null) {
            next=readout;
        }
        else {
            next.append(readout);
        }
    }

    public int countElements() {
        activate(ActivationPurpose.READ);
        return (next==null ? 1 : next.countElements()+1);
    }

    public String toString() {
        activate(ActivationPurpose.READ);
        return car+" : "+time+" : "+description;
    }

    public void activate(ActivationPurpose purpose) {
        if(_activator != null) {
            _activator.activate(purpose);
        }
    }

    public void bind(Activator activator) {
        if (_activator == activator) {
            return;
        }
    }

```

```

    }
    if (activator != null && _activator != null) {
        throw new IllegalStateException();
    }
    _activator = activator;
}
}

```

```

package com.db4odoc.fl.chapter9;

import java.util.*;

import com.db4o.activation.*;

public class TemperatureSensorReadout extends SensorReadout {
    private double temperature;

    public TemperatureSensorReadout(
        Date time, Car car,
        String description, double temperature) {
        super(time, car, description);
        this.temperature = temperature;
    }

    public double getTemperature() {
        activate(ActivationPurpose.READ);
        return temperature;
    }

    public String toString() {
        return super.toString() + " temp : " + temperature;
    }
}

```



## 12. Client/Server

Now that we have seen how transactions work in db4o conceptually, we are prepared to tackle concurrently executing transactions.

We start by preparing our database in the familiar way.

```
// setFirstCar

Pilot pilot = new Pilot("Rubens Barrichello", 99);
Car car = new Car("BMW");
car.setPilot(pilot);
db.store(car);
```

```
// setSecondCar

Pilot pilot = new Pilot("Michael Schumacher", 100);
Car car = new Car("Ferrari");
car.setPilot(pilot);
db.store(car);
```

### 12.1. Embedded server

From the API side, there's no real difference between transactions executing concurrently within the same VM and transactions executed against a remote server. To use concurrent transactions within a single VM, we just open a db4o server on our database file, directing it to run on port 0, thereby declaring that no networking will take place.

```
// accessLocalServer

ObjectServer server = Db4oClientServer.openServer(Db4oClientServer
    .newServerConfiguration(), DB4OFILENAME, 0);
```

```
try {
    ObjectContainer client = server.openClient();
    // Do something with this client, or open more clients
    client.close();
} finally {
    server.close();
}
```

Again, we will delegate opening and closing the server to our environment to focus on client interactions.

```
// queryLocalServer

ObjectContainer client = server.openClient();
listResult(client.queryByExample(new Car(null)));
client.close();
```

#### OUTPUT:

```
2
BMW[Rubens Barrichello/99]/0
Ferrari[Michael Schumacher/100]/0
```

The transaction level in db4o is *read committed*. However, each client container maintains its own weak reference cache of already known objects. To make all changes committed by other clients immediately, we have to explicitly refresh known objects from the server. We will delegate this task to a specialized version of our `#listResult()` method.

```
public static void listRefreshedResult(ObjectContainer
container, ObjectSet result, int depth) {
    System.out.println(result.size());
    while(result.hasNext()) {
        Object obj = result.next();
        container.ext().refresh(obj, depth);
    }
}
```

```

        System.out.println(obj);
    }
}

```

```

// demonstrateLocalReadCommitted

ObjectContainer client1 = server.openClient();
ObjectContainer client2 = server.openClient();
Pilot pilot = new Pilot("David Coulthard", 98);
ObjectSet result = client1.queryByExample(new Car("BMW"));
Car car = (Car) result.next();
car.setPilot(pilot);
client1.store(car);
listResult(client1.queryByExample(new Car(null)));
listResult(client2.queryByExample(new Car(null)));
client1.commit();
listResult(client1.queryByExample(Car.class));
listRefreshedResult(client2, client2.queryByExample(Car.class), 2);
client1.close();
client2.close();

```

## OUTPUT:

```

2
BMW[David Coulthard/98]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[Rubens Barrichello/99]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[David Coulthard/98]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[David Coulthard/98]/0
Ferrari[Michael Schumacher/100]/0

```



Simple rollbacks just work as you might expect now.

```
// demonstrateLocalRollback

ObjectContainer client1 = server.openClient();
ObjectContainer client2 = server.openClient();
ObjectSet result = client1.queryByExample(new Car("BMW"));
Car car = (Car) result.next();
car.setPilot(new Pilot("Someone else", 0));
client1.store(car);
listResult(client1.queryByExample(new Car(null)));
listResult(client2.queryByExample(new Car(null)));
client1.rollback();
client1.ext().refresh(car, 2);
listResult(client1.queryByExample(new Car(null)));
listResult(client2.queryByExample(new Car(null)));
client1.close();
client2.close();
```

#### OUTPUT:

```
2
BMW[Someone else/0]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[David Coulthard/98]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[David Coulthard/98]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[David Coulthard/98]/0
Ferrari[Michael Schumacher/100]/0
```

## 12.2. Networking

From here it's only a small step towards operating db4o over a TCP/IP network. We just specify a port number greater than zero and set up one or more accounts for our client(s).

```
// accessRemoteServer

ObjectServer server = Db4oClientServer.openServer(Db4oClientServer
    .newServerConfiguration(), DB4OFILENAME, PORT);
server.grantAccess(USER, PASSWORD);
try {
    ObjectContainer client = Db4oClientServer.openClient(
        Db4oClientServer.newClientConfiguration(), "localhost",
        PORT, USER, PASSWORD);

    // Do something with this client, or open more clients
    client.close();
} finally {
    server.close();
}
```

The client connects providing host, port, user name and password.

```
// queryRemoteServer

ObjectContainer client = Db4oClientServer.openClient(Db4oClientServer
    .newClientConfiguration(), "localhost", port, user,
password);
listResult(client.queryByExample(new Car(null)));
client.close();
```

#### OUTPUT:

```
2
BMW[David Coulthard/98]/0
Ferrari[Michael Schumacher/100]/0
```

Everything else is absolutely identical to the local server examples above.

```
// demonstrateRemoteReadCommitted

ObjectContainer client1 =
Db4oClientServer.openClient(Db4oClientServer
    .newClientConfiguration(), "localhost", port, user,
password);
ObjectContainer client2 =
Db4oClientServer.openClient(Db4oClientServer
    .newClientConfiguration(), "localhost", port, user,
password);
Pilot pilot = new Pilot("Jenson Button", 97);
ObjectSet result = client1.queryByExample(new Car(null));
Car car = (Car) result.next();
car.setPilot(pilot);
client1.store(car);
listResult(client1.queryByExample(new Car(null)));
listResult(client2.queryByExample(new Car(null)));
client1.commit();
listResult(client1.queryByExample(new Car(null)));
listRefreshedResult(client2, client2.queryByExample(Car.class), 2);
client1.close();
client2.close();
```

## OUTPUT:

```
2
BMW[Jenson Button/97]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[David Coulthard/98]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[Jenson Button/97]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[Jenson Button/97]/0
Ferrari[Michael Schumacher/100]/0
```

```
// demonstrateRemoteRollback

ObjectContainer client1 =
Db4oClientServer.openClient(Db4oClientServer
    .newClientConfiguration(), "localhost", port, user,
password);
ObjectContainer client2 =
Db4oClientServer.openClient(Db4oClientServer
    .newClientConfiguration(), "localhost", port, user,
password);
ObjectSet result = client1.queryByExample(new Car(null));
Car car = (Car) result.next();
car.setPilot(new Pilot("Someone else", 0));
client1.store(car);
listResult(client1.queryByExample(new Car(null)));
listResult(client2.queryByExample(new Car(null)));
client1.rollback();
client1.ext().refresh(car, 2);
listResult(client1.queryByExample(new Car(null)));
listResult(client2.queryByExample(new Car(null)));
client1.close();
client2.close();
```

## OUTPUT:

```
2
BMW[Someone else/0]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[Jenson Button/97]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[Jenson Button/97]/0
Ferrari[Michael Schumacher/100]/0
2
BMW[Jenson Button/97]/0
Ferrari[Michael Schumacher/100]/0
```

### 12.3. Native Queries in Client/Server mode

A quite subtle problem may occur if you're using Native Queries as anonymous (or just non-static) inner classes in Client/Server mode. Anonymous/non-static inner class instances carry a synthetic field referencing their outer class instance - this is just Java's way of implementing inner class access to fields or final method locals of the outer class without introducing any notion of inner classes at all at the bytecode level. If such a non-static inner class predicate cannot be converted to S.O.D.A. form on the client, it will be wrapped into an evaluation and passed to the server, introducing the same problem already mentioned in the [evaluation chapter](#) : db4o will try to transfer the evaluation, using the standard platform serialization mechanism. If this fails, it will just try to pass it to the server via db4o marshallng. However, this may fail, too, for example if the outer class references any local db4o objects like ObjectContainer, etc., resulting in an ObjectNotStorableException.

So to be on the safe side with NQs in C/S mode, you should declare Predicates as top-level or static inner classes only. Alternatively, you could either make sure that the outer classes containing Predicate definitions could principally be persisted to db4o, too, and don't add significant overhead to the predicate (the appropriate value for 'significant' being your choice) or ensure during development that all predicates used actually can be optimized to S.O.D.A. form.

### 12.4. Out-of-band signalling

Sometimes a client needs to send a special message to a server in order to tell the server to do something. The server may need to be signalled to perform a defragment or it may need to be signalled to shut itself down gracefully.

This is configured by calling `#messageRecipient()` , passing the object that will process client-initiated messages.

```
public void runServer() {
    synchronized (this) {
        ServerConfiguration config =
        Db4oClientServer.newServerConfiguration();
        // Using the messaging functionality to redirect all
        // messages to this.processMessage
        config.networking().messageRecipient(this);
        ObjectServer db4oServer = Db4oClientServer.openServer(config
```

```

        , FILE, PORT);
db4oServer.grantAccess(USER, PASS);

// to identify the thread in a debugger
Thread.currentThread().setName(this.getClass().getName());

// We only need low priority since the db4o server has
// it's own thread.
Thread.currentThread().setPriority(Thread.MIN_PRIORITY);
try {
    if (!stop) {
        // wait forever for notify() from close()
        this.wait(Long.MAX_VALUE);
    }
} catch (Exception e) {
    e.printStackTrace();
}
db4oServer.close();
}
}

```

The message is received and processed by a `#processMessage()` method:

```

public void processMessage(MessageContext con, Object message) {
    if (message instanceof StopServer) {
        close();
    }
}
}

```

Db4o allows a client to send an arbitrary signal or message to a server by sending a plain object to the server. The server will receive a callback message, including the object that came from the client. The server can interpret this message however it wants.

```

public static void main(String[] args) {
    ObjectContainer objectContainer = null;
    try {

        // connect to the server
        objectContainer =
Db4oClientServer.openClient(Db4oClientServer
                            .newClientConfiguration(), HOST, PORT, USER, PASS);

    } catch (Exception e) {
        e.printStackTrace();
    }

    if (objectContainer != null) {

        // get the messageSender for the ObjectContainer
        MessageSender messageSender =
objectContainer.ext().configure()
                    .clientServer().getMessageSender();

        // send an instance of a StopServer object
        messageSender.send(new StopServer());

        // close the ObjectContainer
        objectContainer.close();
    }
}

```

## 12.5. Putting it all together: a simple but complete db4o server

Let's put all of this information together now to implement a simple standalone db4o server with a special client that can tell the server to shut itself down gracefully on demand.

First, both the client and the server need some shared configuration information. We will provide this using an interface:

```

package com.db4odoc.fl.chapter6;

/**
 * Configuration used for {@link StartServer} and {@link StopServer}.
 */
public interface ServerInfo {

    /**
     * the host to be used.
     * <br>If you want to run the client server examples on two
    computers,
     * enter the computer name of the one that you want to use as
    server.
     */
    public String    HOST = "localhost";

    /**
     * the database file to be used by the server.
     */
    public String    FILE = "formula1.db4o";

    /**
     * the port to be used by the server.
     */
    public int       PORT = 4488;

    /**
     * the user name for access control.
     */
    public String    USER = "db4o";

    /**
     * the password for access control.
     */
    public String    PASS = "db4o";
}

```



Now we'll create the server:

```
package com.db4odoc.fl.chapter6;

import com.db4o.*;
import com.db4o.cs.*;
import com.db4o.cs.config.*;
import com.db4o.messaging.*;

/**
 * starts a db4o server with the settings from {@link ServerInfo}.
 * <br>
 * <br>
 * This is a typical setup for a long running server. <br>
 * <br>
 * The Server may be stopped from a remote location by running
 * StopServer. The
 * StartServer instance is used as a MessageRecipient and reacts to
 * receiving an
 * instance of a StopServer object. <br>
 * <br>
 */
public class StartServer implements ServerInfo, MessageRecipient {

    /**
     * setting the value to true denotes that the server should be
     * closed
     */
    private boolean stop = false;

    /**
     * starts a db4o server using the configuration from {@link
     * ServerInfo}.
     */
    public static void main(String[] arguments) {
        new StartServer().runServer();
    }

    /**
```

```

        * opens the ObjectServer, and waits forever until close() is
called or a
        * StopServer message is being received.
    */
    public void runServer() {
        synchronized (this) {
            ServerConfiguration config =
Db4oClientServer.newServerConfiguration();

            // Using the messaging functionality to redirect all
            // messages to this.processMessage
            config.networking().messageRecipient(this);

            ObjectServer db4oServer =
Db4oClientServer.openServer(config
                , FILE, PORT);

            db4oServer.grantAccess(USER, PASS);

            // to identify the thread in a debugger
            Thread.currentThread().setName(this.getClass().getName());

            // We only need low priority since the db4o server has
            // it's own thread.
            Thread.currentThread().setPriority(Thread.MIN_PRIORITY);
            try {
                if (!stop) {
                    // wait forever for notify() from close()
                    this.wait(Long.MAX_VALUE);
                }
            } catch (Exception e) {
                e.printStackTrace();
            }
            db4oServer.close();
        }
    }

    /**
     * messaging callback
     *
     * @see
com.db4o.messaging.MessageRecipient#processMessage(MessageContext,
    *     Object)
    */

```

```

    public void processMessage(MessageContext con, Object message) {
        if (message instanceof StopServer) {
            close();
        }
    }

    /**
     * closes this server.
     */
    public void close() {
        synchronized (this) {
            stop = true;
            this.notify();
        }
    }
}

```

And last but not least, the client that stops the server.

```

package com.db4odoc.fl.chapter6;

import com.db4o.*;
import com.db4o.cs.*;
import com.db4o.messaging.*;

/**
 * stops the db4o Server started with {@link StartServer}. <br>
 * <br>
 * This is done by opening a client connection to the server and by
 * sending a
 * StopServer object as a message. {@link StartServer} will react in
 * it's
 * processMessage method.
 */
public class StopServer implements ServerInfo {

    /**

```

```

    * stops a db4o Server started with StartServer.
    *
    * @throws Exception
    */
    public static void main(String[] args) {
        ObjectContainer objectContainer = null;
        try {

            // connect to the server
            objectContainer =
                Db4oClientServer.openClient(Db4oClientServer
                    .newClientConfiguration(), HOST, PORT, USER,
                PASS);

        } catch (Exception e) {
            e.printStackTrace();
        }

        if (objectContainer != null) {

            // get the messageSender for the ObjectContainer
            MessageSender messageSender =
                objectContainer.ext().configure()
                    .clientServer().getMessageSender();

            // send an instance of a StopServer object
            messageSender.send(new StopServer());

            // close the ObjectContainer
            objectContainer.close();
        }
    }
}

```

## 12.6. Conclusion

That's it, folks. No, of course it isn't. There's much more to db4o we haven't covered yet: schema evolution, custom persistence for your classes, writing your own query objects, etc. A much more thorough documentation is provided in the reference that you should have also received with the

download or [online](#).

We hope that this tutorial has helped to get you started with db4o. How should you continue now?

- Register on db4o developer [website](#).
- You could browse the remaining chapters. They are a selection of themes from the reference that very frequently come up as questions in our <http://developer.db4o.com/Forums.aspx>.
- *(Interactive version only)* While this tutorial is basically sequential in nature, try to switch back and forth between the chapters and execute the sample snippets in arbitrary order. You will be working with the same database throughout; sometimes you may just get stuck or even induce exceptions, but you can always reset the database via the console window.
- The examples we've worked through are included in your db4o distribution in full source code. Feel free to experiment with it.
- If you're stuck, browse the information on our [web site](#), check if your problem is submitted to [Jira](#) or visit our forums at <http://developer.db4o.com/Forums.aspx>.

## 12.7. Full source

```
package com.db4odoc.fl.chapter6;

import java.io.*;

import com.db4o.*;
import com.db4o.cs.*;
import com.db4o.cs.config.*;
import com.db4odoc.fl.*;

public class ClientServerExample extends Util {
    final static String DB4OFILENAME =
System.getProperty("user.home")
        + "/formula1.db4o";

    private final static int PORT = 0xdb40;
    private final static String USER = "user";
```

```

private final static String PASSWORD = "password";

public static void main(String[] args) throws IOException {
    new File(DB4OFILENAME).delete();
    accessLocalServer();
    new File(DB4OFILENAME).delete();
    ObjectContainer db = Db4oEmbedded.openFile(Db4oEmbedded
        .newConfiguration(), DB4OFILENAME);
    try {
        setFirstCar(db);
        setSecondCar(db);
    } finally {
        db.close();
    }
    ServerConfiguration config =
Db4oClientServer.newServerConfiguration();
    config.common().objectClass(Car.class).updateDepth(3);
    ObjectServer server = Db4oClientServer.openServer(config,
DB4OFILENAME,
        0);
    try {
        queryLocalServer(server);
        demonstrateLocalReadCommitted(server);
        demonstrateLocalRollback(server);
    } finally {
        server.close();
    }
    accessRemoteServer();
    server = Db4oClientServer.openServer(Db4oClientServer
        .newServerConfiguration(), DB4OFILENAME, PORT);
    server.grantAccess(USER, PASSWORD);
    try {
        queryRemoteServer(PORT, USER, PASSWORD);
        demonstrateRemoteReadCommitted(PORT, USER, PASSWORD);
        demonstrateRemoteRollback(PORT, USER, PASSWORD);
    } finally {
        server.close();
    }
}

public static void setFirstCar(ObjectContainer db) {

```

```

        Pilot pilot = new Pilot("Rubens Barrichello", 99);
        Car car = new Car("BMW");
        car.setPilot(pilot);
        db.store(car);
    }

    public static void setSecondCar(ObjectContainer db) {
        Pilot pilot = new Pilot("Michael Schumacher", 100);
        Car car = new Car("Ferrari");
        car.setPilot(pilot);
        db.store(car);
    }

    public static void accessLocalServer() {
        ObjectServer server =
Db4oClientServer.openServer(Db4oClientServer
        .newServerConfiguration(), DB4OFILENAME, 0);
        try {
            ObjectContainer client = server.openClient();
            // Do something with this client, or open more clients
            client.close();
        } finally {
            server.close();
        }
    }

    public static void queryLocalServer(ObjectServer server) {
        ObjectContainer client = server.openClient();
        listResult(client.queryByExample(new Car(null)));
        client.close();
    }

    public static void demonstrateLocalReadCommitted(ObjectServer
server) {
        ObjectContainer client1 = server.openClient();
        ObjectContainer client2 = server.openClient();
        Pilot pilot = new Pilot("David Coulthard", 98);
        ObjectSet result = client1.queryByExample(new Car("BMW"));
        Car car = (Car) result.next();
        car.setPilot(pilot);
        client1.store(car);
    }

```

```

        listResult(client1.queryByExample(new Car(null)));
        listResult(client2.queryByExample(new Car(null)));
        client1.commit();
        listResult(client1.queryByExample(Car.class));
        listRefreshedResult(client2,
client2.queryByExample(Car.class), 2);
        client1.close();
        client2.close();
    }

    public static void demonstrateLocalRollback(ObjectServer server)
    {
        ObjectContainer client1 = server.openClient();
        ObjectContainer client2 = server.openClient();
        ObjectSet result = client1.queryByExample(new Car("BMW"));
        Car car = (Car) result.next();
        car.setPilot(new Pilot("Someone else", 0));
        client1.store(car);
        listResult(client1.queryByExample(new Car(null)));
        listResult(client2.queryByExample(new Car(null)));
        client1.rollback();
        client1.ext().refresh(car, 2);
        listResult(client1.queryByExample(new Car(null)));
        listResult(client2.queryByExample(new Car(null)));
        client1.close();
        client2.close();
    }

    public static void accessRemoteServer() throws IOException {
        ObjectServer server =
Db4oClientServer.openServer(Db4oClientServer
        .newServerConfiguration(), DB4OFILENAME, PORT);
        server.grantAccess(USER, PASSWORD);
        try {
            ObjectContainer client = Db4oClientServer.openClient(
                Db4oClientServer.newClientConfiguration(),
"localhost",
                PORT, USER, PASSWORD);
            // Do something with this client, or open more clients
            client.close();
        } finally {

```



```

        server.close();
    }
}

    public static void queryRemoteServer(int port, String user,
String password)
        throws IOException {
        ObjectContainer client =
Db4oClientServer.openClient(Db4oClientServer
        .newClientConfiguration(), "localhost", port, user,
password);
        listResult(client.queryByExample(new Car(null)));
        client.close();
    }

    public static void demonstrateRemoteReadCommitted(int port,
String user,
        String password) throws IOException {
        ObjectContainer client1 =
Db4oClientServer.openClient(Db4oClientServer
        .newClientConfiguration(), "localhost", port, user,
password);
        ObjectContainer client2 =
Db4oClientServer.openClient(Db4oClientServer
        .newClientConfiguration(), "localhost", port, user,
password);
        Pilot pilot = new Pilot("Jenson Button", 97);
        ObjectSet result = client1.queryByExample(new Car(null));
        Car car = (Car) result.next();
        car.setPilot(pilot);
        client1.store(car);
        listResult(client1.queryByExample(new Car(null)));
        listResult(client2.queryByExample(new Car(null)));
        client1.commit();
        listResult(client1.queryByExample(new Car(null)));
        listRefreshedResult(client2,
client2.queryByExample(Car.class), 2);
        client1.close();
        client2.close();
    }
}

```

```

    public static void demonstrateRemoteRollback(int port, String
user,
        String password) throws IOException {
    ObjectContainer client1 =
Db4oClientServer.openClient(Db4oClientServer
        .newClientConfiguration(), "localhost", port, user,
password);
    ObjectContainer client2 =
Db4oClientServer.openClient(Db4oClientServer
        .newClientConfiguration(), "localhost", port, user,
password);
    ObjectSet result = client1.queryByExample(new Car(null));
    Car car = (Car) result.next();
    car.setPilot(new Pilot("Someone else", 0));
    client1.store(car);
    listResult(client1.queryByExample(new Car(null)));
    listResult(client2.queryByExample(new Car(null)));
    client1.rollback();
    client1.ext().refresh(car, 2);
    listResult(client1.queryByExample(new Car(null)));
    listResult(client2.queryByExample(new Car(null)));
    client1.close();
    client2.close();
}
}

```

## 13. SODA Evaluations

In the [SODA API chapter](#) we already mentioned *Evaluations* as a means of providing user-defined custom constraints and as a means to run any arbitrary code in a SODA query. Let's have a closer look.

### 13.1. Evaluation API

The evaluation API consists of two interfaces, `Evaluation` and `Candidate`. `Evaluation` implementations are implemented by the user and injected into a query. During a query, they will be called from db4o with a candidate instance in order to decide whether to include it into the current (sub-)result.

The `Evaluation` interface contains a single method only:

```
public void evaluate(Candidate candidate);
```

This will be called by db4o to check whether the object encapsulated by this candidate should be included into the current candidate set.

The `Candidate` interface provides three methods:

```
public Object getObject();  
public void include(boolean flag);  
public ObjectContainer objectContainer();
```

An `Evaluation` implementation may call `#getObject()` to retrieve the actual object instance to be evaluated, it may call `#include()` to instruct db4o whether or not to include this object in the current

candidate set, and finally it may access the current database directly by calling `#objectContainer()` .

## 13.2. Example

For a simple example, let's go back to our Pilot/Car implementation from the [Collections chapter](#). Back then, we kept a history of SensorReadout instances in a List member inside the car. Now imagine that we wanted to retrieve all cars that have assembled an even number of history entries. A quite contrived and seemingly trivial example, however, it gets us into trouble: Collections are transparent to the query API, it just 'looks through' them at their respective members.

So how can we get this done? Let's implement an Evaluation that expects the objects passed in to be instances of type Car and checks their history size.

```
package com.db4odoc.fl.chapter7;

import com.db4o.query.*;
import com.db4odoc.fl.chapter4.*;

public class EvenHistoryEvaluation implements Evaluation {
    public void evaluate(Candidate candidate) {
        Car car=(Car)candidate.getObject();
        candidate.include(car.getHistory().size() % 2 == 0);
    }
}
```

To test it, let's add two cars with history sizes of one, respectively two:

```
// storeCars

Pilot pilot1 = new Pilot("Michael Schumacher", 100);
Car car1 = new Car("Ferrari");
car1.setPilot(pilot1);
car1.snapshot();
db.store(car1);
```

```
Pilot pilot2 = new Pilot("Rubens Barrichello", 99);
Car car2 = new Car("BMW");
car2.setPilot(pilot2);
car2.snapshot();
car2.snapshot();
db.store(car2);
```

and run our evaluation against them:

```
// queryWithEvaluation

Query query = db.query();
query.constrain(Car.class);
query.constrain(new EvenHistoryEvaluation());
ObjectSet result = query.execute();
Util.listResult(result);
```

#### **OUTPUT:**

```
1
BMW[Rubens Barrichello/99]/2
```

### **13.3. Drawbacks**

While evaluations offer you another degree of freedom for assembling queries, they come at a certain cost: As you may already have noticed from the example, evaluations work on the fully instantiated objects, while 'normal' queries peek into the database file directly. So there's a certain performance penalty for the object instantiation, which is wasted if the object is not included into the candidate set.

Another restriction is that, while 'normal' queries can bypass encapsulation and access candidates' private members directly, evaluations are bound to use their external API, just as in the language itself.

One last hint: Evaluations are expected to be serializable for client/server operation. So be careful when implementing them as (anonymous) inner classes and keep in mind that those will carry an implicit reference to their surrounding class and everything that belongs to it. Best practice is to always implement evaluations as normal top level or static inner classes.

## 13.4. Conclusion

With the introduction of evaluations we finally completed our query toolbox. Evaluations provide a simple way of assemble arbitrary custom query building blocks, however, they come at a price.

## 13.5. Full source

```
package com.db4odoc.fl.chapter7;

import java.io.*;

import com.db4o.*;
import com.db4o.query.*;
import com.db4odoc.fl.*;
import com.db4odoc.fl.chapter4.*;

public class EvaluationExample extends Util {
    final static String DB4OFILENAME =
System.getProperty("user.home") + "/formula1.db4o";

    public static void main(String[] args) {
        new File(DB4OFILENAME).delete();
        ObjectContainer db =
Db4oEmbedded.openFile(Db4oEmbedded.newConfiguration(), DB4OFILENAME);
        try {
            storeCars(db);
            queryWithEvaluation(db);
        } finally {
            db.close();
        }
    }
}
```

```

public static void storeCars(ObjectContainer db) {
    Pilot pilot1 = new Pilot("Michael Schumacher", 100);
    Car car1 = new Car("Ferrari");
    car1.setPilot(pilot1);
    car1.snapshot();
    db.store(car1);
    Pilot pilot2 = new Pilot("Rubens Barrichello", 99);
    Car car2 = new Car("BMW");
    car2.setPilot(pilot2);
    car2.snapshot();
    car2.snapshot();
    db.store(car2);
}

public static void queryWithEvaluation(ObjectContainer db) {
    Query query = db.query();
    query.constrain(Car.class);
    query.constrain(new EvenHistoryEvaluation());
    ObjectSet result = query.execute();
    Util.listResult(result);
}
}

```

## 14. Configuration

db4o provides a wide range of configuration methods to request special behaviour. For a complete list of all available methods see the API documentation for the `com.db4o.config` and `com.db4o.cs.config` packages.

A more complete description of Configuration usage and scope can also be obtained from the [Reference](#) documentation.

Some hints around using configuration calls:

### 14.1. Scope

Configuration should be created and passed to an opening `ObjectContainer` or `ObjectServer`:

```
EmbeddedConfiguration config = Db4oEmbedded.newConfiguration();
```

```
ServerConfiguration serverConfig =  
Db4oClientServer.newServerConfiguration();
```

```
ClientConfiguration clientConfig =  
Db4oClientServer.newClientConfiguration();
```

Appropriate configuration should be submitted when an `ObjectContainer` or `ObjectServer` is opened:

```
Db4oEmbedded.openFile(config, filename)
```

```
Db4oClientServer.openServer(serverConfig, filename, PORT)
```



```
Db4oClientServer.openClient(clientConfig, HOST, PORT, USER, PASS);
```

A separate configuration instance should be created for each new `ObjectContainer` `ObjectServer`. It is recommended to use a factory method with all the necessary settings.

## 14.2. Calling Methods

Configurations that influence the database file format will have to take place, before a database is created, before the first `#openXXX()` call. Some examples:

```
EmbeddedConfiguration conf = Db4oEmbedded.newConfiguration();  
conf.blockSize(8);  
conf.stringEncoding(new MyStringEncoding());
```

Configuration settings are **not** stored in db4o database files. Accordingly the same configuration has to be submitted **every time** an `ObjectContainer` `ObjectServer` is opened.

## 15. Indexes

db4o allows to index fields to provide maximum querying performance. To request an index to be created, you would issue the following API method call in your global [db4o configuration method](#) before you open an ObjectContainer/ObjectServer:

```
// assuming
class Foo{
    String bar;
}

CommonConfiguration#objectClass(Foo.class).objectField("bar").indexed
(true);
```

If the configuration is set in this way, an index on the Foo#bar field will be created (if not present already) the next time you open an ObjectContainer/ObjectServer and you use the Foo class the first time in your application.

Contrary to all other [configuration calls](#) indexes - once created - will remain in a database even if the index configuration call is not issued before opening an ObjectContainer/ObjectServer.

To drop an index you would also issue a configuration call in your db4o configuration method:

```
CommonConfiguration#objectClass(Foo.class).objectField("bar").indexed
(false);
```

Actually dropping the index will take place the next time the respective class is used.

db4o will tell you when it creates and drops indexes, if you choose a message level of 1 or higher:

```
CommonConfiguration#messageLevel(1);
```

For creating and dropping indexes on large amounts of objects there are two possible strategies:

(1) Import all objects with indexing off, configure the index and reopen the ObjectContainer/ObjectServer.

(2) Import all objects with indexing turned on and commit regularly for a fixed amount of objects (~10,000).

(1) will be faster.

(2) will keep memory consumption lower.

## 16. IDs

The db4o team recommends, not to use object IDs where this is not necessary. db4o keeps track of object identities in a transparent way, by identifying "known" objects on updates. The reference system also makes sure that every persistent object is instantiated only once, when a graph of objects is retrieved from the database, no matter which access path is chosen. If an object is accessed by multiple queries or by multiple navigation access paths, db4o will always return the one single object, helping you to put your object graph together exactly the same way as it was when it was stored, without having to use IDs.

The use of IDs does make sense when object and database are disconnected, for instance in stateless applications.

db4o provides two types of ID systems.

### 16.1. Internal IDs

The internal db4o ID is a physical pointer into the database with only one indirection in the file to the actual object so it is the fastest external access to an object db4o provides. The internal ID of an object is available with

```
objectContainer.ext().getID(object);
```

To get an object for an internal ID use

```
objectContainer.ext().getByID(id);
```

Note that #getByID() does not activate objects. If you want to work with objects that you get with #getByID(), your code would have to make sure the object is **activated** by calling

```
objectContainer.activate(object, depth);
```

db4o assigns internal IDs to any stored first class object. These internal IDs are guaranteed to be unique within one ObjectContainer/ObjectServer and they will stay the same for every object when an ObjectContainer/ObjectServer is closed and reopened. Internal IDs **will change** when an object is moved from one ObjectContainer to another, as it happens during Defragment.

## 16.2. Unique Universal IDs (UUIDs)

For long term external references and to identify an object even after it has been copied or moved to another ObjectContainer, db4o supplies UUIDs. These UUIDs are not generated by default, since they occupy some space and consume some performance for maintaining their index. UUIDs can be turned on globally or for individual classes:

```
FileConfiguration#generateUUIDs(Integer.MAX_VALUE);  
Db4o.configure().objectClass(Foo.class).generateUUIDs(true);
```

The respective methods for working with UUIDs are:

```
ExtObjectContainer#getObjectInfo(Object)  
ObjectInfo#getUUID();  
ExtObjectContainer#getByUUID(Db4oUUID);
```

## 17. Enhancement

As we have seen both [Transparent Activation](#) and [Native Queries](#) will produce correct results out-of-the-box.

To get your application to run as fast as possible with db4o, you will want to make sure that only required objects are loaded from the database and that Native Queries are optimized to use field indexes where this is possible.

Theoretically you could write all the necessary code by hand but you will save yourself a lot of time if you use automatic enhancement.

The db4o enhancer tools will add code to your persistent classes to make them work even better with db4o.

db4o for Java supplies three different enhancer strategies:

[Enhancing at Compile/Deployment Time](#)

[Enhancing at Class Loading Time](#)

[Native Query Optimization at Query Execution Time](#)

### 17.1. Required Libraries

The enhancer tasks require the addition of the following libraries to your project:

**ant.jar**

for using the [Ant](#) enhancer task

**bloat-1.0.jar**

the bytecode optimization library

**db4o-8.0-instrumentation.jar**

instrumentation library on top of bloat

**db4o-8.0 -java5.jar**

the db4o core engine

**db4o-8.0 -nqopt.jar**

the Native Query Optimizer

**db4o-8.0-taj.jar**

the Transparent Activation Framework for Java

**db4o-8.0 -tools.jar**

the tools interface that provides the top level enhancer tasks.

Alternatively you can add **db4o-8.0-all-java5.jar** instead, which contains the classes from all the libraries listed above.

## 17.2. Enhancing at Compile Time

The db4o enhancer adds code to class files or jar files. Afterwards these files will be slightly different to what the debugger expects.

In the setup the db4o team has been working with, using the Eclipse IDE, enhancing has worked perfectly when files were instrumented in-place, directly in the `/bin/` directory where the Eclipse compiler places compiled class files. In all our tests the Eclipse debugger simply ignored additional statements and stepped over them and debugging worked perfectly as usual.

The db4o enhancer technology is new. Not all possible development environment setups have been checked by the db4o team and there may be incompatibility issues with your IDE when enhancing class and library files in place. By trying out in-place enhancement with your setup and by reporting back issues to the [db4o forums](#) you can help the db4o team to improve enhancement for your personal setup. A possible strategy to resolve problems with in-place enhancement would be to use different output directories than `/bin` and `/lib` as output paths for the enhancer and to run your enhanced application from there.

### 17.2.1. Enhancing with Ant

db4otools.jar contains the main enhancer task:

`com.db4o.enhance.Db4oEnhancerAntTask`

For all possibilities of using this task see the [topic on build time enhancement](#) in the reference documentation.

The simplest enhancer task can do the following:

1. optimize Native Queries
2. add the Activatable interface to your classes, making sure a persistent object is activated whenever any field is read.
3. replace constructor invocation for platform collections (`ArrayList`,...) with a custom activatable version derived from the platform collection

Here is an example of how an [Ant](#) script could look like. This script enhances all class files and jar files except for the db4o libraries in-place, in the /bin and /lib directory of your project:

```
<?xml version="1.0"?>
<project name="db4o enhance project" default="enhance" basedir=".">

  <path id="project.classpath">
    <pathelement path="${basedir}/bin" />
    <fileset dir="lib">
      <include name="**/*.jar"/>
    </fileset>
  </path>

  <taskdef name="db4o-enhance"
    classname="com.db4o.enhance.Db4oEnhancerAntTask"
    classpathref="project.classpath" />

  <target name="enhance">
    <db4o-enhance classtargetdir="${basedir}/bin"
      jartargetdir="${basedir}/lib" nq="true" ta="true" collections="true">
      <classpath refid="project.classpath" />
      <sources dir="${basedir}/bin" />
      <jars dir="${basedir}/lib">
        <include name="*.jar" />
        <exclude name="db4o-*.jar" />
        <exclude name="ant.jar" />
        <exclude name="bloat-1.0.jar" />
      </jars>
    </db4o-enhance>
  </target>

</project>
```

The instrumentation process can be configured with the following attributes:

nq: switch for native query optimization enhancement



ta: switch for transparent activation/persistence enhancement

collections: switch for enhancement of platform collections for transparent activation/persistence (only effective if ta is switched on)

By default, these all are set to true.

If you use Eclipse, there is a very convenient way to make sure an [Ant](#) script is executed every time after compilation and before you run your application: You can add a builder to your project. To do this, right click on your project, choose "Properties" + "Builders" + "New" + "Ant Builder" and enter the name of the build file you created.

### 17.2.2. Programmatic Enhancement

The db4o enhancer is just another Java application so of course you can start it directly. The enhancer user interface is a convenience interface to the underlying instrumentation layer. To take advantage of all the possibilities you may want to consider a look at the sources of `com.db4o.instrumentation.main.Db4oFileInstrumentor` and call instrumentation directly.

Here is a very basic example how you could enhance all the files in the `/bin` folder below the project 'myproject' using the `Db4oFileEnhancer`:

```
import com.db4o.enhance.*;

public static void main(String[] args) throws Exception {
    String path = "../myproject/bin";
    new Db4oFileEnhancer().enhance(path, path);
}
```

### 17.3. Enhancing at Load Time

As an alternative to enhancing classes at build time, it is also possible to run a db4o application using a special launcher. Under the hood the `Db4oEnhancedLauncher` installs a special `ClassLoader` that instruments classes for db4o on the fly, when they are loaded.

For using the launcher, please see the method signatures of

```
Db4oEnhancedLauncher#launch()
```

## 17.4. NQ Optimization at Querying Time

In case no other enhancer has been run previously, Native Queries will still be optimized automatically if the following optimization libraries are found in the CLASSPATH:

bloat-1.0.jar, db4o-8.0-instrumentation.jar, db4o-8.0-nqopt.jar

The Native Query optimizer is still under development to eventually "understand" all Java constructs. Current optimization supports the following constructs well:

- compile-time constants
- simple member access
- primitive comparisons
- #equals() on primitive wrappers and Strings
- #contains()/#startsWith()/#endsWith() for Strings
- arithmetic expressions
- boolean expressions
- static field access
- array access for static/predicate fields
- arbitrary method calls on static/predicate fields (without candidate based params)
- candidate methods composed of the above
- chained combinations of the above

Note that the current implementation does not support polymorphism and multiline methods yet.

## 17.5. Monitoring Native Query optimization

To find out if a Native Query runs optimized or unoptimized you can attach a query execution listener as follows:

```
((ObjectContainerBase)db).getNativeQueryHandler().addListener(new
Db4oQueryExecutionListener() {
    public void notifyQueryExecuted(NQOptimizationInfo info) {
```

```
        System.err.println(info);  
    }  
    });
```

The listener will be notified on each native query call and will be passed the Predicate object processed, the optimized expression tree (if successful) and the success status of the optimization run:

NativeQueryHandler.UNOPTIMIZED ("UNOPTIMIZED")

if the predicate could not be optimized and is run in unoptimized mode

NativeQueryHandler.PREOPTIMIZED ("PREOPTIMIZED")

if the predicate already was optimized (due to class file or load time instrumentation)

NativeQueryHandler.DYNOPTIMIZED ("DYNOPTIMIZED")

if the predicate was optimized at query execution time

## 18. Interactive Tutorial Troubleshooting

db4o interactive tutorial uses Java applets to execute code examples directly in your browser enabling you to see the results immediately during reading.

In order to use the interactive functionality a Java JRE 1.5 or above needs to be installed and enabled in the browser.

Normally this and db4o for java installation is all that is needed to start with the interactive examples. However some system configurations can prevent the examples from running properly.

Use the following check-list to locate and fix the problem:

- JRE1.5 or above should be installed.
- JAVA\_HOME environment variable should point to the correct JRE (or JDK).
- The Java control panel should be configured to use the web browser.
- Java security settings have to allow a user to grant permissions to signed content and to grant permission to content from an untrusted authority.
- You should also check that your system firewalls do not block interactive content.

### 18.1. Configuring JRE on Windows

To see whether your browser is configured to use the Java Runtime Environment or not, open the Windows Control Panel and check if the Java icon is present.

In the Java Control Panel:

- check that your browser is enabled
- check that the user is granted permissions to signed content (untrusted authority as well).

## 19. License

[Versant Inc.](#) supplies the object database engine db4o under a triple licensing regime:

### 19.1. General Public License (GPL)

db4o is free to be used:

- for development,
- in-house as long as no deployment to third parties takes place,
- together with works that are placed under the GPL themselves.

You should have received a copy of the GPL in the file db4o.license.html together with the db4o distribution.

If you have questions about when a commercial license is required, please read our GPL Interpretation policy for further detail, available at:

<http://www.db4o.com/about/company/legalpolicies/gplinterpretation.aspx>

### 19.2. Opensource Compatibility license (dOCL)

The db4o Opensource Compatibility License (dOCL) is designed for free/open source projects that want to embed db4o but do not want to (or are not able to) license their derivative work under the GPL in its entirety. This initiative aims to proliferate db4o into many more open source projects by providing compatibility for projects licensed under Apache, LGPL, BSD, EPL, and others, as required by our users. The terms of this license are available here: ["dOCL" agreement](#).

### 19.3. Commercial License

For incorporation into own commercial products and for use together with redistributed software that is not placed under the GPL, db4o is also available under a commercial license.

Visit the [purchasing area on the db4o website](#) or [contact db4o sales](#) for licensing terms and pricing.

### 19.4. Bundled 3rd Party Licenses

The db4o distribution comes with the following 3rd party libraries:

-[Apache Ant](#)(Apache Software License)

Files: lib/ant.jar, lib/ant.license.txt

Ant can be used as a make tool for class file based optimization of native queries at compile time.

This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).

-**BLOAT**(GNU LGPL)

Files: lib/bloat-1.0.jar, lib/bloat.license.txt

Bloat is used for bytecode analysis during native queries optimization. It needs to be on the classpath during runtime at load time or query execution time for just-in-time optimization. Preoptimized class files are not dependent on BLOAT at runtime.

## 20. Contacting Versant

### Versant Corporation

255 Shoreline Drive  
Suite 450  
Redwood City, CA 94065  
USA

### Phone

+1 (650) 232-2431

### Fax

+1 (650) 232-2401

### Sales

Fill out our [sales contact form](#) on the db4o website  
or  
mail to [sales@db4o.com](mailto:sales@db4o.com)

### Join the db4o Community

Join the [db4o community](#) for help, tips and tricks.  
Ask for help in the [db4o forums](#) at any time.  
And take a look at additional resources on [the community website](#).  
If you want to stay informed, subscribe to our [db4o blogs](#)

### Careers

[career@db4o.com](mailto:career@db4o.com)

### Partnering

[partner@db4o.com](mailto:partner@db4o.com)