Native replay architecture and dataflow

The simulator is a connected pipeline, not a collection of independent counters.

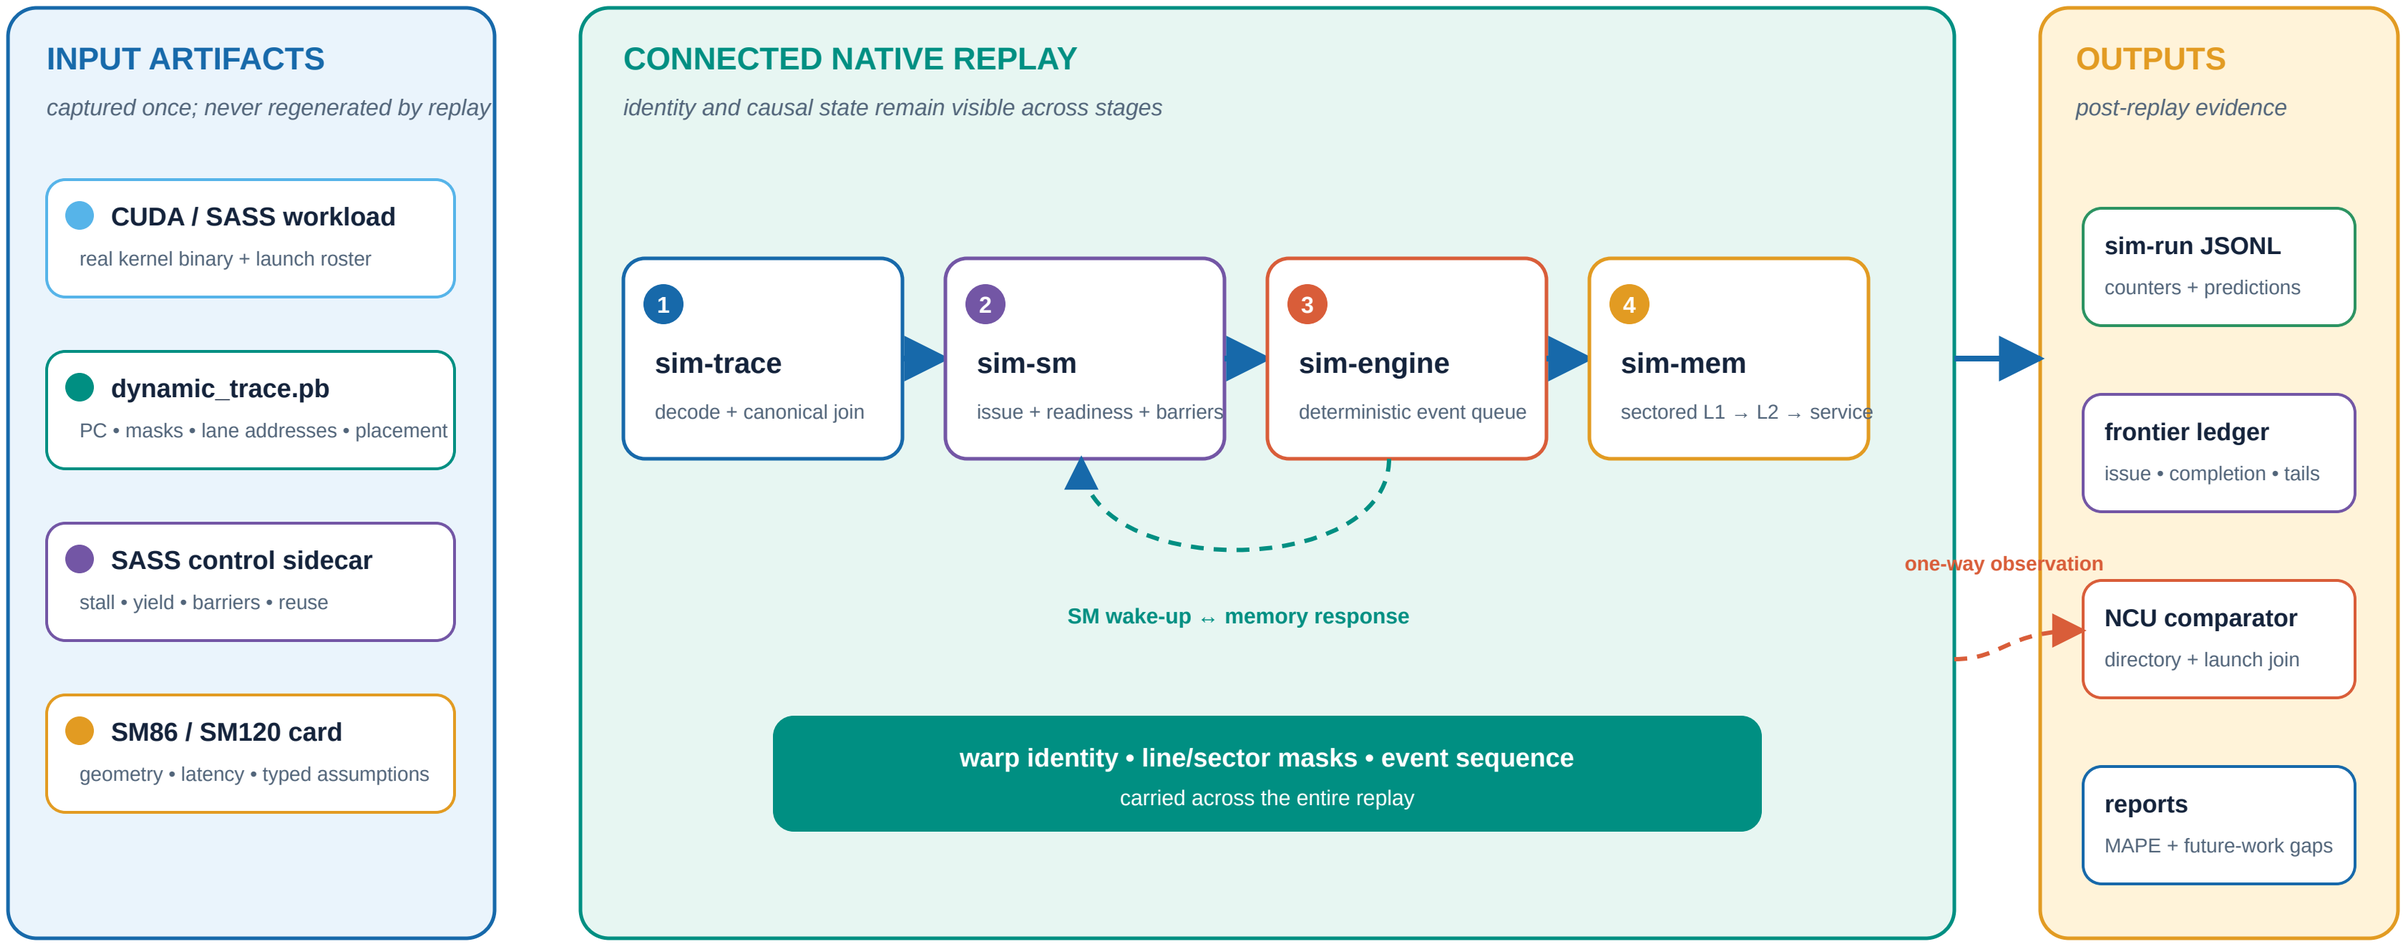

Caption. The native path connects trace identity, scheduling, event ordering, memory state, and report emission. NCU enters only after replay; no profiler value is allowed to alter the modeled path.

Source: docs/ARCHITECTURE.md, docs/COMPONENTS.md, sim/trace, sim/sm, sim/engine, sim/mem, and sim/direct_run.