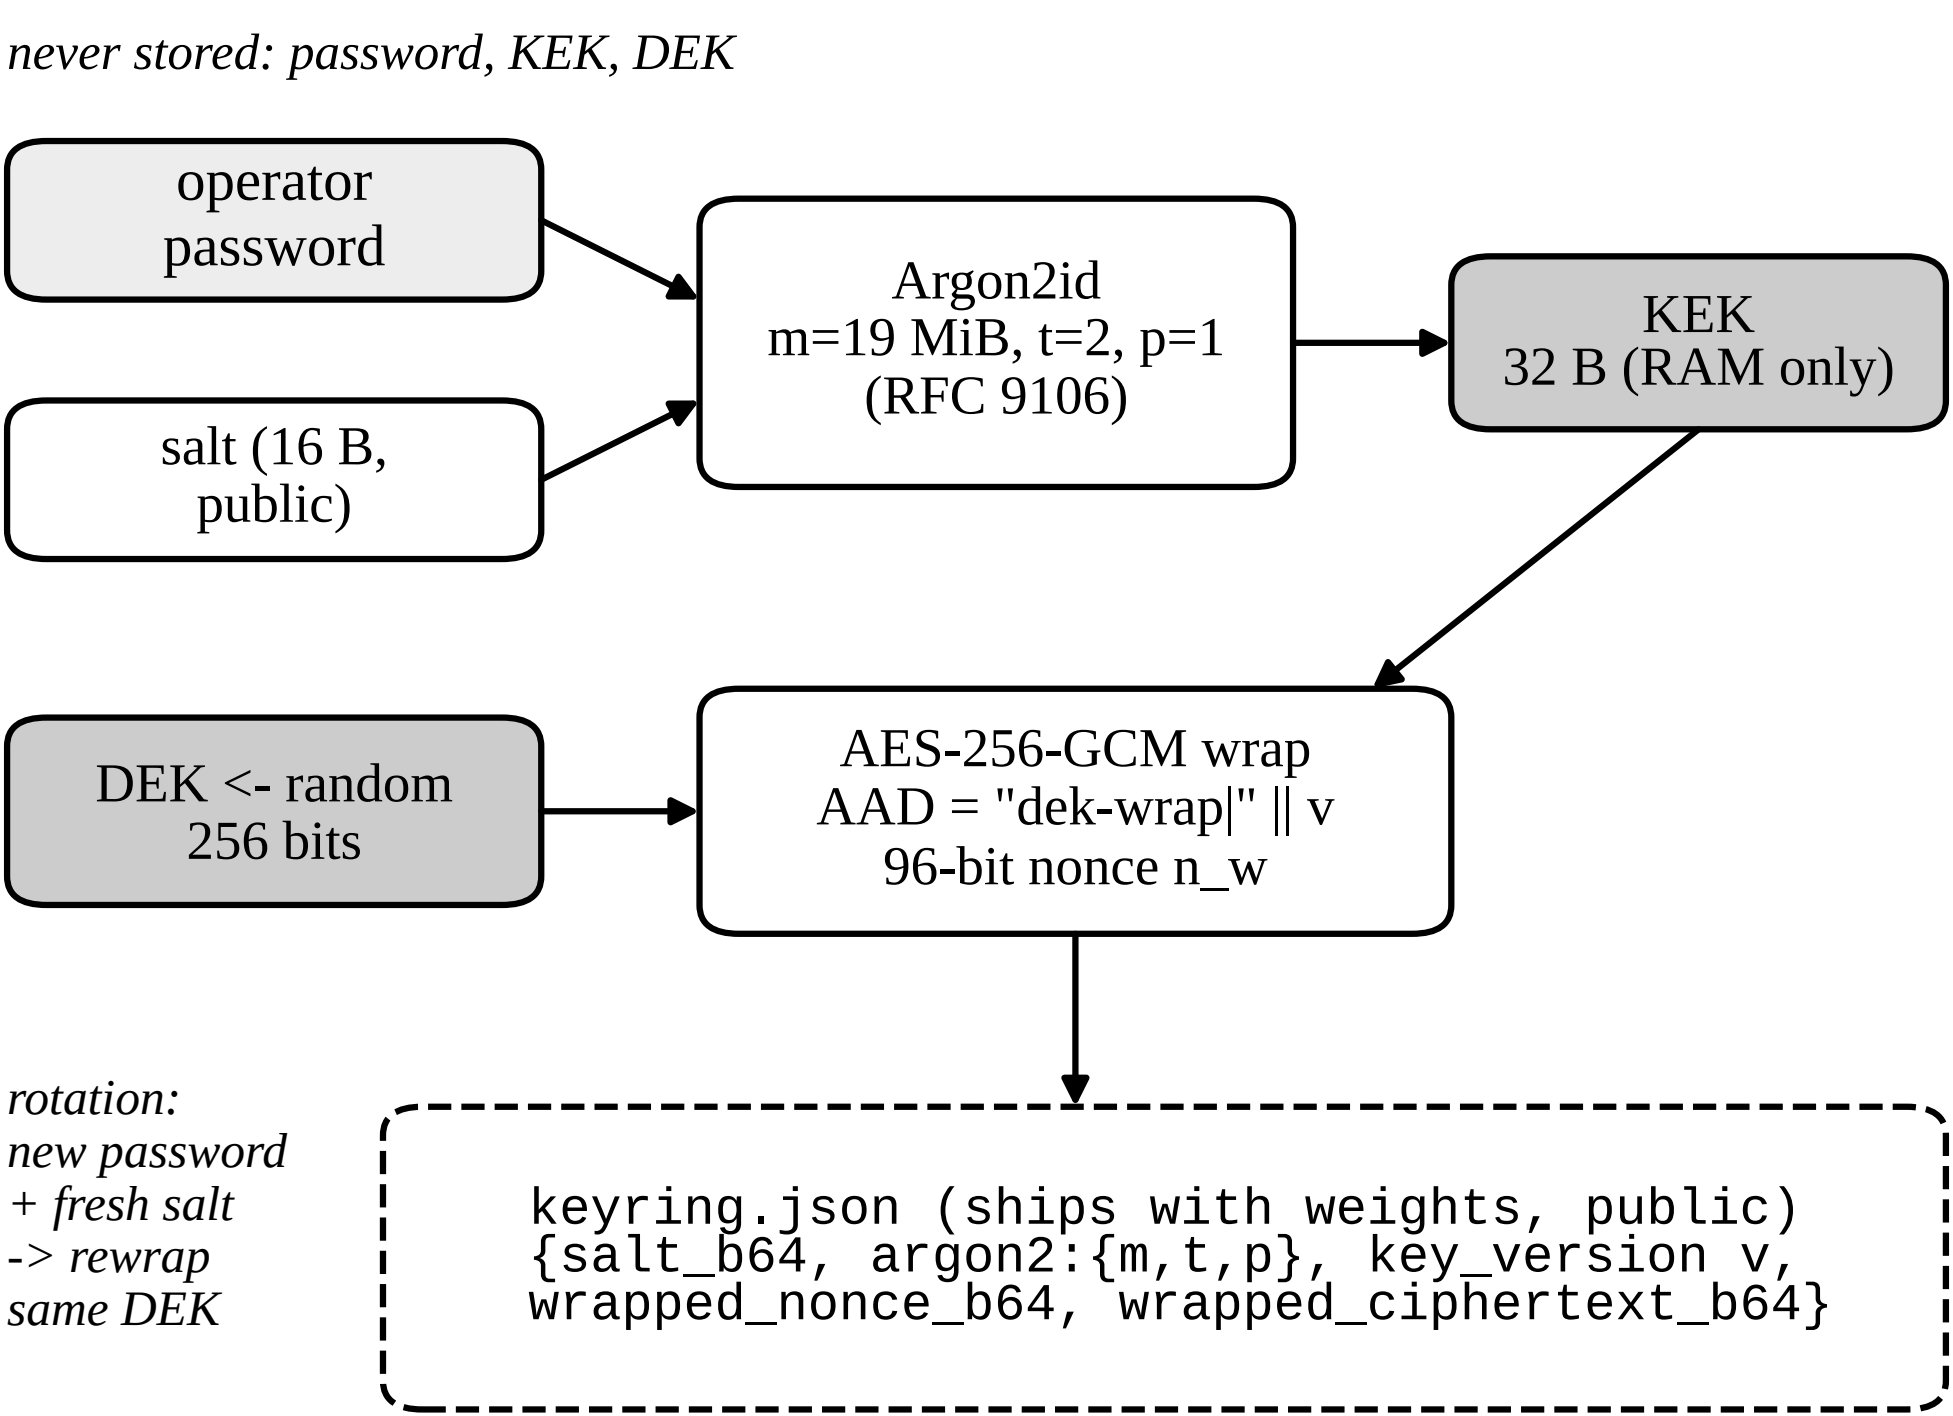
never stored: password, KEK, DEK
operator password
salt (16 B, public)
Argon2id m=19 MiB, t=2, p=1 (RFC 9106)
KEK 32 B (RAM only)
DEK <- random 256 bits
AES-256-GCM wrap AAD = "dek-wrap|" || v 96-bit nonce n_w
rotation: new password + fresh salt -> rewrap same DEK
keyring.json (ships with weights, public)
{salt_b64, argon2:{m,t,p}, key_version v, wrapped_nonce_b64, wrapped_ciphertext_b64}