



## **LEMBAR KERJA PRAKTIKUM CLOUD COMPUTING**

### **INSTALASI DAN KONFIGURASI LAYANAN HOSTING DENGAN LAMPP (SAAS)**

#### **IDENTITAS:**

Nama:	<b>Riski Midi Wardana</b>
NIM:	<b>123170035</b>
Kelas:	<b>C</b>
Hari, Tanggal:	<b>Jumat, 21 Februari 2020</b>

#### **CONTOH ISIAN:**

1. Tampilkan hasil login pada Ubuntu Server dengan menggunakan PuTTY

```
root@eternal-loops: ~  
login as: root  
root@45.76.145.117's password:  
Welcome to Ubuntu 18.04.3 LTS (GNU/Linux 4.15.0-45-generic x86_64)  
  
* Documentation:  https://help.ubuntu.com  
* Management:    https://landscape.canonical.com  
* Support:        https://ubuntu.com/advantage  
  
System information as of Mon Feb 17 21:56:08 WIB 2020  
  
System load:  0.0                Processes:            146  
Usage of /:   84.9% of 19.63GB   Users logged in:     1  
Memory usage: 78%                IP address for ens3: 45.76.145.117  
Swap usage:   33%  
  
* Multipass 1.0 is out! Get Ubuntu VMs on demand on your Linux, Windows or  
  Mac. Supports cloud-init for fast, local, cloud devops simulation.  
  
    https://multipass.run/  
  
* Canonical Livepatch is available for installation.  
  - Reduce system reboots and improve kernel security. Activate at:  
    https://ubuntu.com/livepatch  
  
187 packages can be updated.  
141 updates are security updates.  
  
*** System restart required ***  
Last login: Sun Feb  2 19:18:13 2020 from 180.254.121.187  
root@eternal-loops:~#
```

2. Deskripsikan parameter yang digunakan untuk keluar dari akun root

```
$ exit
```


Perintah exit digunakan untuk keluar dari sesi akun aktif

3. Tampilkan pesan kesalahan pada saat login PHPMyAdmin



## **TUGAS BAGIAN PERTAMA:**

1. Tampilan hasil login Server Ubuntu pada PuTTY (tampilan dashboard/motd)

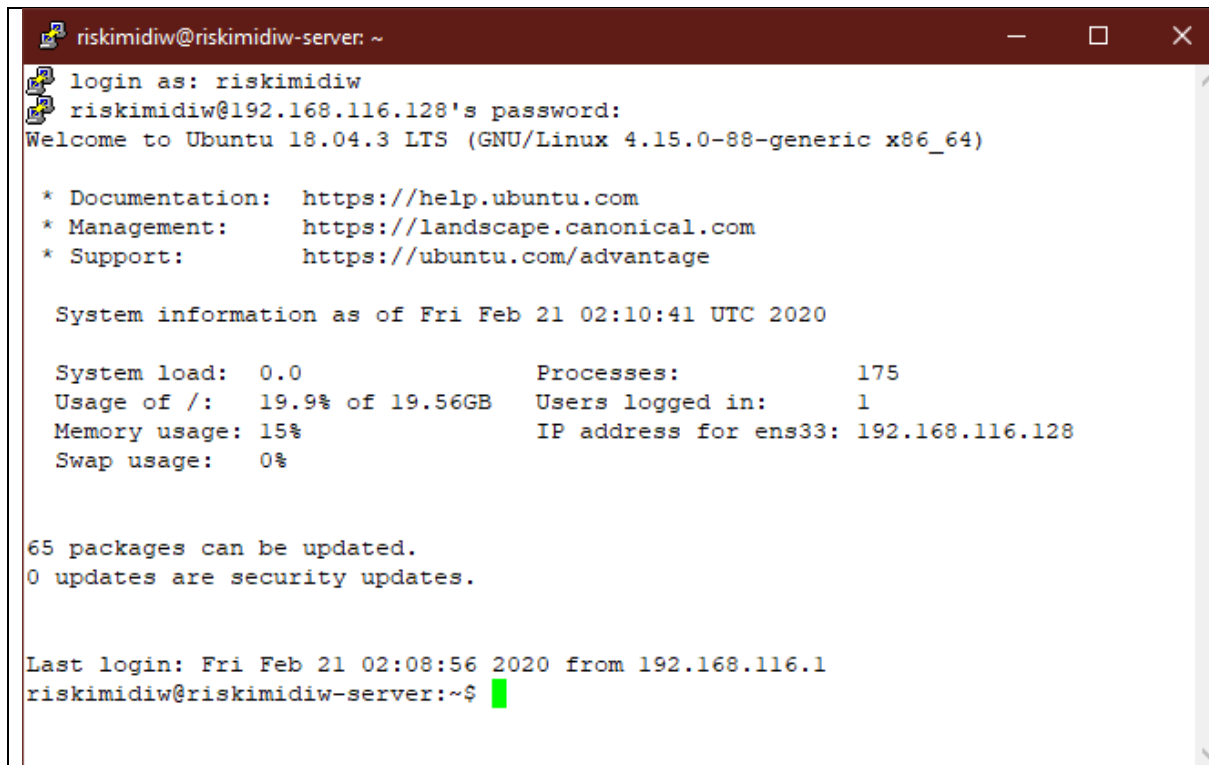


```
riskimidiw@riskimidiw-server: ~  
login as: riskimidiw  
riskimidiw@192.168.116.128's password:  
Welcome to Ubuntu 18.04.3 LTS (GNU/Linux 4.15.0-88-generic x86_64)  
  
* Documentation:  https://help.ubuntu.com  
* Management:    https://landscape.canonical.com  
* Support:       https://ubuntu.com/advantage  
  
System information as of Fri Feb 21 02:10:41 UTC 2020  
  
System load:  0.0                Processes:            175  
Usage of /:   19.9% of 19.56GB   Users logged in:     1  
Memory usage: 15%               IP address for ens33: 192.168.116.128  
Swap usage:   0%  
  
65 packages can be updated.  
0 updates are security updates.  
  
Last login: Fri Feb 21 02:08:56 2020 from 192.168.116.1  
riskimidiw@riskimidiw-server:~$
```

2. Deskripsikan parameter atau cara untuk mendapatkan IP dari Server Ubuntu

\$ lihat di ip di dashboard motd, atau ketikan perintah ifconfig, kemudian cari ipnya

3. Tampilkan hasil instalasi Apache (Ubuntu Default Page) pada browser (perlihatkan juga address bar pada browser)

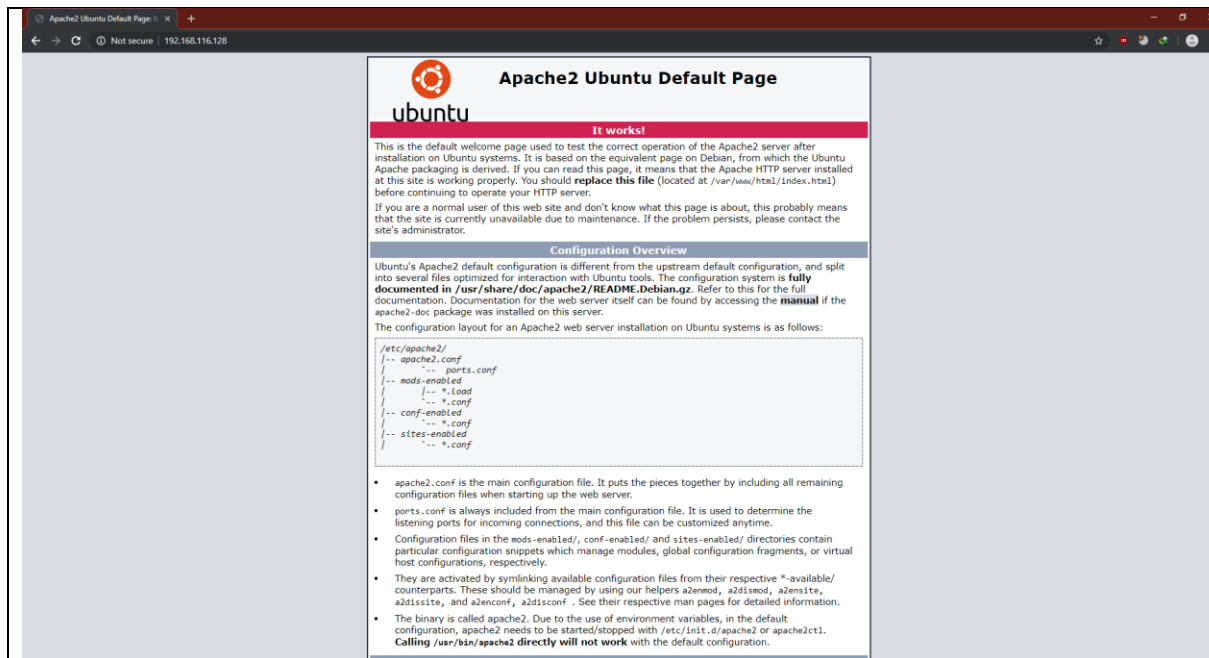

#### 4. Tampilkan proses instalasi MySQL

```
riskimidiw@riskimidiw-server: ~
riskimidiw@riskimidiw-server:~$ sudo apt install mysql-server
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following additional packages will be installed:
 libaio1 libcgi-fast-perl libcgi-pm-perl libencode-locale-perl
 libevent-core-2.1-6 libfcgi-perl libhtml-parser-perl libhtml-tagset-perl
 libhtml-template-perl libhttp-date-perl libhttp-message-perl libio-html-perl
 liblwp-mediatypes-perl libtimedate-perl liburi-perl mysql-client-5.7
 mysql-client-core-5.7 mysql-common mysql-server-5.7 mysql-server-core-5.7
Suggested packages:
 libdata-dump-perl libipc-sharedcache-perl libwww-perl mailx tinycat
The following NEW packages will be installed:
 libaio1 libcgi-fast-perl libcgi-pm-perl libencode-locale-perl
 libevent-core-2.1-6 libfcgi-perl libhtml-parser-perl libhtml-tagset-perl
 libhtml-template-perl libhttp-date-perl libhttp-message-perl libio-html-perl
 liblwp-mediatypes-perl libtimedate-perl liburi-perl mysql-client-5.7
 mysql-client-core-5.7 mysql-common mysql-server mysql-server-5.7
 mysql-server-core-5.7
0 upgraded, 21 newly installed, 0 to remove and 65 not upgraded.
Need to get 19.7 MB of archives.
After this operation, 156 MB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://id.archive.ubuntu.com/ubuntu bionic/main amd64 mysql-common all 5.8
```

```
riskindw@riskindw-server:~$ sudo mysql_secure_installation

Created symlink /etc/systemd/system/multi-user.target.wants/mysql.service - /lib
/systemd/system/mysql.service.
Setting up mysql-server (5.7.28-0ubuntu0.18.04.1) ...
Processing triggers for libc-bin (2.27-3ubuntu1) ...
Processing triggers for systemd (237-3ubuntu1.0.8) ...
Processing triggers for ureadahead (0.100.0-21) ...
riskindw@riskindw-server:~$ sudo mysql_secure_installation

Securing the MySQL server deployment.

Connecting to MySQL using a blank password.

VALIDATE PASSWORD PLUGIN can be used to test passwords
and improve security. It checks the strength of password
and allows the users to set only those passwords which are
secure enough. Would you like to setup VALIDATE PASSWORD plugin?

Press y|Y for Yes, any other key for No: No
Please set the password for root here.

New password:

Re-enter new password:
By default, a MySQL installation has an anonymous user,
allowing anyone to log into MySQL without having to have
a user account created for them. This is intended only for
testing, and to make the installation go a bit smoother.
You should remove them before moving into a production
environment.

Remove anonymous users? (Press y|Y for Yes, any other key for No) : Y
Success.

Normally, root should only be allowed to connect from
'localhost'. This ensures that someone cannot guess at
the root password from the network.

Disallow root login remotely? (Press y|Y for Yes, any other key for No) : Y
Success.

By default, MySQL comes with a database named 'test' that
anyone can access. This is also intended only for testing,
and should be removed before moving into a production
environment.


Remove test database and access to it? (Press y|Y for Yes, any other key for No)
: Y
- Dropping test database...
Success.
- Removing privileges on test database...
Success.

Reloading the privilege tables will ensure that all changes
made so far will take effect immediately.


Reload privilege tables now? (Press y|Y for Yes, any other key for No) : Y
Success.

All done!
riskindw@riskindw-server:~$
```

5. Tampilkan keberhasilan instalasi PHP dengan cara menampilkan info.php pada browser

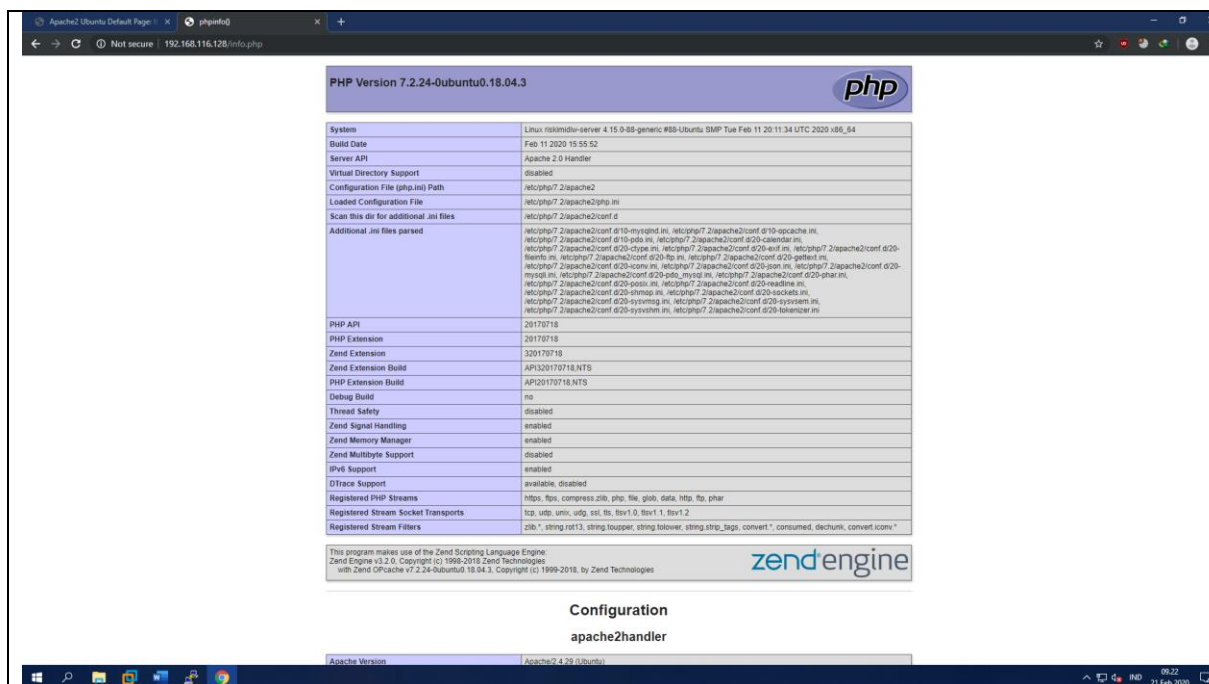


6. Tampilkan halaman awal dari login PHPmyAdmin pada browser

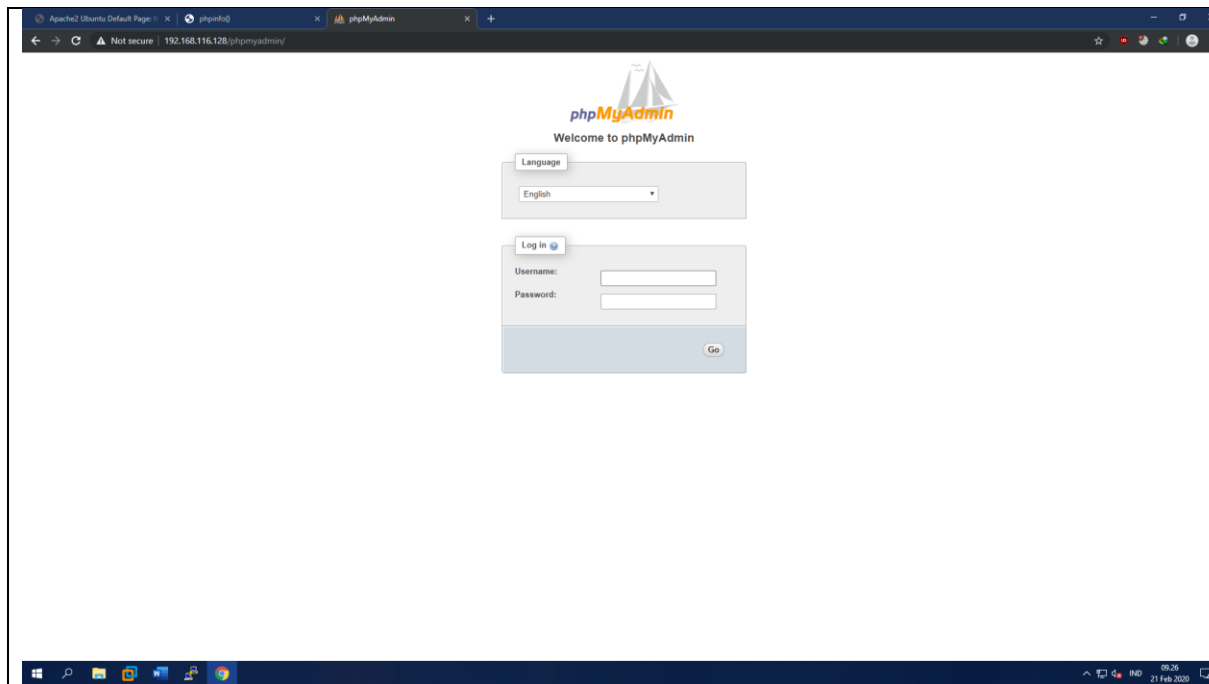

## 7. Deskripsikan parameter untuk memperbaiki login database (Flush Privileges)

\$ digunakan untuk melakukan refresh pada privillages di database

## 8. Tampilkan hasil login WinSCP yang menunjukkan berkas pada Ubuntu Server

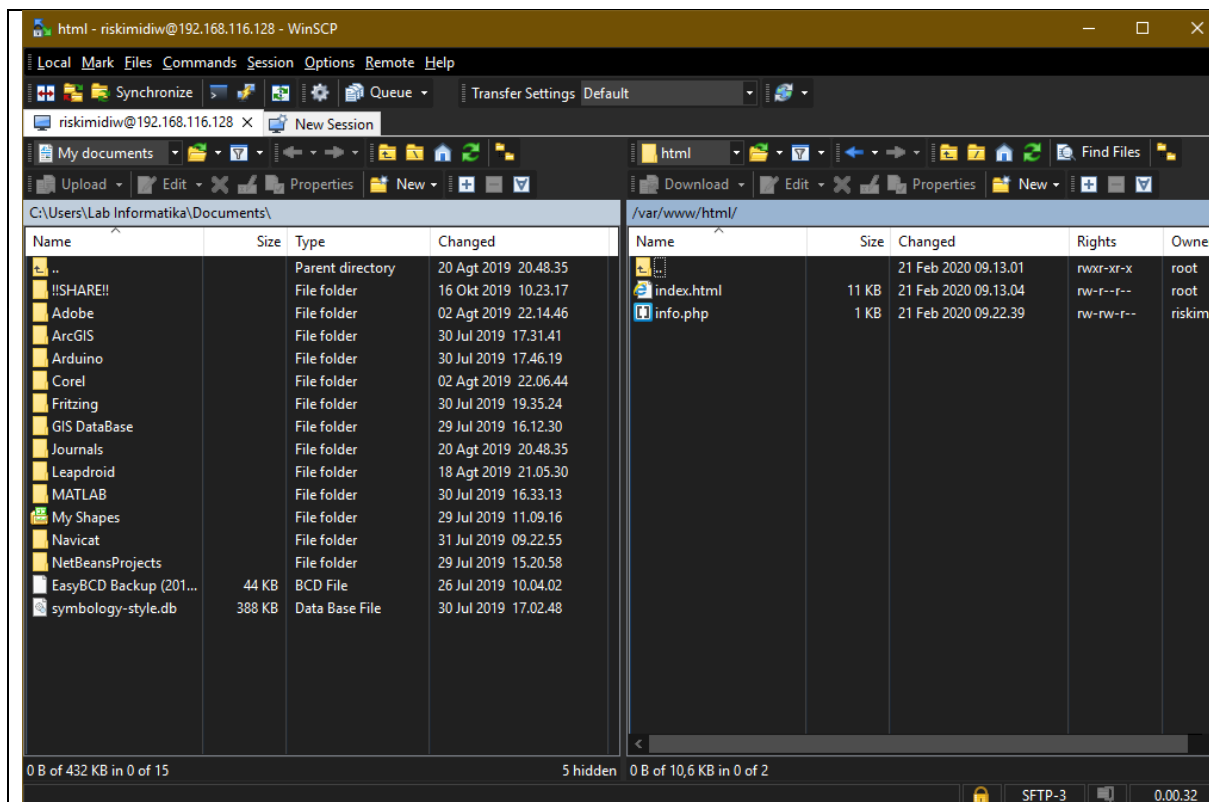


## **TUGAS BAGIAN KEDUA:**

Khusus untuk yang telah mengerjakan tugas 000webhost:


Unduh berkas PHP/HTML Rumah Makan yang tersimpan pada 000webhost Anda.

Khusus untuk yang belum mengerjakan tugas 000webhost:

Buatlah biodata/CV sederhana yang menampilkan identitas Anda menggunakan bahasa PHP/HTML dengan contoh hasil seperti pada ilustrasi berikut

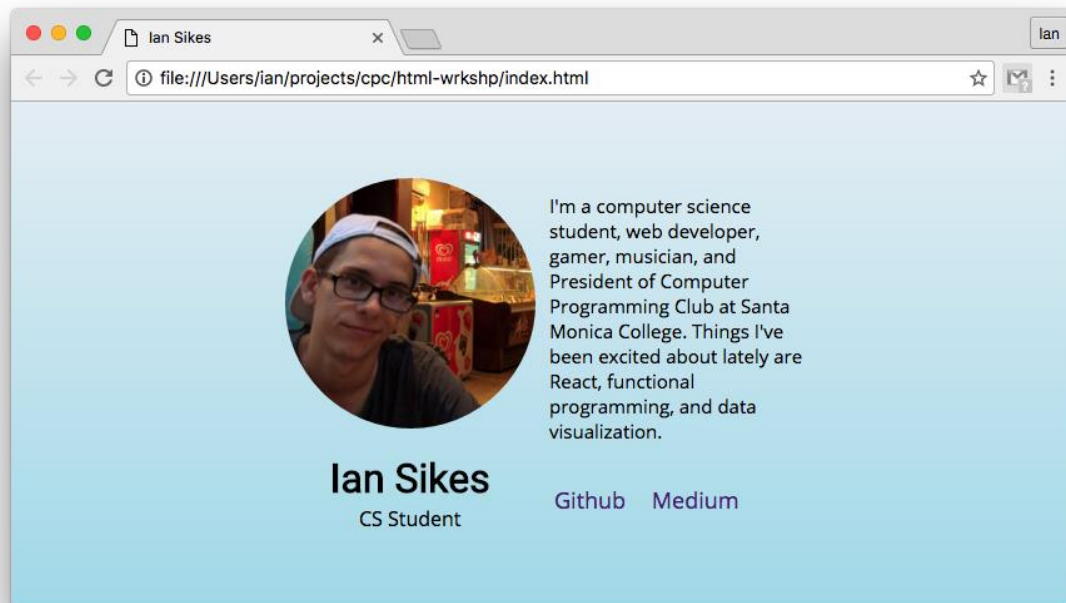

LAKUKAN UNGGAH BERKAS TERSEBUT PADA UBUNTU SERVER, KEMUDIAN TAMPILKAN HASILNYA PADA BROWSER. ATUR JUGA DATABASE BILA PERLU.

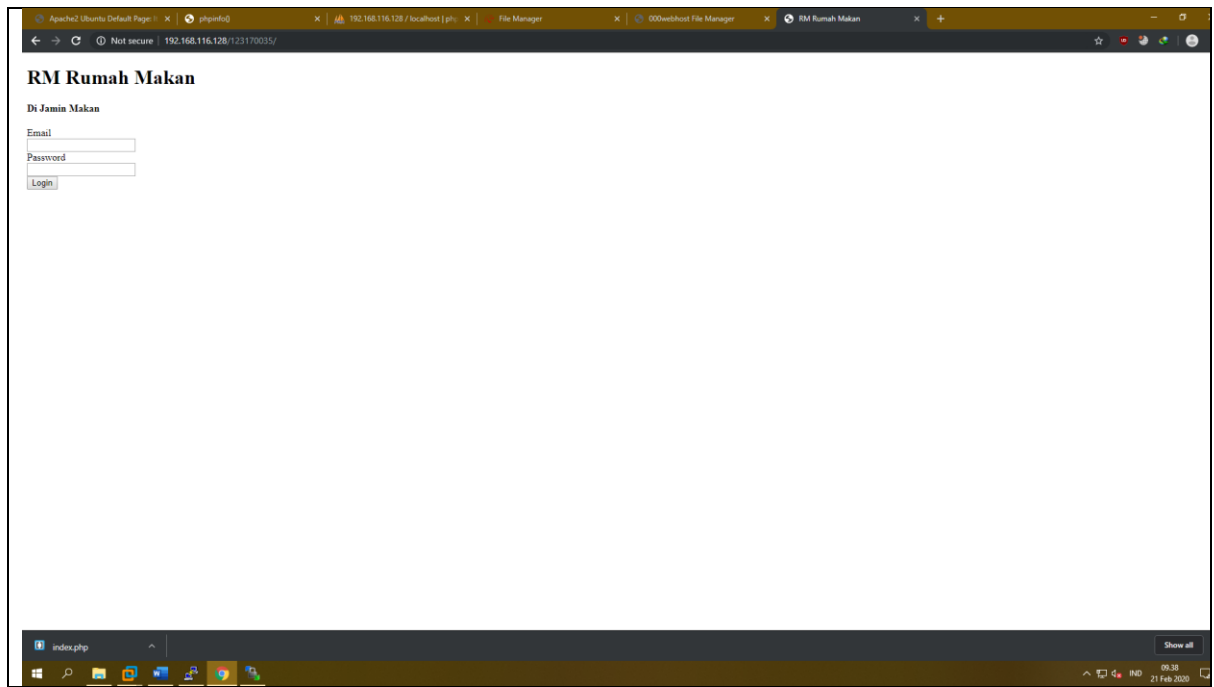




### **TUGAS BAGIAN KETIGA:**

Catatlah IP lima teman Anda secara acak pada tabel berikut, kemudian buat definisi domain untuk teman Anda dengan format: <http://www.namateman.if.upnyk.ac.id>

No.	IP	Nama	Domain
ex.	192.168.64.250	Wahyu Aji Nugroho	<b>wahyu</b> .if.upnyk.ac.id
	192.168.64.245	Muhammad Imam Alfatah	<b>imam</b> .if.upnyk.ac.id
1.	192.168.116.128	Riski Midi Wardana	<b>riski</b> .if.upnyk.ac.id
2.			.if.upnyk.ac.id
3.			.if.upnyk.ac.id
4.			.if.upnyk.ac.id
5.			.if.upnyk.ac.id

Tampilkan hasil akses situs tersebut (menggunakan domain, bukan akses dengan IP) pada isian berikut (perlihatkan URL pada tangkapan layar):

#### 1. Situs pertama

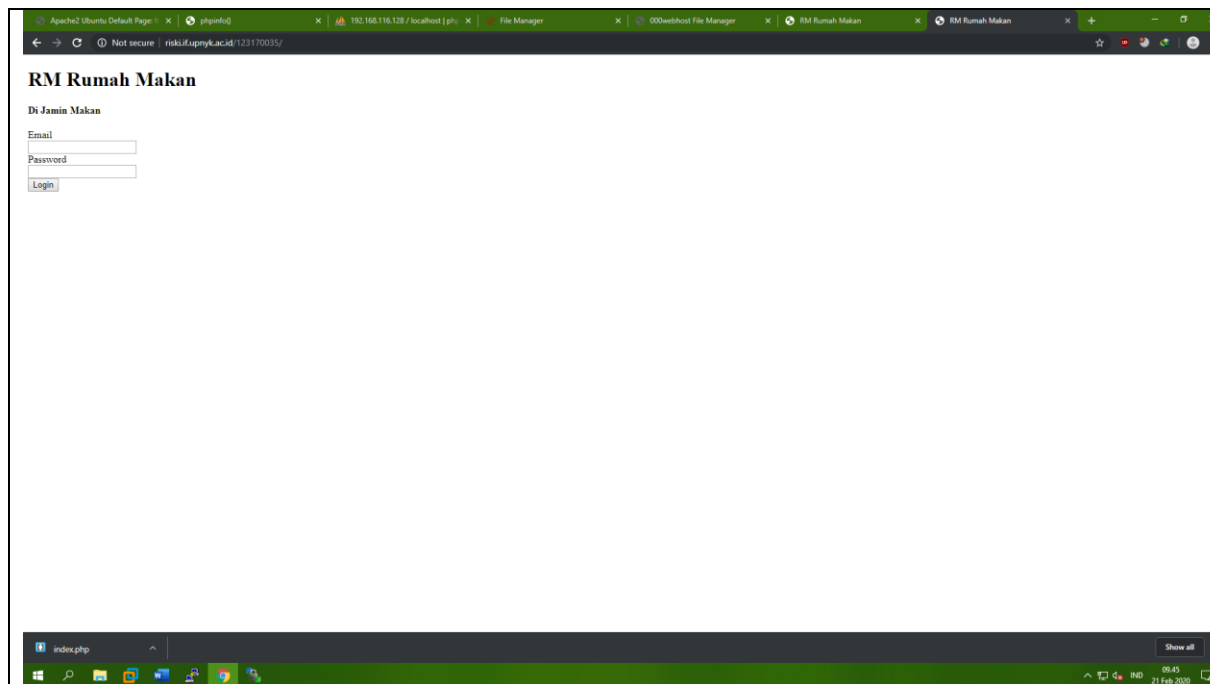

#### 2. Situs kedua

#### 3. Situs ketiga

4. Situs keempat

5. Situs kelima