



Overview: FORTRAN I,II,IV,77

```
PROGRAM AVEX
INTEGER INTLST(99)
ISUM = 0
C   read the length of the list
READ (*, *) LSTLEN
IF ((LSTLEN .GT. 0) .AND. (LSTLEN .LT. 100)) THEN
C   read the input in an array
DO 100 ICTR = 1, LSTLEN
  READ (*, *) INTLST(ICTR)
  ISUM = ISUM + INTLST(ICTR)
100 CONTINUE
C   compute the average
IAVE = ISUM / LSTLEN
C   write the input values > average
DO 110 ICTR = 1, LSTLEN
  IF (INTLST(ICTR) .GT. IAVE) THEN
    WRITE (*, *) INTLST(ICTR)
  END IF
110 CONTINUE
ELSE
  WRITE (*, *) 'ERROR IN LIST LENGTH'
END IF
END
```

- FORTRAN had a dramatic impact on computing in early days
- Still used for numerical computation



FORTRAN 90,95,HPF

```
PROGRAM AVEX
INTEGER INT_LIST(1:99)
INTEGER LIST_LEN, COUNTER, AVERAGE
C  read the length of the list
READ (*, *) LIST_LEN
IF ((LIST_LEN > 0) .AND. (LIST_LEN < 100)) THEN
C  read the input in an array
DO COUNTER = 1, LIST_LEN
READ (*, *) INT_LIST(COUNTER)
END DO
C  compute the average
AVERAGE = SUM(INT_LIST(1:LIST_LEN)) / LIST_LEN
C  write the input values > average
DO COUNTER = 1, LIST_LEN
IF (INT_LIST(COUNTER) > AVERAGE) THEN
WRITE (*, *) INT_LIST(COUNTER)
END IF
END DO
ELSE
WRITE (*, *) 'ERROR IN LIST LENGTH'
END IF
END
```

- Major revisions
 - Recursion
 - Pointers
 - Records
- New control constructs
 - **while-loop**
- Extensive set of array operations
 - $A[1:N] = B[1:N] * 1000.0$
- HPF (High-Performance Fortran) includes constructs for parallel computation



Lisp

```
(DEFINE (avex lis)
  (filtergreater lis (/ (sum lis) (length lis)))
)
(DEFINE (sum lis)
  (COND
    ((NULL? lis) 0)
    (ELSE (+ (CAR lis) (sum (CDR lis)))))
  )
)
(DEFINE (filtergreater lis num)
  (COND
    ((NULL? lis) '())
    ((> (CAR lis) num) (CONS (CAR lis)
                             (filtergreater (CDR lis) num)))
    (ELSE (filtergreater (CDR lis) num))
  )
)
```

- Lisp (List Processing)
- The original functional language developed by McCarthy as a realization of Church's lambda calculus
- Many dialects exist, including Common Lisp and Scheme
- Very powerful for symbolic computation with lists
- Implicit memory management with garbage collection
- Influenced functional programming languages (ML, Miranda, Haskell)



Algol 60

```
comment avex program
begin
  integer array intlist [1:99];
  integer listlen, counter, sum, average;
  sum := 0;
  comment read the length of the input list
  readint (listlen);
  if (listlen > 0) & (listlen < 100) then
    begin
      comment read the input into an array
      for counter := 1 step 1 until listlen do
        begin
          readint (intlist[counter]);
          sum := sum + intlist[counter]
        end;
      comment compute the average
      average := sum / listlen;
      comment write the input values > average
      for counter := 1 step 1 until listlen do
        if intlist[counter] > average then
          printint (intlist[counter])
        end
      else
        printstring ("Error in input list length")
      end
    end
  end
```

- The original block-structured language
 - Local variables in a statement block
- First use of Backus-Naur Form (BNF) to formally define language grammar
- All subsequent imperative programming languages are based on it
- Not widely used in the US
- Unsuccessful successor Algol 68 is large and relatively complex



COBOL

```
IDENTIFICATION DIVISION.  
PROGRAM-ID.    EXAMPLE.
```

```
ENVIRONMENT DIVISION.  
CONFIGURATION SECTION.  
SOURCE-COMPUTER.    IBM-370.  
OBJECT-COMPUTER.    IBM-370.
```

```
DATA DIVISION.  
WORKING-STORAGE SECTION.  
77 FAHR    PICTURE 999.  
77 CENT    PICTURE 999.
```

```
PROCEDURE DIVISION.  
DISPLAY 'Enter Fahrenheit ' UPON CONSOLE.  
ACCEPT FAHR FROM CONSOLE.  
COMPUTE CENT = (FAHR- 32) * 5 / 9.  
DISPLAY 'Celsius is ' CENT UPON CONSOLE.  
GOBACK.
```

- Originally developed by the Department of Defense
- Intended for business data processing
- Extensive numerical formatting features and decimal number storage
- Introduced the concept of records and nested selection statement
- Programs organized in divisions:
 - IDENTIFICATION: Program identification
 - ENVIRONMENT: Types of computers used
 - DATA: Buffers, constants, work areas
 - PROCEDURE: The processing parts (program logic).



BASIC

```
REM avex program
  DIM intlist(99)
  sum = 0
REM read the length of the input list
  INPUT listlen
  IF listlen > 0 AND listlen < 100 THEN
REM read the input into an array
    FOR counter = 1 TO listlen
      INPUT intlist(counter)
      sum = sum + intlist(counter)
    NEXT counter
REM compute the average
    average = sum / listlen
REM write the input values > average
    FOR counter = 1 TO listlen
      IF intlist(counter) > average THEN
        PRINT intlist(counter);
      NEXT counter
    ELSE
      PRINT "Error in input list length"
    END IF
  END
```

- BASIC (Beginner's All-Purpose Symbolic Instruction Code)
- Intended for interactive use (intepreted) and easy for "beginners"
- Goals: easy to learn and use for non-science students
- Structure of early basic dialects were similar to Fortran
- Classic Basic
- QuickBasic (see example)
- MS Visual Basic is a popular dialect



PL/I

```
AVEX: PROCEDURE OPTIONS (MAIN);
  DECLARE INTLIST (1:99) FIXED;
  DECLARE (LISTLEN, COUNTER, SUM, AVERAGE) FIXED;
  SUM = 0;
  /* read the input list length */
  GET LIST (LISTLEN);
  IF (LISTLEN > 0) & (LISTLEN < 100) THEN
    DO;
      /* read the input into an array */
      DO COUNTER = 1 TO LISTLEN;
        GET LIST (INTLIST(COUNTER));
        SUM = SUM + INTLIST(COUNTER);
      END;
      /* compute the average */
      AVERAGE = SUM / LISTLEN;
      /* write the input values > average */
      DO COUNTER = 1 TO LISTLEN;
        IF INTLIST(COUNTER) > AVERAGE THEN
          PUT LIST (INTLIST(COUNTER));
      END;
    ELSE
      PUT SKIP LIST ('ERROR IN INPUT LIST LENGTH');
  END AVEX;
```

- Developed by IBM
 - Intended to replace FORTRAN, COBOL, and Algol
- Introduced exception handling
- First language with pointer data type
- Poorly designed, too large, too complex



Ada and Ada95

```
with TEXT_IO;
use TEXT_IO;
procedure AVEX is
  package INT_IO is new INTEGER_IO (INTEGER);
  use INT_IO;
  type INT_LIST_TYPE is array (1..99) of INTEGER;
  INT_LIST : INT_LIST_TYPE;
  LIST_LEN, SUM, AVERAGE : INTEGER;
begin
  SUM := 0;
  -- read the length of the input list
  GET (LIST_LEN);
  if (LIST_LEN > 0) and (LIST_LEN < 100) then
    -- read the input into an array
    for COUNTER := 1 .. LIST_LEN loop
      GET (INT_LIST(COUNTER));
      SUM := SUM + INT_LIST(COUNTER);
    end loop;
    -- compute the average
    AVERAGE := SUM / LIST_LEN;
    -- write the input values > average
    for counter := 1 .. LIST_LEN loop
      if (INT_LIST(COUNTER) > AVERAGE) then
        PUT (INT_LIST(COUNTER));
        NEW_LINE;
      end if
    end loop;
  else
    PUT_LINE ("Error in input list length");
  end if;
end AVEX;
```

- Originally intended to be the standard language for all software commissioned by the US Department of Defense
- Very large
- Elaborate support for packages, exception handling, generic program units, concurrency
- Ada 95 is a revision developed under government contract by a team at Intermetrics, Inc.
 - Adds objects, shared-memory synchronization, and several other features



Smalltalk-80

```
class name          Avex
superclass          Object
instance variable names  intlist
"Class methods"
"Create an instance"
  new
    ^ super new
"Instance methods"
"Initialize"
  initialize
    intlist <- Array new: 0
"Add int to list"
  add: n | oldintlist |
    oldintlist <- intlist.
    intlist <- Array new: intlist size + 1.
    intlist <- replaceFrom: 1 to: intlist size with: oldintlist.
    ^ intlist at: intlist size put: n
"Calculate average"
  average | sum |
    sum <- 0.
    1 to: intlist size do:
      [:index | sum <- sum + intlist at: index].
    ^ sum // intlist size
"Filter greater than average"
  filtergreater: n | oldintlist i |
    oldintlist <- intlist.
    i <- 1.
    1 to: oldintlist size do:
      [:index | (oldintlist at: index) > n
        ifTrue: [oldintlist at: i put: (oldintlist at: index)]]
    intlist <- Array new: oldintlist size.
    intlist replaceFrom: 1 to: oldintlist size with: oldintlist
```

- Developed by XEROX PARC: first IDE with windows-based graphical user interfaces (GUIs)
- The first full implementation of an object-oriented language



Prolog

```
avex(IntList, GreaterThanAveList) :-
    sum(IntList, Sum),
    length(IntList, ListLen),
    Average is Sum / ListLen,
    filtergreater(IntList, Average, GreaterThanAveList).
% sum(+IntList, -Sum)
% recursively sums integers of IntList
sum([Int | IntList], Sum) :-
    sum(IntList, ListSum),
    Sum is Int + ListSum.
sum([], 0).
% filtergreater(+IntList, +Int, -GreaterThanIntList)
% recursively remove all integers <= Int from IntList
filtergreater([AnInt | IntList], Int, [AnInt |
    GreaterThanIntList]) :-
    AnInt > Int, !,
    filtergreater(IntList, Int, GreaterThanIntList).
filtergreater([AnInt | IntList], Int, GreaterThanIntList) :-
    filtergreater(IntList, Int, GreaterThanIntList).
filtergreater([], Int, []).
```

- The most widely used logic programming language
- Declarative: states what you want, not how to get it
- Based on formal logic



Pascal

```
program avex(input, output);
  type
    intlisttype = array [1..99] of integer;
  var
    intlist : intlisttype;
    listlen, counter, sum, average : integer;
begin
  sum := 0;
  (* read the length of the input list *)
  readln(listlen);
  if ((listlen > 0) and (listlen < 100)) then
    begin
      (* read the input into an array *)
      for counter := 1 to listlen do
        begin
          readln(intlist[counter]);
          sum := sum + intlist[counter]
        end;
      (* compute the average *)
      average := sum / listlen;
      (* write the input values > average *)
      for counter := 1 to listlen do
        if (intlist[counter] > average) then
          writeln(intlist[counter])
        end
      end
    else
      writeln('Error in input list length')
    end.
end.
```

- Designed by Swiss professor Niklaus Wirth
- Designed for teaching "structured programming"
- Small and simple
- Had a strong influence on subsequent high-level languages Ada, ML, Modula



Haskell

- The leading purely functional language, based on Miranda
- Includes curried functions, higher-order functions, non-strict semantics, static polymorphic typing, pattern matching, list comprehensions, modules, monadic I/O, and layout (indentation)-based syntactic grouping

```
sum []      = 0
sum (a:x) = a + sum x
```

```
avex []      = []
avex (a:x) = [n | n <- a:x, n > sum (a:x) / length (a:x)]
```



C (ANSI C, K&R C)

```
main()
{   int intlist[99], listlen, counter, sum, average;
    sum = 0;
    /* read the length of the list */
    scanf("%d", &listlen);
    if (listlen > 0 && listlen < 100)
    {   /* read the input into an array */
        for (counter = 0; counter < listlen; counter++)
        {   scanf("%d", &intlist[counter]);
            sum += intlist[counter];
        }
        /* compute the average */
        average = sum / listlen;
        /* write the input values > average */
        for (counter = 0; counter < listlen; counter++)
            if (intlist[counter] > average)
                printf("%d\n", intlist[counter]);
    }
    else
        printf("Error in input list length\n");
}
```

- One of the most successful programming languages
- Primarily designed for systems programming but more broadly used
- Powerful set of operators, but weak type checking and no dynamic semantic checks



C++

```
main()
{
    std::vector<int> intlist;
    int listlen;
    /* read the length of the list */
    std::cin >> listlen;
    if (listlen > 0 && listlen < 100)
    {
        int sum = 0;
        /* read the input into an STL vector */
        for (int counter = 0; counter < listlen; counter++)
        {
            int value;
            std::cin >> value;
            intlist.push_back(value);
            sum += value;
        }
        /* compute the average */
        int average = sum / listlen;
        /* write the input values > average */
        for (std::vector<int>::const_iterator it = intlist.begin();
             it != intlist.end(); ++it)
            if ((*it) > average)
                std::cout << (*it) << std::endl;
    }
    else
        std::cerr << "Error in input list length" << std::endl;
}
```

- The most successful of several object-oriented successors of C
- Evolved from C and Simula 67
- Large and complex, partly because it supports both procedural and object-oriented programming



Java

```
import java.io;
class Avex
{
    public static void main(String args[]) throws IOException
    {
        DataInputStream in = new DataInputStream(System.in);
        int listlen, counter, sum = 0, average;
        int [] intlist = int[100];
        // read the length of the list
        listlen = Integer.parseInt(in.readLine());
        if (listlen > 0 && listlen < 100)
        {
            // read the input into an array
            for (counter = 0; counter < listlen; counter++)
            {
                intlist[counter] =
                Integer.valueOf(in.readLine()).intValue();
                sum += intlist[counter];
            }
            // compute the average
            average = sum / listlen;
            // write the input values > average
            for (counter = 0; counter < listlen; counter++)
            {
                if (intlist[counter] > average)
                    System.out.println(intlist[counter] + "\n");
            }
        }
        else
            System.out.println("Error in input length\n");
    }
}
```

- Developed by Sun Microsystems
- Based on C++, but significantly simplified
- Supports only object-oriented programming
- Safe language (e.g. no pointers but references, strongly typed, and implicit garbage collection)
- Portable and machine-independent with Java virtual machine (JVM)



Other Notable Languages

- C#
 - Similar to Java, but platform dependent (MS .NET)
 - Common Language Runtime (CLR) manages objects that can be shared among the different languages in .NET
- Simula 67
 - Based on Algol 60
 - Primarily designed for discrete-event simulation
 - Introduced concept of coroutines and the class concept for data abstraction
- APL
 - Intended for interactive use ("throw-away" programming)
 - Highly expressive functional language makes programs short, but hard to read
- Scripting languages
 - Perl, Python, Ruby, ...



Why are There so Many Programming Languages?

■ Evolution

- Design considerations: What is a good or bad programming construct?
- Early 70s: structured programming in which goto-based control flow was replaced by high-level constructs (e.g. while loops and case statements)
- Late 80s: nested block structure gave way to object-oriented structures

■ Special Purposes

- Many languages were designed for a specific problem domain, e.g:
 - Scientific applications
 - Business applications
 - Artificial intelligence
 - Systems programming
 - Internet programming

■ Personal Preference


- The strength and variety of personal preference makes it unlikely that anyone will ever develop a universally accepted programming language



What Makes a Programming Language Successful?

- Expressive Power
 - Theoretically, all languages are equally powerful (Turing complete)
 - Language features have a huge impact on the programmer's ability to read, write, maintain, and analyze programs
 - Abstraction facilities enhance expressive power
- Ease of Use for Novice
 - Low learning curve and often interpreted, e.g. Basic and Logo
- Ease of Implementation
 - Runs on virtually everything, e.g. Basic, Pascal, and Java
- Open Source
 - Freely available, e.g. Java
- Excellent Compilers and Tools
 - Fortran has extremely good compilers
 - Supporting tools to help the programmer manage very large projects
- Economics, Patronage, and Inertia
 - Powerful sponsor: Cobol, PL/I, Ada
 - Some languages remain widely used long after "better" alternatives

Classification of Programming Languages

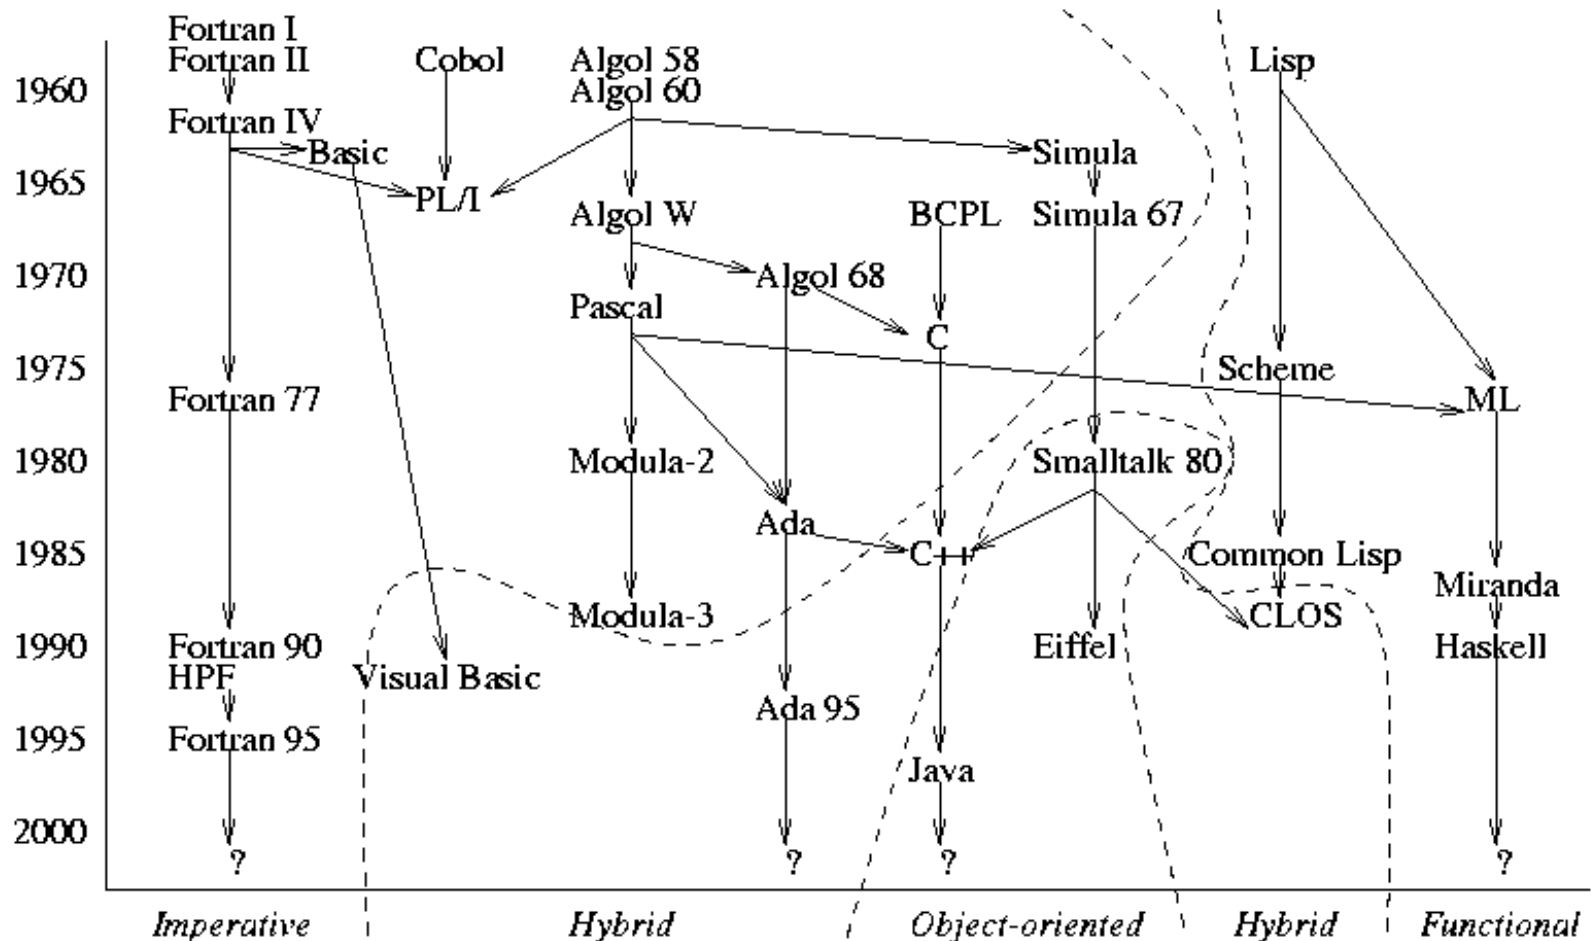



Classification of Programming Languages

Declarative Implicit solution "What the computer should do"	Functional (Lisp, Scheme, ML, Haskell) Logical (Prolog) Dataflow
Imperative Explicit solution "How the computer should do it"	Procedural "von Neumann" (Fortran, C) Object-oriented (Smalltalk, C++, Java)



Contrasting Examples

Procedural (C):

```
int gcd(int a, int b)
{ while (a != b)
    if (a > b) a = a-b; else b = b-a;
  return a;
}
```

Functional (Haskell):

```
gcd a b
| a == b = a
| a > b = gcd (a-b) b
| a < b = gcd a (b-a)
```

Logical (Prolog):

```
gcd(A, A, A) .
gcd(A, B, G) :- A > B, N is A-B, gcd(N, B, G) .
gcd(A, B, G) :- A < B, N is B-A, gcd(A, N, G) .
```



Summary

- History of programming language history
 - What is the first high level language? -Fortran
 - What are the first language for the following features?
 - Context free grammar –algol58
 - Record - COBOL
 - Exception handling – PL/1
 - Abstract data type –Simula 67
 - Pointer - PL/1
 - Functional programming - Lisp
- Language classification
 - Imperative and declarative language