# Introduction to Data Science with Python

Chapter 2

January 17, 2023

#### Topics of the course

1. Chapter

2. Chapter

3. Chapter

#### **Python Fundamentals**

Basic concepts, Variables, basic data structures, functions

# Data Wrangling & Simple visualizations

How to process data with pandas and visualize it with matplotlib

## Visualizations & Modelling

More plots with matplotlib and seaborn and an introduction to modelling

#### What you learn in this Chapter...

... how to use Python libraries

... work with data in a DataFrame

... filter, merge and group your data

... visualize data with simple plots

# Data Wrangling & Visualization Libraries

#### Libraries

- A collection of functions is bundled in a **library**
- we import these libraries and can use the defined functions
- Some libraries come with a Python installation, some need to be installed



... for plotting and visualization



... for working with tabular data (Excel-files, csv-files,...)




... creating machine learning models

### Libraries



#### Libraries

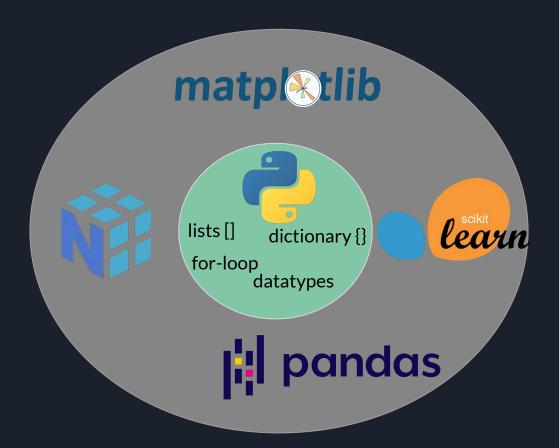

#### Function & Methods

**Functions** 

```
a = function_name(parameter)
```

#### Function & Methods


**Functions** 

Methods

```
a = function_name(parameter)
```

```
a = "a string!"
a = a.upper() # 'A STRING!'
```

## Import Libraries

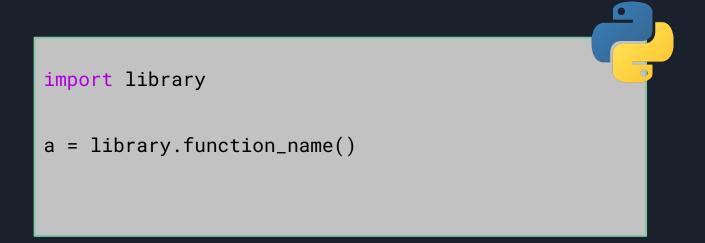

## Import Libraries

```
import library as 1
a = 1.function_name()
```

# Data Wrangling & Visualization Arrays with Numpy

## NumPy - library



- Library for scientific computing
- Work with lists, matrices or higher dimensional structures
- NumPy lists have much more functionality than usual lists

```
import numpy as np
a = np.array([1,2,3,4])
```

#### NumPy - library




- Library for scientific computing
- Work with lists, matrices or higher dimensional structures
- NumPy lists have much more functionality than usual lists

```
import numpy as np
a = np.array([1,2,3,4])
a.sum() # 10
a.mean() # 2.5
a.std() # 1.118...
```



#### Documentation

- Explanations to the methods and functions
- Often include examples and tutorials
- https://numpy.org/doc/

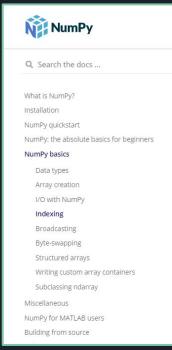

User Guide API reference Development

#### Single element indexing

Single element indexing for a 1-D array is what one expects. It work exactly like that for other standard Python sequences. It is 0-based, and accepts negative indices for indexing from the end of the array.

```
>>> x = np.arange(10)
>>> x[2]
2
>>> x[-2]
8
```

Unlike lists and tuples, numpy arrays support multidimensional indexing for multidimensional arrays. That means that it is not necessary to separate each dimension's index into its own set of square brackets.

```
>>> x.shape = (2,5) # now x is 2-dimensional
>>> x[1,3]
8
>>> x[1,-1]
```

Note that if one indexes a multidimensional array with fewer indices than dimensions, one gets a subdimensional array. For example:

#### NumPy - Append

```
import numpy as np
a = np.array([1,2,3,4])
np.append(a, [5,6,7]) # array([1, 2, 3, 4, 5, 6, 7])
```

#### NumPy - Append

```
import numpy as np
a = np.array([1,2,3,4])
np.append(a, [5,6,7]) # array([1, 2, 3, 4, 5, 6, 7])
a = np.append(a, [5,6,7])
```


#### Compute with arrays - Broadcasting

```
import numpy as np
a = np.array([1,2,3])
a * 2 # array([2, 4, 6])
a ** 2 # array([1, 4, 9])
a - 1 # array([0, 1, 2])
```

#### Compute with arrays

```
import numpy as np
a = np.array([1,2,3])
b = np.array([1,1,1])
a + b # array([2, 3, 4])
```

#### Indexing

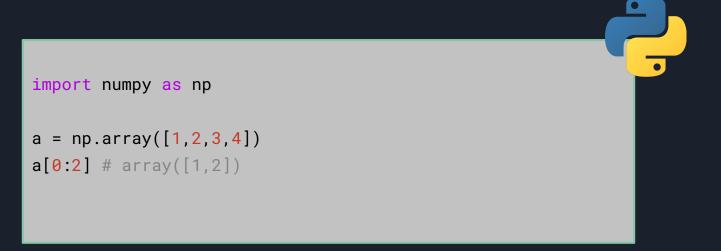

#### Boolean Indexing

```
import numpy as np
a = np.array([1,2,3,4])
a[[True,True,False,False]] # array([1,2])
```

#### Boolean Indexing

```
import numpy as np
a = np.array([1,2,3,4])
a <= 2 # [True, True, False, False]</pre>
```

#### Boolean Indexing

```
import numpy as np

a = np.array([1,2,3,4])
a <= 2 # [True, True, False, False]
a[a<=2] # array([1,2])</pre>
```

#### Exercise 1

```
import numpy as np
a = np.array([1,2,3,4])
a = np.append(a, [5,6,7])# [1,2,3,4,5,6,7]
a[a<=2] # [1,2] (boolean indexing)
a.sum() # 28</pre>
```

## We will continue at 13:15

# Data Wrangling & Visualization **Tabular Data with Pandas**

# pandas - library

```
import pandas as pd

data = {
```


```
"Name":["Clara", "Tom", "Sarah", "John"],

"Age" :[20,24,19,21]}

df = pd.DataFrame(data)
```

	Name	Age
0	Clara	20
1	Tom	24
2	Sarah	19
3	John	21

#### DataFrame - data structure

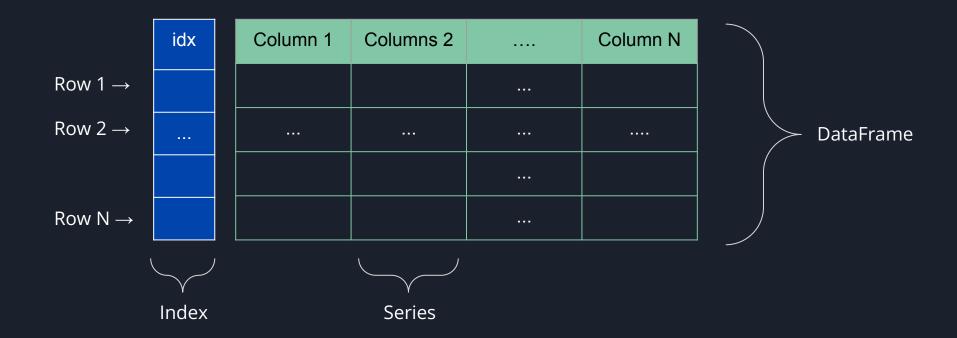

#### Read data

- Pandas can read data from files
- Various data formats possible

```
df = pd.read_csv('path_to_file')
df = pd.read_excel('path_to_file')
df = pd.read_sql_table('postgres://db')
```

#### First look at the data



df.head()

	id	price	neighbourhood_group_cleansed	latitude
		-		
0	28684898	\$50.00	Neukölln	52.473978
1	22607348	\$10.00	Treptow - Köpenick	52.468095
2	21019199	\$35.00	Neukölln	52.481810
3	21919556	\$99.00	Pankow	52.537269
4	4820648	\$39.00	Friedrichshain-Kreuzberg	52.491483




#### df.describe()

	id	price	latitude	longitude	bathrooms
count	1.353100e+04	13531.000000	13531.000000	13531.000000	13508.000000
mean	1.573089e+07	70.082625	52.509956	13.405871	1.095203
std	8.580394e+06	255.451132	0.030773	0.058517	0.335469
min	2.695000e+03	0.000000	52.346203	13.103557	0.000000
25%	8.041528e+06	30.000000	52.489082	13.374950	1.000000
50%	1.697254e+07	45.000000	52.509229	13.416764	1.000000
75%	2.264464e+07	70.000000	52.532808	13.439258	1.000000
max	2.986735e+07	9000.000000	52.651670	13.721671	8.500000

Select Data

### Select data in a DataFrame

idx	Name	Age
0	Clara	20
1	Tom	24
2	Sarah	19
3	John	21

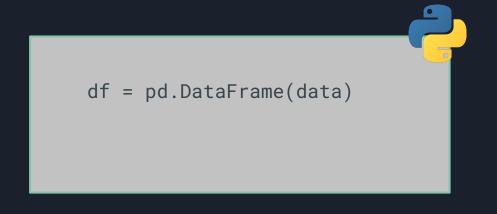

### Select data in a DataFrame

idx	Name Age	
0	Clara	20
1	Tom	24
2	Sarah	19
3	John	21

```
df = pd.DataFrame(data)
df["Name"]
```


### Select data in a DataFrame

idx	Name	Age
0	Clara	20
1	Tom	24
2	Sarah	19
3	John	21

```
df = pd.DataFrame(data)
df.iloc[0:3]
```


#### Add data to a DataFrame

idx	Name	Age	Grade
0	Clara	20	1
1	Tom	24	2
2	Sarah	19	3
3	John	21	4

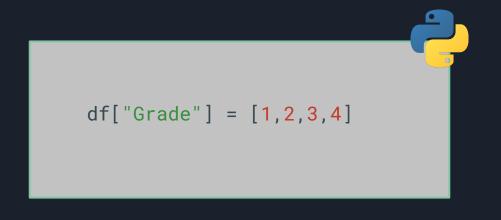

### Compute with data in a DataFrame

idx	Name	Age	Grade
0	Clara	20	2
1	Tom	24	3
2	Sarah	19	4
3	John	21	5

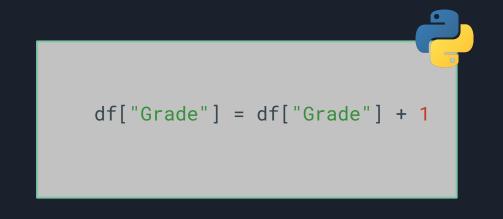

# Drop data

idx	Name	Age	Grade
0	Clara	20	$  \setminus 1 /  $
1	Tom	24	
2	Sarah	19	3
3	John	21	4

```
# Drop column

df = df.drop(column="Grade")
```

## Drop data

idx	Name	Age	Grade
2	Sarah	19	3
3	John	21	4

```
# Drop column

df = df.drop(column="Grade")

# Drop row

df.drop([0,1], inplace=True)
```

Filter data


idx	Name	Age	Grade
0	Clara	20	2
2	John	21	5

idx	Name	Age	Grade
0	Clara	20	2
1	Tom	24	3
2	Sarah	19	4
3	John	21	5

```
df["Age"] <= 20

→ [True, False, True, False]</pre>
```

idx	Name	Age	Grade
0	Clara	20	2
2	John	21	5

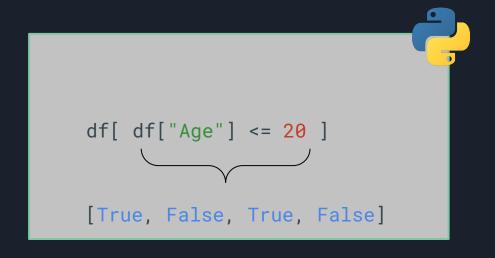

idx	Name	Age	Grade
0	Clara	20	2


```
df[
    (df["Age"] <= 20) &
    (df["Grade"] < 3)
]</pre>
```

idx	Name	Age	Grade
0	Clara	20	2
2	Sarah	19	4

```
df[
    (df["Age"] == 20) |
    (df["Grade"] == 4)
]
```


# Combine filtering with other methods

idx	Name	Age	Grade
0	Clara	20	2
2	John	21	5

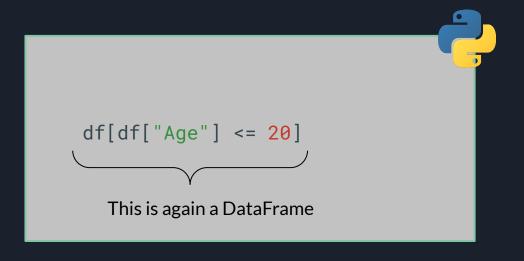

## Combine filtering with other methods

idx	Name	Age	Grade
0	Clara	20	2
2	John	21	5

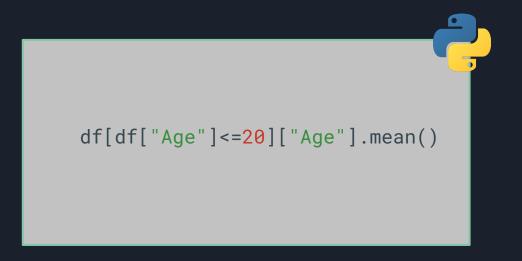

#### Exercise 2

```
import pandas as pd

df = pd.DataFrame(data) # create dataframe

df['new_column'] = [1,2,3]

df.sort_values(by='column_name') # sort

df[df['age']<=20] # filter data</pre>
```

# Pandas methods

## Apply pandas methods

- Pandas has large amount of commonly used methods
- Can be applied to single column or whole data frame

```
df["Grade"].mean()
df["Grade"].std()
df["Grade"].sum()
```

#### Often used methods

```
df["Grade"].mean()
df["Grade"].sum()
df["Grade"].value_counts()
df.sort_values(by="Grade")
df.groupby(by="Grade").sum()
df1.merge(df2)
df.drop(colums=["Grade"])
df["Grade"].replace(5, "Failed")
```

# Group-By


idx	Name	Age	Gender
0	Clara	20	F
1	Tom	24	M
2	Sarah	19	F
3	John	21	M

What is the average age per gender?


# Group-By

df.groupby(by='Gender').mean()

idx	Name	Age	Gender
0	Clara	20	F
1	Tom	24	М
2	Sarah	19	F
3	John	21	М

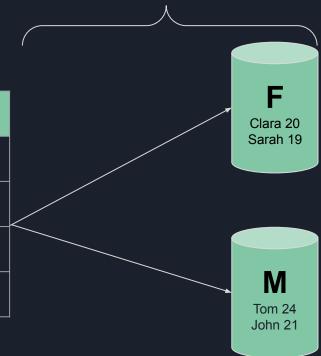

# Group-By

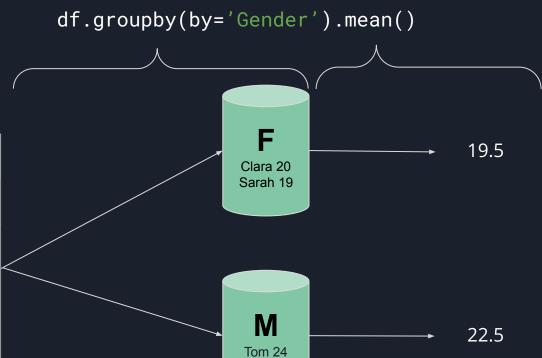

John 21

idx	Name	Age	Gender
0	Clara	20	F
1	Tom	24	М
2	Sarah	19	F
3	John	21	М

Name	Age	Grade
Clara	20	2
Tom	24	3
Sarah	19	4


Name	Subject
Sarah	Physics
Tom	Politics
John	English

Name	Age	Grade
Clara	20	2
Tom	24	3
Sarah	19	4

Name	Subject	
Sarah	Physics	
Tom	Politics	
John	English	

Name	Age	Grade	Subject
Tom	24	3	Politics
Sarah	19	4	Physics

Name	Age	Grade
Clara	20	2
Tom	24	3
Sarah	19	4

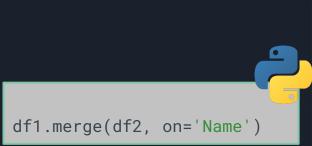

Name	Subject
Sarah	Physics
Tom	Politics
John	English

Name	Age	Grade	Subject
Tom	24	3	Politics
Sarah	19	4	Physics

Name	Age	Grade
Clara	20	2
Tom	24	3
Sarah	19	4

df1.merge(df2,how='left',
on='Name')

Name	Subject
Sarah	Physics
Tom	Politics
John	English

Name	Age	Grade	Subject
Tom	24	3	Politics
Sarah	19	4	Physics
Clara	20	2	-

## Exercise 3

```
import pandas as pd

df = df.groupby(by='column_name')

df = df.merge(df2,on='column_name',how='left')
```

Data Wrangling & Visualization


Visualizations with Matplotlib

# matp (\*\*) - library

- data visualization tool
- generate highly customizable plots
- good integrated with pandas


```
import matplotlib.pyplot as plt
x = [0,1,2,3,4,5]
y = [0,2,4,8,16,32]
plt.plot(x,y)
```






#### Histogram

```
import matplotlib.pyplot as plt
x = [1,2,2,2,2,3,3]
plt.hist(x, bins=3)
```

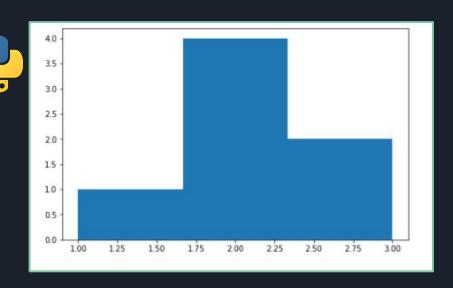

```
import matplotlib.pyplot as plt
x = [0,1,2,3,4,5]
y = [0,2,4,8,16,32]
y2 = [0,1,2,3,4,5]


plt.plot(x,y)
plt.plot(x,y2)
```

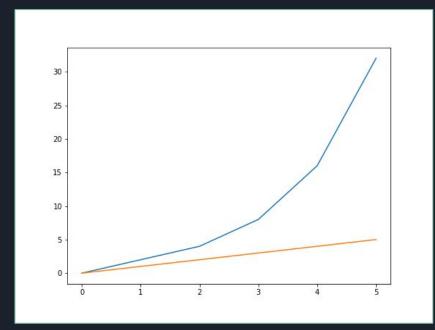

```
import matplotlib.pyplot as plt
x = [0,1,2,3,4,5]
y = [0,2,4,8,16,32]
y2 = [0,1,2,3,4,5]

plt.plot(x,y, color='green', label='Graph A')
plt.plot(x,y2, color='red', label='Graph B')


plt.legend()
```

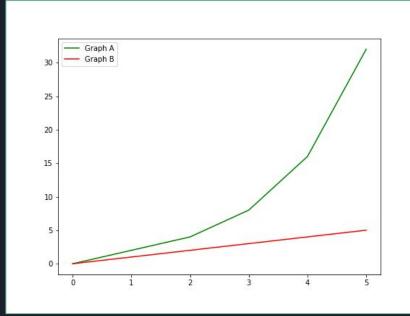


```
import matplotlib.pyplot as plt
x = [0,1,2,3,4,5]
y = [0,2,4,8,16,32]
y2 = [0,1,2,3,4,5]

plt.plot(x,y, color='green', label='Graph A')
plt.plot(x,y2, color='red', label='Graph B')

plt.legend()
plt.xlabel("X-label")
plt.ylabel("Y-label")
plt.title("Title")
```

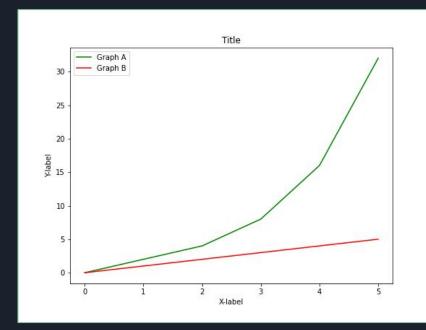

```
import matplotlib.pyplot as plt
x = [0, 1, 2, 3, 4, 5]
y = [0, 2, 4, 8, 16, 32]
y2 = [0,1,2,3,4,5]
plt.plot(x,y, color='green', label='Graph A')
plt.plot(x,y2, color='red', label='Graph B')
plt.legend()
plt.xlabel("X-label")
plt.ylabel("Y-label")
plt.title("Title",
{'fontname':'DejaVu Sans', 'size':'20'})
plt.grid()
```

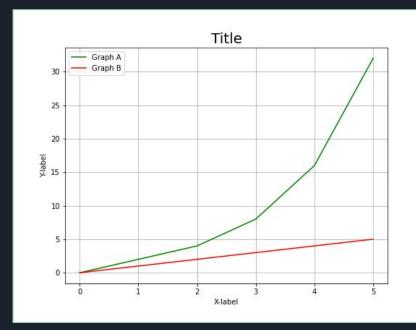

#### pandas & matplotlib

- Pandas and matplotlib work very well together
- We can pass columns of a DataFrame to matplotlib

```
import matplotlib.pyplot as plt
df = pd.DataFrame(data)
plt.hist(df["Age"])
```

## Exercise 4

```
import matplotlib.pyplot as plt
df = pd.DataFrame(data)
plt.hist(df["Age"])
```

# Data Wrangling & Visualization Clean Data with Pandas

#### Clean data


Data comes often in an untidy form, therefore some data cleaning is necessary

Name	Town		
Clara	Frankfurt a.M.		
Sarah	Frankfurt am Main		
John	Berlin		

#### Clean data

Data comes often in an untidy form, therefore some data cleaning is necessary

Name	Subject
Clara	Physics
Sarah	physics
John	Math

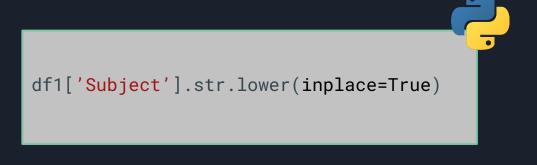

# Working with dates



What kind of data type is this: "27-03-2021"?

a) integer b) float c) string d) date



```
df['Birthday'] = pd.to_datetime(df['Birthday'])
```

Name	Birthday	
Clara	"20/10/1995"	
Sarah	"10/01/1999"	
John	"05/03/2001"	



```
df['Birthday'] = pd.to_datetime(df['Birthday'], format="%d/%m/%y")
```

Name	Birthday
Clara	"20/10/1995"
Sarah	"10/01/1999"
John	"05/03/2001"



```
df['Birthday'] = pd.to_datetime(df['Birthday'], format="%m-%d-%y")
```

Name	Birthday
Clara	"10-10-1995"
Sarah	"10-01-1999"
John	"05-03-2001"

```
df['day'] = df['Birthday'].dt.day
df['weekday'] = df['Birthday'].dt.weekday
df['month'] = df['Birthday'].dt.month
```

Name	Birthday	day	weekday	month
Clara	"10-10-1995"	10	1	10
Sarah	"10-01-1999"	1	4	10
John	"05-03-2001"	3	3	5



#### Set date as index

date	City	Temperature
"20-04-2021"	Frankfurt	10
"20-04-2021"	Berlin	11
"20-04-2021"	Munich	12
"21-04-2021"	Frankfurt	11
"21-04-2021"	Berlin	13
"21-04-2021"	Munich	14
"22-04-2021"	Frankfurt	9
"21-04-2021"	Berlin	10



```
df = df.set_index(['date'])
```