Rwy Idg 11500 WAAS APP CRS TDŹE 286 сн **97509** 0110 312 Apt Elev W01B

## RNAV (GPS) Y RWY 1C

WASHINGTON DULLES INTL (IAD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC/DME Rwy 1L, ILS Rwy 1L (Cat II), ILS Rwy 1L (Cat III), ILS or LOC Rwy 1R, ILS Rwy 1R (Cat III), ILS Rwy 1R (Cat III). LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR MISSED APPROACH: Climb to 3000 direct BOYDS and hold.

POTOMAC APP CON ATIS 134.85 120.45 306.925


MISSED APCH FIX


NE-3, 03 APR 2014 to 01 MAY 2014

**DULLES TOWER** 120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134\_425 348\_6 (Rwys 1L/19R and 12/30)

GND CON 121.9 317.8 (EAST) 121.625 348.6 (WEST)

CLNC DEL 135.7 317.8

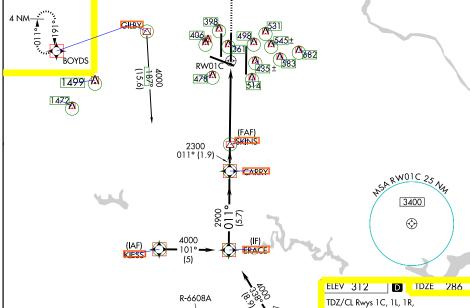





WASHINGTON, DC Amdt 1A 08MAR12 940-1

628 (700-1)

**CIRCLING** 

628 (700-2)

628 (700-13/4)