
Heatmap Visualization Documentation

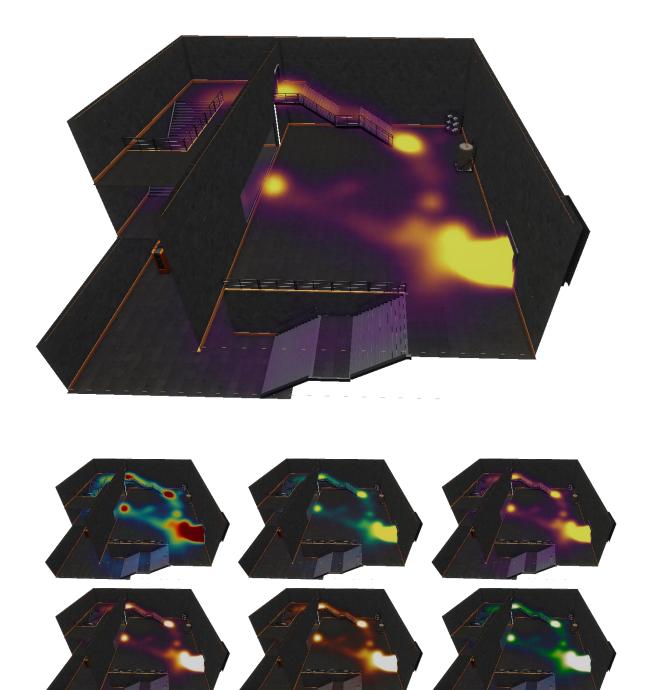

Version: 1.0.0


Contents

1.	General Description	1
2.	Important Files	1
3.	How To Use	2
	3.1 Heatmap Prefab	2
	3.2 Heatmap Area	2
	3.3 Heatmap Generation Settings	3
	3.4 Heatmap Rendering Settings	4
	3.5 Generate Heatmap	4
4.	Performance and Restrictions	6
5.	Colormaps	6
6.	Troubleshooting	7
	6.1 Not Showing Anything	7
	6.2 Compute Shader Timeout	8

1. General Description

The Heatmap Visualization Package can be used to analyze Data gathered from play testers, beta testers or just players. It works entirely in edit mode, so no need to enter play mode.

2. Important Files

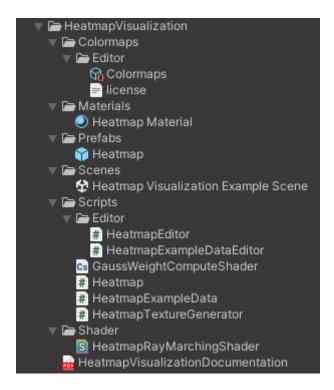



- Prefabs/Heatmap.prefab
 This is the main Prefab, use it to generate and show your heatmap.
- Scripts/Heatmap.cs
 This is the main Component on the main prefab.
- Scripts/ HeatmapTextureGenerator.cs
 In here is the class, which generates the Texture3D used for rendering the Heatmap.
- Scripts/Editor/HeatmapEditor.cs
 The Editor Script for Heatmap.cs.
- Colormaps/Editor/Colormaps.gradients
 This file holds some gradients you can use.

3. How To Use

3.1 Heatmap Prefab


1.1 Place the heatmap prefab in your scene.

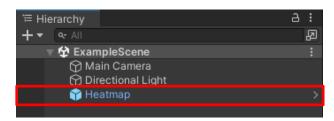

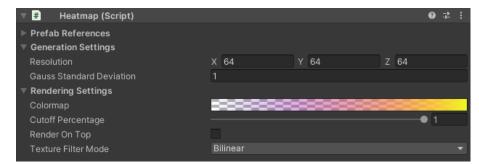


3.2 Heatmap Area

Adjust the position and scale of the prefabs transform, so it matches your map or world.



3.3 Heatmap Generation Settings

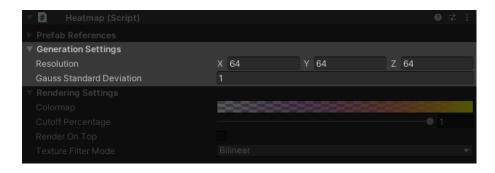


Resolution

The Resolution of the generated Texture3D. The Higher the Resolution the longer it takes to generate. On my System I can get it up to 512x512x512. I recommend starting with lower resolutions like 64x64x64 and increase from there.

• Gauss Standard Deviation


The Influence range of each datapoint. The Influence is in the form of a normal distribution function.

3.4 Heatmap Rendering Settings

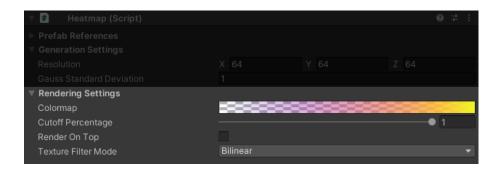

Colormap

The gradient used as colormap from cold to hot. Six different colormaps are included in the Package.



• Cutoff Percentage

Set the maximum heat value as a percentage based on the highest value.

Usually there is a lot of Datapoints at the Spawn point. This can prevent other areas from being visible at all. Therefore, you might need to set a threshold to cut off outliers.

• Render On Top

If false, heat values behind another object will be ignored.

Texture Filter Mode point, bilinear or trilinear

3.5 Generate Heatmap

Version: 1.0.0

Call the GenerateHeatmap(List<Vector3> points) Function of the Heatmap Component on the prefab in your scene. It only expects a List of points. Any points out of bounds will be ignored.

Part of the package is the HeatmapExampleData Script, which generates random datapoints.

4. Performance and Restrictions


The Cost of the heatmap generation is dependent on the texture resolution and the data point count. I was able to generate Heatmaps up to 256x256x256 and 1 000 000 data points in about a second. This can be achieved due to a compute shader taking over the most expensive part of the pipeline. On higher resolutions, the compute shader might reach the graphic drivers timeout (the timeout can be changed in a setting usually).

5. Colormaps

More Information about the used colormaps can be read on this post: https://www.kennethmoreland.com/color-advice/

6. Troubleshooting


6.1 Not Showing Anything



Inspect the material of the Mesh Renderer of the Heatmap game object.




If it shows properly in the material preview (while selecting the game object), it might be due to a Problem with the Depth Buffer.



If the depth buffer can't be used in your project, there might be problems when enabling *Render On Top* in the *Heatmap Rendering Settings*. You should try to disable it.

6.2 Compute Shader Timeout

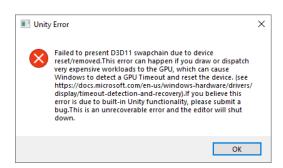

When getting this error on generating the Heatmap, this might be due to the graphics drivers compute shader timeout. You should try a lower *Resolution* in the *Heatmap Rendering Settings*.

If you really need the high resolution, there might be ways to increase the compute shader timeout on your system.