solifi.

CODELENS

HOME ASSIGNMENT · AI AUTOMATION

Solifi CodeLens — AI GitHub Code Reviewer

An AI code-review system built with an n8n workflow and a Groq-hosted LLM. It scores any GitHub source file on five quality parameters and returns actionable recommendations through a custom web UI.

Submitted by	Khartik
Date	13 October 2026
Tech stack	n8n · Groq (Llama 3.3 70B) · HTML / CSS / JavaScript · GitHub
Repository	https://github.com/<your-username>/solifi-codelens

SUBMISSION CHECKLIST

Deliverables at a glance

#	Expected deliverable	Where to find it	Status
1	Phase-wise implementation file	Section 2	Included
2	Complete UI development prompt file	Section 3 · `prompts/UI_Development_Prompt.md`	Included
3	n8n GitHub Code Reviewer workflow file	Section 4 · Appendix B · `n8n/…workflow.json`	Included
4	Complete UI source-code files	Appendix A · `codelens-ui/index.html`	Included
5	Screenshot of the complete n8n workflow	Section 4	Included
6	Screenshots of the final UI and code-review results	Section 5	Included
7	GitHub repository link	Section 6	Included
8	Short demo video, if required	Section 7	Included

OVERVIEW

1. Solution overview

A developer pastes a GitHub file link into the **CodeLens** UI. The UI sends the link to an **n8n webhook**. n8n downloads the raw source and passes it to a **Basic LLM Chain** backed by the **Groq Chat Model**. The chain reviews the code as a senior Java architect would. The structured Markdown review goes back to the UI, which renders the score table, the overall score, the improvement areas and the summary.

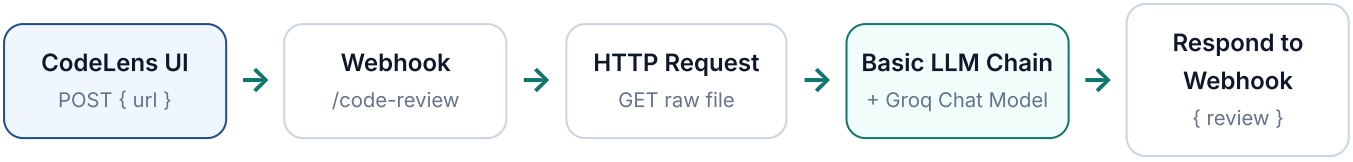


Figure 1 — End-to-end request flow

Scoring model

Parameter	What is evaluated	Max
Code Readability	Naming conventions, indentation, structure, comments	20
Code Efficiency	No unnecessary loops or redundant logic; performance	20
Error Handling	try-catch/finally, meaningful messages, logging	20
Maintainability	Modularity, reusability, extensibility	20
Best Practices & Standards	SOLID, DRY, imports, dependency management	20
Overall	Sum of the five parameters	**100**

DELIVERABLE 1

2. Phase-wise implementation

The solution was built in six phases, from requirements to delivery.

Phase 1

Requirement analysis & design

Define what the reviewer must do and how the pieces connect.

- Captured the input (a GitHub file URL) and the output (five parameter scores out of 20, an overall score out of 100, improvement areas and a summary).
- Picked the stack: **n8n** for orchestration, **Groq** for fast, low-cost LLM inference, and a static **HTML/CSS/JS** front end.
- Designed the request flow: UI → Webhook → fetch raw file → LLM chain → respond to UI.

Deliverable: Architecture diagram and API contract `POST {url}` → `{review}`.

Phase 2

Environment setup

Get the local runtime ready.

- Installed and ran n8n locally (`npx n8n`) at `http://localhost:5678`.
- Created a Groq API key at console.groq.com and stored it as an n8n **Groq API** credential.
- Created a GitHub repository to hold the UI, workflow export, prompts and docs.

Deliverable: A running n8n instance with credentials configured.

Phase 3

Prompt engineering

Write a structured review prompt that gives consistent, scorable output.

- Built the prompt with the **I-C-E-P** pattern: Instructions, Context, Example output and Persona.
- Defined five scoring parameters: Readability, Efficiency, Error Handling, Maintainability, and Best Practices & Standards.
- Added an example table so the LLM returns Markdown the UI can render directly.
- Injected the fetched source code with the n8n expression `{{ $json.data }}`.

Deliverable: `prompts/Code_Review_Prompt.txt`

Phase 4

n8n workflow build

Build the back-end review pipeline.

- **Webhook** (POST `/code-review`, respond through a Respond node, CORS enabled).
- **HTTP Request**: GET on the raw GitHub URL, with the response format set to *Text*, so the code arrives in `data`.
- **Basic LLM Chain** uses the review prompt and is linked to the **Groq Chat Model** sub-node (`llama-3.3-70b-versatile`, temperature 0.2).
- **Respond to Webhook** returns `{ review: $json.text }` to the caller.
- Tested each node with *Execute step*, then activated the workflow.

Deliverable: `n8n/AI_GitHub_Code_Reviewer.workflow.json`

Phase 5

UI development

Build a polished front end for reviewers.

- Wrote a detailed UI development prompt covering layout, behaviour, visual design and accessibility (Section 3).
- Generated and refined **Solifi CodeLens**, a single `index.html` file with a hero, review form, review history, guidelines and a results panel.
- Added GitHub *blob → raw* URL conversion, input validation, a loading skeleton, timeout and error handling, and dark mode.
- Rendered the Markdown review safely with `marked` + `DOMPurify`, and added *Copy review* and *Download report*.

Deliverable: `codelens-ui/index.html`

Phase 6

Integration, testing & delivery

Connect the UI to the workflow end to end and package the submission.

- Pointed `CONFIG.WEBHOOK_URL` at the n8n production webhook and served the UI on `127.0.0.1:8765`.
- Ran a review of `LearnDragAndDrop.java` (Selenium sample). It scored 60/100 with actionable recommendations.
- Checked the error paths: an invalid URL, n8n offline (CORS/network) and the timeout.
- Captured screenshots, pushed the code to GitHub and recorded the demo video.

Deliverable: This document, the GitHub repository and the demo video.

DELIVERABLE 2

3. Complete UI development prompt

This prompt was used to generate the CodeLens front end. It is also in the repository as `prompts/UI_Development_Prompt.md`.

Role: You are a senior front-end engineer and product designer. Build a production-quality, single-page web UI for an AI-powered GitHub code reviewer.

1. Goal

Build "Solifi CodeLens — AI Code Reviewer", a web page where a developer pastes a GitHub file URL, clicks **Review Code**, and gets an AI review back from an n8n workflow. The review is shown as a formatted report.

2. Tech constraints

- Plain **HTML + CSS + vanilla JavaScript** in one file (`index.html`). No build step and no framework.
- Allowed CDN libraries: `marked` (Markdown → HTML) and `DOMPurify` (sanitising the HTML).
- Must run from any static server (e.g. `python -m http.server 8765`).
- All settings sit in one `CONFIG` object at the top of the script: the webhook URL, the sample file URL and the request timeout.

3. Backend contract (n8n)

- `POST {CONFIG.WEBHOOK_URL}` with JSON body `{ "url": "<raw GitHub file URL>" }`.
- The response is either JSON `{ "review": "<markdown>" }` or plain-text Markdown. Handle both.
- The review Markdown contains a parameter score table (5 parameters, each out of 20), an overall score out of 100, a list of improvement areas and a summary.

4. Layout & components

1. **Header:** the brand mark (sparkle icon in a rounded tile), the wordmark "solifi." with the tagline "CODELENS", a **Dark mode** toggle and a **Service status** pill (idle / reviewing / last review succeeded / last review failed).
2. **Hero:** the eyebrow "INTELLIGENT CODE REVIEW"; the H1 "Solifi CodeLens — **AI Code Reviewer**" with the second half in the accent colour; the sub-copy "Every line of code, reviewed before it ships..."; a decorative orbit illustration with a sparkle tile.
3. **Two-column workspace** (stacks to one column under 960px):
4. **Left column**
   - *Start a code review* card: a GitHub file URL input (monospace), a primary **Review Code** button, a **Try a sample** chip and the helper text "Paste a raw GitHub URL or a normal GitHub file link."
   - *Recent Activity → Review History*: the last 10 reviews kept in localStorage (file name, timestamp and URL), with a count badge. Clicking an item re-opens that review.
   - *Consistent Quality → Review Guidelines*: a checklist of six focus areas (bug and logic correctness, resource cleanup, explicit waits, frame switching, assertions, naming/standards).

5. **Right column:** *Your code, in focus → Review results*
   - A status chip ("Ready when you are" / "Reviewing…" / "Review complete" / "Review failed").
   - A results card with the eyebrow "AI CODE REVIEW", the file name, and **Copy review** and **Download report** (.md) buttons.
   - The rendered Markdown review with styled tables, inline code and headings.
   - An empty state before the first review and a skeleton loader while reviewing.
6. **Footer** with a short credit line.

5. Behaviour

- Accept both `github.com/<owner>/<repo>/blob/<branch>/<path>` and `raw.githubusercontent.com/...`. Convert blob links to raw links before sending.
- Validate the input: it must not be empty and must be a GitHub link. Show inline errors.
- Disable the button and show a spinner while a request is in flight. Abort after `CONFIG.TIMEOUT_MS`.
- Show friendly error messages for network, CORS, timeout and non-200 responses.
- Pressing Enter in the input submits the review.
- Store the dark-mode choice in localStorage (wrapped in try/catch) and respect `prefers-color-scheme`.

6. Visual design


- Clean enterprise look: soft blue-grey background with a subtle radial gradient, white cards with 20px radius, 1px borders and soft shadows.
- Primary colour: deep navy-to-teal gradient (`#1e3a8a → #0f766e`). Accent colour: `#2563eb`.
- Font: **Inter** (Google Fonts) for text and **JetBrains Mono** for code.
- Small uppercase, letter-spaced eyebrows above section titles.
- Accessible: visible focus rings, `aria-live` on results, labelled inputs, AA contrast in both themes.

7. Deliverable

One complete `index.html` file with no placeholders except `CONFIG`.

DELIVERABLES 3 & 5


4. n8n GitHub Code Reviewer workflow

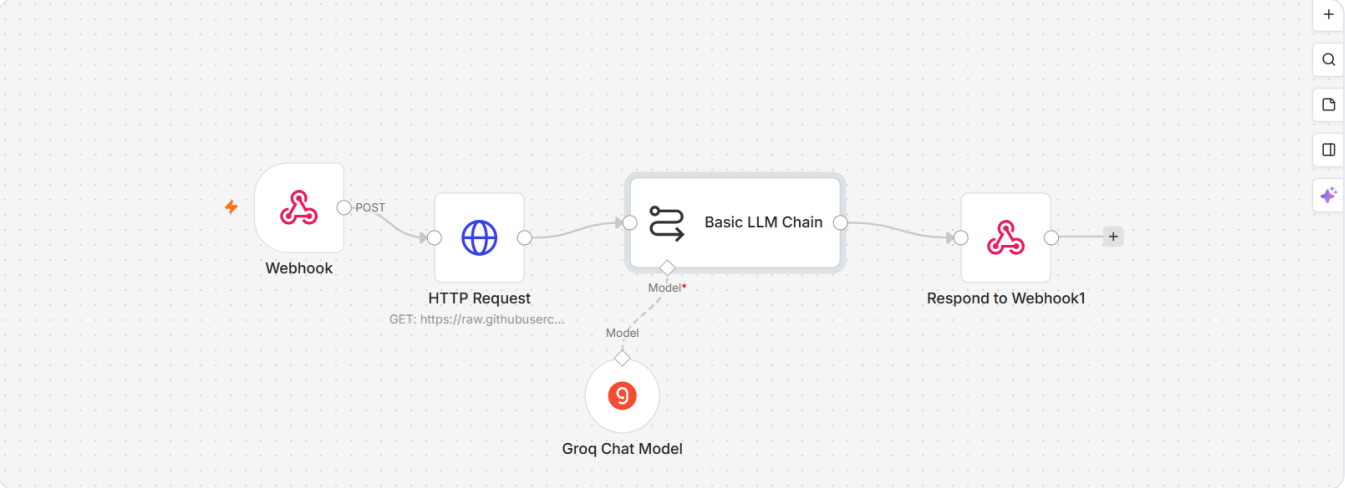

Screenshot 1 — Complete n8n workflow. Webhook → HTTP Request → Basic LLM Chain (with the Groq Chat Model) → Respond to Webhook1.

Node configuration

#	Node	Type	Key settings	Purpose
1	**Webhook**	Trigger	POST `/webhook/code-review`; Respond: *Using 'Respond to Webhook' node*; Allowed origins `*`	Receives `{ "url": "…" }` from the UI
2	**HTTP Request**	Action	GET `{{ $json.body.url }}`; Response format: *Text*	Downloads the raw Java source → `data`
3	**Basic LLM Chain**	AI chain	Prompt: *Define below*; contains the review prompt plus `{{ $json.data }}`	Builds the review request
3a	**Groq Chat Model**	AI sub-node	Model `llama-3.3-70b-versatile`, temperature 0.2, Groq API credential	Generates the Markdown review
4	**Respond to Webhook1**	Response	Respond with JSON `{ review: $json.text }`	Returns the review to the UI

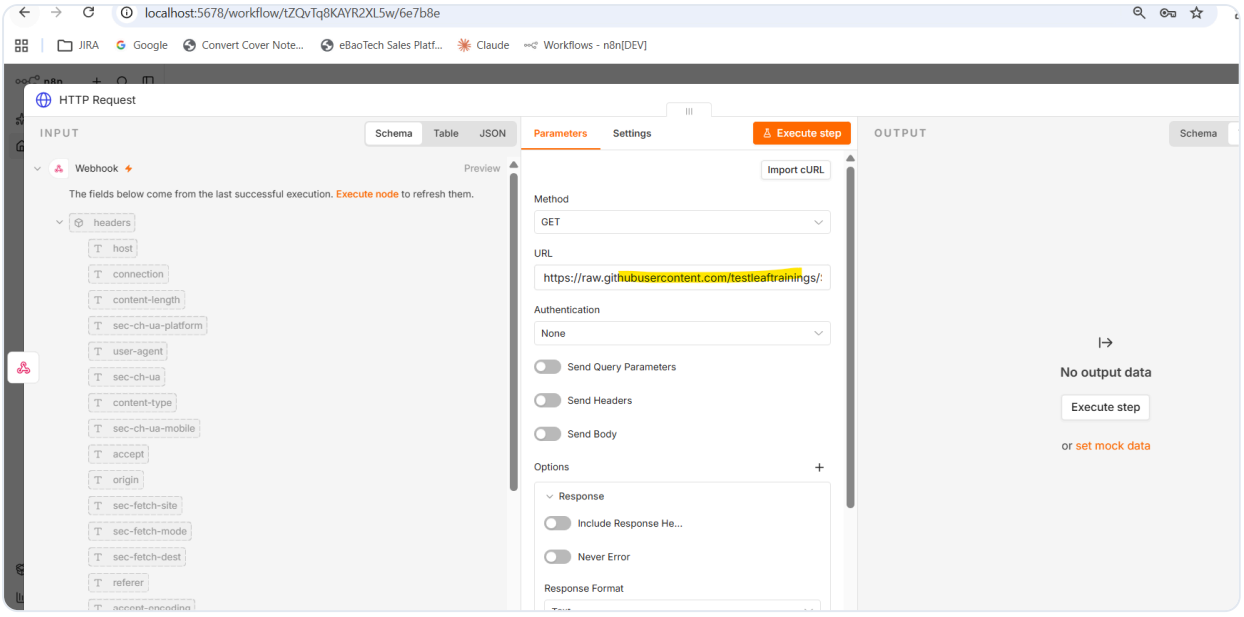

Screenshot 2 — HTTP Request node. GET request to `raw.githubusercontent.com`, with the Webhook payload as input.

LLM review prompt (Basic LLM Chain)

```
For this given Input java code :{{ $json.data }} follow these;

Instuctions:

You are an expert Software Code Reviewer specialized in Java enterprise development and test automation frameworks.
Your task is to analyze and review the uploaded Java code based on specific quality parameters and provide:

Individual parameter scores (each out of 20)

Overall code quality score (out of 100)

Actionable feedback and recommendations for improvement

Evaluate the Java code against the following five parameters:

Code Readability: Are naming conventions, indentation, and structure clear and consistent?

Code Efficiency: Does the code avoid unnecessary loops, redundant logic, and optimize performance?

Error Handling: Does the code handle exceptions gracefully with meaningful messages and proper use of try-catch/finally or logging?

Maintainability: Is the code modular, reusable, and easily extendable for future changes?

Best Practices & Standards: Does the code follow Java best practices (SOLID, DRY, proper imports, dependency management, etc.)?

Finally, generate an overall rating with improvement areas and a short summary.

C – Context

The input Java code belongs to a production-grade software project (could be backend automation, web app, or API service).
```

```
Assume that this code will be part of a shared repository reviewed by multiple developers, so
it must comply with clean code, maintainability, and security standards.
You are reviewing this code as part of a formal pull request (PR) process.


Example Output (Review Summary):

Parameter       Description     Score (out of 20)
Code Readability        Naming is clear but lacks comments or documentation.    16
Code Efficiency Simple arithmetic; no inefficiencies observed.  18
Error Handling  Missing division-by-zero handling.      10
Maintainability Class is minimal; not modularized for future extensions.        14
Best Practices & Standards      Lacks input validation and unit tests.  13

Overall Score: 71 / 100

Improvement Areas:

Add input validation for division-by-zero errors.

Include JavaDoc comments for public methods.

Implement basic unit tests to validate functionality.

Summary:
The code functions correctly but lacks robustness and documentation. Minor improvements can
enhance production readiness.

P — Persona


You are a senior Java architect and code reviewer with 10+ years of experience in enterprise
application design, CI/CD integration, and automation frameworks (Spring Boot, Selenium,
Playwright, TestNG).
You are known for balancing code quality with real-world performance and maintainability.
```

The full importable workflow is in **Appendix B** and in the repository as `n8n/AI_GitHub_Code_Reviewer.workflow.json`. To use it, go to *Workflows → Import from file* and attach your Groq credential.


DELIVERABLE 6

5. Final UI & code-review results


This sample run reviews `LearnDragAndDrop.java`, a Selenium drag-and-drop script from the *testleaftrainings* repository. It scored **60 / 100**.

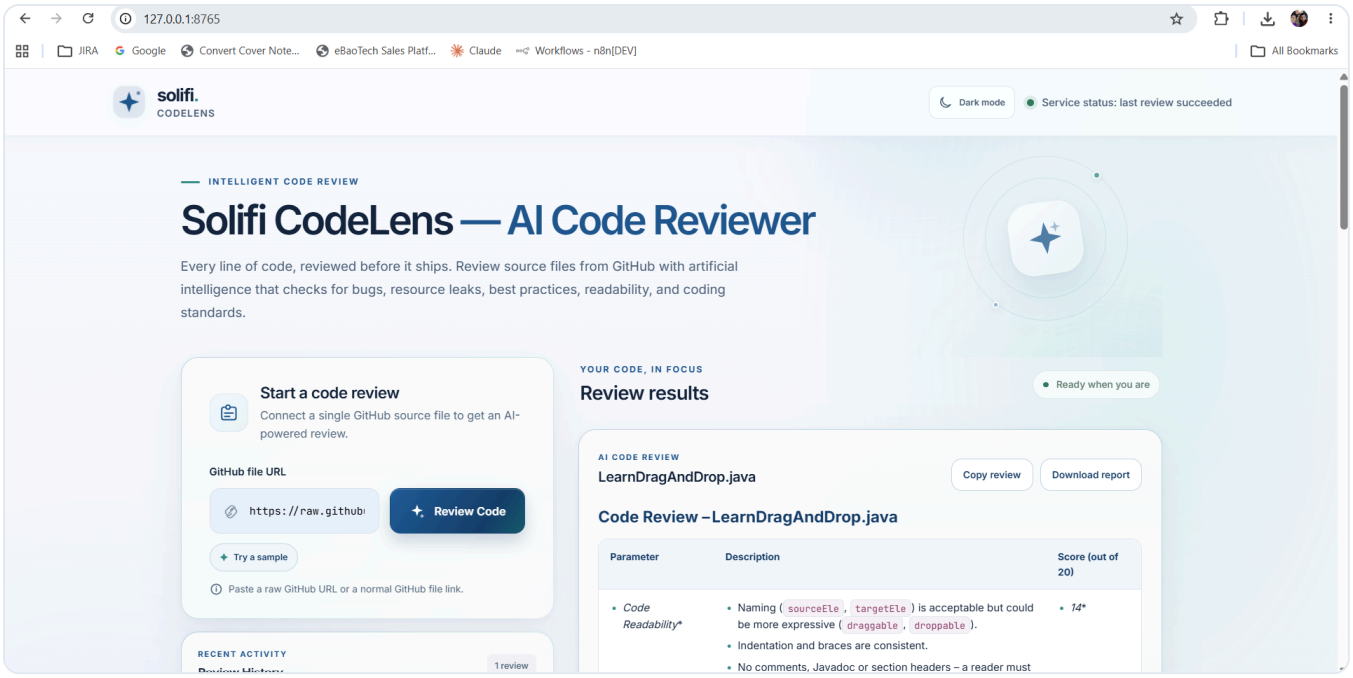


Screenshot 3 — CodeLens home page. Header with dark mode and service status, the hero, the review form and the start of the review results.

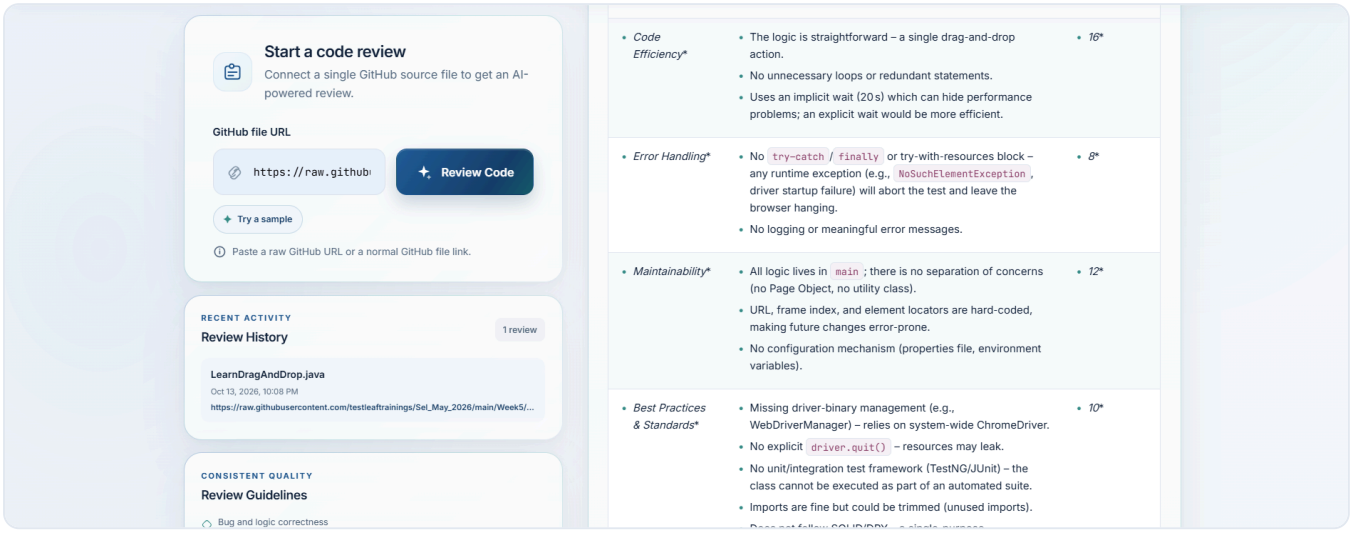


Screenshot 4 — Parameter scores. Efficiency 16, Error Handling 8, Maintainability 12, Best Practices 10, with review history on the left.

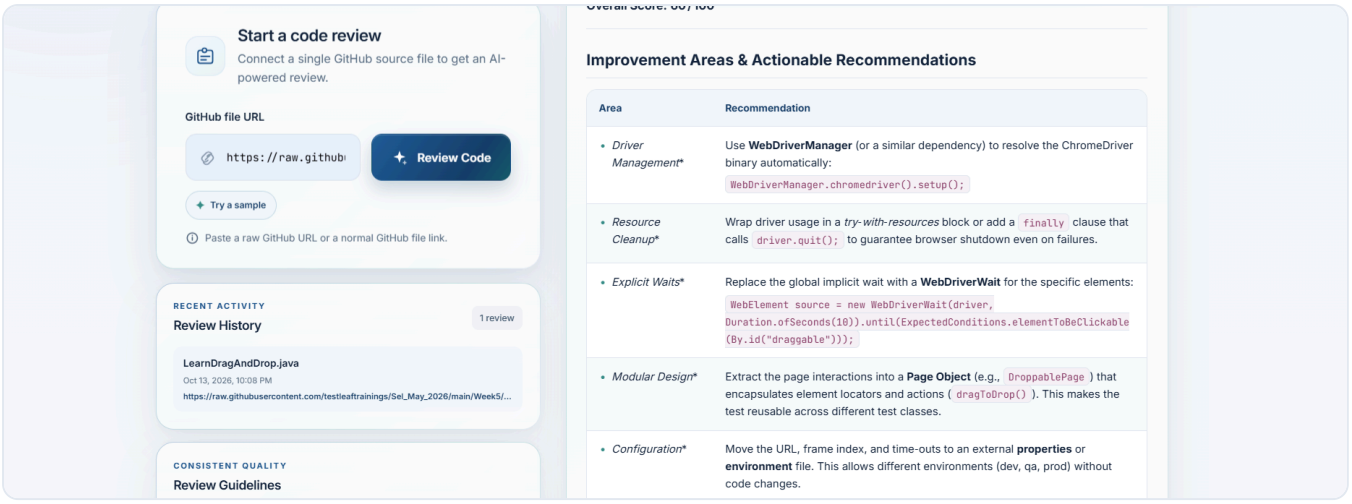

Screenshot 5 — Improvement areas. Driver management, resource cleanup, explicit waits, modular design and configuration.

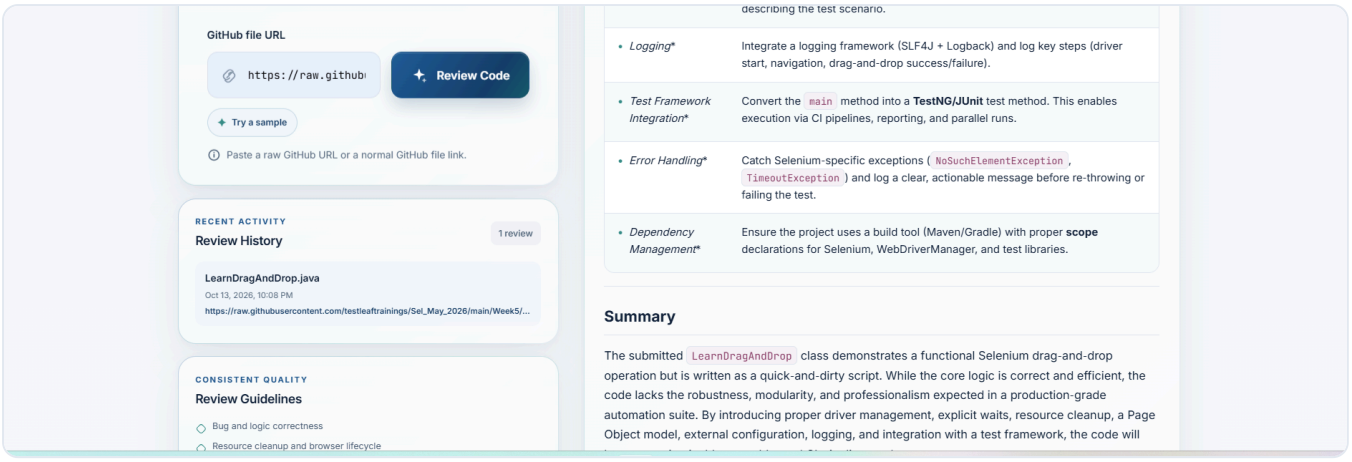

Screenshot 6 — More recommendations. Logging, test-framework integration, error handling, dependency management and the start of the summary.

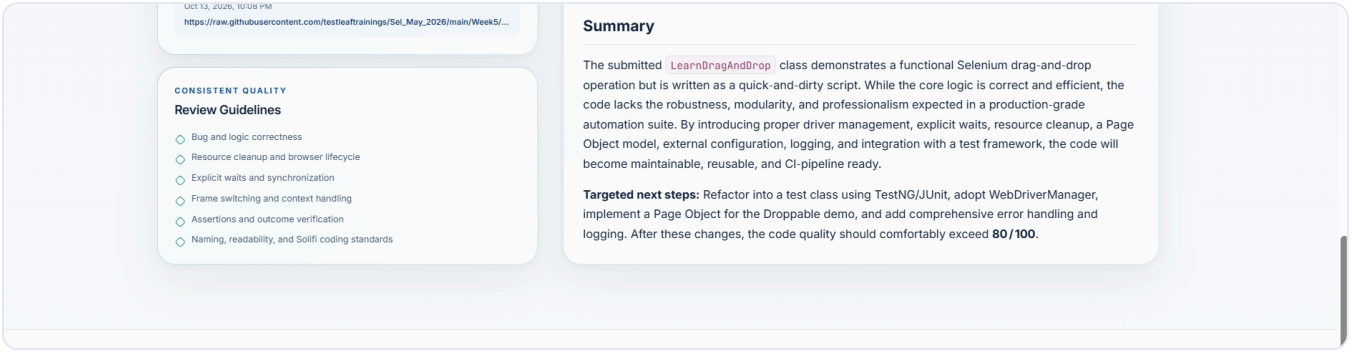

Screenshot 7 — Summary and next steps. Includes the Review Guidelines panel.

Result summary

Parameter	Score	Key finding
Code Readability	14	Naming is acceptable, but there is no Javadoc and there are no comments
Code Efficiency	16	Straightforward logic; the implicit 20 s wait should become an explicit wait
Error Handling	8	No try-catch/finally and no logging
Maintainability	12	All logic is in `main`, with hard-coded locators and URL
Best Practices & Standards	10	No WebDriverManager, no `driver.quit()` and no TestNG/JUnit
Overall	**60 / 100**	Functional, but not ready for production CI

DELIVERABLE 7

6. GitHub repository

🔗 **https://github.com/<your-username>/solifi-codelens**

Repository structure

Path	Contents
`codelens-ui/index.html`	Complete UI source (HTML + CSS + JS in one file)
`n8n/AI_GitHub_Code_Reviewer.workflow.json`	Importable n8n workflow
`prompts/Code_Review_Prompt.txt`	LLM review prompt
`prompts/UI_Development_Prompt.md`	UI generation prompt
`docs/`	This document and the screenshots
`README.md`	Setup and run instructions

How to run

1. Start n8n with `npx n8n`. It runs at `http://localhost:5678`.
2. Import `n8n/AI_GitHub_Code_Reviewer.workflow.json` and add a **Groq API** credential to the Groq Chat Model node.
3. **Activate** the workflow. The webhook is `http://localhost:5678/webhook/code-review`.
4. Serve the UI with `cd codelens-ui && python -m http.server 8765`, then open `http://127.0.0.1:8765`.
5. Paste a GitHub file URL and click **Review Code**.

DELIVERABLE 8

7. Demo video

🎬 Demo video: <paste Loom / YouTube / Google Drive link here>

Demo walkthrough (about 2 minutes)

Time	What is shown
0:00 – 0:20	The problem and the solution overview (Figure 1)
0:20 – 0:50	The n8n canvas: each node, the Groq model and the review prompt
0:50 – 1:30	CodeLens UI: paste a GitHub link, click Review Code and show the scores
1:30 – 1:50	Recommendations, the summary, Copy review / Download report, dark mode and history
1:50 – 2:00	Wrap-up and the GitHub repository

DELIVERABLE 4

Appendix A — Complete UI source code

`codelens-ui/index.html`: a single self-contained file. It uses the `marked` and `DOMPurify` CDN libraries and the Inter and JetBrains Mono fonts.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <title>Solifi CodeLens — AI Code Reviewer</title>
  <link rel="preconnect" href="https://fonts.googleapis.com" />
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin />
  <link href="https://fonts.googleapis.com/css2?family=Inter:wght@400;500;600;700;800&family=JetBrains+Mono:wght@40
0;500&display=swap" rel="stylesheet" />
  <script src="https://cdnjs.cloudflare.com/ajax/libs/marked/12.0.2/marked.min.js"></script>
  <script src="https://cdnjs.cloudflare.com/ajax/libs/dompurify/3.1.6/purify.min.js"></script>
  <style>
    :root {
      --bg: #f3f6fa; --bg-grad: #e6f0f4; --card: #ffffff; --card-soft: #f7f9fc;
      --border: #e2e8f0; --text: #0f172a; --muted: #5b6577; --faint: #94a3b8;
      --accent: #2563eb; --accent-2: #1e4f8a; --teal: #0f766e; --ok: #10b981; --err: #dc2626; --warn: #d97706;
      --code-bg: #fdf2f6; --code-fg: #9d174d; --code-border: #f5d0e0;
      --shadow: 0 10px 30px -12px rgba(15, 23, 42, .12); --radius: 20px;
    }
    [data-theme="dark"] {
      --bg: #0b1220; --bg-grad: #0f1d2e; --card: #111a2b; --card-soft: #152035;
      --border: #24324a; --text: #e6edf7; --muted: #9aa8bd; --faint: #64748b;
      --accent: #60a5fa; --accent-2: #93c5fd; --teal: #2dd4bf;
      --code-bg: #2a1626; --code-fg: #f9a8d4; --code-border: #4a2240;
      --shadow: 0 10px 30px -12px rgba(0, 0, 0, .6);
    }
    * { box-sizing: border-box; margin: 0; padding: 0; }
    body {
      font-family: "Inter", system-ui, sans-serif; color: var(--text); line-height: 1.55;
      background: radial-gradient(1200px 600px at 85% 10%, var(--bg-grad), transparent 60%), var(--bg);
      min-height: 100vh; transition: background .3s, color .3s;
    }
    code, pre, .mono { font-family: "JetBrains Mono", ui-monospace, monospace; }
    button { font: inherit; cursor: pointer; }
    :focus-visible { outline: 3px solid color-mix(in srgb, var(--accent) 45%, transparent); outline-offset: 2px; bor
der-radius: 8px; }

    /* Header */
    header { border-bottom: 1px solid var(--border); background: color-mix(in srgb, var(--card) 70%, transparent); b
ackdrop-filter: blur(8px); position: sticky; top: 0; z-index: 10; }
    .nav { max-width: 1600px; margin: 0 auto; padding: 14px 40px; display: flex; align-items: center; justify-conten
t: space-between; gap: 16px; }
    .brand { display: flex; align-items: center; gap: 14px; }
    .brand-tile { width: 46px; height: 46px; border-radius: 12px; display: grid; place-items: center; background: va
r(--card-soft); border: 1px solid var(--border); color: var(--accent-2); }
    .brand-name { font-weight: 700; font-size: 20px; letter-spacing: -.02em; line-height: 1; }
    .brand-name span { color: var(--teal); }
    .brand-tag { font-size: 12px; font-weight: 600; letter-spacing: .14em; color: var(--muted); margin-top: 4px; }
    .nav-right { display: flex; align-items: center; gap: 16px; }
    .btn-ghost { display: inline-flex; align-items: center; gap: 8px; padding: 9px 14px; border-radius: 12px; borde
r: 1px solid var(--border); background: var(--card); color: var(--text); font-size: 13px; font-weight: 600; }
    .btn-ghost:hover { border-color: var(--accent); }
    .status { display: inline-flex; align-items: center; gap: 8px; font-size: 14px; color: var(--muted); font-weigh
t: 500; }
    .dot { width: 9px; height: 9px; border-radius: 50%; background: var(--faint); box-shadow: 0 0 0 4px color-mix(in
srgb, currentColor 0%, transparent); }
    .dot.ok { background: var(--ok); box-shadow: 0 0 0 4px color-mix(in srgb, var(--ok) 20%, transparent); }
    .dot.busy { background: var(--warn); animation: pulse 1s infinite; }
    .dot.err { background: var(--err); }
    @keyframes pulse { 50% { opacity: .35; } }

    /* Hero */
    main { max-width: 1440px; margin: 0 auto; padding: 56px 40px 40px; }
    .hero { display: grid; grid-template-columns: 1fr 300px; gap: 24px; align-items: center; margin-bottom: 48px; }
    .eyebrow { display: inline-flex; align-items: center; gap: 12px; font-size: 12px; font-weight: 700; letter-spaci
ng: .16em; color: var(--accent-2); text-transform: uppercase; }
    .eyebrow::before { content: ""; width: 28px; height: 2px; background: var(--teal); }
    .eyebrow.plain::before { display: none; }
    h1 { font-size: clamp(32px, 4.6vw, 54px); font-weight: 800; letter-spacing: -.035em; line-height: 1.08; margin:
14px 0 18px; }
    h1 .accent { color: var(--accent-2); }
```

```
    .lede { font-size: 18px; color: var(--muted); max-width: 800px; }
    .orbit { position: relative; width: 240px; height: 240px; margin-left: auto; }
    .orbit .ring { position: absolute; inset: 0; border: 1px solid color-mix(in srgb, var(--teal) 30%, transparent);
border-radius: 50%; }
    .orbit .ring.r2 { inset: 30px; }
    .orbit .tile { position: absolute; inset: 64px; border-radius: 24px; background: var(--card); box-shadow: var(--
shadow); display: grid; place-items: center; color: var(--accent-2); transform: rotate(-6deg); }
    .orbit .sat { position: absolute; width: 8px; height: 8px; border-radius: 50%; background: var(--teal); }

    /* Workspace */
    .workspace { display: grid; grid-template-columns: minmax(320px, 530px) 1fr; gap: 36px; align-items: start; }
    .card { background: var(--card); border: 1px solid var(--border); border-radius: var(--radius); box-shadow: var
(--shadow); padding: 28px; }
    .stack { display: grid; gap: 20px; }
    .card-head { display: flex; gap: 16px; align-items: flex-start; margin-bottom: 24px; }
    .icon-tile { flex: none; width: 54px; height: 54px; border-radius: 14px; display: grid; place-items: center; bac
kground: var(--card-soft); border: 1px solid var(--border); color: var(--accent-2); }
    .card h2 { font-size: 22px; font-weight: 600; letter-spacing: -.01em; }
    .card h3 { font-size: 18px; font-weight: 600; margin-top: 4px; }
    .sub { color: var(--muted); font-size: 15px; }
    label { display: block; font-weight: 600; font-size: 15px; margin-bottom: 10px; }
    .input-row { display: flex; gap: 14px; }
    .input-wrap { flex: 1; position: relative; }
    .input-wrap svg { position: absolute; left: 16px; top: 50%; transform: translateY(-50%); color: var(--faint); }
    input[type="url"] { width: 100%; height: 62px; padding: 0 14px 0 48px; border-radius: 14px; border: 1px solid va
r(--border); background: var(--card-soft); color: var(--text); font-family: "JetBrains Mono", monospace; font-size:
15px; }
    input[type="url"]:focus { outline: none; border-color: var(--accent); background: var(--card); }
    input.invalid { border-color: var(--err); }
    .btn-primary { flex: none; height: 62px; padding: 0 30px; border: 0; border-radius: 14px; color: #fff; font-weig
ht: 700; font-size: 16px; display: inline-flex; align-items: center; gap: 10px; background: linear-gradient(135deg,
#1e3a8a, #1e4f8a 55%, #0f766e); box-shadow: 0 12px 24px -10px rgba(30, 58, 138, .6); transition: transform .15s; }
    .btn-primary:hover:not(:disabled) { transform: translateY(-1px); }
    .btn-primary:disabled { opacity: .7; cursor: progress; }
    .spinner { width: 18px; height: 18px; border: 2px solid rgba(255,255,255,.4); border-top-color: #fff; border-rad
ius: 50%; animation: spin .8s linear infinite; }
    @keyframes spin { to { transform: rotate(360deg); } }
    .chip { margin-top: 14px; display: inline-flex; align-items: center; gap: 8px; padding: 8px 14px; border-radius:
999px; border: 1px solid color-mix(in srgb, var(--teal) 40%, var(--border)); background: var(--card); color: var(--a
ccent-2); font-size: 13px; font-weight: 600; }
    .hint { margin-top: 14px; display: flex; gap: 8px; align-items: center; font-size: 14px; color: var(--muted); }
    .error-msg { margin-top: 10px; color: var(--err); font-size: 14px; font-weight: 500; min-height: 1em; }
    .badge { font-size: 12px; padding: 5px 10px; border-radius: 8px; background: var(--card-soft); border: 1px solid
var(--border); color: var(--muted); white-space: nowrap; }
    .row-between { display: flex; justify-content: space-between; align-items: flex-start; gap: 12px; }
    .history { list-style: none; margin-top: 18px; display: grid; gap: 10px; }
    .history li button { width: 100%; text-align: left; border: 1px solid var(--border); background: var(--card-sof
t); border-radius: 12px; padding: 12px 14px; color: var(--text); }
    .history li button:hover { border-color: var(--accent); }
    .history .h-name { font-weight: 600; font-size: 14px; }
    .history .h-time { font-size: 12px; color: var(--muted); margin: 2px 0; }
    .history .h-url { font-size: 12px; color: var(--accent-2); white-space: nowrap; overflow: hidden; text-overflow:
ellipsis; }
    .empty-small { margin-top: 14px; font-size: 14px; color: var(--faint); }
    .guidelines { list-style: none; margin-top: 16px; display: grid; gap: 10px; }
    .guidelines li { display: flex; gap: 10px; align-items: center; font-size: 14px; color: var(--muted); }
    .guidelines li::before { content: ""; width: 10px; height: 10px; border: 1.5px solid var(--teal); transform: rot
ate(45deg); border-radius: 2px; flex: none; }

    /* Results */
    .results-head { display: flex; justify-content: space-between; align-items: flex-end; margin-bottom: 22px; gap:
16px; }
    .results-head h2 { font-size: 28px; font-weight: 600; margin-top: 6px; }
    .pill { display: inline-flex; align-items: center; gap: 8px; padding: 8px 14px; border-radius: 999px; backgroun
d: var(--card); border: 1px solid var(--border); font-size: 13px; font-weight: 500; color: var(--muted); }
    .result-card { padding: 28px 30px; min-height: 420px; }
    .result-top { display: flex; justify-content: space-between; align-items: flex-start; gap: 16px; padding-bottom:
14px; }
    .file-name { font-size: 20px; font-weight: 600; margin-top: 6px; word-break: break-all; }
    .actions { display: flex; gap: 10px; flex-wrap: wrap; }
    .empty { display: grid; place-items: center; text-align: center; padding: 70px 20px; color: var(--muted); }
    .empty .icon-tile { margin-bottom: 16px; }
    .skeleton div { height: 14px; border-radius: 6px; margin: 14px 0; background: linear-gradient(90deg, var(--card-
soft), var(--border), var(--card-soft)); background-size: 200% 100%; animation: shimmer 1.2s infinite; }
    @keyframes shimmer { to { background-position: -200% 0; } }

    /* Rendered markdown */
    .md { font-size: 15.5px; color: var(--text); }
    .md h1, .md h2 { font-size: 24px; color: var(--accent-2); margin: 18px 0 14px; letter-spacing: -.01em; font-weig
ht: 700; }
    .md h3 { font-size: 21px; margin: 28px 0 12px; padding-bottom: 10px; border-bottom: 1px solid var(--border); fon
t-weight: 700; }
    .md p { margin: 10px 0; }
    .md ul, .md ol { padding-left: 20px; margin: 6px 0; }
    .md li { margin: 6px 0; }
```

```
    .md li::marker { color: var(--teal); }
    .md hr { border: 0; border-top: 1px solid var(--border); margin: 24px 0; }
    .md code { font-size: 13px; padding: 2px 6px; border-radius: 6px; background: var(--code-bg); color: var(--code-
fg); border: 1px solid var(--code-border); }
    .md pre { background: var(--card-soft); border: 1px solid var(--border); border-radius: 12px; padding: 14px; ove
rflow-x: auto; }
    .md pre code { background: none; border: 0; color: var(--text); padding: 0; }
    .md table { width: 100%; border-collapse: separate; border-spacing: 0; margin: 16px 0; border: 1px solid var(--b
order); border-radius: 14px; overflow: hidden; font-size: 15px; }
    .md th { text-align: left; background: var(--card-soft); padding: 14px 16px; font-weight: 600; border-bottom: 1p
x solid var(--border); }
    .md td { padding: 14px 16px; border-bottom: 1px solid var(--border); vertical-align: top; }
    .md tr:last-child td { border-bottom: 0; }
    .md tr:nth-child(even) td { background: color-mix(in srgb, var(--card-soft) 60%, transparent); }
    .table-scroll { overflow-x: auto; }

    footer { text-align: center; padding: 30px; color: var(--faint); font-size: 13px; border-top: 1px solid var(--bo
rder); margin-top: 40px; }
    .toast { position: fixed; bottom: 24px; left: 50%; transform: translateX(-50%) translateY(20px); opacity: 0; bac
kground: var(--text); color: var(--bg); padding: 10px 18px; border-radius: 10px; font-size: 14px; transition: .25s;
pointer-events: none; }
    .toast.show { opacity: 1; transform: translateX(-50%); }

    @media (max-width: 960px) {
      .workspace, .hero { grid-template-columns: 1fr; }
      .orbit { display: none; }
      .nav, main { padding-left: 16px; padding-right: 16px; }
      .input-row { flex-direction: column; }
      .status-text { display: none; }
    }
  </style>
</head>
<body>
  <header>
    <div class="nav">
      <div class="brand">
        <div class="brand-tile" aria-hidden="true">
          <svg width="24" height="24" viewBox="0 0 24 24" fill="currentColor"><path d="M12 2l2.2 7.8L22 12l-7.8 2.2L
12 22l-2.2-7.8L2 12l7.8-2.2z"/></svg>
        </div>
        <div><div class="brand-name">solifi<span>.</span></div><div class="brand-tag">CODELENS</div></div>
      </div>
      <div class="nav-right">
        <button class="btn-ghost" id="themeBtn" aria-pressed="false">
          <svg width="16" height="16" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2"><path d
="M21 12.8A9 9 0 1 1 11.2 3a7 7 0 0 0 9.8 9.8z"/></svg>
          <span id="themeLabel">Dark mode</span>
        </button>
        <div class="status" role="status"><span class="dot" id="svcDot"></span><span class="status-text" id="svcTex
t">Service status: idle</span></div>
      </div>
    </div>
  </header>

  <main>
    <section class="hero">
      <div>
        <div class="eyebrow">Intelligent code review</div>
        <h1>Solifi CodeLens — <span class="accent">AI Code Reviewer</span></h1>
        <p class="lede">Every line of code, reviewed before it ships. Review source files from GitHub with artificia
l intelligence that checks for bugs, resource leaks, best practices, readability, and coding standards.</p>
      </div>
      <div class="orbit" aria-hidden="true">
        <div class="ring"></div><div class="ring r2"></div>
        <span class="sat" style="top:22px; right:52px"></span><span class="sat" style="bottom:46px; left:40px; widt
h:6px; height:6px; opacity:.6"></span>
        <div class="tile"><svg width="54" height="54" viewBox="0 0 24 24" fill="currentColor"><path d="M10 3l2 7 7 2
-7 2-2 7-2-7-7-2 7-2z"/><path d="M19 2l.8 2.2L22 5l-2.2.8L19 8l-.8-2.2L16 5l2.2-.8z" opacity=".6"/></svg></div>
      </div>
    </section>

    <section class="workspace">
      <!-- Left column -->
      <div class="stack">
        <div class="card">
          <div class="card-head">
            <div class="icon-tile" aria-hidden="true">
              <svg width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2"><re
ct x="5" y="4" width="14" height="17" rx="2"/><path d="M9 4V3h6v1M9 10h6M9 14h6"/></svg>
            </div>
            <div><h2>Start a code review</h2><p class="sub">Connect a single GitHub source file to get an AI-powered
review.</p></div>
          </div>
          <form id="reviewForm" novalidate>
            <label for="urlInput">GitHub file URL</label>
```

```
            <div class="input-row">
              <div class="input-wrap">
                <svg width="18" height="18" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2"><
path d="M21.4 11.1l-9.2 9.2a6 6 0 0 1-8.5-8.5l9.2-9.2a4 4 0 0 1 5.7 5.7l-9.2 9.2a2 2 0 0 1-2.8-2.8l8.5-8.5"/></svg>
                <input type="url" id="urlInput" placeholder="https://raw.githubusercontent.com/…" autocomplete="off"
spellcheck="false" />
              </div>
              <button type="submit" class="btn-primary" id="reviewBtn">
                <svg width="20" height="20" viewBox="0 0 24 24" fill="currentColor"><path d="M10 3l2 7 7 2-7 2-2 7-2
-7-7-2 7-2z"/></svg>
                <span>Review Code</span>
              </button>
            </div>
            <div class="error-msg" id="errorMsg" role="alert"></div>
          </form>
          <button class="chip" id="sampleBtn" type="button">✦ Try a sample</button>
          <p class="hint">
            <svg width="16" height="16" viewBox="0 0 24 24" fill="none" stroke="currentColor" stroke-width="2"><circ
le cx="12" cy="12" r="10"/><path d="M12 16v-4M12 8h.01"/></svg>
            Paste a raw GitHub URL or a normal GitHub file link.
          </p>
        </div>

        <div class="card">
          <div class="row-between">
            <div><div class="eyebrow plain">Recent activity</div><h3>Review History</h3></div>
            <span class="badge" id="historyCount">0 reviews</span>
          </div>
          <ul class="history" id="historyList"></ul>
          <p class="empty-small" id="historyEmpty">No reviews yet. Your last 10 reviews will appear here.</p>
        </div>

        <div class="card">
          <div class="eyebrow plain">Consistent quality</div><h3>Review Guidelines</h3>
          <ul class="guidelines">
            <li>Bug and logic correctness</li>
            <li>Resource cleanup and browser lifecycle</li>
            <li>Explicit waits and synchronization</li>
            <li>Frame switching and context handling</li>
            <li>Assertions and outcome verification</li>
            <li>Naming, readability, and Solifi coding standards</li>
          </ul>
        </div>
      </div>

      <!-- Right column -->
      <div>
        <div class="results-head">
          <div><div class="eyebrow plain">Your code, in focus</div><h2>Review results</h2></div>
          <span class="pill"><span class="dot ok" id="pillDot"></span><span id="pillText">Ready when you are</span>
</span>
        </div>
        <div class="card result-card" aria-live="polite">
          <div class="result-top" id="resultTop" hidden>
            <div><div class="eyebrow plain">AI code review</div><div class="file-name" id="fileName"></div></div>
            <div class="actions">
              <button class="btn-ghost" id="copyBtn" type="button">Copy review</button>
              <button class="btn-ghost" id="downloadBtn" type="button">Download report</button>
            </div>
          </div>
          <div id="resultBody">
            <div class="empty">
              <div class="icon-tile"><svg width="24" height="24" viewBox="0 0 24 24" fill="none" stroke="currentColo
r" stroke-width="2"><path d="M16 18l6-6-6-6M8 6l-6 6 6 6"/></svg></div>
              <h3>No review yet</h3>
              <p class="sub">Paste a GitHub file link and press <strong>Review Code</strong>. Scores, issues and rec
ommendations will appear here.</p>
            </div>
          </div>
        </div>
      </div>
    </section>
  </main>

  <footer>Solifi CodeLens · AI code review powered by n8n + Groq LLM</footer>
  <div class="toast" id="toast"></div>

  <script>
    /* ---------- Configuration ---------- */
    const CONFIG = {
      WEBHOOK_URL: "http://localhost:5678/webhook/code-review",   // n8n production webhook (use /webhook-test/ whil
e testing)
      SAMPLE_URL: "https://github.com/testleaftrainings/Sel_May_2026/blob/main/Week5/LearnDragAndDrop.java", // repl
ace with your sample file
      TIMEOUT_MS: 120000,
```

```
      HISTORY_KEY: "codelens.history",
      THEME_KEY: "codelens.theme",
      MAX_HISTORY: 10
    };

    const $ = (id) => document.getElementById(id);
    const els = {
      form: $("reviewForm"), input: $("urlInput"), btn: $("reviewBtn"), err: $("errorMsg"),
      sample: $("sampleBtn"), svcDot: $("svcDot"), svcText: $("svcText"), pillDot: $("pillDot"), pillText: $("pillTe
xt"),
      top: $("resultTop"), fileName: $("fileName"), body: $("resultBody"), copy: $("copyBtn"), download: $("download
Btn"),
      hList: $("historyList"), hCount: $("historyCount"), hEmpty: $("historyEmpty"), theme: $("themeBtn"), themeLabe
l: $("themeLabel"), toast: $("toast")
    };
    let current = { markdown: "", file: "" };

    /* ---------- Safe storage ---------- */
    const store = {
      get(k, fallback) { try { const v = localStorage.getItem(k); return v ? JSON.parse(v) : fallback; } catch { ret
urn fallback; } },
      set(k, v) { try { localStorage.setItem(k, JSON.stringify(v)); } catch { /* storage unavailable */ } }
    };

    /* ---------- Theme ---------- */
    function applyTheme(t) {
      document.documentElement.dataset.theme = t;
      els.themeLabel.textContent = t === "dark" ? "Light mode" : "Dark mode";
      els.theme.setAttribute("aria-pressed", t === "dark");
    }
    applyTheme(store.get(CONFIG.THEME_KEY, matchMedia("(prefers-color-scheme: dark)").matches ? "dark" : "light"));
    els.theme.addEventListener("click", () => {
      const next = document.documentElement.dataset.theme === "dark" ? "light" : "dark";
      applyTheme(next); store.set(CONFIG.THEME_KEY, next);
    });

    /* ---------- Helpers ---------- */
    function toRawUrl(input) {
      let url;
      try { url = new URL(input.trim()); } catch { return null; }
      if (url.hostname === "raw.githubusercontent.com") return url.href;
      if (url.hostname === "github.com") {
        const parts = url.pathname.split("/").filter(Boolean);           // owner/repo/blob/branch/path...
        if (parts.length >= 5 && parts[2] === "blob") {
          return `https://raw.githubusercontent.com/${parts[0]}/${parts[1]}/${parts.slice(3).join("/")}`;
        }
      }
      return null;
    }
    const fileFrom = (u) => decodeURIComponent(u.split("/").pop() || "file");
    function toast(msg) { els.toast.textContent = msg; els.toast.classList.add("show"); setTimeout(() => els.toast.c
lassList.remove("show"), 1800); }
    function setStatus(state) {
      const map = {
        idle: ["", "Service status: idle", "ok", "Ready when you are"],
        busy: ["busy", "Service status: reviewing…", "busy", "Reviewing…"],
        ok: ["ok", "Service status: last review succeeded", "ok", "Review complete"],
        err: ["err", "Service status: last review failed", "err", "Review failed"]
      }[state];
      els.svcDot.className = "dot " + map[0]; els.svcText.textContent = map[1];
      els.pillDot.className = "dot " + map[2]; els.pillText.textContent = map[3];
    }
    function setLoading(on) {
      els.btn.disabled = on;
      els.btn.innerHTML = on ? '<span class="spinner"></span><span>Reviewing…</span>'
        : '<svg width="20" height="20" viewBox="0 0 24 24" fill="currentColor"><path d="M10 3l2 7 7 2-7 2-2 7-2-7-7-
2 7-2z"/></svg><span>Review Code</span>';
    }

    /* ---------- Rendering ---------- */
    function renderReview(markdown, file) {
      current = { markdown, file };
      els.fileName.textContent = file; els.top.hidden = false;
      const html = DOMPurify.sanitize(marked.parse(markdown, { gfm: true, breaks: false }));
      els.body.innerHTML = `<div class="md">${html}</div>`;
      els.body.querySelectorAll("table").forEach((t) => { const w = document.createElement("div"); w.className = "ta
ble-scroll"; t.replaceWith(w); w.appendChild(t); });
    }
    function renderSkeleton(file) {
      els.fileName.textContent = file; els.top.hidden = false;
      els.body.innerHTML = '<div class="skeleton">' + Array.from({ length: 9 }, (_, i) => `<div style="width:${[92,
70, 85, 60, 95, 78, 66, 88, 50][i]}%"></div>`).join("") + "</div>";
    }
    function renderError(msg) {
      els.body.innerHTML = `<div class="empty"><div class="icon-tile" style="color:var(--err)">!</div><h3>Review fai
```

```
led</h3><p class="sub"></p></div>`;
      els.body.querySelector("p").textContent = msg;
    }

    /* ---------- History ---------- */
    function loadHistory() { return store.get(CONFIG.HISTORY_KEY, []); }
    function saveHistory(entry) {
      const list = [entry, ...loadHistory().filter((h) => h.url !== entry.url)].slice(0, CONFIG.MAX_HISTORY);
      store.set(CONFIG.HISTORY_KEY, list); drawHistory();
    }
    function drawHistory() {
      const list = loadHistory();
      els.hCount.textContent = `${list.length} review${list.length === 1 ? "" : "s"}`;
      els.hEmpty.hidden = list.length > 0;
      els.hList.innerHTML = "";
      list.forEach((h) => {
        const li = document.createElement("li"); const b = document.createElement("button"); b.type = "button";
        b.innerHTML = `<div class="h-name"></div><div class="h-time"></div><div class="h-url"></div>`;
        b.querySelector(".h-name").textContent = h.file;
        b.querySelector(".h-time").textContent = new Date(h.at).toLocaleString(undefined, { dateStyle: "medium", tim
eStyle: "short" });
        b.querySelector(".h-url").textContent = h.url;
        b.addEventListener("click", () => { els.input.value = h.url; renderReview(h.markdown, h.file); setStatus("o
k"); });
        li.appendChild(b); els.hList.appendChild(li);
      });
    }

    /* ---------- Review flow ---------- */
    async function review(rawInput) {
      els.err.textContent = ""; els.input.classList.remove("invalid");
      if (!rawInput.trim()) return fail("Please paste a GitHub file URL.");
      const rawUrl = toRawUrl(rawInput);
      if (!rawUrl) return fail("That doesn't look like a GitHub file link. Use github.com/…/blob/… or raw.githubuser
content.com/…");

      const file = fileFrom(rawUrl);
      setLoading(true); setStatus("busy"); renderSkeleton(file);
      const ctrl = new AbortController(); const timer = setTimeout(() => ctrl.abort(), CONFIG.TIMEOUT_MS);
      try {
        const res = await fetch(CONFIG.WEBHOOK_URL, {
          method: "POST", headers: { "Content-Type": "application/json" },
          body: JSON.stringify({ url: rawUrl }), signal: ctrl.signal
        });
        if (!res.ok) throw new Error(`The review service returned HTTP ${res.status}.`);
        const text = await res.text();
        let markdown = text;
        try { const j = JSON.parse(text); markdown = j.review ?? j.text ?? j.output ?? (Array.isArray(j) ? (j[0]?.te
xt ?? j[0]?.review) : null) ?? text; } catch { /* plain text */ }
        if (!markdown || !String(markdown).trim()) throw new Error("The review service returned an empty respons
e.");
        renderReview(String(markdown), file); setStatus("ok");
        saveHistory({ url: rawUrl, file, markdown: String(markdown), at: Date.now() });
      } catch (e) {
        const msg = e.name === "AbortError" ? "The review took too long and was cancelled. Please try again."
          : e instanceof TypeError ? "Could not reach the review service. Check that n8n is running, the workflow is
active, and CORS is allowed."
          : e.message;
        renderError(msg); setStatus("err");
      } finally { clearTimeout(timer); setLoading(false); }
    }
    function fail(msg) { els.err.textContent = msg; els.input.classList.add("invalid"); els.input.focus(); }

    els.form.addEventListener("submit", (e) => { e.preventDefault(); review(els.input.value); });
    els.sample.addEventListener("click", () => { els.input.value = CONFIG.SAMPLE_URL; review(CONFIG.SAMPLE_URL); });
    els.copy.addEventListener("click", async () => {
      try { await navigator.clipboard.writeText(current.markdown); toast("Review copied to clipboard"); } catch { to
ast("Copy failed — select and copy manually"); }
    });
    els.download.addEventListener("click", () => {
      const blob = new Blob([`# Code Review — ${current.file}\n\n${current.markdown}`], { type: "text/markdown" });
      const a = document.createElement("a"); a.href = URL.createObjectURL(blob);
      a.download = `code-review-${current.file.replace(/\.[^.]+$/, "")}.md`; a.click(); URL.revokeObjectURL(a.href);
    });

    drawHistory(); setStatus(loadHistory().length ? "ok" : "idle");
  </script>
</body>
</html>
```

DELIVERABLE 3

Appendix B — n8n workflow export (JSON)

`n8n/AI_GitHub_Code_Reviewer.workflow.json`: import it through *Workflows → Import from file*, then select your Groq credential in the Groq Chat Model node.


```
{
  "name": "AI GitHub Code Reviewer (Solifi CodeLens)",
  "nodes": [
    {
      "parameters": {
        "httpMethod": "POST",
        "path": "code-review",
        "responseMode": "responseNode",
        "options": {
          "allowedOrigins": "*"
        }
      },
      "id": "a22d2d0c-5d6f-4d25-a34b-83cf0453a43b",
      "name": "Webhook",
      "type": "n8n-nodes-base.webhook",
      "typeVersion": 2,
      "position": [
        0,
        0
      ],
      "webhookId": "550ed39a-0243-4a5f-b646-35d3e7974c19"
    },
    {
      "parameters": {
        "url": "={{ $json.body.url }}",
        "options": {
          "response": {
            "response": {
              "responseFormat": "text"
            }
          }
        }
      },
      "id": "e81c0adc-74ed-46e9-8854-08d28dcc6811",
      "name": "HTTP Request",
      "type": "n8n-nodes-base.httpRequest",
      "typeVersion": 4.2,
      "position": [
        220,
        0
      ]
    },
    {
      "parameters": {
        "promptType": "define",
        "text": "=For this given Input java code :{{ $json.data }} follow these;\n\nInstuctions:\n\nYou are an exper
t Software Code Reviewer specialized in Java enterprise development and test automation frameworks.\nYour task is to
analyze and review the uploaded Java code based on specific quality parameters and provide:\n\nIndividual parameter
scores (each out of 20)\n\nOverall code quality score (out of 100)\n\nActionable feedback and recommendations for im
provement\n\nEvaluate the Java code against the following five parameters:\n\nCode Readability: Are naming conventio
ns, indentation, and structure clear and consistent?\n\nCode Efficiency: Does the code avoid unnecessary loops, redu
ndant logic, and optimize performance?\n\nError Handling: Does the code handle exceptions gracefully with meaningful
messages and proper use of try-catch/finally or logging?\n\nMaintainability: Is the code modular, reusable, and easi
ly extendable for future changes?\n\nBest Practices & Standards: Does the code follow Java best practices (SOLID, DR
Y, proper imports, dependency management, etc.)?\n\nFinally, generate an overall rating with improvement areas and a
short summary.\n\nC \u2013 Context\n\nThe input Java code belongs to a production-grade software project (could be b
ackend automation, web app, or API service).\nAssume that this code will be part of a shared repository reviewed by
multiple developers, so it must comply with clean code, maintainability, and security standards.\nYou are reviewing
this code as part of a formal pull request (PR) process.\n\n\nExample Output (Review Summary):\n\nParameter\tDescrip
tion\tScore (out of 20)\nCode Readability\tNaming is clear but lacks comments or documentation.\t16\nCode Efficiency
\tSimple arithmetic; no inefficiencies observed.\t18\nError Handling\tMissing division-by-zero handling.\t10\nMainta
inability\tClass is minimal; not modularized for future extensions.\t14\nBest Practices & Standards\tLacks input val
idation and unit tests.\t13\n\nOverall Score: 71 / 100\n\nImprovement Areas:\n\nAdd input validation for division-by
-zero errors.\n\nInclude JavaDoc comments for public methods.\n\nImplement basic unit tests to validate functionalit
y.\n\nSummary:\nThe code functions correctly but lacks robustness and documentation. Minor improvements can enhance
production readiness.\n\nP \u2013 Persona\n\nYou are a senior Java architect and code reviewer with 10+ years of exp
erience in enterprise application design, CI/CD integration, and automation frameworks (Spring Boot, Selenium, Playw
right, TestNG).\nYou are known for balancing code quality with real-world performance and maintainability."
      },
      "id": "ccd1ddfc-d8f0-422b-9b8f-965495f5ff6d",
      "name": "Basic LLM Chain",
      "type": "@n8n/n8n-nodes-langchain.chainLlm",
```

```
      "typeVersion": 1.5,
      "position": [
        460,
        0
      ]
    },
    {
      "parameters": {
        "model": "llama-3.3-70b-versatile",
        "options": {
          "temperature": 0.2
        }
      },
      "id": "bc596ae6-e7d3-48f9-bb05-22fda1896654",
      "name": "Groq Chat Model",
      "type": "@n8n/n8n-nodes-langchain.lmChatGroq",
      "typeVersion": 1,
      "position": [
        460,
        220
      ],
      "credentials": {
        "groqApi": {
          "id": "REPLACE_WITH_YOUR_GROQ_CREDENTIAL_ID",
          "name": "Groq account"
        }
      }
    },
    {
      "parameters": {
        "respondWith": "json",
        "responseBody": "={{ JSON.stringify({ review: $json.text, file: $('Webhook').item.json.body.url }) }}",
        "options": {
          "responseHeaders": {
            "entries": [
              {
                "name": "Access-Control-Allow-Origin",
                "value": "*"
              }
            ]
          }
        }
      },
      "id": "f822e111-2210-4f9c-8c66-2d09260ae0d2",
      "name": "Respond to Webhook1",
      "type": "n8n-nodes-base.respondToWebhook",
      "typeVersion": 1.1,
      "position": [
        760,
        0
      ]
    }
  ],
  "connections": {
    "Webhook": {
      "main": [
        [
          {
            "node": "HTTP Request",
            "type": "main",
            "index": 0
          }
        ]
      ]
    },
    "HTTP Request": {
      "main": [
        [
          {
            "node": "Basic LLM Chain",
            "type": "main",
            "index": 0
          }
        ]
      ]
    },
    "Groq Chat Model": {
      "ai_languageModel": [
        [
          {
            "node": "Basic LLM Chain",
            "type": "ai_languageModel",
            "index": 0
          }
        ]
```

```
      ]
    },
    "Basic LLM Chain": {
      "main": [
        [
          {
            "node": "Respond to Webhook1",
            "type": "main",
            "index": 0
          }
        ]
      ]
    }
  },
  "active": false,
  "settings": {
    "executionOrder": "v1"
  },
  "pinData": {},
  "tags": []
}
```